



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at [wvOASIS.gov](http://wvOASIS.gov). As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at [WVPurchasing.gov](http://WVPurchasing.gov) with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

## Header 3

## General Information

Contact

Default Values

Discount

Document Information

Procurement Folder: 576948

Procurement Type: Central Purchase Order

Vendor ID: 000000171998



Legal Name: EQUIPMENT DEPOT OHIO INC

Alias/DBA:

Total Bid: \$31,489.40

Response Date: 05/09/2019



Response Time: 10:23

SO Doc Code: CRFQ

SO Dept: 0214

SO Doc ID: SUR1900000006

Published Date: 5/6/19

Close Date: 5/20/19

Close Time: 13:30

Status: Closed

Solicitation Description: New LPG Powered Sit-Down Counterbalance Forklift Truck

Total of Header Attachments: 3

Total of All Attachments: 3



| Line | Comm Ln Desc | Qty     | Unit Issue | Unit Price      | Ln Total Or Contract Amount |
|------|--------------|---------|------------|-----------------|-----------------------------|
| 1    | Forklifts    | 1.00000 | LS         | \$31,489.400000 | \$31,489.40                 |

| Comm Code | Manufacturer | Specification | Model # |
|-----------|--------------|---------------|---------|
| 24101603  |              |               |         |

**Extended Description :** New, Unused LPG Powered Sit-Down Counterbalance Forklift Truck as per attached specifications.

**Comments:** The attached quote is build to the exact specifications outlined in the solicitation. The forklift will come from the factory built specifically for the Surplus location.

# QUOTATION



Equipment Depot Ohio, Inc.  
218 Smiley Drive  
St. Albans, WV 25177

## PREPARED FOR

Customer: WV SURPLUS WAREHOUSE \*COD\*  
Address: 2700 CHARLES AVENUE  
DUNBAR, WV 25064

## REFERENCE

Effective From: Thursday, May 9, 2019  
Effective To: Friday, November 15, 2019  
Quote #: 431140  
Account Manager: JOHN SHAFFER  
Direct Phone:  
E-mail: john.shaffer@eqdepot.com



## FGC28N - 5,500 lb. Capacity LP Cushion Tire Forklift

### HIGHLIGHTS

#### Productivity

- GK25 2.5L 4 Cylinder Engine
- EPA Emission Compliant Fuel System
- U.L. Approved Model
- Single Speed Powershift Automatic Transmission
- Transmission Oil Cooler
- Transmission Return to Neutral for Start

#### Reliability

- Engine Protection System:
- Engine Coolant Temperature Warning & Cutback
  - Transmission Oil Temperature Warning & Cutback
  - Engine Oil Pressure Warning & Cutback
  - Brake Fluid Level Warning
  - Periodic Maintenance Alerts & Display Indicator
- Isolated (Rubber mounted) Key Components:
- Hydraulic Control Valves
  - Transmission
  - Engine
  - Radiator
  - Exhaust System
  - Secondary Lift Cylinders on Mast
- Hydrostatic Power Steering  
Separate Brake and Inching Pedals  
Cyclone Air Filter  
High Position Air Intake  
Maintenance Free Battery  
Anti Restart Ignition Key Switch  
Fully Insulated Steel Engine Hood  
500 Hour Service Intervals

#### Operator Comfort

- Tilt Steering Column with Mechanical Quick Return
- Elongated Grab Bar
- Open Step with Anti Slip Plate





## FGC28N - 5,500 lb. Capacity LP Cushion Tire Forklift

Electronic Direction Control

### Operator Protection

Premium LCD/LED Display including:

- Combination Hour Meter & On Board Diagnostic Display
- Speedometer and Clock Display
- Travel Direction Indicator
- Low Fuel Indicator (LPG Fuel System only)  
or Fuel Gage (Gasoline Fuel System Only)
- Engine Coolant Temperature Gauge
- Alternator (Battery Charging Status) Warning
- Diagnostic Warning
- Operator Passcode Functionality (Optional Activation)
- Other systems-related indicators & warnings

### Added Operator Protection

Integrated Presence System (IPS)

- Transmission to Neutral & Display Indicator
  - Mast & Auxiliary Hydraulic Lockout & Display Indicator
  - Parking Brake Warning & Display Indicator
  - Seat Belt Reminder Warning & Display Indicator
- Dual Action Parking Brake Handle

## KEY FEATURES & BENEFITS

|                                   |   |
|-----------------------------------|---|
| <b>OPTIMAL PERFORMANCE</b>        | GK25 engines provide reliable performance in even the toughest conditions. They are engineered to produce minimal noise and emissions. The engine protection system (EPS) also monitors the entire system to ensure maximum production.   |
| <b>OPERATOR COMFORT</b>           | The operator compartment is designed with the comfort of the operator in mind. From the standard comfort seat to the numerous features built in for noise and vibration reduction, the lift truck is made to allow the operator to perform at high levels for the entire shift without unnecessary fatigue or discomfort.     |
| <b>INTEGRATED PRESENCE SYSTEM</b> | The IPS ensures that the operator is operating the forklift how it is supposed to be. Full transmission and hydraulic function lockout, accompanied by audible alarms, make sure that potential risks in operating the forklifts are kept to a minimum.   |
| <b>SERVICEABILITY</b>             | With 500 hour service intervals and the most reliable dealer network in the industry, Mitsubishi forklift trucks can be counted on to stay running with minimal maintenance. Whenever it finally is time to repair or maintain the truck, access to the major components is extremely easy and can be achieved without tools. |
| <b>PREMIUM LED/LCD DISPLAY</b>    | The standard premium display allows the operator to keep all of the systems of the forklift in check. If there is anything wrong, the operator is notified through one of the many icons that monitor truck performance. This can help prevent more damage to the truck excessive downtime.                                   |

## CONFIGURATION

|                                |   |   |
|--------------------------------|---|---|
| <b>CHASSIS</b>                 | 1 | 5,500 lb. Capacity LP Cushion Tire Forklift   |
| <b>RATINGS &amp; STANDARDS</b> | 1 | EPA Compliant   |
| <b>RATINGS &amp; STANDARDS</b> | 1 | UL Approved   |
| <b>MAST</b>                    | 1 | 186.0" MFH / 83.5" OAL / 35.0" FFH Triplex  |
| <b>FORKS</b>                   | 1 | 2.0" X 4.9" X 42" Hook Type - Fully Tapered & Polished                                |
| <b>POWERTRAIN</b>              | 1 | GK25 2.5L 4 Cylinder Gas and LPG Engine   |
| <b>POWERTRAIN</b>              | 1 | Single Speed Powershift Transmission  |
| <b>TIRE OPTIONS</b>            | 1 | Cushion, Lugged Drive Tires   |
| <b>TIRE OPTIONS</b>            | 1 | Black, Smooth Steer Tires   |
| <b>FORK POSITIONER</b>         | 1 | Cascade 55K-FPS-A222 36.2" wide Sideshifting Fork Positioner (does NOT include forks) |
| <b>LOAD BACKREST</b>           | 1 | 48" High Load Backrest  |
| <b>HYDRAULIC ACTIVATION</b>    | 1 | 4-Section Valve With Cowl Mounted Levers  |



## FGC28N - 5,500 lb. Capacity LP Cushion Tire Forklift

|                              |   |   |
|------------------------------|---|---|
| HYDRAULIC HOSEING OPTIONS    | 1 | Dual Function Internal Hosing -Triplex Mast   |
| TILT CYLINDERS               | 1 | Standard Tilt Cylinders                       |
| OVERHEAD GUARD               | 1 | Standard Overhead Guard - 81.5" To Top        |
| PRODUCTIVITY OPTIONS         | 1 | Premium LCD/LED Display                       |
| PRODUCTIVITY OPTIONS         | 1 | Engine Protection System                      |
| PRODUCTIVITY OPTIONS         | 1 | Separate Brake & Inching Pedals               |
| SPECIAL APPLICATIONS OPTIONS | 1 | Aluminum Core Square Fin Radiator             |
| SPECIAL APPLICATIONS OPTIONS | 1 | Integrated Presence System                    |
| WARNING / LIGHT OPTIONS      | 1 | Electronic Back-up Alarm                      |
| WARNING / LIGHT OPTIONS      | 1 | Two Forward LED Working Lights On OHG         |
| WARNING / LIGHT OPTIONS      | 1 | Rear LED Stop/Tail/Back-up Combination Lights |
| WARNING / LIGHT OPTIONS      | 1 | Amber Strobe Light - Mounted Above OHG        |
| SEAT                         | 1 | Comfort (Non-Suspension) Vinyl Seat           |
| ACCESSORIES                  | 1 | Orange Seat Belt                              |
| LP TANK                      | 1 | Steel LP Tank, Horizontal Fill - 33.5#        |
| LANGUAGE MARKINGS            | 1 | English Language Markings North/South America |
|                              | 1 | Misc  |

### FGC28N INVESTMENT SUMMARY

| QTY                                | DESCRIPTION                                     | UNIT PRICE  | EXTENDED PRICE     | ACCEPTED |
|------------------------------------|---|-------------|--------------------|----------|
| 1                                  | MIT 5,500 lb. Capacity LP Cushion Tire Forklift | \$31,489.40 | \$31,489.40        |          |
| <b>SPECIFIED INVESTMENT TOTAL:</b> |   |             | <b>\$31,489.40</b> |          |

### FGC28N WARRANTY

FGC28N      Extended Full Coverage Warranty - 60 Months/10000 Hours



**PERFORMANCE. GUARANTEED.**

Other companies talk about performance. We guarantee it. Here’s our pledge and promise to be the best service company in the industry. Period.

**RESOLUTION**

Have a concern? Not for long. Our employees are empowered to solve customer concerns on the spot. If you are still not satisfied, it’s elevated to the regional leader for immediate attention and resolution.

**SERVICE**

Ready to roll 24/7/365 days a year and backed by a 4-hour emergency response time, or the first hour of labor is on us. Plus, free loaners on forklift and aerial lift repairs if we fail to fix it right the first time or by the time promised.

**PARTS**

All parts purchased from us are guaranteed for 6 months.

**RENTALS**

Rental equipment will be delivered on-time as promised or delivery is free.

**30 DAY BUYBACK**

If the new equipment fails to perform as promised and you’re not satisfied, we’ll buy it back. It’s that simple

**EQUIPPED TO SERVE™**

**ACCEPTANCE AS CONTRACT OF SALE**

Authorized agent understands and agrees to the Terms and Conditions as included with this Quote

**WV SURPLUS WAREHOUSE \*COD\***

**Equipment Depot Ohio, Inc.**

Authorized Agent Signature

Authorized Agent Signature

Date Signed

Date Signed

Printed name

JOHN SHAFFER

Printed name

Title/Position

ACCOUNT MANAGER

Title/Position

Customer Purchase Order Number

*Please consult with your accountant, tax professional, or equivalent to confirm characterization of equipment and tax implications. Other financing options and terms may be available (including financing sales tax). Please consult with your product specialist representative for additional financing options.*

# TERMS AND CONDITIONS AGREEMENT (AGREEMENT)

**BY AND BETWEEN:**

- Equipment Depot Ltd. (hereinafter referred to as Seller)
- Equipment Depot Kentucky, Inc. (hereinafter referred to as Seller)
- X  Equipment Depot WV/ Ohio, Inc. (hereinafter referred to as Seller)
- Equipment Depot of Illinois, Inc. (hereinafter referred to as Seller)
- Equipment Depot Pennsylvania, Inc. (hereinafter referred to as Seller)

(Branch Name and Phone No.: \_\_\_\_\_)

AND STATE OF WEST VIRGINIA

1. ACCEPTANCE. This quotation is an invitation for an offer and is tendered by Buyer for the acceptance by Seller. It shall become a binding contract only when accepted by the General Manager or General Sales Manager at the branch of the Seller's sales and service office stated herein. Upon said acceptance, this Agreement shall be effective after and shall survive (i) delivery of the equipment ordered hereunder and (ii) the signing of any additional security agreement relating to said equipment. If the terms hereof conflict with any such security agreement, the terms of the latter shall control.
2. SHIPMENT. Unless otherwise specifically agreed, all prices are for material packed for domestic shipment and for delivery F.O.B. factory or point of shipment. Shipping dates are approximate and based on prompt receipt of all necessary information. All risk of loss shall be upon the Buyer from point of shipment. Buyer shall pay all transportation and delivery charges to final destination.
3. PRICES. Prices quoted herein are based in present costs. Prices are subject to increase by Seller at any time prior to delivery in respect of all or any portion of the equipment on order for scheduled delivery more than six (6) months from order date, to the extent necessary to cover Seller's increased costs applicable thereto.
4. PAYMENT. Partial shipments may be made and payments therefor shall become due in accordance with the terms hereof. Finance charges are subject to rates in effect at time of delivery of equipment herein described. The terms of sale herein are subject to credit approval and Seller may at any time prior to delivery modify the terms of payment originally specified to assure prompt payment for the equipment ordered.
5. TAXES. The amount of taxes stated on the face hereof, if any, is approximate only. Buyer is liable for the full amount of all taxes applicable to or as a result of this transaction, exclusive of franchise taxes and taxes measured by the net income of Seller. Buyer shall pay the amount of all such taxes as at any time requested by Seller as if originally added to the price. If Seller pays such taxes, Buyer shall reimburse Seller therefor.
6. SECURITY INTEREST AND DEFAULT. Seller shall retain a security interest in the equipment delivered hereunder until the total selling price, including taxes, delivery and other charges, is paid in full by Buyer. Buyer agrees to sign and deliver to Seller any additional security agreement required by Seller.

If Buyer shall fail or refuse to accept delivery of the equipment and parts ordered hereunder or shall default in the performance of any of the terms, covenants and conditions of this Agreement, Seller may retain the cash deposited or paid to it and the equipment accepted by it on account of the sale price, if any, and apply the same toward payment of its damages. If equipment ordered has been delivered to Buyer by Seller at the time of default, Seller may declare the full

amount due and payable without notice or demand and may repossess the equipment. Repossession and disposition of equipment, and suit for any deficient, shall be pursuant to applicable laws. The remedies provided herein in favor of Seller shall not be deemed exclusive, but shall be cumulative and shall be in addition to all other remedies in Seller's favor existing at law or in equity.

7. WARRANTY. Warranty in effect at the time of sale confirmation for the specific product described in this proposal shall apply.
8. DELAYS. Seller shall not be liable for loss or damage due to delay in delivery or manufacture, resulting from any cause beyond Seller's reasonable control, including but not limited to, compliance with any regulations, orders, or instructions of any federal, state or municipal government or any department or agency thereof, acts of God, acts or omissions of the Buyer, acts of civil or military authority, fires, strikes, factory shutdowns or alterations, embargoes, war, riot, delays in transportation, or inability due to causes beyond the Seller's reasonable control to obtain necessary labor, manufacturing facilities or materials from the Seller's usual sources; and any delays resulting from any such cause shall constitute a waiver of all claims for damages. In no event shall Buyer or Seller be liable for special or consequential damages.
9. CANCELLATION. Buyer may cancel its order, reduce quantities, revise specifications or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitments made by Seller, and Buyer shall indemnify Seller against any loss resulting therefrom.
10. ENTIRE AGREEMENT AND APPLICABLE LAW. The rights and obligations of Seller and Buyer under any order placed pursuant hereto shall be governed by the laws of the state of where accepted by Seller. The provisions hereof are intended by Buyer and Seller as a final expression of their agreement and are intended also as a complete and exclusive statement of all the terms applicable to Buyer's order. No waiver, modification or addition to any of the terms hereof shall be binding on Seller unless made in writing by the General Manager or the General Sales Manager at Seller's branch as stated herein. In the event of conflict between Buyer's purchase order and the terms hereof, the latter shall control.
11. TITLE. Title to the goods herein described shall not pass to the Buyer until the purchase price has been paid in full. In the event of non-payment within sixty (60) days after delivery, we reserve the right to repossess said goods and to charge a reasonable sum for the use thereof during the period from delivery to repossession.

QUOTATION NO: \_\_\_\_\_

**ACCEPTED:**

By: \_\_\_\_\_

Printed Name: \_\_\_\_\_

Date: \_\_\_\_\_

By: \_\_\_\_\_

**Signature of Buyer's authorized representative**

Printed Name: \_\_\_\_\_

Date: \_\_\_\_\_



# **CUSHION TIRE FORKLIFT**

3,000-6,500 LB CAPACITY LP GAS MODELS

COMFORT AND CONVENIENCE YOU CAN RELY ON



# COMFORT COMES STANDARD.

STEP INTO THE OPERATOR COMPARTMENT OF AN FGC15N-FGC33N CUSHION TIRE FORKLIFT



**MITSUBISHI**

## **Comfortable Operator Compartment:**

With three-point access, operators of any size can easily enter the operator compartment of these Mitsubishi forklift trucks. The large floor space allows more foot room for the operator, while the “through the floor” pedal design further reduces operator fatigue and discomfort throughout the day.

**Ergonomic Seat:** The FGC15N forklift series features seats with adjustable forward and backward movement, added side support in the back cushion and an orange, anti-cinch seat belt, creating a comfortable work environment for operators of varying heights. An optional full-suspension seat is available on the FGC20N-FGC33N models for additional support during long shifts.

## **Operator Comfort:**

Optional fingertip control armrest provides operators with low-effort levers and length / height adjustment, all while increasing precision and control.

**Adjustable Steering:** The forklift’s steering column is equipped with standard memory tilt steering. Allowing for infinite adjustment in a 12 degree range, the steering column’s “memory” feature retains the operator’s preferred settings for added convenience and comfort during operation.

- Designed for operator comfort
- Adjustable seating for flexibility
- Enhanced visibility
- Memory tilt steering column

All come together to create a working environment that reduces fatigue through even the longest shifts.

Every operator is different, so the key to creating a comfortable shift is a flexible design.



The FGC15N-FGC33N series comes standard with the Integrated Presence System (IPS), which is designed to disengage all powered travel and some hydraulic functionality when the operator leaves the normal operating position. Additionally, warning alarms sound and indicators are shown on the display panel, informing the operator and surrounding personnel that the system is engaged.



| Features                    | Standard | Optional |
|-----------------------------|----------|----------|
| Memory tilt steering column | ●        |          |
| Integrated Presence System  | ●        |          |
| Two forward LED work lights | ●        |          |
| Electronic back-up alarm    | ●        |          |
| Low LPG indicator           | ●        |          |
| Premium LCD Display         | ●        |          |
| Engine Protection System    | ●        |          |
| Full-suspension seat        |          | ●        |
| Swivel seat package         |          | ●        |
| Swing-down LP tank bracket  |          | ●        |

Ask your local dealer about the available options for improved performance, productivity and operator comfort.

# POWERFUL EFFICIENCY.

QUALITY COMPONENTS AND EASY MAINTENANCE MEAN INCREASED UPTIME




- Designed for uptime
- Smooth, powerful engines
- Reliable components
- Easy service access
- Flexible options

These features give Mitsubishi forklift trucks the strength to perform, shift after shift.

#### **Efficient From The Inside Out:**

The GK21 (53 hp / FGC15N-FGC25N) and GK25 (61 hp / FGC28N-FGC33N) engines – both proven performers – are well known for reliability when working in demanding applications. Both engines deliver high performance with excellent fuel efficiency and meet all CARB and EPA emissions regulations.

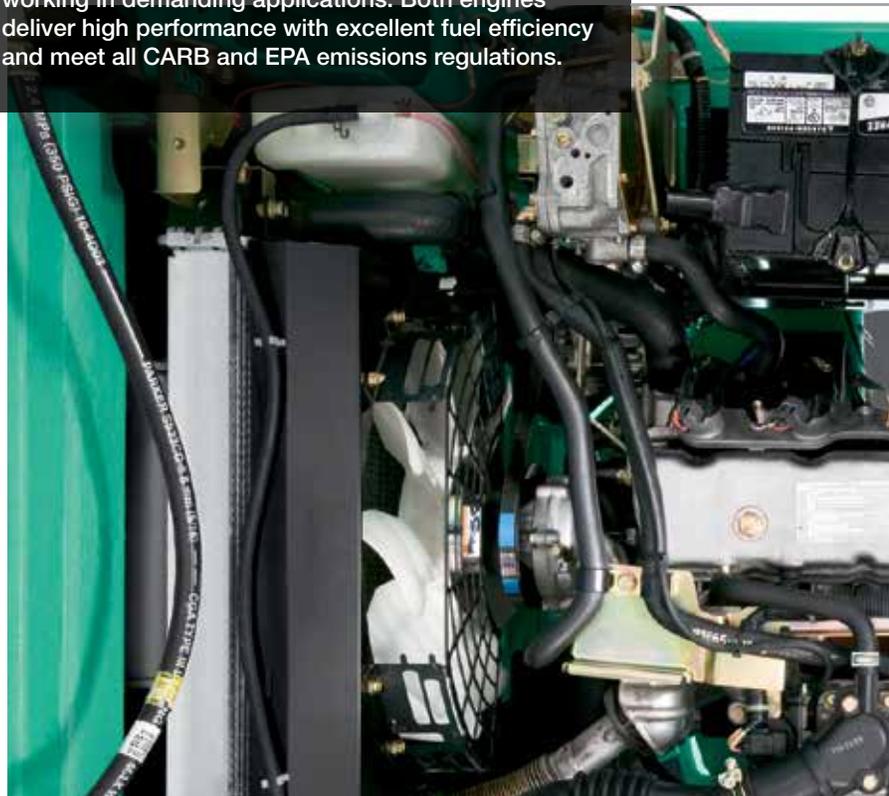

**Cool And Quiet:** The forklift's fan and radiator system is equipped with a horizontal cross flow cooling system to help keep the engine cool and functioning at peak performance. The corrugated design provides optimal heat exchange, while the aluminum core helps to prevent corrosion. The direct drive fan also reduces noise and necessary maintenance, benefiting your operators and your business.


**Engine Protection:** Regulated by the Vehicle Control Module, the Engine Protection System keeps the truck running at desirable levels while helping to prevent damage to the forklift, saving you money. If any of the vital fluids becomes critically low, RPM levels are automatically lowered and the operator is immediately notified by a light on the dash display.

**Easy Service Access:** Tool-free access to the engine compartment makes routine maintenance, such as cleaning radiator fins, much easier. Additionally, the Vehicle Control Module is conveniently located under the dashboard cup holder, making it readily accessible.



Additional options are available to customize the forklift for your application:

- Bottler's Tilt
- Ground Speed Control
- Warning Lights
- Fuel Saver Mode
- Underbelly Screen
- Air Intake Precleaner
- Foundry/Brick Protection

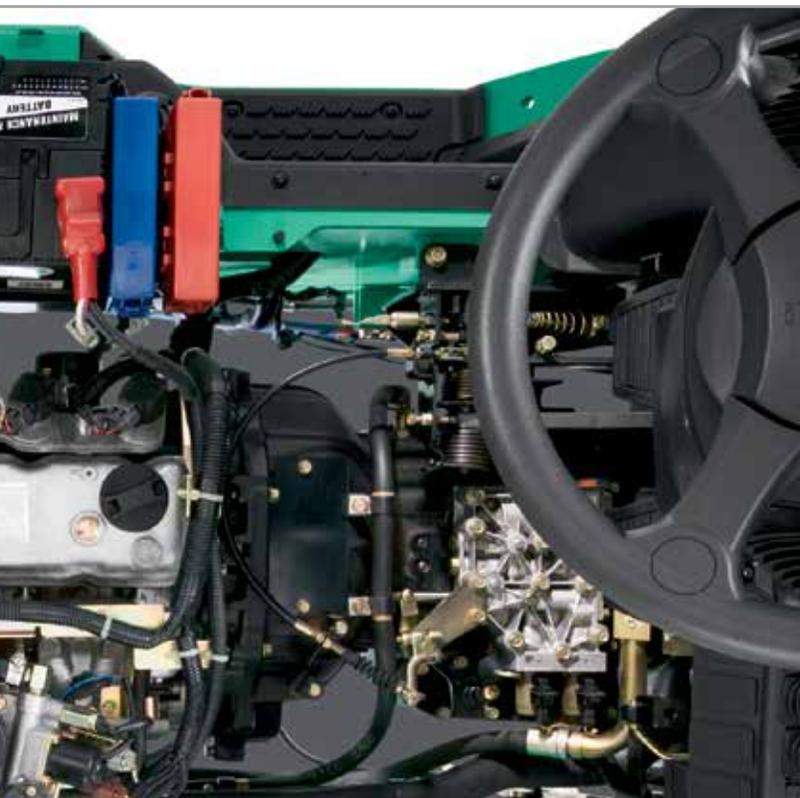

| CHARACTERISTICS |   |           | FGC15N                    |                  | FGC18N                    |                  | FGC20CN                   |                  | FGC20N                    |                  |
|-----------------|---|-----------|---------------------------|------------------|---------------------------|------------------|---------------------------|------------------|---------------------------|------------------|
| 1               | Capacity at rated load center                           | lb kg     | 3,000                     | 1,500            | 3,500                     | 1,750            | 4,000                     | 2,000            | 4,000                     | 2,000            |
| 2               | Capacity at load center - distance                      | in mm     | 24                        | 500              | 24                        | 500              | 24                        | 500              | 24                        | 500              |
| 3               | Power – fuel type                                       |           | LP gas                    |                  | LP gas                    |                  | LP gas                    |                  | LP gas                    |                  |
| 4               | Tire type – cushion or pneumatic                        |           | cushion                   |                  | cushion                   |                  | cushion                   |                  | cushion                   |                  |
| 5               | Wheels (x = driven) number front / rear                 |           | 2x / 2                    |                  | 2x / 2                    |                  | 2x / 2                    |                  | 2x / 2                    |                  |
| DIMENSIONS      |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 6               | Maximum fork height - with standard two-stage mast      | in mm     | 131                       | 3,325            | 131.0                     | 3,325            | 131.0                     | 3,330            | 131.5                     | 3,340            |
| 7               | Free fork height – with standard two-stage mast         | in mm     | 4.5                       | 115              | 4.5                       | 115              | 4.7                       | 120              | 5.1                       | 130              |
| 8               | Forks – length x width x thickness                      | in mm     | 42 x 3.9 x 1.4            | 1,070 x 100 x 35 | 42 x 3.9 x 1.4            | 1,070 x 100 x 35 | 42 x 3.9 x 1.6            | 1,070 x 100 x 40 | 42 x 3.9 x 1.6            | 1,070 x 100 x 40 |
| 9               | Fork spacing, out-to-out minimum / maximum              | in mm     | 7.9 / 32.3                | 200 / 820        | 7.9 / 32.3                | 200 / 820        | 7.9 / 32.3                | 200 / 820        | 7.9 / 36.2                | 200 / 920        |
| 10              | Tilt, forward / backward                                | deg       | 5 / 10                    |                  | 5 / 10                    |                  | 5 / 10                    |                  | 5 / 9                     |                  |
| 11              | Length to fork face                                     | in mm     | 82.3                      | 2,090            | 83.5                      | 2,120            | 85.8                      | 2,180            | 90.4                      | 2,295            |
| 12              | Overall width with standard tires                       | in mm     | 38.2                      | 970              | 38.2                      | 970              | 40.2                      | 1,021            | 41.9                      | 1,064            |
| 13              | Overall width with standard tires (wide stance)         | in mm     | 39.3                      | 997              | 39.3                      | 997              | N/A                       | N/A              | 44.4                      | 1,128            |
| 14              | Overall width with standard tires (wide axle)           | in mm     | Not Applicable            |                  |                           |                  |                           |                  |                           |                  |
| 15              | Height with mast lowered                                | in mm     | 83.0                      | 2,105            | 83.0                      | 2,105            | 83.5                      | 2,105            | 83.0                      | 2,110            |
| 16              | Seat height   | in mm     | 43.1                      | 1,096            | 43.1                      | 1,096            | 43.1                      | 1,096            | 42.7                      | 1,086            |
| 17              | Height to top of overhead guard                         | in mm     | 80.9                      | 2,055            | 80.9                      | 2,055            | 80.9                      | 2,055            | 81.5                      | 2,070            |
| 18              | Height with mast extended                               | in mm     | 179.5                     | 4,550            | 179.5                     | 4,550            | 179.5                     | 4,550            | 180.0                     | 4,570            |
| 19              | Minimum outside turning radius                          | in mm     | 69.9                      | 1,775            | 71.3                      | 1,810            | 72.8                      | 1,850            | 77.4                      | 1,965            |
| 20              | Load moment constant                                    | in mm     | 15.3                      | 388              | 15.3                      | 388              | 15.9                      | 404              | 16.3                      | 414              |
| 21              | Minimum aisle – 90° stack – zero clearance without load | in mm     | 85.2                      | 2,163            | 86.5                      | 2,198            | 88.7                      | 2,254            | 93.7                      | 2,379            |
| PERFORMANCE     |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 22              | Travel speed, loaded / empty                            | mph km/h  | 9.6 / 10.3                | 15.5 / 16.5      | 9.6 / 10.3                | 15.5 / 16.5      | 9.6 / 10.3                | 15.5 / 16.5      | 10.9 / 11.2               | 17.5 / 18.0      |
| 23              | Lift speed, loaded / empty                              | fpm mm/s  | 122 / 124                 | 620 / 630        | 122 / 124                 | 620 / 630        | 122 / 124                 | 620 / 630        | 126 / 130                 | 640 / 660        |
| 24              | Lowering speed, loaded / empty                          | fpm mm/s  | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        |
| 25              | Drawbar pull – loaded at 1 mph (1.6 kph)                | lb N      | 3,750                     | 16,700           | 3,750                     | 16,700           | 3,660                     | 16,300           | 4,650                     | 20,700           |
| 26              | Drawbar pull – loaded maximum                           | lb N      | 4,270                     | 19,000           | 4,270                     | 19,000           | 4,160                     | 18,500           | 5,190                     | 23,100           |
| 27              | Gradeability – loaded at 1 mph (1.6 kph)                | %         | 45                        |                  | 40                        |                  | 36                        |                  | 45                        |                  |
| 28              | Gradeability – loaded maximum                           | %         | 53                        |                  | 47                        |                  | 42                        |                  | 51                        |                  |
| WEIGHT          |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 29              | Empty   | lb kg     | 6,070                     | 2,760            | 6,450                     | 2,930            | 7,010                     | 3,180            | 7,360                     | 3,340            |
| 30              | Axle load without load, front / rear                    | lb kg     | 2,320 / 3,750             | 1,050 / 1,710    | 2,180 / 4,270             | 990 / 1,940      | 2,070 / 4,940             | 940 / 2,240      | 3,050 / 4,310             | 1,390 / 1,950    |
| 31              | Axle load with load, front                              | lb kg     | 7,830                     | 3,820            | 8,620                     | 4,210            | 9,480                     | 4,650            | 9,980                     | 4,850            |
| CHASSIS         |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 32              | Tire size, front (standard)                             | in        | 18 x 6 x 12.125           |                  | 18 x 6 x 12.125           |                  | 18 x 7 x 12.125           |                  | 21 x 7 x 15               |                  |
| 33              | Tire size, rear   | in        | 14 x 5 x 10               |                  | 14 x 5 x 10               |                  | 14 x 5 x 10               |                  | 16 x 6 x 10.5             |                  |
| 34              | Wheelbase   | in mm     | 46.9                      | 1,190            | 46.9                      | 1,190            | 46.9                      | 1,190            | 55.1                      | 1,400            |
| 35              | Tread width, front (standard tires)                     | in mm     | 32.2                      | 818              | 32.2                      | 818              | 33.2                      | 843              | 34.9                      | 886              |
| 36              | Tread width, front ( wide-stance tires)                 | in mm     | 33.3                      | 845              | 33.3                      | 845              | N/A                       | N/A              | 37.4                      | 950              |
| 37              | Tread width, rear (standard tires)                      | in mm     | 32.3                      | 820              | 32.3                      | 820              | 32.3                      | 820              | 35.0                      | 890              |
| 38              | Ground clearance at lowest point of mast                | in mm     | 3.0                       | 75.0             | 3.0                       | 75.0             | 3.0                       | 75.0             | 3.1                       | 80.0             |
| 39              | Ground clearance at center of wheelbase                 | in mm     | 4.6                       | 116              | 4.6                       | 116              | 4.6                       | 116              | 5.5                       | 139              |
| 40              | Service brakes  | type      | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  |
| 41              | Parking brakes  | type      | hand-operated, mechanical |                  | hand-operated, mechanical |                  | hand-operated, mechanical |                  | hand-operated, mechanical |                  |
| ELECTRICAL      |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 42              | Engine model  |           | GK21E                     |                  | GK21E                     |                  | GK21E                     |                  | GK21E                     |                  |
| 43              | Continuous output (S.A.E. gross)                        | HP kW     | 50                        | 37.4             | 50                        | 37.4             | 50                        | 37.4             | 55                        | 41.0             |
| 44              |   | at rpm    | 2,400                     |                  | 2,400                     |                  | 2,400                     |                  | 2,700                     |                  |
| 45              | Maximum torque (S.A.E. gross)                           | lb-ft Nm  | 111                       | 151              | 111                       | 151              | 111                       | 151              | 111                       | 151              |
| 46              |   | at rpm    | 2,000                     |                  | 2,000                     |                  | 2,000                     |                  | 2,000                     |                  |
| 47              | Cylinder / displacement                                 | cu in L   | 4 / 126                   | 4 / 2.1          | 4 / 126                   | 4 / 2.1          | 4 / 126                   | 4 / 2.1          | 4 / 126                   | 4 / 2.1          |
| 48              | Transmission type                                       |           | powershift                |                  | powershift                |                  | powershift                |                  | powershift                |                  |
| 49              | Number of transmission speeds, forward / reverse        |           | 1 / 1                     |                  | 1 / 1                     |                  | 1 / 1                     |                  | 1 / 1                     |                  |
| 50              | Battery   | volts     | 12                        |                  | 12                        |                  | 12                        |                  | 12                        |                  |
| HYDRAULICS      |   |           |                           |                  |                           |                  |                           |                  |                           |                  |
| 51              | Relief pressure   | psi bar   | 2,630                     | 181              | 2,630                     | 181              | 2,630                     | 181              | 2,630                     | 181              |
| 52              | Hydraulic flow  | gpm L/min | 19.0                      | 72.0             | 19.0                      | 72.0             | 19.0                      | 72.0             | 23.5                      | 89.1             |

## SAFETY STANDARDS

These trucks meet American National Standards Institute/Industrial Truck Standards Development Foundation, ANSI/ITSDF B56.1. UL-Classified by Underwriters Laboratories, Inc., as to fire and electric shock hazard only; Type LP, LPS (optional), Industrial Trucks. Users should be aware of, and adhere to, applicable codes and regulations regarding operator training, use, operation and maintenance of powered industrial trucks, including:


- ANSI/ITSDF B56.1.
- NFPA 505, fire safety standard for powered industrial trucks - type designations, areas of use, maintenance and operation.
- Occupational Safety and Health Administration (OSHA) regulations that may apply.

Specifications, equipment, technical data, photos and illustrations based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment.

|    | FGC25N                    |                  | FGC28N                    |                  | FGC30N                    |                  | FGC33N                    |                  |
|----|---------------------------|------------------|---------------------------|------------------|---------------------------|------------------|---------------------------|------------------|
| 1  | 5,000                     | 2,500            | 5,500                     | 2,800            | 6,000                     | 3,000            | 6,500                     | 3,300            |
| 2  | 24                        | 500              | 24                        | 500              | 24                        | 500              | 24                        | 500              |
| 3  | LP gas                    |                  | LP gas                    |                  | LP gas                    |                  | LP gas                    |                  |
| 4  | cushion                   |                  | cushion                   |                  | cushion                   |                  | cushion                   |                  |
| 5  | 2x / 2                    |                  |
| 6  | 131.5                     | 3,340            | 130.5                     | 3,315            | 130.5                     | 3,315            | 131.0                     | 3,345            |
| 7  | 5.1                       | 130              | 5.3                       | 135              | 5.3                       | 135              | 5.5                       | 140              |
| 8  | 42 x 3.9 x 1.6            | 1,070 x 100 x 40 | 42 x 4.9 x 1.8            | 1,070 x 125 x 45 | 42 x 4.9 x 1.8            | 1,070 x 125 x 45 | 42 x 4.9 x 1.8            | 1,070 x 125 x 45 |
| 9  | 7.9 / 36.2                | 200 / 920        | 7.9 / 37.8                | 200 / 960        | 7.9 / 37.8                | 200 / 960        | 7.9 / 37.8                | 200 / 960        |
| 10 | 5 / 9                     |                  | 5 / 6                     |                  | 5 / 6                     |                  | 5 / 6                     |                  |
| 11 | 92.7                      | 2,355            | 95.3                      | 2,420            | 96.7                      | 2,455            | 97.8                      | 2,485            |
| 12 | 41.9                      | 1,064            | 43.9                      | 1,115            | 43.9                      | 1,115            | 43.9                      | 1,115            |
| 13 | 44.4                      | 1,128            | 45.5                      | 1,155            | 45.5                      | 1,155            | 45.5                      | 1,155            |
| 14 | Not Applicable            |                  |                           |                  |                           |                  |                           |                  |
| 15 | 83.0                      | 2,110            | 83.0                      | 2,110            | 83.0                      | 2,110            | 88.0                      | 2,230            |
| 16 | 42.7                      | 1,086            | 42.7                      | 1,086            | 42.7                      | 1,086            | 42.7                      | 1,086            |
| 17 | 81.5                      | 2,070            | 81.5                      | 2,070            | 81.5                      | 2,070            | 81.5                      | 2,070            |
| 18 | 180.0                     | 4,570            | 179.0                     | 4,540            | 179.0                     | 4,540            | 181                       | 4,570            |
| 19 | 79.5                      | 2,020            | 81.3                      | 2,065            | 82.5                      | 2,095            | 83.7                      | 2,125            |
| 20 | 16.3                      | 414              | 17.2                      | 436              | 17.2                      | 436              | 17.4                      | 441              |
| 21 | 95.8                      | 2,434            | 98.5                      | 2,501            | 99.6                      | 2,531            | 101.0                     | 2,566            |
| 22 | 10.9 / 11.2               | 17.5 / 18.0      | 10.3 / 10.6               | 16.5 / 17.0      | 10.3 / 10.6               | 16.5 / 17.0      | 10.3 / 10.6               | 16.5 / 17.0      |
| 23 | 126 / 130                 | 640 / 660        | 104 / 106                 | 530 / 540        | 104 / 106                 | 530 / 540        | 104 / 106                 | 530 / 540        |
| 24 | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        | 98.4 / 98.4               | 500 / 500        |
| 25 | 4,610                     | 20,500           | 4,860                     | 21,600           | 4,830                     | 21,500           | 4,830                     | 21,500           |
| 26 | 5,170                     | 23,000           | 5,510                     | 24,500           | 5,490                     | 24,400           | 5,460                     | 24,300           |
| 27 | 37                        |                  | 36                        |                  | 33                        |                  | 31                        |                  |
| 28 | 43                        |                  | 41                        |                  | 38                        |                  | 35                        |                  |
| 29 | 8,160                     | 3,710            | 9,010                     | 4,090            | 9,490                     | 4,310            | 9,940                     | 4,510            |
| 30 | 2,830 / 5,330             | 1,290 / 2,420    | 3,010 / 5,990             | 1,370 / 2,720    | 2,900 / 6,590             | 1,320 / 2,990    | 2,880 / 7,060             | 1,300 / 3,210    |
| 31 | 11,490                    | 5,620            | 12,640                    | 5,730            | 13,390                    | 6,560            | 14,230                    | 7,070            |
| 32 | 21 x 7 x 15               |                  | 21 x 8 x 15               |                  | 21 x 8 x 15               |                  | 21 x 8 x 15               |                  |
| 33 | 16 x 6 x 10.5             |                  |
| 34 | 55.1                      | 1,400            | 55.1                      | 1,400            | 55.1                      | 1,400            | 55.1                      | 1,400            |
| 35 | 34.9                      | 886              | 35.9                      | 912              | 35.9                      | 912              | 35.9                      | 912              |
| 36 | 37.4                      | 950              | 37.5                      | 952              | 37.5                      | 952              | 37.5                      | 952              |
| 37 | 35.0                      | 890              | 35.0                      | 890              | 35.0                      | 890              | 35.0                      | 890              |
| 38 | 3.1                       | 80.0             | 3.1                       | 80.0             | 3.1                       | 80.0             | 3.1                       | 80.0             |
| 39 | 5.5                       | 139              | 5.5                       | 139              | 5.5                       | 139              | 5.5                       | 139              |
| 40 | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  | foot-operated, hydraulic  |                  |
| 41 | hand-operated, mechanical |                  | hand-operated, mechanical |                  | hand-operated, mechanical |                  | hand-operated, mechanical |                  |
| 42 | GK21E                     |                  | GK25E                     |                  | GK25E                     |                  | GK25E                     |                  |
| 43 | 55                        | 41.0             | 63                        | 46.9             | 63                        | 46.9             | 63                        | 46.9             |
| 44 | 2,700                     |                  | 2,700                     |                  | 2,700                     |                  | 2,700                     |                  |
| 45 | 111                       | 151              | 139                       | 188              | 139                       | 188              | 139                       | 188              |
| 46 | 2,000                     |                  | 1,600                     |                  | 1,600                     |                  | 1,600                     |                  |
| 47 | 4 / 126                   | 4 / 2.1          | 4 / 152                   | 4 / 2.5          | 4 / 152                   | 4 / 2.5          | 4 / 152                   | 4 / 2.5          |
| 48 | powershift                |                  | powershift                |                  | powershift                |                  | powershift                |                  |
| 49 | 1 / 1                     |                  | 1 / 1                     |                  | 1 / 1                     |                  | 1 / 1                     |                  |
| 50 | 12                        |                  | 12                        |                  | 12                        |                  | 12                        |                  |
| 51 | 2,630                     | 181              | 2,630                     | 181              | 2,630                     | 181              | 2,630                     | 181              |
| 52 | 23.5                      | 89.1             | 23.5                      | 89.1             | 23.5                      | 89.1             | 23.5                      | 89.1             |

Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

# FGC15N- FGC33N

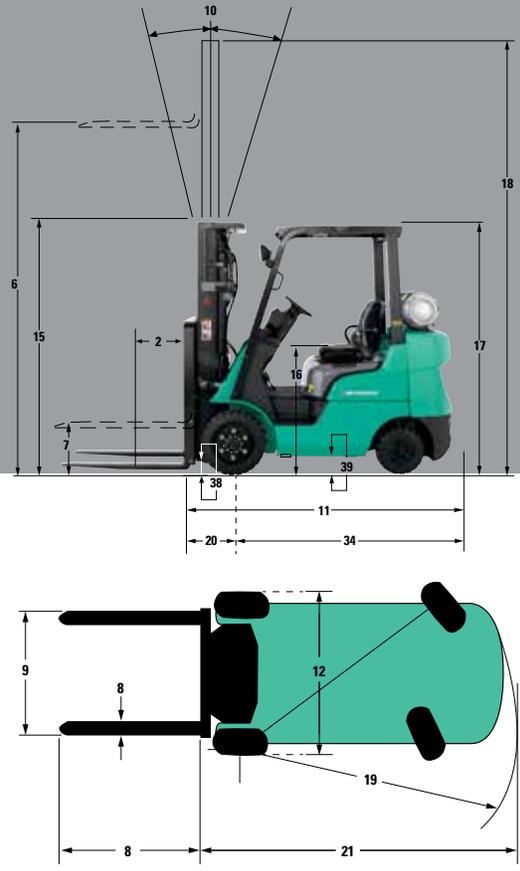

# FGC15N-FGC33N

3,000-6,500 LB CAPACITY CUSHION TIRE FORKLIFT

## Delivering Exceptional Value

### More Than 296,000 Parts To Keep You Running

Mitsubishi Forklift Trucks offers several parts programs, all designed to bring you top performance and convenience for your material handling needs. Contact your local dealer to put our services to work for you.

### Support To Fit Your Operation

Find out why more companies are relying on Mitsubishi forklift truck dealers to keep their fleet operating at top performance. Our efficiency provides customers with a better return on investment, and qualified service technicians, diverse parts inventory and unparalleled selection of service options can help reduce your total cost of ownership.

### Extensive Dealer Network

The Mitsubishi forklift truck dealer network is dedicated to finding the right forklift solution for your business. With more than 300 dealer locations, you can rely on your local dealer to provide the service you need when you need it most.



Manufactured with superior quality and exceptional value, Mitsubishi forklift trucks are supported by an extensive dealer and field support network located throughout North and South America. Don't forget to ask your local Mitsubishi forklift truck dealer about details on factory retail programs, financing plans and additional options and dealer services like planned maintenance and operator training.

STATE OF WEST VIRGINIA  
Purchasing Division

# PURCHASING AFFIDAVIT

**CONSTRUCTION CONTRACTS:** Under W. Va. Code § 5-22-1(i), the contracting public entity shall not award a construction contract to any bidder that is known to be in default on any monetary obligation owed to the state or a political subdivision of the state, including, but not limited to, obligations related to payroll taxes, property taxes, sales and use taxes, fire service fees, or other fines or fees.

**ALL OTHER CONTRACTS:** Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

**EXCEPTION:** The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**DEFINITIONS:**

**"Debt"** means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

**"Employer default"** means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

**"Related party"** means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

**AFFIRMATION:** By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that: (1) for construction contracts, the vendor is not in default on any monetary obligation owed to the state or a political subdivision of the state, and (2) for all other contracts, that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

**WITNESS THE FOLLOWING SIGNATURE:**

Vendor's Name: Equipment Depot

Authorized Signature: [Signature] Date: 1-18-19

State of Kentucky

County of Fayette, to-wit:

Taken, subscribed, and sworn to before me this 18<sup>th</sup> day of January, 2019.

My Commission expires 1/19/20, 2019.

AFFIX SEAL HERE



NOTARY PUBLIC

[Signature]