



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR209187

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
FRANK WHITTAKER 304-558-2316

***709022058** 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

VICE SUPPLY LTD
 MAY 15 2009
 IN BUSINESS

DIVISION OF NATURAL RESOURCES
 HAWKS NEST STATE PARK
 177 WEST MAIN STREET
 POST OFFICE BOX 857
 ANSTED, WV 25812
 304-658-5196

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/07/2009				

BID OPENING DATE: **06/16/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		
<p>PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)</p> <p>THE WEST VIRGINIA PURCHASING DIVISION, FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES, IS SOLICITING BIDS FOR PLAYGROUND EQUIPMENT FOR HAWKS NEST STATE PARK PER THE ATTACHED SPECIFICATIONS.</p> <p>A MANDATORY PRE-BID MEETING WILL BE HELD ON MAY 20, 2009 AT 10:00 AM AT THE PARK HEADQUARTERS. FAILURE TO ATTEND THE MANDATORY PRE-BID MEETING WILL RESULT IN BID DISQUALIFICATION. AN INDIVIDUAL MAY NOT REPRESENT MORE THAN ONE VENDOR AT THE MANDATORY PRE-BID MEETING.</p> <p>TECHNICAL QUESTIONS MUST BE SUBMITTED IN WRITING TO FRANK WHITTAKER IN THE PURCHASING DIVISION VIA FAX AT 304-558-4115 OR VIA EMAIL AT FRANK.M.WHITTAKER@WV.GOV. ALL TECHNICAL QUESTIONS WILL BE RESPONDED TO BY ADDENDUM AFTER THE DEADLINE.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT MAY BE DEEMED NULL AND VOID, AND TERMINATED WITHOUT FURTHER ORDER.</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE</p>						

RECEIVED

2009 JUN 11 P 9:56

PURCHASING DIVISION
STATE OF WV

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>John G. ...</i>	TELEPHONE 1-800-848-7556	DATE JUNE 10, 2009
TITLE VICE PRESIDENT	ADDRESS CHANGES TO BE NOTED ABOVE	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the *West Virginia Code* and the *Legislative Rules* of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125 fee.
5. All services performed or goods delivered under State Purchase Order/Contracts are to be continued for the term of the Purchase Order/Contracts, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the *West Virginia Code*.
8. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, this Contract may be deemed null and void, and terminated without further order.
14. **HIPAA BUSINESS ASSOCIATE ADDENDUM:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Cover Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.
15. **WEST VIRGINIA ALCOHOL & DRUG-FREE WORKPLACE ACT:** If this Contract constitutes a public improvement construction contract as set forth in Article 1D, Chapter 21 of the West Virginia Code ("The West Virginia Alcohol and Drug-Free Workplace Act"), then the following language shall hereby become part of this Contract: "The contractor and its subcontractors shall implement and maintain a written drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act, as set forth in Article 1D, Chapter 21 of the West Virginia Code. The contractor and its subcontractors shall provide a sworn statement in writing, under the penalties of perjury, that they maintain a valid drug-free work place policy in compliance with the West Virginia and Drug-Free Workplace Act. It is understood and agreed that this Contract shall be cancelled by the awarding authority if the Contractor: 1) Fails to implement its drug-free workplace policy; 2) Fails to provide information regarding implementation of the contractor's drug-free workplace policy at the request of the public authority; or 3) Provides to the public authority false information regarding the contractor's drug-free workplace policy."

INSTRUCTIONS TO BIDDERS

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in case of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications: Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130, Charleston, WV 25305-0130



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

BFO NUMBER
DNR209187

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER
304-558-2316

*709022058 800-848-7556
SERVICE SUPPLY LTD
1524 SOUTH HAMILTON RD
COLUMBUS OH 43227

MAY 15 2009

IN BUSINESS
 SMT

DIVISION OF NATURAL RESOURCES
HAWKS NEST STATE PARK
177 WEST MAIN STREET
POST OFFICE BOX 857
ANSTED, WV
25812 **304-658-5196**

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/07/2009				

BID OPENING DATE: **06/16/2009** **BID OPENING TIME 01:30PM**

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		
<p>PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)</p> <p>THE WEST VIRGINIA PURCHASING DIVISION, FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES, IS SOLICITING BIDS FOR PLAYGROUND EQUIPMENT FOR HAWKS NEST STATE PARK PER THE ATTACHED SPECIFICATIONS.</p> <p>A MANDATORY PRE-BID MEETING WILL BE HELD ON MAY 20, 2009 AT 10:00 AM AT THE PARK HEADQUARTERS. FAILURE TO ATTEND THE MANDATORY PRE-BID MEETING WILL RESULT IN BID DISQUALIFICATION. AN INDIVIDUAL MAY NOT REPRESENT MORE THAN ONE VENDOR AT THE MANDATORY PRE-BID MEETING.</p> <p>TECHNICAL QUESTIONS MUST BE SUBMITTED IN WRITING TO FRANK WHITTAKER IN THE PURCHASING DIVISION VIA FAX AT 304-558-4115 OR VIA EMAIL AT FRANK.M.WHITTAKER@WV.GOV. ALL TECHNICAL QUESTIONS WILL BE RESPONDED TO BY ADDENDUM AFTER THE DEADLINE.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT MAY BE DEEMED NULL AND VOID, AND TERMINATED WITHOUT FURTHER ORDER.</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE</p>						

RECEIVED

2009 JUN 11 P 9 56

PURCHASING DIVISION
 STATE OF WV

SEE REVERSE SIDE FOR TERMS AND CONDITIONS			
SIGNATURE <i>Frank Whittaker</i>	TELEPHONE 1-800-848-7556	DATE JUNE 10, 2009	
TITLE VICE PRESIDENT	ADDRESS CHANGES TO BE NOTED ABOVE		

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR209187

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER 304-558-2316

VENDOR

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
 HAWKS NEST STATE PARK
 177 WEST MAIN STREET
 POST OFFICE BOX 857
 ANSTED, WV 25812 304-658-5196

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/07/2009				

BID OPENING DATE: 06/16/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>INFORMATION FOR ANY ALTERNATES MAY BE GROUNDS FOR REJECTION OF THE BID. THE STATE RESERVES THE RIGHT TO WAIVE MINOR IRREGULARITIES IN BIDS OR SPECIFICATIONS IN ACCORDANCE WITH SECTION 148-1-4(F) OF THE WEST VIRGINIA LEGISLATIVE RULES AND REGULATIONS.</p> <p>NOTICE</p> <p>A SIGNED BID MUST BE SUBMITTED TO:</p> <p>DEPARTMENT OF ADMINISTRATION PURCHASING DIVISION BUILDING 15 2019 WASHINGTON STREET, EAST CHARLESTON, WV 25305-0130</p> <p>THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:</p> <p>SEALED BID</p> <p>BUYER: 44</p> <p>RFQ. NO.: DNR209187</p> <p>BID OPENING DATE: 06/16/2009</p> <p>BID OPENING TIME: 1:30 PM</p> <p>PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID:</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS		
SIGNATURE <i>Tracy Lowe</i>	TELEPHONE 1-800-848-7556	DATE JUNE 10, 2009
TITLE VICE PRESIDENT	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR209187

PAGE
3

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER
304-558-2316

VENDOR
 *709022058 800-848-7556
SERVICE SUPPLY LTD
1524 SOUTH HAMILTON RD

COLUMBUS OH 43227

SHIP TO
DIVISION OF NATURAL RESOURCES
HAWKS NEST STATE PARK
177 WEST MAIN STREET
POST OFFICE BOX 857
ANSTED, WV
25812 **304-658-5196**

DATE PRINTED 05/07/2009	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
-----------------------------------	---------------	----------	--------	---------------

BID OPENING DATE: **06/16/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
				614-863-0113		
				CONTACT PERSON (PLEASE PRINT CLEARLY):		
				JERRY GROVES		
***** THIS IS THE END OF RFQ DNR209187 ***** TOTAL:						<u>\$50,406.25</u>

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Jerry Groves</i>	TELEPHONE 1-800-848-7556	DATE JUNE 10, 2009
TITLE VICE PRESIDENT	ADDRESS CHANGES TO BE NOTED ABOVE	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

Hawks Nest State Park Playground Specifications

To supply playground equipment to offer play activities for children ages five (5) to twelve (12) and a multi-station active adult fitness station area at Hawks Nest State Park, Ansted, West Virginia. Fitness area units to be mounted on asphalt surface. Playground equipment to be installed with engineered fiber surface. Park personnel will install all playground and fitness equipment. All items must be F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within sixty (60) days of purchase order award. The award may be split if it is in the best interest of the West Virginia Division of Natural Resources.

PLAYGROUND AREA

Playworld "Playmakers" custom play structure, Model #12209-1, or equal. Structure components must include all hardware necessary for assembly. Structure must include the following components:

- Three (3) Playworld 5 inch OD 108 inch with ground zero post, Item #ZZPM0008GZ, or equal.
- Two (2) Playworld 5 inch OD 120 inch steel post with cap, Item #ZZPM0016, or equal.
- Nine (9) Playworld 5 inch OD 132 inch steel with cap, Item #ZZPM0026, or equal.
- Three (3) Playworld 5 inch OD144 inch post with cap, Item #ZZPM0036 or equal.
- Two (2) Playworld 5 inch OD 144 inch post ground zero, Item #ZZPM0036GZ, or equal.
- Three (3) Playworld square coated deck assembly, Item #ZZPM0616, or equal.
- Four (4) Playworld 45 degree tri-deck, Item #ZZPM0639, or equal.
- One (1) Playworld 12 inch deck to deck kick plate, Item #ZZPM2530, or equal.
- One (1) Playworld 12 inch 45 degree tri-deck kick plate, Item #ZZPM2537, or equal.
- One (1) Playworld transfer station with barriers and a minimum 36 inch deck, Item # ZZPM2008, or equal.
- One (1) Playworld approach step for transfer station, Item #ZZUN2019, or equal.
- One (1) Playworld rumble seat slide with hood and with a minimum 60 inch deck, Item #ZZPM2737, or equal.
- One (1) Playworld oval insert panel with a deck mount, Item #ZZPM4807, or equal.

Hawks Nest State Park Playground Specifications

- One (1) Playworld construction panel insert, Item #ZZUN4793, or equal.
- Three (3) Playworld access gate, Item #ZZPM4288, or equal.
- One (1) Playworld rock climber, Item #ZZPM7439, or equal,
- One (1) Playworld solar climber with a minimum 60 inch deck, Item #ZZPM7659, or equal.
- One (1) Playworld spiral climber with a minimum 48 inch deck, Item #ZZPM8150, or equal.
- One (1) Playworld hopscotch climber with a minimum 48 inch deck, Item #ZZPM8260, or equal.
- One (1) Playworld rockblocks deck access support for a minimum 36 inch -48 inch deck, Item #ZZUNO167, or equal.
- One (1) Playworld rockblocks Z support for a minimum 84 inch wall, Item #ZZUN0177, or equal.
- Two (2) Playworld rockblocks end support for a minimum 60 inch wall, Item #ZZUN0178, or equal.
- One (1) Playworld rockblocks kinked wall for an 84 inch wall, Item #ZZUN8357, or equal.
- One (1) Playworld RockBlocks end wall for a minimum of 60 inch wall, Item #ZZUN8360, or equal.
- One (1) Playworld RockBlocks 90 degree right wall a minimum of 84 inch to 60 inch, Item #ZZUN8370, or equal.
- One (1) Playworld the grid for a minimum of 60 inch and 84 inch wall, Item #ZZUN8427, or equal.
- One (1) Playworld whirlwind climber a minimum of 36 inch, Item #ZZUN6737, or equal.
- One (1) Playworld whirlwind climber a minimum of 48 inch, Item #ZZUN6738, or equal.
- One (1) Playworld 270 degree horizontal loop ladder, Item #ZZPM5716, or equal.
- One (1) Playworld chinning/turning bar, Item #ZZPM5736, or equal.
- One (1) Playworld step around, Item #ZZPM0149, or equal.
- One (1) Playworld u-bounce, Item #ZZPM6850, or equal.
- One (1) Playworld challenge walk, Item #ZZPM6860, or equal.
- One (1) Playworld vortex, Item #ZZPM6810, or equal.
- One (1) Playworld 6 foot arch bridge, Item #ZZPM6590, or equal.

Geotextile fabric, 2,250 sq. ft. roll, or equal. Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

Hawks Nest State Park Playground Specifications

Geotextile fabric, 1,125 sq. ft. roll, or equal. Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

Engineered wood fiber, 90 cubic yards, or equal. Material must be recently harvested and debarked; free of chemical treatments and additives; free of soil, twigs, leaves and other contaminants.

ACTIVE ADULT FITNESS AREAS

Playworld LifeTrail lower body warm-up station, Item #LT002, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) lower body warm-up, standard, Item #ZZLT0015, or equal.
- One (1) lower-body warm-up, tall, Item #ZZLT0016, or equal.
- One (1) osteoporosis information panel, Item #ZZLT0025, or equal.

Playworld LifeTrail torso stability station, Item #LT004, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) back strengthening activity panel, Item #ZZLT0029, or equal.
- One (1) seated curl activity panel, Item #ZZLT0043, or equal.
- One (1) posture and safe lifting information panel, Item #ZZLT0030, or equal.

Hawks Nest State Park Playground Specifications

Playworld LifeTrail forearm rolls station, Item #LT007, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) forearm rolls standard ADA, Item #ZZLT0014, or equal.
- One (1) forearm rolls, Item #ZZLT0013, or equal.
- One (1) healthy eating information panel, Item #ZZLT0029, or equal.

Playworld LifeTrail standing push-up station, Item #LT006, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) standing push-up activity panel, Item #ZZLT0005, or equal.
- One (1) standing pull-up ADA activity panel, Item #ZZLT0021, or equal.
- One (1) Tai chi information panel, Item #ZZLT0028, or equal.

Playworld LifeTrail upper body warm-up station, Item #LT005, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) upper body warm-up activity panel, Item #ZZLT0018, or equal.
- One (1) upper ADA body warm-up activity panel, Item #ZZLT0019, or equal.
- One (1) benefits of exercise information panel, Item #ZZLT0027, or equal.

Hawks Nest State Park Playground Specifications

ADDITIVE ALTERNATE NUMBER ONE

Playworld LifeTrail upper body stretch station, Item #LT008 or equal. Structure must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) upper body stretch and strengthening advanced, Item #ZZLT0034, or equal.
- One (1) upper body stretch and strengthening, standard, Item #ZZLT0035, or equal.
- One (1) exercise your mind information panel, Item #ZZLT0032, or equal.

ADDITIVE ALTERNATE NUMBER TWO

Playworld LifeTrail bench stepper station, Item #LT003, or equal. Structure must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) bench stepper, standard, activity panel, Item #ZZLT0006, or equal.
- One (1) bench stepper, advanced, activity panel, Item #ZZLT0007, or equal.
- One (1) osteoporosis information panel, Item #ZZLT0025, or equal.

ADDITIVE ALTERNATE NUMBER THREE

Playworld LifeTrail balance station, Item #LT010, or equal. Station must include the following components:

Hawks Nest State Park Playground Specifications

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) partial lunge, Item #ZZLT0008, or equal.
- One (1) single leg balance, Item #ZZLT0010, or equal.
- One (1) prevention of falling/balance information panel, Item #ZZLT0033, or equal.

ADDITIVE ALTERNATE NUMBER FOUR

Playworld LifeTrail welcome station, Item #LT001, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) welcome station introductions, Item #ZZLT0003, or equal.
- One (1) welcome station warnings, Item #ZZLT0004, or equal.
- One (1) stress management/pain reduction information panel, Item #ZZLT0031, or equal.

ADDITIVE ALTERNATE NUMBER FIVE

Playworld LifeTrail lower body stretch station, Item #LT0009, or equal. Station must include the following components:

- One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal. Frame must be free standing; must be a footed design; must have a high density plastic roof that fits over the top of panels; must have metal powder coated posts to shed water; and have a minimum of three sided activity or information panels mounts one panel per side and mounts on solid surface.
- One (1) hamstring stretch, Item #ZZLT0011, or equal.
- One (1) calf stretch, Item #ZZLT0012, or equal.

Hawks Nest State Park Playground Specifications

- One (1) yoga information panel, Item #ZZLT0024, or equal.

ADDITIVE ALTERNATE NUMBER SIX

Halsey Taylor water fountain, Model #4420-FR Endura II or equal. Fountain must be free standing with a tubular pedestal and must be ADA accessible.

Hawks Nest State Park Playground Specifications

All playground equipment and engineered wood fiber must meet the following requirements:

- Compliance with U.S. Consumer Product Safety Commission, Handbook for Public Playground Safety.
- Compliance with ASTM Standard F 1487.
- Compliance with Architectural and Transportation Barriers Compliance Board, Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Play Areas.

Vendors must submit the following attachments:

- Complete manufacturer's parts specifications and warranties.
- Layout drawing to scale of the proposed play structure or equipment.
- ASTM and CPSC Statement of Compliance

Warranties:

- All equipment and engineered wood fiber must be guaranteed to be free of defects in workmanship and material for a minimum of one year from date of acceptance. However, if manufacturer warranty periods are longer than the required minimum one year warranty, those warranties shall apply.

All playground equipment must include tamper proof fasteners to prevent theft and destruction.

Color scheme of equipment must be coordinated with Park Superintendent upon award. Color of items will be selected from manufacturer's standard colors.

A mandatory pre-bid conference will be held on May 20, 2009, at Hawks Nest State Park at 10:00 a.m. A failure to attend the mandatory pre-bid conference will result in bid disqualification. An individual may not represent more than one firm at the pre-bid conference.




2009 PLAYMAKERS

- COMPLIES WITH:
- ASTM F1487-01
 - ASTM F1487-98
 - CPSC #325
 - ADA - ADAAG
 - CSA Z614-03

SITE PLAN

PROJECT NO.	DATE
P12209-1	1/22/09
SCALE	DRAWN BY:
1/8" = 1'-0"	TKA

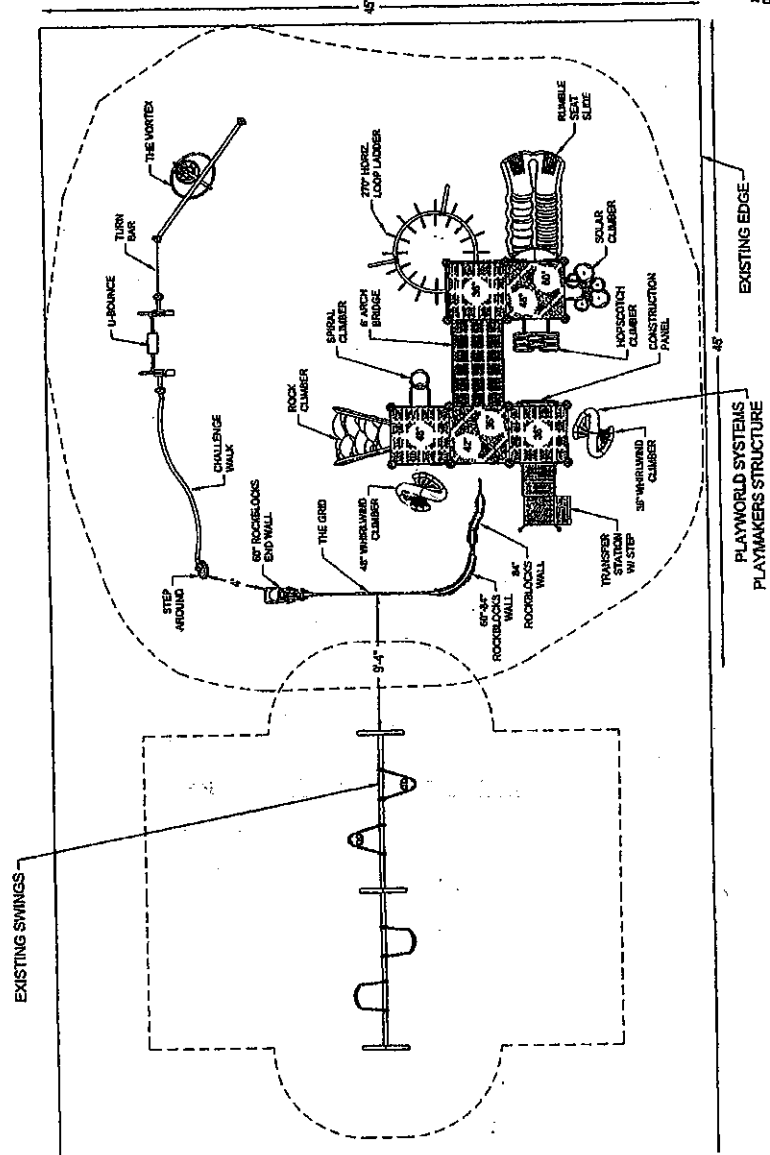

Playground Specialists, Inc.
 17352 N. Selton Ave
 Emmitsburg, MD
 410.962.0972

Hawks Nest State Park


playground Specialists inc.
 17352 N. Selton Ave, Emmitsburg, MD 21726



Hawks Nest State Park



playground

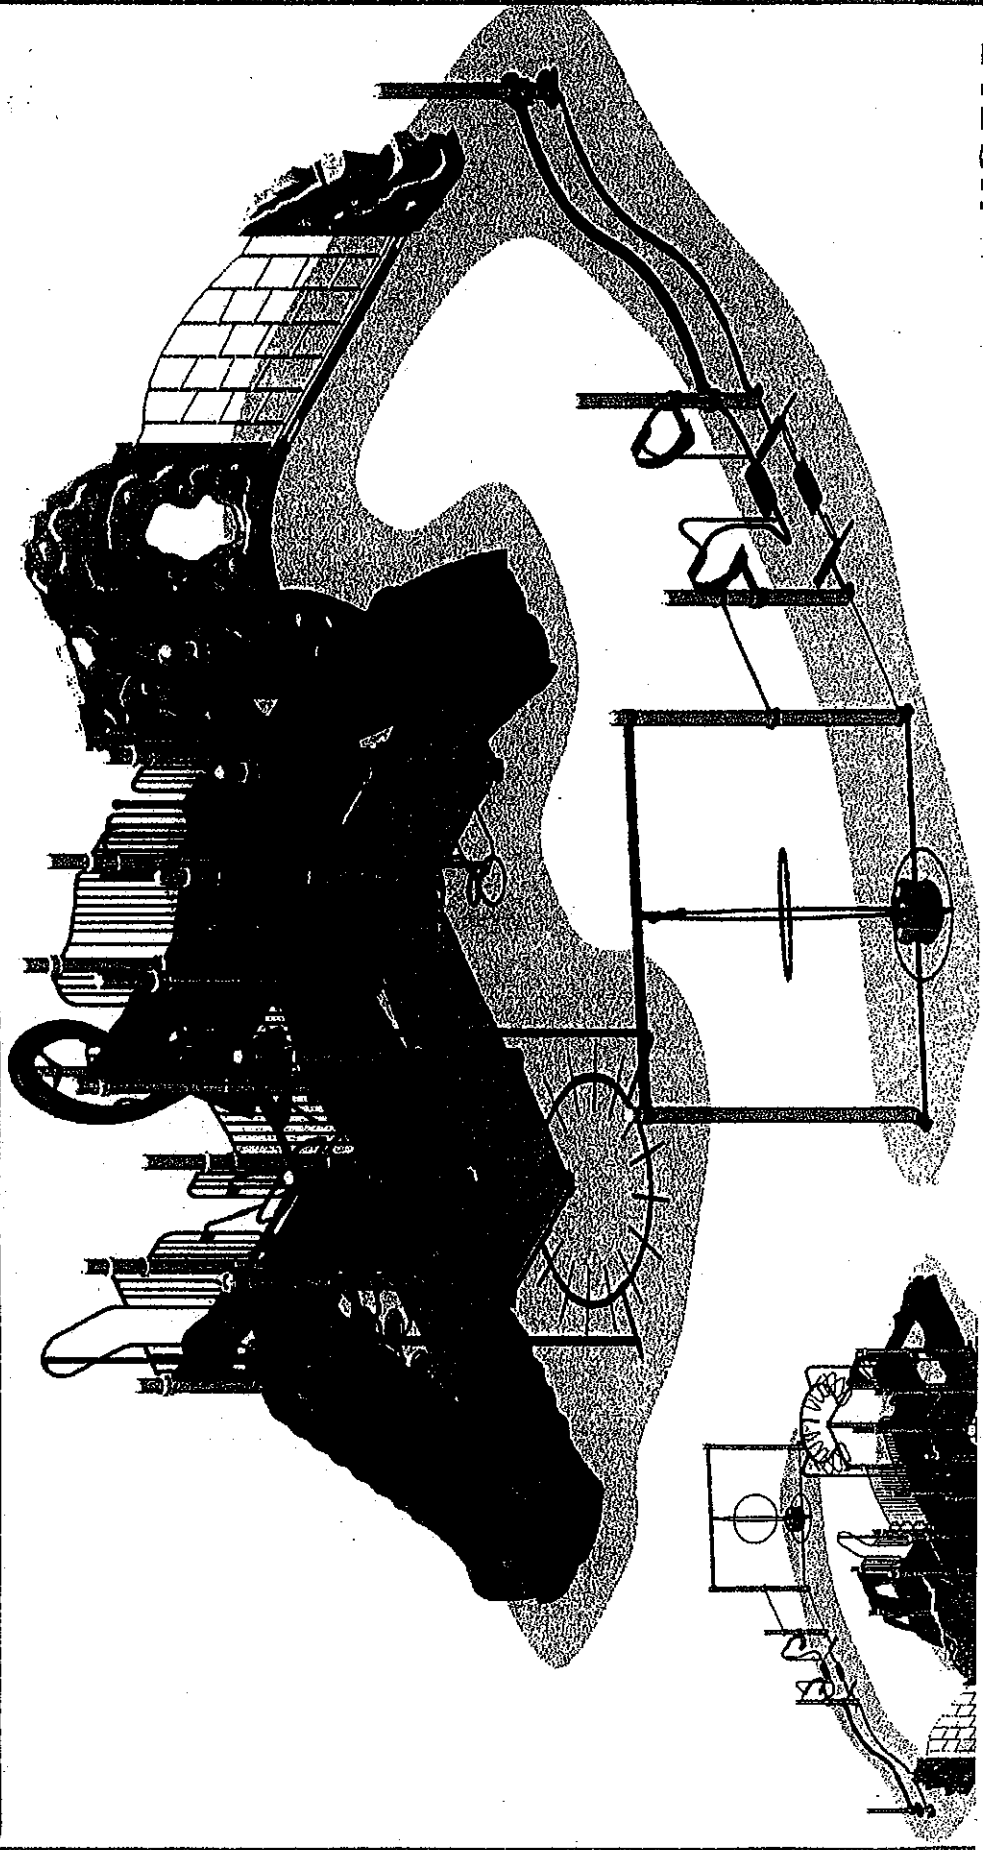

Hawks Nest State Park PLAYGROUND EQUIPMENT SHEET

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding in or equal brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request For Quotation.

Item No.	Equipment	Manufacturer	Model
1	Playground Area - Playworld "Playmakers" custom play structure, Model #12209-1, or equal. Structure must include the following components:	Landscape Structures Inc.	Custom Design #35220-1-1 Per our enclosed specifications and list of Landscape Structures Inc. products
	Three (3) Playworld 5 inch OD 108 inch with ground zero post, Item #ZZPM0008GZ, or equal.	Landscape Structures Inc.	Included in Item #1
	Two (2) Playworld 5 inch OD 120 inch steel post with cap, Item #ZZPM0016, or equal.	Landscape Structures Inc.	Included in Item #1
	Nine (9) Playworld 5 inch OD 132 inch steel with cap, Item #ZZPM0026, or equal.	Landscape Structures Inc.	Included in Item #1
	Three (3) Playworld 5 inch OD 144 inch post with cap, Item #ZZPM0036 or equal.	Landscape Structures Inc.	Included in Item #1
	Two (2) Playworld 5 inch OD 144 inch post ground zero, Item #ZZPM0036GZ, or equal.	Landscape Structures Inc.	Included in Item #1
	Three (3) Playworld square coated deck assembly, Item #ZZPM0616, or equal.	Landscape Structures Inc.	Included in Item #1
	Four (4) Playworld 45 degree tri-deck, Item #ZZPM0639, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld 12 inch deck to deck kick plate, Item #ZZPM2530, or equal.	Landscape Structures Inc.	Included in Item #1

Hawks Nest State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) Playworld 12 inch 45 degree tri-deck kick plate, Item #ZZPM2537, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld transfer station with barriers and a minimum 36 inch deck, Item # ZZPM2008, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld approach step for transfer station, Item #ZZUN2019, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld rumble seat slide with hood and with a minimum 60 inch deck, Item #ZZPM2737, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld oval insert panel with a deck mount, Item #ZZPM4807, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld construction panel insert, Item #ZZUN4793, or equal.	Landscape Structures Inc.	Included in Item #1
	Three (3) Playworld access gate, Item #ZZPM4288, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld rock climber, Item #ZZPM7439, or equal,	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld solar climber with a minimum 60 inch deck, Item #ZZPM7659, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld spiral climber with a minimum 48 inch deck, Item #ZZPM8150, or equal.	Landscape Structures Inc.	Included in Item #1

Hawks Nest State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) Playworld hopscotch climber with a minimum 48 inch deck, Item #ZZPM8260, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld rockblocks deck access support for a minimum 36 inch -48 inch deck, Item #ZZUNO167, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld rockblocks Z support for a minimum 84 inch wall, Item #ZZUN0177, or equal.	Landscape Structures Inc.	Included in Item #1
	Two (2) Playworld rockblocks end support for a minimum 60 inch wall, Item #ZZUN0178, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld rockblocks kinked wall for an 84 inch wall, Item #ZZUN8357, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld RockBlocks end wall for a minimum of 60 inch wall, Item #ZZUN8360, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld RockBlocks 90 degree right wall a minimum of 84 inch to 60 inch, Item #ZZUN8370, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld the grid for a minimum of 60 inch and 84 inch wall, Item #ZZUN8427, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld whirlwind climber a minimum of 36 inch, Item #ZZUN6737, or equal.	Landscape Structures Inc.	Included in Item #1

Hawks Nest State Park

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) Playworld whirlwind climber a minimum of 48 inch, Item #ZZUN6738, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld 270 degree horizontal loop ladder, Item #ZZPM5716, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld chinning/turning bar, Item #ZZPM5736, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld step around, Item #ZZPM0149, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld u-bounce, Item #ZZPM6850, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld challenge walk, Item #ZZPM6860, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld vortex, Item #ZZPM6810, or equal.	Landscape Structures Inc.	Included in Item #1
	One (1) Playworld 6 foot arch bridge, Item #ZZPM6590, or equal.	Landscape Structures Inc.	Included in Item #1
2	Playground Area - Geo-textile fabric, 2,250 sq. ft. roll, or equal.	Zeager Bros.	
3	Playground Area - Geo-textile fabric, 1,125 sq. ft., roll or equal.	Zeager Bros.	
4	Playground Area - Engineered wood fiber, 90 cubic yards, or equal.	Zeager Bros.	WoodCarpet
5	Active Adult Fitness Area - Playworld LifeTrail lower body warm-up station, Item #LT002, or equal. Station must include the following components:	Landscape Structures Inc. 20-Station Vitacourse	Design #35220-2-1 Per enclosed layout

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) lower body warm-up, standard, Item #ZZLT0015, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) lower-body warm-up, tall, Item #ZZLT0016, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) osteoporosis information panel, Item #ZZLT0025, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
6	Active Adult Fitness Area - Playworld LifeTrail torso stability station, Item #LT004, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) back strengthening activity panel, Item #ZZLT0029, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) seated curl activity panel, Item #ZZLT0043, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) posture and safe lifting information panel, Item #ZZLT0030, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
7	Active Adult Fitness Area - Playworld LifeTrail forearm rolls station, Item #LT007, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) forearm rolls standard ADA, Item #ZZLT0014, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) forearm rolls, Item #ZZLT0013, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) healthy eating information panel, Item #ZZLT0029, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
8	Active Adult Fitness Area - Playworld LifeTrail standing push-up station, Item #LT006, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) standing push-up activity panel, Item #ZZLT0005, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) standing pull-up ADA activity panel, Item #ZZLT0021, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Tai chi information panel, Item #ZZLT0028, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
9	Active Adult Fitness Area - Playworld LifeTrail upper body warm-up station, Item #LT005, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) upper body warm-up activity panel, Item #ZZLT0018, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) upper ADA body warm-up activity panel, Item #ZZLT0019, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5

Hawks Nest State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) benefits of exercise information panel, Item #ZZLT0027, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
10	Additive Alternate Number One - Active Adult Fitness Area - Playworld LifeTrail upper body stretch station, Item #LT008 or equal. Structure must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) upper body stretch and strengthening advanced, Item #ZZLT0034, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) upper body stretch and strengthening standard, Item #ZZLT0035, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) exercise your mind information panel, Item #ZZLT0032, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
11	Additive Alternate Number Two - Active Adult Fitness Area - Playworld LifeTrail bench stepper station, Item #LT003, or equal. Structure must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	Item #5 20-Station Vitacourse
	One (1) bench stepper, standard, activity panel, Item #ZZLT0006, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5

Hawks Nest State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) bench stepper, advanced, activity panel, Item #ZZLT0007, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) osteoporosis information panel, Item #ZZLT0025, or equal.	Landscape Structures	20-Station Vitacourse Item #5
12	Additive Alternate Number Three - Active Adult Fitness Area - Playworld LifeTrail balance station, Item #LT010, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) partial lunge, Item #ZZLT0008, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) single leg balance, Item #ZZLT0010, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) prevention of falling/balance information panel, Item #ZZLT0033, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
13	Additive Alternate Number Four - Active Adult Fitness Area - Playworld LifeTrail welcome station, Item #LT001, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) welcome station introductions, Item #ZZLT0003, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5

Hawks Nest State Park

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
	One (1) welcome station warnings, Item #ZZLT0004, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) stress management/pain reduction information panel, Item #ZZLT0031, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
14	Additive Alternate Number Five - Active Adult Fitness Area - Playworld LifeTrail lower body stretch station, Item #LT0009, or equal. Station must include the following components:	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) Playworld LifeTrail frame, Item #ZZLT0001, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) hamstring stretch, Item #ZZLT0011, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) calf stretch, Item #ZZLT0012, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
	One (1) yoga information panel, Item #ZZLT0024, or equal.	Landscape Structures Inc.	20-Station Vitacourse Item #5
15	Additive Alternate Number Six - Active Adult Fitness Area Halsey Taylor water fountain, Model #4420-FR Endura II or equal.	No Bid	No Bid

PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
1	1	Playground Area - Playworld "Playmakers" custom play structure, Model #12209-1, or equal.	\$25,000.00	\$25,000.00
2	1	Playground Area - Geotextile 2,250 sq. ft. roll or equal.	\$.15	\$ 347.50
3	1	Playground Area - Geotextile 1,125 sq. ft. roll or equal.	\$.15	\$ 168.75
4	90 cubic yards	Playground Area - Engineered wood fiber or equal.	\$ 21.00	\$ 1,890.00
5	1	Active Adult Fitness Area - Playworld LifeTrail lower body warm-up station, Item #LT002, or equal.	\$23,000.00	\$23,000.00
6	1	Active Adult Fitness Area - Playworld LifeTrail torso stability station, Item #LT004, or equal.		20-Station Vitacourse by Landscape Structures
7	1	Active Adult Fitness Area - Playworld LifeTrail forearm rolls station, Item #LT007, or equal.		20-Station Vitacourse by Landscape Structures
8	1	Active Adult Fitness Area - Playworld LifeTrail standing push-up station, Item #LT006, or equal.		20-Station Vitacourse by Landscape Structures
9	1	Active Adult Fitness Area - Playworld LifeTrail upper body warm-up station, Item #LT005, or equal.		20-Station Vitacourse by Landscape Structures
10	1	Additive Alternate Number One - Active Adult Fitness Area - Playworld LifeTrail upper body stretch station, Item #LT008 or equal.		20-Station Vitacourse by Landscape Structures
11	1	Additive Alternate Number Two - Active Adult Fitness Area - Playworld LifeTrail bench stepper station, Item #LT003, or equal.		20-Station Vitacourse by Landscape Structures

Total 20-Station Vitacourse
by Landscape Structures Inc.

Hawks Nest State Park Playground Equipment

PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
12	1	Additive Alternate Number Three - Active Adult Fitness Area - Playworld LifeTrail balance station, Item #LT010, or equal.		20-Station Vitacourse by Landscape Structures
13	1	Additive Alternate Number Four - Active Adult Fitness Area - Playworld LifeTrail welcome station, Item #LT001, or equal.		20-Station Vitacourse by Landscape Structures
14	1	Additive Alternate Number Five - Active Adult Fitness Area - Playworld LifeTrail lower body stretch station, Item #LT0009, or equal.		20-Station Vitacourse by Landscape Structures
15	1	Additive Alternate Number Six - Active Adult Fitness Area - Halsey Taylor water fountain, Model #4420-FR Endura II or equal.	No Bid	No Bid
		TOTALS		\$50,406.25

State of West Virginia

VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with West Virginia Code, §5A-3-37. (Does not apply to construction contracts). West Virginia Code, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the West Virginia Code. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

- 1. Application is made for 2.5% resident vendor preference for the reason checked: Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; or, Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or, Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; or,
2. Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
3. Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
4. Application is made for 5% resident vendor preference for the reason checked: Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; or,
5. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; or,
6. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: SERVICE SUPPLY LTD., INC. Signed: JERRY GROVES VICE PRESIDENT Date: JUNE 10, 2009 Title:

*Check any combination of preference consideration(s) indicated above, which you are entitled to receive.

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

VENDOR OWING A DEBT TO THE STATE:

West Virginia Code §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

If this is a solicitation for a public improvement construction contract, the vendor, by its signature below, affirms that it has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code*. The vendor **must** make said affirmation with its bid submission. Further, public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code* and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the *West Virginia Code* may take place before their work on the public improvement is begun.

ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.

LICENSING:

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.

Under penalty of law for false swearing (*West Virginia Code* §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

Vendor's Name: SERVICE SUPPLY LTD., INC.

Authorized Signature:  Date: JUNE 10, 2009

Purchasing Affidavit (Revised 01/01/09) JERRY GROVES, VICE PRESIDENT



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

**Request for
 Quotation**

RFQ NUMBER
DNR209187

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
**FRANK WHITTAKER
 304-558-2316**

*709022058 800-848-7556
SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 HAWKS NEST STATE PARK
 177 WEST MAIN STREET
 POST OFFICE BOX 857
 ANSTED, WV
 25812 304-658-5196

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
06/02/2009				

BID OPENING DATE: **06/16/2009** BID OPENING TIME: **01:30PM**

LINE	QUANTITY	UOP	GAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
***** ADDENDUM NO.1 *****						
THIS ADDENDUM IS ISSUED TO PROVIDE THE FOLLOWING:						
1) MANDATORY PRE-BID SIGN SHEET						
2) TECHNICAL QUESTIONS AND ANSWERS						
3) REVISED PRICING PAGE.						
0001	1	LS		650-38		
PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)						
***** THIS IS THE END OF RFQ DNR209187 ***** TOTAL:						\$50,406.25

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *[Signature]* TELEPHONE: **1-800-848-7556** DATE: **JUNE 10, 2009**
 TITLE: **VICE PRESIDENT** ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

DNR209187
Hawks Nest State Park Playground Equipment
Addendum #1

Mr. Shriver advised that the playground diagram on page 12 needed to be flipped over to see the correct view. The swings are on the right side.

- 1) On Page 5 the bid requests 2,250 sq. feet of Geotextile Fabric and on Page 6 the bid requests 1,125 sq. feet. How much fabric is needed?
3,375.00 sq. feet is needed. The two measurements on the bid request total the correct amount.
- 2) Does the Geotextile Fabric have to be two separate rolls?
No. Two rolls are not required; however it must equal 3, 375.00 sq feet.
- 3) Is there a picture of the exercise equipment on a website?
Yes. [www.playworldsystems.com/about us/product lines/lifetrail](http://www.playworldsystems.com/about_us/product_lines/lifetrail)
- 4) Is there a certain color required for the equipment?
The color scheme of equipment will be selected upon award.
- 5) Is insurance and certificates required now?
The Purchasing Affidavit should be completed and submitted with your bid. Insurance and bonds are not required on this since the scope of work does not involve construction.
- 6) Is the adult active stations on pavement?
Yes, they will be surface mount.
- 7) How did you pick the water fountain?
I choose this one because it is ADA, vandal proof and serviceable. The Halsey Taylor Model 4420-FR Endura II is available to see on-line. See attached picture.
- 8) Will the swings be replaced?
The bid does not include swings. The swings we have will stay in the same location.
- 9) Will installation be required?
The park staff will be responsible for all installation.



Halsey Taylor.
Satisfying Thirsts Since 1912

MODEL 4420 FR



This fountain is certified to NSF/ANSI 61.

GENERAL

Pedestal, Endura II™ Steel fountain with textured powder-coat finish and E-coat immersion for year-round beauty with minimum maintenance. The E-coat immersion process coats the outside and inside of the fountain for the ultimate in corrosion protection. Contour-formed stainless steel bi-level basins with rounded corners and edges reduce splatter, insure proper drainage and prevent standing waste water. Designed to be easily accessible to both physically challenged and able-bodied individuals. Ideally suited for installation in public areas. Model meets state and federal requirements as defined by the Americans with Disabilities Act.

FREEZE-RESISTANT VALVE SYSTEM

Freeze-resistant valve designed for ground installation 18" below the frost line. 60" of access tubing provided with the freeze-resistant valve system. The length of the tubing can be adjusted in the field for lesser frost depths.

BUBBLER

Vandal-resistant bubbler is one-piece, chrome-plated. Unit has integral hood guard design to prevent contamination from other users, airborne deposits and tampering.

PUSHBUTTON ACTUATION MECHANISM

Self-closing, vandal-resistant pushbutton does not require grasping or twisting.

AUTOMATIC STREAM HEIGHT REGULATOR

Self-closing assembly is located inside unit to prevent tampering. Unit resists corrosion and lining. A constant stream height is automatically maintained under line pressures that vary from 20 to 105 psi.

WATER INLET

3/8" female NPT fitting.

DRAIN OUTLET


Drain requirements are detailed in the owner's manual.

ACCESS PANEL

Manufactured of heavy-gauge steel with vandal-resistant screws. Provides access for easy hook-up of all plumbing connections.

Freeze-Resistant Bi-Level Endura II™ Tubular Pedestal

Barrier-Free Fountain

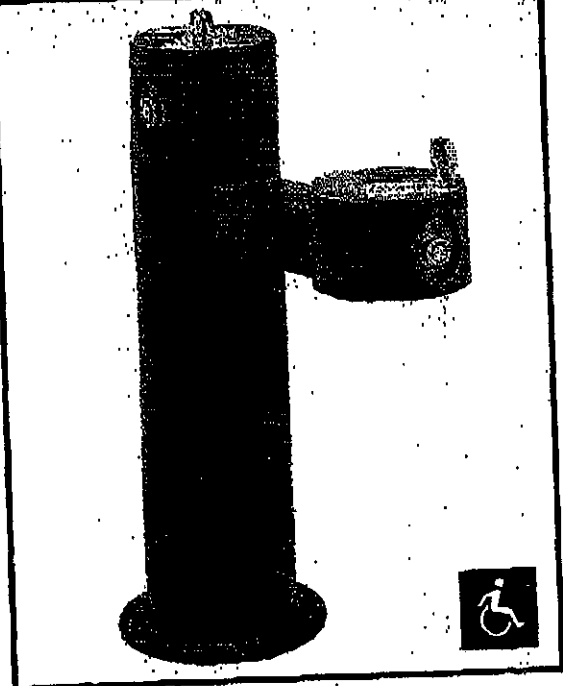

Standard Finish is Evergreen textured powder-coat Endura II™

Each 4420 FR consists of 2 cartons of the following:

- Fountain
- Freeze-Resistant Valve System

Service stop not included.

Shipping weight: 175 lbs.

JOB NAME: _____

ENGINEER/CONTRACTOR NAME: _____

APPROVAL: _____

DATE: _____



halseytaylor.com

HALSEY TAYLOR, 2222 CAMDEN COURT, OAK BROOK, ILLINOIS 60523

SIGN IN SHEET

Page _____ of _____

Date: _____

Request for Proposal No.

PLEASE PRINT

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

TELEPHONE & FAX NUMBERS

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Playground Specialists</u> Rep: <u>Tammy Wood</u> Email Address: <u>tammy@playspec.com</u>	<u>17352 N. Seton Avenue</u> <u>Emmitsburg, MD 21727</u>	PHONE <u>(301) 271-9236</u> TOLL FREE <u>800-385-0075</u> FAX <u>(301) 271-9239</u>
Company: <u>Premier Const. Group, LLC</u> Rep: <u>Thomas Turpin II</u> Email Address: <u>lunewolf_732003@yahoo.com</u>	<u>Rt 2 Box 91</u> <u>Jane Lew, WV 26370</u>	PHONE <u>(304) 616-3514</u> TOLL FREE <u>119</u> FAX <u>(304) 884-6900</u>
Company: <u>VA PLAYGROUND SERVICES</u> Rep: <u>JIM BENEDICT</u> Email Address: <u>JIMEVA@playgrounds.com</u>	<u>VIRGINIA PLAYGROUND SERVICES</u> <u>14276 RIVERSIDE DR</u> <u>ASHLAND, VA 23005</u>	PHONE <u>434-249-2158</u> TOLL FREE FAX <u>434-249-3189</u>
Company: <u>Taylor Sports & Recreation</u> Rep: <u>Tim Nelson</u> Email Address: <u>CNE67@aol.com</u>	<u>836 Echo Road</u> <u>South Charleston, WV</u> <u>25303</u>	PHONE <u>304-744-6548</u> TOLL FREE <u>800-286-9693</u> FAX <u>304-744-6545</u>
Company: <u>Davis Athletics, LLC</u> Rep: <u>Fred Davis</u> Email Address: <u>f1davis@yahoo.com</u>	<u>2325 Liberty Street</u> <u>Parkersburg, WV 26101</u>	PHONE <u>304-428-3000</u> TOLL FREE FAX <u>304-428-3002</u>

06/20/2009 10:15 FAX 304 558 2183

DIV. PROCUREMENT SERVICES - HAVENS NEST

06/01

SIGN IN SHEET

PLEASE PRINT

Page 77 of

Date:

Request for Proposal No.

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

TELEPHONE & FAX NUMBERS

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Blue Ridge Outdoor Designs</u>	<u>P.O. Box 123</u>	PHONE <u>540 265 7586</u>
Rep: <u>Jim Jones</u>	<u>Blue Ridge, Va 24064</u>	TOLL FREE
Email Address: <u>brokensnow@verizon.net</u>		FAX <u>428 839 2142</u>
Company: <u>Southern Playground</u>	<u>P.O. Box 4505</u>	PHONE <u>757 948 1229</u>
Rep: <u>Kenny Robinson</u>	<u>Virginia Beach, VA 23451</u>	TOLL FREE <u>800 287 1314</u>
Email Address: <u>KRobinson@southernplayground.com</u>		FAX <u>757 431 0036</u>
Company: <u>Service Supply Ltd. Inc.</u>	<u>997 Sunset Tr</u>	PHONE <u>304-743-5269</u>
Rep: <u>Pam Melton</u>	<u>Milton WV 25541</u>	TOLL FREE <u>800-248-7556</u>
Email Address: <u>playgroundpam@yahoo.com</u>		FAX <u>304-743-3250</u>
Company: <u> </u>		PHONE
Rep: <u> </u>		TOLL FREE
Email Address: <u> </u>		FAX
Company: <u> </u>		PHONE
Rep: <u> </u>		TOLL FREE
Email Address: <u> </u>		FAX

06/20/2008 10:15 FAX 304 558 2165

DNR PROCUREMENT OFFICE - BAKES NEET

001

Hawks Nest State Park Playground Equipment PRICING SHEET

PLEASE NOTE: BID MUST SHOW UNIT PRICE.

Item No.	Quantity	Description	Unit Price	Amount
1	1	Playground Area - Playworld "Playmakers" custom play structure, Model #12209-1, or equal.		
2	2,250 square feet	Playground Area - Geotextile fabric or equal.	Cost per SQUARE FOOT	PLEASE NOTE: Bidders must include a unit price. This item cannot be bid Lump Sum. 2,250 square feet x price per square foot = amount
3	1,125 square feet	Playground Area - Geotextile fabric or equal.	Cost per SQUARE FOOT	PLEASE NOTE: Bidders must include a unit price. This item cannot be bid Lump Sum. 1,125 square feet x price per square foot = amount
4	90 cubic yards	Playground Area - Engineered wood fiber or equal.	Cost per CUBIC YARD	PLEASE NOTE: Bidders must include a unit price. This item cannot be bid Lump Sum. 1 cubic yard x price = amount
5	1	Active Adult Fitness Area - Playworld LifeTrail lower body warm-up station, Item #LT002, or equal.		
6	1	Active Adult Fitness Area - Playworld LifeTrail torso stability station, Item #LT004, or equal.		
7	1	Active Adult Fitness Area - Playworld LifeTrail forearm rolls station, Item #LT007, or equal.		

Hawks Nest State Park Playground Equipment PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
8	1	Active Adult Fitness Area - Playworld LifeTrail standing push- up station, Item #LT006, or equal.		
9	1	Active Adult Fitness Area - Playworld LifeTrail upper body warm-up station, Item #LT005, or equal.		
10	1	Additive Alternate Number One - Active Adult Fitness Area - Playworld LifeTrail upper body stretch station, Item #LT008 or equal.		
11	1	Additive Alternate Number Two - Active Adult Fitness Area - Playworld LifeTrail bench stepper station, Item #LT003, or equal.		
12	1	Additive Alternate Number Three - Active Adult Fitness Area - Playworld LifeTrail balance station, Item #LT010, or equal.		
13	1	Additive Alternate Number Four - Active Adult Fitness Area - Playworld LifeTrail welcome station, Item #LT001, or equal.		
14	1	Additive Alternate Number Five - Active Adult Fitness Area - Playworld LifeTrail lower body stretch station, Item #LT0009, or equal.		
15	1	Additive Alternate Number Six - Active Adult Fitness Area - Halsey Taylor water fountain, Model #4420-FR Endura II or equal.		
		TOTALS		

LS
**landscape
structures™**

February 2, 2009

To Whom It May Concern:

Landscape Structures Inc. has been actively involved in the development of safety standards for public playground equipment for more than 15 years. We are also a charter member of the International Play Equipment Manufacturers Association (IPEMA).

All products covered under the scope of the Standard in our 2009 Park and Playground Equipment catalog have been tested/certified and validated by an independent third party to be in compliance with the requirements of the ASTM (American Society for Testing and Materials) F1487 Safety Standard according to procedures set forth by the IPEMA, except where listed. A listing of all certified products can be seen at www.ipema.org. This listing will also show that all products except where noted, are certified to the CAN/CSA Z614-07 Children's Playspaces and Equipment published in March 2007 by the Canadian Standards Association (CSA).


To the best of our knowledge, we also conform to the U.S. Consumer Products Safety Commission's (CPSC) Handbook for Public Playground Safety published in 1998.

The company achieved ISO 9001:2000 certification in March 2003 and the ISO 14001 environmental standard in September 1998. The pursuit of ISO certification helped Landscape Structures establish its quality management systems and establish the infrastructure for continued growth.

If you have any questions, please contact the undersigned.


Sincerely,

Landscape Structures Inc.




Randy Watermill
Director of Product Development

Subscribed and sworn before me on this 2nd day of February, 2009.


Notary Public

2/2/09
Date



(Notary Stamp)



2009 Play Equipment Warranty

You have our word.

- **100-Year Limited Warranty** for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.
- **15-Year Limited Warranty** for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff™-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurf® against material or manufacturing defects when properly installed. Corocord® cable on Spacenet™ climbers against breakage.
- **10-Year Limited Warranty** for all CoolToppers™ structural steel frames and Mobius climbers™ against structural failure due to natural deterioration or manufacturing defects.
- **5-Year Limited Warranty** for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.
- **3-Year Limited Warranty** for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™; PVC belting material, HealthBeat™ hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion, natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgment of Order and will be free of defects in manufacturing and material. Seller further warrants:

All the warranties commence on date of Seller's invoice. Should any failure to conform to the above express warranties appear within the applicable warranty period, Seller shall, upon being notified in writing promptly after discovery of the defect and within the applicable warranty period, correct such nonconformity either by repairing any defective part or parts, or by making available a replacement part within 60 days of written notification. Seller shall deliver the repaired or replacement part or parts to the site free of charge, but will not be responsible for providing labor or the cost of labor for the removal of the defective part or parts and the installation of any replacement part or parts. Replacement parts will be warranted for the balance of the original warranty.

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANT-ABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE.

The remedies hereby provided shall be the exclusive and sole remedies of the purchaser. Seller shall not be liable for any direct, indirect, special, incidental or consequential damages.

Seller neither assumes nor authorizes any employee, representative or any other person to assume for Seller any other liability in connection with the sale or use of the structures sold, and there are no oral agreements or warranties collateral to or affecting this agreement. The warranty stated above is valid only if the structures and or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc.; have been subjected to normal use for the purpose for which the goods were designed; have not been subject to misuse, negligence, vandalism, or accident; have not been subjected to addition or substitution of parts; and have not been modified, altered, or repaired by persons other than Seller or Seller's designees in any respect which, in the judgement of Seller, affects the condition or operation of the structures. To make a claim, send your written statement of claim, along with the original job number or invoice number to: Landscape Structures Inc. 601 7th Street South, Delano, Minnesota, 55328-8605

Signed:

Chairman

Date: 01/01/09



2009 Terms of Sale

PRICING: Prices in the Landscape Structures price list do not include delivery and handling charges. Prices are subject to change without notice.

TERMS: To tax-supported institutions and those with established credit: Net 30 days from the date of the invoice. 1.5% per month thereafter, freight charges are prepaid and applied to the invoice. Taxes: Prices listed in the Landscape Structures price list do not include applicable taxes, if any.

WEIGHTS: Weights shown in the catalog and price list are approximate, and may vary. Delivery: If delivery of the equipment is by common carrier, should there be damage or a shortage, notify the carrier at once and sign delivery documents provided by the carrier noting the damage or shortage. Most products are delivered on large pallets and will require a forklift or similar equipment to unload as a unit on the site. If this is not possible, the units can be unpacked in the truck.

INSTALLATION: All Playstructures and/or equipment are delivered unassembled and packaged with recyclable materials. For a list of Factory Certified Installers in your area, please contact your Landscape Structures Representative.

SERVICE: We have knowledgeable, qualified sales consultants throughout the world. Our Representatives are available to help you before, during and after the sale. Landscape Structures Inc. has exclusive design software that features all of our parts and

pieces in pull-down menus. With this, your Sales Representative can design a playground layout that meets not only your needs, but ASTM and CPSC standards. In addition, we have a full staff of NPSI-certified designers along with 2D and 3D drawing capabilities to assist you with your playground plans. Please contact us at 601 Seventh Street South, Delano, Minnesota 55328 or call 1-800-328-0035 inside the USA or 1-763-972-3391 outside the USA, for your sales representative or visit our web site at playlsi.com

RETURN POLICY: As an indication of our commitment to our customers, Landscape Structures will accept returns of new structures and/or new equipment purchased within 60 days of the original invoice date. Advance notification is necessary to assure proper credit. Parts not included in this return policy are custom parts, (including PlayShaper® posts) as well as used or damaged parts. A 20% restock fee plus all freight charges will apply to all product returns. Note: All parts are subject to inspection upon return. Parts returned damaged may not receive a full credit. For this reason, it is important that all returned parts are properly packaged to prevent damages while in transit.

PRODUCT CHANGES: Because of our commitment to safety, innovation, and value, we reserve the right to change specifications at any time.

CONTRACTOR LICENSE

Authorized by the

West Virginia Contractor Licensing Board

Number:

WV013333

Classification:

SPECIALTY

SERVICE SUPPLY LTD INC
DBA SERVICE SUPPLY LTD INC
1524 S HAMILTON RD
COLUMBUS, OH 43227-2493

Date Issued

JANUARY 24, 2009

Expiration Date

JANUARY 24, 2010


Authorized Company Signature


Chair, West Virginia Contractor
Licensing Board



WEST VIRGINIA
CONTRACTOR
LICENSING
BOARD

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



**WORKERS COMPENSATION
AND
EMPLOYERS LIABILITY POLICY**

INFORMATION PAGE WC 00 00 01 (A)

RENEWAL OF POLICY NUMBER: WC10102907-04
POLICY NUMBER: WC10102907-05

INSURER: BRICKSTREET MUTUAL INSURANCE COMPANY

- | | | |
|----|---|---|
| 1. | INSURED:
SERVICE SUPPLY LTD INC
1524 SOUTH HAMILTON ROAD
COLUMBUS, OH 43227 | PRODUCER:
BRICKSTREET MUTUAL INSURANCE
COMPANY
400 QUARRIER STREET
CHARLESTON, WV 25301-2010 |
|----|---|---|

Insured is a(n) CORPORATION

Other work places and identification numbers are shown in the schedule(s) attached.

2. The policy period is from 11/30/2008 to 11/30/2009 12:01 A.M. at the insured's mailing address.
3. **A. WORKERS COMPENSATION INSURANCE:** Part One of the policy applies to the Workers Compensation Law of the state(s) listed here:
- WEST VIRGINIA
- B. EMPLOYERS LIABILITY INSURANCE:** Part Two of the policy applies to work in each state listed in item 3.A. The limits of our liability under Part Two are:
- | | | |
|----------------------------|-----------|---------------|
| Bodily Injury by Accident: | \$100,000 | Each Accident |
| Bodily Injury by Disease: | \$500,000 | Policy Limit |
| Bodily Injury by Disease: | \$100,000 | Each Employee |
- C. OTHER STATES INSURANCE:** Part Three of the policy applies to the states, if any, listed here:
- See West Virginia Limited Other States Insurance Endorsement WC 99 03 05
- D.** This policy includes these endorsements and schedules:
- SEE LIST OF ENDORSEMENTS - EXTENSION OF INFORMATION PAGE
4. The premium for this policy will be determined by our Manuals of Rules, Classifications, Rates and Rating Plans. All required information is subject to verification and change by audit to be made in accordance with Part Five of the Policy.

DATE OF ISSUE: 12/29/2008
ISSUING OFFICE: Charleston, WV
PRODUCER: BRICKSTREET MUTUAL INSURANCE COMPANY



Bureau of Workers' Compensation

30 W. Spring St.
Columbus, OH 43215

Certificate of Premium Payment

This certifies the employer listed below has paid into the Ohio State Insurance Fund as required by law. Therefore, the employer is entitled to the rights and benefits of the fund for the period specified. For more information, call 1-800-OHIOBWC.

This certificate must be conspicuously posted.

Policy No. and Employer

Period Specified Below

406937

01/01/2009 Thru 08/31/2009

SERVICE SUPPLY LTD., INC.
1524 S HAMILTON RD
COLUMBUS, OH 43227-2429



ohiobwc.com

Marsha P. Ryan
Administrator

You can reproduce this certificate as needed.

Ohio Bureau of Workers' Compensation

Required Posting


Effective Oct. 13, 2004, Section 4123.54 of the Ohio Revised Code requires notice of rebuttable presumption. Rebuttable presumption means an employee may dispute or prove untrue the presumption (or belief) that alcohol or a controlled substance not prescribed by the employee's physician is the proximate cause (main reason) of the work-related injury.

The burden of proof is on the employee to prove the presence of alcohol or a controlled substance was not the proximate cause of the work-related injury. An employee who tests positive or refuses to submit to chemical testing may be disqualified for compensation and benefits under the Workers' Compensation Act.



Bureau of Workers' Compensation

You must post this language with the certificate of premium payment.



Ohio Bureau of Workers' Compensation

Governor, Ted Strickland
Administrator/CEO Marsha P. Ryan

Focus on
Ohio Employers

log on

? help print search glossary cc

- Accident/Injury Info »
- Claim Info »
- Claim Payment »
- Claim Reference Info »
- Coverage look-up
- Employer Services »
- Quick Pay
- Safety Services »
- Self-Insured »
- Forms
- Section Map

Live support available
Monday through Friday
7:30 a.m. - 5:30 p.m.
[Click here to get help!](#)

Service: State construction contractor search results

Policy number: 406937-0
 Company name: SERVICE SUPPLY LTD., INC.
 Construction contractor status: APPROVED
 Construction contractor status date: 5/4/2007 12:00:00 AM

[search again](#)

Note: BWC has designed this database for those responsible for ensuring that a construction contractor or subcontractor has a drug-free program that complies with the governor's executive order requiring a drug-free workplace. A contractor or subcontractor in an APPROVED status has agreed to implement a drug-free workplace program which makes the company compliant with the governor's executive order. Therefore, you can print this page for your records.

Click the Help tab in the upper-right hand corner for more status definitions.



ACORD™ CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
12/10/2008

PRODUCER Phone: 6168783351
The Campbell Group
PO Box 1788
Grand Rapids MI 49501

Fax: 8008473129

SERVICE SUPPLY LTD.

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURED
Service Supply Ltd Inc
1524 S Hamilton Road
Columbus OH 43227

IN BUSINESS FOR FUN AND SAFETY

INSURERS AFFORDING COVERAGE	NAIC #
INSURER A: Continental Casualty Co	
INSURER B: American Casualty Co of Read	
INSURER C:	
INSURER D:	
INSURER E:	

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR ADD'L LTR INSR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
B	GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	2088184534	12/10/2008	12/10/2009	EACH OCCURRENCE \$1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$100,000 MED EXP (Any one person) \$5,000 PERSONAL & ADV INJURY \$1,000,000 GENERAL AGGREGATE \$2,000,000 PRODUCTS - COMP/OP AGG \$2,000,000
A	AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS	2088184498	12/10/2008	12/10/2009	COMBINED SINGLE LIMIT (Ea accident) \$1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$
	GARAGE LIABILITY <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT \$ OTHER THAN AUTO ONLY: EA ACC \$ AGG \$
A	EXCESS/UMBRELLA LIABILITY <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE DEDUCTIBLE <input checked="" type="checkbox"/> RETENTION \$10,000	2088184453	12/10/2008	12/10/2009	EACH OCCURRENCE \$2,000,000 AGGREGATE \$2,000,000 \$ \$ \$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				WC STATU-TORY LIMITS <input type="checkbox"/> OTH-ER <input type="checkbox"/> E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$
B	OTHER Installation Floater	2088184534	12/10/2008	12/10/2009	\$120,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS

CERTIFICATE HOLDER

Service Supply Ltd Inc
1524 South Hamilton Road
Columbus OH 43227

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE

Wanna Fitzpatrick

IMPORTANT

If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

DISCLAIMER

The Certificate of Insurance on the reverse side of this form does not constitute a contract between the issuing Insurer(s), authorized representative or producer, and the certificate holder, nor does it affirmatively or negatively amend, extend or alter the coverage afforded by the policies listed thereon.

PRODUCER
Aon Risk Services Central, Inc.
fka Aon Risk Services, Inc. of Minnesota
8300 Norman Center Drive
Suite 1000
Minneapolis MN 55437 USA

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

PHONE: (952) 656-8000 FAX: (312) 381-0536

INSURED
Landscape Structures, Inc.,
Basics, Inc., Skatewave, a
Division of Landscape Structures, Inc.
601 7th Street South
Delano MN 55328 USA

INSURERS AFFORDING COVERAGE		NAIC #
INSURER A:	ACE American Insurance Company	22667
INSURER B:	American International Specialty Lines	26883
INSURER C:		
INSURER D:		
INSURER E:		

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	ADD'L INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS SHOWN ARE AS REQUESTED	
						LIMITS	
A		GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> BFPD Incl. <input checked="" type="checkbox"/> Bkt Contractual Incl GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	PMIG23860971 GL & Products Liability	06/01/08	06/01/09	EACH OCCURRENCE	\$2,000,000
						DAMAGE TO RENTED PREMISES (Ea occurrence)	\$50,000
						MED EXP (Any one person)	Excluded
						PERSONAL & ADV INJURY	\$2,000,000
						GENERAL AGGREGATE	\$4,000,000
						PRODUCTS - COMP/OP AGG	\$4,000,000
		AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS <input type="checkbox"/> NON OWNED AUTOS				COMBINED SINGLE LIMIT (Ea accident)	
						BODILY INJURY (Per person)	
						BODILY INJURY (Per accident)	
						PROPERTY DAMAGE (Per accident)	
		GARAGE LIABILITY <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT	
						OTHER THAN AUTO ONLY: EA ACC	
						AGG	
B		EXCESS/UMBRELLA LIABILITY <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE <input type="checkbox"/> DEDUCTIBLE <input type="checkbox"/> RETENTION \$10,000	BE1030126	06/01/08	06/01/09	EACH OCCURRENCE	\$5,000,000
						AGGREGATE	\$5,000,000
		WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR / PARTNER / EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				WC STATUTORY LIMITS	
						OTHER	
						E.L. EACH ACCIDENT	
						E.L. DISEASE-EA EMPLOYEE	
						E.L. DISEASE-POLICY LIMIT	
		OTHER					

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/EXCLUSIONS ADDED BY ENDORSEMENT/SPECIAL PROVISIONS
Broad Form Vendors Endorsement

CERTIFICATE HOLDER	CANCELLATION
Service Supply Ltd., Inc. 1524 South Hamilton Road Columbus OH 43227 USA	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT. BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.
	AUTHORIZED REPRESENTATIVE

Aon Risk Services Central, Inc.

Holder Identifier: 570028850357 Certificate No: 570028850357

SERVICE SUPPLY LTD., INC.



1524 SOUTH HAMILTON ROAD ~ COLUMBUS, OHIO 43227 ~ TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

June 1, 2005

Service Supply Ltd., Inc. - founded in 1959 in Columbus, Ohio. We originally had offices in the Bryson Building in Columbus, Ohio, and have been in our present facilities, 1524 South Hamilton Road, Columbus, Ohio since 1967.

Ralph Groves, my brother, founded Service Supply Ltd., Inc. and was president until his death in 1973.

Our employees at this time are:

Mary G. Groves (wife) President (1960)
Jerry Groves (son) Vice President (1969)
Janet Kletecka (daughter) Board of Directors (1974)
Alan Kletecka (son-in law) Sales Manager (1973)
Ben Groves (husband) Secretary-Treasurer (1961)
Donna Hetzner - Secretary (1999)
Linda Groves (daughter-in-law) Secretary (1977)
Linda Kroonemeyer - Secretary (1986)
Medrith Mollenkamp - Secretary (1988)
Connie Triplett - Secretary (2003)

We have five (5) sales persons located in various areas of Ohio, Indiana and West Virginia that are on straight commission basis. Some of these sales persons also offer other lines that are related to the same market that we service. This gives us a total of seven (7) sales persons on the road.

Service Supply Ltd., Inc. originally sold items pertaining to Traffic and Highway Safety such as paint strippers, traffic paint, signs, and sign posts. We expanded into the park and recreation market and then into the school market which includes all grade 1-12 and colleges. We also call on the private sector where our site amenities, signs, and play structures are popular. Our early childcare play equipment is designed for institutional and corporate facilities that have become involved in day care centers.

Should you have any questions, please feel free to call me Toll Free -
in Ohio call 800-282-1900 - Indiana and West Virginia call 800-848-7556.

Very truly yours,

SERVICE SUPPLY LTD., INC.

Jerry Groves

Jerry Groves
Vice President

JG/dlh

A partial list of our suppliers and their principals, addresses, phone numbers, and products to follow:

- **Landscape Structures, Inc.**, Barb and Steve King, Route #3, 601 7th Street, South, Delano, MN 55328
612-479-2546 **PLAYGROUND EQUIPMENT**
- **Wabash Valley Manufacturing, Inc.**, Jerry Shilling, P. O. Box 5, Silver Lake, IN 46982
219-352-2102 **SITE AMENITIES** (expanded metal)
- **DuMor, Inc.**, Steve Richard, P. O. Box 142, Mifflintown, PA 17059
717-436-2106 **SITE AMENITIES** (wood)
- **American Aluminum Seating, Inc.**, Bob Palmer, P. O. Box 1468, Marshalltown, IA 50158
515-753-5366 **PORTABLE BLEACHERS, STADIUM GRANDSTANDS**
- **Interkal LLC**, Richard Patterson, P. O. Box 2107, Kalamazoo, MI 49003
616-349-1521 **TELESCOPIC GYM BLEACHERS**

We are listed in D&B; any late payments that may be listed on these reports are the result of problems in delivery of total order, which in turn holds up payment to the manufacturer. This would only appear if it were a very large order, which would involve telescopic bleachers.

Our bank, which we have been with since 1959, is National City Bank, Bexley Office, 2594 East Main Street, Bexley, OH 43209- phone 614-238-7100.

Our accountant is Schwartz, Adleman, Kellerman & Marks, (Mr. Sam Schwartz) 145 North Reynoldsburg-New Albany Road, Blacklick, OH 43004-9701. Phone number is 614-866-1600.

Our legal counsel is the firm of Kahn, Kleinman, Yanowitz & Arnson (contact for Service Supply is Mr. Neil Kurit, The Tower at Erieview, Suite 2600, 1301 East Ninth Street, Cleveland, OH 44114-1824. Neil Kurit's phone number is 216-736-3452.

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT OF THE BOARD OF DIRECTORS

December 12, 1988

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following actions by this unanimous written consent:

RESOLVED: That the following persons be, and they hereby are, elected to the offices of the Corporation set opposite their respective names, each to serve in such capacity until his or her successor is duly elected and qualified:

Mary G. Groves	President
Jerry L. Groves	Vice President
Oscar B. Groves	Secretary/Treasurer
Alan Kletecka	Sales Manager

RESOLVED: That the officers of the Corporation select a bank to be the official depository of the Corporation and that the corporate resolutions required by such institution be, and they same hereby are, adopted by the Corporation as part of this resolution and that any one of the officers be, and they hereby are, authorized to execute, acknowledge, and deliver in the name and on behalf of the Corporation, any and all agreements, documents and certificates, and to do and perform all such acts and things as may be deemed by them necessary or appropriate to effectuate the purpose of this resolution;

RESOLVED FURTHER: That said bank be, and it hereby is, authorized to pay out the funds of the Corporation on deposit with it from time to time upon checks, drafts or other withdrawal orders drawn upon it and signed in the name of the Corporation by any one of the following persons:

Oscar B. Groves
Mary G. Groves

whether the checks, drafts or other withdrawal orders are payable to cash, bearer, the orders of any third party, the order of the signing officers or employees of the Corporation, or to the order

of any other officer or employee of the Corporation in either his or her individual or official capacity; and

RESOLVED FURTHER: That the Secretary of the Corporation be, and hereby is, authorized to furnish to said institution a certified copy of this resolution and that this resolution remain in full force and effect until a certified copy of a resolution amending, modifying, replacing, or rescinding this resolution has been furnished to the bank; and


RESOLVED FURTHER: That any one of the officers be, and they hereby are, authorized to execute and deliver any and all notes, agreements, documents or papers of any type or nature whatsoever to consummate the purpose of the foregoing resolution.

RESOLVED: That any one of the officers be, and they hereby are, authorized to pay all fees and expenses incident to and necessary for the organization of the Corporation.

RESOLVED: That any of the officers of the Corporation be, and they hereby are, authorized, directed and empowered to file or cause to be filed a Notification of Exemption on Form 3-0 with the Ohio Division of Securities within sixty (60) days from the date of the original subscription to the shares of the Corporation.



Oscar B. Groves



Mary G. Groves



Jerry Groves



Janet Kletecka

"Directors"

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT
OF THE BOARD OF DIRECTORS

January 2, 1989

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following action by this unanimous written consent:

RESOLVED: That the following persons are authorized to sign any bids on behalf of the Corporation:

Oscar B. Groves
Mary G. Groves
Alan Kletecka
Jerry L. Groves
Janet Kletecka

Oscar B. Groves
Oscar B. Groves
Mary G. Groves
Mary G. Groves
Janet Kletecka
Janet Kletecka
Jerry L. Groves
Jerry L. Groves
"Directors"

SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

NOTICE TO ALL COMPANY SUPERVISORY AND ADMINISTRATIVE PERSONNEL

Attached hereto and a part hereof is our Written Statement of Company Policy of Service Supply Ltd., Inc. with respect to equal employment opportunity.

It now becomes part of your responsibility with Service Supply Ltd., Inc. to implement this policy in every way, especially with respect to taking affirmation action as stated in the policy. Accordingly, you are hereby directed to:

- A. Post such notices as are prescribed by the Federal or State laws, City Ordinances and resolutions, and the rules and regulations adopted thereunder together with the applicable orders of the governmental agencies or officers established thereunder.
- B. Encourage employment of minority group employees for work in trades where they are not frequently represented. This will be done generally by our main office in hiring but the same shall apply to all job sites. Any applicant for any job should be referred to Mrs. Mary Groves at the main office to assure proper processing of his or her application.
- C. Encourage minority group candidates for apprenticeship classes.



Secretary-Treasurer

Signature of Company Official

SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

WRITTEN STATEMENT OF COMPANY POLICY

It is the policy of Service Supply Ltd., Inc. that equal employment opportunity be afforded to all qualified persons without regard to race, religion, color, sex or national origin.

In support of this policy Service Supply Ltd., Inc. will not discriminate against any employee or applicant for employment because of race, religion, color, sex or national origin.

The Service Supply Ltd., Inc. will take affirmative action to insure that applicants are employed, and that employees are treated during employment without regard to race, religion, color, sex or national origin. Such action will include but not be limited to:

**RECRUITMENT, ADVERTISING OR SOLICITATION FOR
EMPLOYMENT, HIRING, PLACEMENT, UPGRADING, TRANSFER
OR DEMOTION. SELECTION FOR TRAINING INCLUDING
APPRENTICESHIP, TREATMENT DURING EMPLOYMENT, RATES
OF PAY OR OTHER FORMS OF COMPENSATION, LAYOFF OR
TERMINATION.**

SERVICE SUPPLY LTD., INC.

Ben Groves

Secretary -Treasurer

Signature of Company Official

SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

WRITTEN STATEMENT OF COMPANY POLICY

Please be advised that our policy also includes ancestry.

Service Supply Ltd., Inc. is a family oriented business. We have a total of nine employees, all but three employees are related. We do not recruit, if necessary to recruit, sources and all applicants will be advised that we are an equal opportunity employer.

There is no training program at the present, if it becomes necessary, we will make training available.

If an employee feel that he or she has been discriminated against, they should contact Ben Groves, Secretary/Treasurer of Service Supply Ltd., Inc., he will inform them of any other areas of redress. We will not retaliate against any employee or applicant who files an internal grievance.



Signature of Company
Official

SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

January 1, 1990

NOTICE TO EMPLOYEES

RE: DRUG FREE WORKPLACE POLICY

Please be advised that as of this date, all employees of Service Supply Ltd., Inc. are hereby notified that we consider Service Supply Ltd., Inc. to be a Drug Free Workplace.


Without exception, the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance while in the workplace is strictly prohibited.

Service Supply Ltd., Inc. requires that as a condition of employment, any employee convicted of a drug violation occurring in the workplace must notify his or her employer within five (5) days after conviction.

Any employee found in violation of this policy is subject to appropriate personnel action, up to and including termination of employment. Continued employment may be conditioned upon successful completion of an acceptable drug rehabilitation program.

Any employee seeking information on drug or alcohol abuse awareness, the availability of counseling and referral services should contact Ben Groves, Secretary-Treasurer at (614) 861-3681.

SERVICE SUPPLY LTD., INC.



Mary G. Groves
President

MG/bh

QUOTE SHEET

Quote No: 35220-1-1

Date: 05-27-09
By: GDW

Rep Organization: SERVICE SUPPLY
Contact Person: PAM WILLIAMSON

Project Title: HAWK'S NEST STATE PARK

Location: ANSTED, WV

Style: Playbooster Posts: Aluminum
Age: 5-12 Unless Otherwise Noted.

Phone No:
Bury Type: Direct Bury

QTY	NO.	DESCRIPTION
POSTS		
5	111404C	132 ALUM. POST D.B.
9	111404D	124 ALUM. POST D.B.
1	111404E	116 ALUM. POST D.B.
2	111404F	108 ALUM. POST D.B.
1	111404G	100 ALUM. POST D.B.
1	111404H	92 ALUM. POST D.B.
DECKS		
1	152911A	CURVED TRANSFER MOD RIGHT
2	121948A	KICK PLATE FOR 8 RISE
2	121949A	KICK PLATE FOR 8 RISE - TRI DK
2	111228A	SQUARE TENDERDECK
1	111229A	SQUARE DECK EXTENSION
1	111231A	TRIANGULAR TENDERDECK
4	122197A	TRIANGULAR TENDERDECK 90 DEG
PERMALENE PANELS		
1	117146A	GEAR PANEL [ABOVE DECK]
SLIDES		
1	123336A	DOUBLE WAVE POLY SLIDE 48 DECK
BRIDGES		
1	143677A	ARCH BRIDGE W/GUARDRAIL
CLIMBERS		
1	150975A	CASCADE CLIMBER 48 DECK DB
1	148432A	CORKSCREW W/PERM 48 DECK
1	148434A	LOOP POLE W/PERM 48 DECK
1	153076A	MINI SUMMIT CLIMBER 48 DECK D.B.
1	122533B	SPIRAL CLIMBER 48 DECK
1	116249A	VERTICAL LADDER 32 DECK
1	116249B	VERTICAL LADDER 48 DECK
MORE FUN		

Page: 2

Date: 05-27-09

Project Title: HAWK'S NEST STATE PARK

Quote No: 35220-1-

1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

2 111275A HANDLOOP ASSEMBLY

1 111357B TURNING BAR

1 158678A CLIMBING WALL

OVERHEAD EVENTS

1 126203A RING A LING HORIZ.LADDER

1 120872A SWING OUT

Weight & Cost of Playstructure Items

Concrete: 67.30 cu-ft, Footings: 42

Labor: 57.75 Man-Hours

INDEPENDENT COMPONENTS

KIDS IN MOTION

1 120876A SPRING POD

PLAYTHINGS

1 100041A CURVED BALANCE BEAM

1 100040A VERTICAL PIPE CLIMBER 4'DB ONLY

1 100040B VERTICAL PIPE CLIMBER 6'DB ONLY

INDEPENDENT SWINGS

1 100050C ARCH SWING DB ONLY UNCOATED

Two Belt Seats.

1 111579C ARCH SWING ADD BAY DB ONLY SCT

Two Full Bucket Seats.

Weight & Cost of Independent Items

Concrete: 21.75 cu-ft, Footings: 14

Labor: 17.00 Man-Hours

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 89.05 cu-ft, Footings: 56

Labor: 74.75 Man-Hours

Total Safety Zone Square Footage = 2167 sq ft

Estimated Man-Hours do not include site preparation.

Material Specifications

Quote: 35220-1-1.QSd

5/28/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

Hardness (D3363) rating 2H

Impact (D2794) rating minimum 80 inch-pounds

Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater

UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and
90 percent gloss retention

Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI
Tensile Strength (min): 55,000 PSI
% Elongation in 2 inches: 25
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI
Tensile Strength (min): 38,000 PSI
% Elongation in 2 inches: 10
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI
Yield Strength: 28,000 PSI
Elongation: 7% in 2 inches
Shear Strength: 29,000 PSI
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

111404C

Posts For Decks 132"/56" Deck

Post: See PlayBooster (PB) General Specifications.

111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.

111404G

Posts For Decks 100"/24" Deck

Post: See PlayBooster (PB) General Specifications.

111404H

Posts For Decks 92"/16" Deck

Post: See PlayBooster (PB) General Specifications.

152911A

Transfer Modules, Brown Deck Only To 32" Deck, Curved, Right or Left Step

Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 29" per (2) sides. Finish: TenderTuff, brown in color.

Step Sections/Top Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 3/8" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Panels: Solid color Permalene, color specified.

Deck Support: Weldment comprised of 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 3/8" O.D. x 5" long CRS rod. Finish: Powdercoat, brown in color.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.080" - .095") and 1 3/4" x 1 3/4" x 1/8" HR angle. Finish: Powdercoat, brown in color.

Railings: Weldment comprised of 1.125" O.D. x 11 GA. (.120") steel tubing with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

121948A

Kick Plate 8" Rise

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

121949A

Kick Plate 8" Rise, 90* Tri-Deck

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111229A

Decks Square Tenderdeck, Extension, Brown Only

Square Deck Extension: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 42" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111231A

Decks Triangular Tenderdeck, Brown Only

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in

design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

122197A

Decks 90* Triangular Tenderdeck

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

117146A

Gear Panel

Permalene Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified. Gears two color, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

123336A

Double Wave Poly Slide 48" - 56" Deck

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Rail Spacer: Fabricated from 1.3125" O.D. x 16 GA (.065") steel tubing. Finish: Powdercoat, color specified.

Mid-Support: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 3" zinc plated flat steel. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Spacer: Solid color Permalene, color specified.

143677A

Arch Bridges 123" Module, Brown Only, w/Guardrail, Max. 40" Decks

Guardrail: Weldment comprised of 1.029" O.D. RS-20 (.070" - .080") galvanized steel vertical rungs and 1.900" O.D. RS-20 (.090" - .100") galvanized steel rails. Finish: Powdercoat, color specified.

Arch Bridge Deck: Weldment comprised of 12 GA (.105") sheet steel conforming to ASTM A569 and 3/16" HR flat steel. Standing surface is perforated with 1/4" diameter holes. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

150975A

Cascade Climbers 48" - 56" Deck, (Available for Direct Bury Only)

Panels: Solid color Permalene, color specified.

Barrier: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tube per ASTM A513 with 203 or 303 stainless steel welded inserts with 5/8" internal threads and 1/4" tabs. Finish: TenderTuff, color specified.

Support Pipe: Weldment comprised of 2.375" O.D. RS40 (.130"-.140" wall) galvanized steel tube, 1/4" x 1 1/4" HR flat steel and 12 Ga. (.105") sheet HRPO steel. Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

148432A

Corkscrews 32" - 48" Deck

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

148434A

Loop Poles 32" - 48" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

153076A

Mini Summit Climber, 40" and 48" Decks, (40" Available for Direct Bury Only)

Summit Climber: Rotationally molded from U.V. stabilized linear low density

polyethylene, color specified.

Handhold Panel: Solid color Permalene, color specified.

Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

122533B

Spiral Climber, Brown Treads Only 40" - 48" Deck

Spiral Step: Weldment comprised of 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing and 1/4" x 1 3/4" wide steel clamps. Finish: Powdercoat, color specified.

Tread: Fabricated from 12 GA (.105") HRPO steel plate with 5/16" perforated holes. Finish: TenderTuff, brown in color.

Enclosure Panel: Solid color Permalene measuring 17 9/16" wide x 41" high, color specified.

Support Rail: Weldment comprised of 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing with 203 or 303 stainless steel 5/8" threaded inserts, 3/16" support tab, and 3/16" attachment bracket. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

116249A

Vertical Ladders, Deck To Ground Vertical Ladder, 24" -- 32" Deck

Vertical Ladder: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing, 1.029" O.D. RS-20 (.070" - .080") and 3/16" x 2" wide steel flat plates. Finish: TenderTuff, color specified.

Footer: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

116249B

Vertical Ladders, Deck To Ground Vertical Ladder, 40" - 48" Deck

Vertical Ladder: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing, 1.029" O.D. RS-20 (.070" - .080") and 3/16" x 2" wide steel flat plates. Finish: TenderTuff, color specified.

Footer: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111275A

Handloop Assembly

Handloop: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel inserts, with 5/8" internal thread. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111357B

Turning Bar, (1) Aluminum Post

Rail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel 5/8" threaded inserts. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

158678A

CLIMBING WALL

Post: See PlayBooster (PB) General Specifications.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Support Beam: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing, 1/4" x 3" wide half clamps and zinc plated chain rings. Finish: Powdercoat, color specified.

Ladder: Comprised of 4/0 zinc plated chain. Finish: TenderTuff, color specified, and 13/16" O.D. 6061 aluminum rails.

Support (DB): Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing and 11 GA (.120") x 4" x 30" zinc plated steel strap. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

126203A

Ring-a-Ling, Max. 32" Decks

Support: Weldment comprised of 2.750" O.D. x .125" wall zinc plated steel tubing and 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Ladders: Weldment comprised of 2.375" O.D. RS-40 (.130" - .140") galvanized steel tubing crossover, 2.375" O.D. RS-20 (.095" - .105") galvanized steel

tubing, formed 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing and formed 1/4" x 3" wide zinc plated steel. Finish: Powdercoat, color specified.

3" Half Clamp: Fabricated from formed 1/4" x 3" wide zinc plated steel. Finish: Powdercoat, color specified.

120872A

Swing Out, 16" Deck Height Only

Support Beam: Weldment comprised of 2.375" O.D. RS-40 (.130" - .140") galvanized steel tubing, 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing and 1.250" diameter grade 304 stainless steel shaft. Finish: Powdercoat, color specified.

Ring Swing Out: Fabricated and formed from 1.125" O.D. x 11 GA (.120") black tubing. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

120876A

Spring Pods, Sold Individually Per Pod

Pod: Rotationally molded from U.V. stabilized linear low density polyethylene measuring 14" diameter x 7" high, color specified.

Footer: Fabricated from 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and a 1/4" x 1 15/16" O.D. x 3 1/2" long spring. Also a weldment comprised of 3/16" x 5" diameter plate and 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100041A

Curved Balance Beam

Balance Beam: Weldment comprised of 1 1/2" x 3" x 11 GA (.120") rectangular steel tubing. Finish: TenderTuff, color specified.

Support Leg: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing and 3/8" x 2 1/2" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100040A

Vertical Pipe Climbers 4' High, (Available for Direct Bury Only)

Vertical Pipe Climber: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and formed 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

100040B

Vertical Pipe Climbers 6' High, (Available for Direct Bury Only)

Vertical Pipe Climber: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and formed 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff®-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurf® against material or manufacturing defects when properly installed. Corocord® cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppers® structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

QUOTE SHEET

Quote No: 35220-2-1

Date: 05-29-09
By: GDW

Rep Organization: SERVICE SUPPLY
Contact Person: PAM WILLIAMSON

Project Title: HAWK'S NEST STATE PARK

Location: ANSTED, WV

Phone No:

Style: No-Structure

Bury Type: Direct Bury

Age: 5-12 Unless Otherwise Noted.

QTY NO.	DESCRIPTION
---------	-------------

INDEPENDENT COMPONENTS

FITNESS STATIONS

1 138121A VITACOURSE 20 STATION DB ONLY

Weight & Cost of Independent Items

Concrete: 118.50 cu-ft, Footings: 86

Labor: 40.75 Man-Hours

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 118.50 cu-ft, Footings: 86

Labor: 40.75 Man-Hours

Estimated Man-Hours do not include site preparation.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.

Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed _____ Date _____

Material Specifications

Quote: 35220-2-1.QSd

6/2/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

Hardness (D3363) rating 2H

Impact (D2794) rating minimum 80 inch-pounds

Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater

UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and
90 percent gloss retention

Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

Material Specifications:

138121A

VitaCourse 20 Stations, Complete

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff®-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurf® against material or manufacturing defects when properly installed. Corocord® cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppers® structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.