

 $\Box$ 

0

0

# State of West Virginia Department of Administration Purchasing Division

### NOTICE

Due to the size of this bid, it was impractical to scan every page for online viewing. We have made an attempt to scan and publish all pertinent bid information. However, it is important to note that some pages were necessarily omitted.

If you would like to review the bid in its entirety, please contact the buyer. Thank you.

\*\*\*



VEROOR

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Request for

8

REC NUMBER 708EC001

÷	PAGE	
_	.,	
	1	
	1	

ADDRESS CORRESPONDENCE TO ATTENTION OF: NOTSNHOL NHOL

304-558-2402

26201

304-372-9875 \*709043435 FAIRPLAIN TRACTOR SALES INC PO BOX 787 RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRIN	ITED	TER	MS OF SAL	E	SHIP VIA	F.O.B.	FREIGHT TERMS
07/23/					DID	OPENING TIME	01:30PM
BID OPENING DATE	: Macconton de la	09/05/	2007	in a me			
LINE	QUA	NTITY	UOP	CAT NO	ITEM NUMBER	UNITPRICE	AMOUNT
0001		1	EΑ	:	020-66		\$79,995.00
	2 WHEE	L DRIV			TRACTOR, WITH MO	WERS	
					END CONTRACT	TOD WITTH HINTNERS	
	MID MC	UNTED	ARTIC OWER	ULATE AS DE	VE UTILITY TRACT D BOOM MOWER/ GR SCRIBED IN ATTAC	RASS ROTARY MOWE	[R/
	STATE AT 10:	CAPITO	L COM	PLEX,	ORY PRE-BID CONF BUILDING 15, CO 7. FAILURE TO ATT IN BID DISQUALT	INFERENCE ROOM, LEND THE PRE-BID	
	QUEST1 CLOSE	ONS: W	RITTE	N QUE	STIONS WILL BE A	ACCEPTED THROUGH	I
	QUEST	IONS MA	Y BE	SENT	PURCHASING DE JOHN JOHNSTON 2019 WASHING CHARLESTON, VIA FAX, E-MAIL VADMIN.GOV	N TON ST. E. WV. 25305	IL.
	IT IS QUEST	THE VE	NDORS	RESI	PONSIBILITY TO VECEIVED BY CALLI	ERIFY THAT THEIR NG 304-558-2402	
	EXHIB					TO FEFFATTUR OF	
	LIFE	OF CONT	RACT	AND	IS CONTRACT BECO EXTENDS FOR A P	ERIOD OF ONE (1	) )
				SEER	EVERSE SIDE FOR TERMS AND C		ATE
SIGNATURE	Can	1011 a	47.	whi		-372-9875	10-22-07
PRESIDE			FEIN	55-054	104/1	ADDRESS CHAN	IGES TO BE NOTED ABOVE



State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

708EC001

RFO NUMBER

ADDRESS CORRESPONDENCE TO ATTENTION OF

JOHN JOHNSTON 304-558-2402

Ţ

\*709043435 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

07/23/	TED '2007		RMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
OPENING DATE:		09/05/	2007	DID	OBENING TIME	
LINE	QUA	NTITY	LICE CAT	ITEM NUMBER		01:30PM
			NO	TIEW.NOWBER	UNIT PRICE	AMOUNT
	VEAD O	ND HART				
	NECECC	TIND NO.	L SUCH "KI	ASONABLE TIME" T	HEREAFTER AS IS	
	ORIGIN	ואור האינ ואחר ואו	TOACT TO	NEW CONTRACT OR	RENEW THE	
	NOT FY	CEED T	WELVE (12)	E "REASONABLE TI	ME" PERIOD SHAL	L
	TIME"	THE VE	NDOB MAY	ERMINATE THIS CO	THIS "REASONAB	LE
	ANY RE	ASON U	PON GIVINA	THE DIRECTOR OF	NIRACI FOR	
	THIRTY	(30)	DAYS WRITE	EN NOTICE.	PURCHASING	
				NOTICE:		
	UNLESS	SPECI	FIC PROVIS	IONS ARE STIPULA	TED IN THIS	
	CONIKA	CT DOC	UMENT, THE	TERMS. CONDITIO	NS. AND PRICING	
1	SET HE	REIN A	RE FIRM FO	R THE LIFE OF TH	E CONTRACT.	
		1	- 1	,		
	RENEWA	L: TH	IS CONTRAC	T MAY BE RENEWED	UPON THE MUTUAL	_
1	MKTIIF	N CUNS	ENT OF THE	SPENDING UNIT A	ND VENDOR.	
	PURMII	IED ID	THE DIREC	TOR OF PURCHASIN	G THIRTY (30)	
ļ.	DAYS P	KIOK I	D THE EXPI	RATION DATE. SU	CH RENEWAL SHALL	_
ļ	BE IN	ACCURD	ANCE WITH	THE TERMS AND CO	NDITIONS OF THE	
ľ	CI) AL	AL CUN	RACT AND	SHALL BE LIMITED	TO TWO (2) ONE	
ľ	(I) YE	AR PER	ו פתחז			
,	CANCEL	LATION	TUE DIE	ECTOR OF BURGUES	<b></b>	
F	SIGHT	TO CAN	EI TOTO C	ECTOR OF PURCHAS ONTRACT IMMEDIAT	ING RESERVES THE	
	NOTICE	TO THE	VENDOR T	F THE COMMODITIE	ELY UPUN WRITTEN	
5	SUPPLI	ED ARE	OF AN INF	ERIOR QUALITY OR	> AUDION SEKATCE	i S
N.	ITH T	HE SPE	CIFICATION	S OF THE BID AND	CONTRACT HERETA	
		Ī		o. IIIL DID AND	CONTRACT HEREIT	•
įc	PEN MA	ARKET C	CLAUSE: T	HE DIRECTOR OF P	URCHASING MAY	
¥.	AUTHUK.	IZE A S	SPENDING U	NIT TO PURCHASE	NN THE OPEN	
₽F	TAKKE L	* MTIHE	INT THE FI	LING OF A REDUIS	ITION OR COST	
/C	SITMA		MS SPECIF	IFD ON THIS COUT	DART END THME	
ļĽ	DIATE 1	DELIVER	RY IN EMER	GENCIES DUE TO U	VEORESEEN CAUSES	
14	THEFT	NTMP RIF	I NUM LIM	ITED TO DELAVE TH	I TDANCDODTATION	
L	JR AN I	JNANTIC	IPATED IN	CREASE IN THE VO	.UME OF WORK).	
	UANTI			1		
		I LES:	IS UNIA B	S LISTED IN THE	REQUISITION ARE	
			IS UNLT, B	ASED ON ESTIMATES	S SUPPLIES BY TH	
URE			SEERE	ERSE SIDE FOR TERMS AND CON	DITIONS	1
UNE:	Can	NI I	17 ishin	TELEPHONE ا	04-372-9875	
PRESIDENT		FEIN				10-22-07
	V DEOD	<u>, , , , , , , , , , , , , , , , , , , </u>	5	5-054044 <u>1</u> F NAME AND ADDRESS II	ADDRESS CHANGE	S TO BE NOTED ABOVE



State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

304-372-9875

### Request for

708EC001

RFQ NUMBER

PAGE	ż
<del></del>	

JOHN 304-5	J	0	Н	N	S	Ţ	0	N
304-5	5	8	_	2	4	O	2	

FAIRPLAIN TRACTOR SALES INC PO BOX 787

**\*709043435** 

RIPLEY WV 25271 DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRIN	ΓED	TEA	MS OF SAI	Ε	SHIP V	A		F.O.B.	FREIGI	HTTERMS
07/23/										
D OPENING DATE:	Commence various successions	09/05/	2007		ranto especial de la como en esta de marco	BID	<u>OPENIN</u>	IG TIME	01:30PM	06.34.34.000000000000000000
LINE	QUAN	ATHY	UOP	CAT NO.	ITEM NUN	BER		UNIT PRICE	Al	MOUNT
	ŀ				IT IS UND				т	
	1				ER THE QU					
	1		•		URING THE					
		K HOKE	OK L	L33 1	IIAR IIIL W	DANTII				
	1				PENDING U				1	
	1	-		ł .	RACT ORDE					
				1	D BY THIS THE PURCH	The state of the s			IAL	
	ľ			t .	DMINISTRA			APPROVAL		
	AND EN	CUMBRA	NCE,	ONE C	OPY OF TH	E PURCH				
	,			1	NDING UNI		1			
	1			<b>5</b>	S AUTHORI SS APPROV		1			İ
	BY THE		[			ED AND	ENCOM	DEKED		
	l			1	ENT THE V					
					ION, THIS					
	CALLY ORDER.		ם א מא	TD, A	ND IS TER	WINAIFD	MTIH	וטנ דטאוווטנ	: K	
	DKDEK.									
	REV. 9	/98								
	EXHIBI	T 6								ļ
				)						1
	PRICE	ADJUST	MENT	PROVI	SION:					
	ı		3		INIA WILL	CONSID	ER BI	DS THAT		
	1			1	PRICE AD				≣	ļ
	i				THE CONT		J		_ 1	İ
					COVERS BO				?	
					ITY PRICE				ne l	ļ
	Į.			1	ABOR, WHI				"	
	1		li .	•	PRODUCT.				≣	}
	BASED	UPON A	N ACT	UAL D	DLLAR FIG	URE, NO	TAP	ERCENTAGE	•	
	]		<u> </u>	I SEE RE	 VERSE SIDE FOR T	ERMS AND CO	L NDITIONS			
GNATURE	1/2	noll.	217	in h	ر <sub>ي</sub> ر	TELEPHONE	304-372-9	9875 P	ATE 10-22-07	7
TLE PRESIDEN	<del></del>	FI FI	EN /	111-1 V	55-0540441			ADDRESS CHAN		



State of West Virginia
Department of Administration

Request for
Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

304-372-9875

RFO NUMBER 708EC001

ADDRESS CORRESPONDENCE TO ATTENTION OF:

JOHN JOHNSTON 304-558-2402

þ

FAIRPLAIN TRACTOR SALES INC PO BOX 787

RIPLEY WV 25271

**\*709043435** 

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 **BRUSHY FORK ROAD** BUCKHANNON, WV 26201

DATE PRIN	TED T	FIMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/23/	2007				
BID OPENING DATE:	09/05	/2007	BID	OPENING TIME O	1:30PM
LINE	QUANTITY	UOP CAT	ITEM NUMBER	UNIT PRICE	AMOUNT
	ALL PRICE A A MANNER AC GOVERNMENTA PUBLISHED P SHOULD BE R PURCHASING DATE OF THE PRICE ADJUS ACCEPT THE ACCORDINGLY AND CANCEL PURCHASING CURRENTLY U IS ISSUED T MUST ACCEPT CARD FOR PA AGENCY AS A	DJUSTMENT R CEPTABLE TO L BENCH MAR RICE LISTS. ECEIVED IN AT LEAST 30 INCREASE. TMENT, THE PRICE ADJUS OR REJECT THE CONTRAC CARD ACCEPT TILIZES A V HROUGH A BA THE STATE YMENT OF AL	EQUESTS MUST BE THE DIRECTOR PU KS, GENERAL MARK SUCH REQUESTS WRITING BY THE D DAYS IN ADVANCE ANY TIME THE VE PURCHASING DIVIS TMENT AND AMEND THE ADUSTMENT IN T. ANCE: THE STATE ISA PURCHASING C NK. THE SUCCESS OF WEST VIRGINIA L ORDERS PLACED	SUBSTANTIATED IN RCHASING, E.G. ET INCREASE, FOR AND INCREASE IRECTOR OF OF THE EFFECTIVE NDOR REQUESTS A ION MAY EITHER THE CONTRACT ITS ENTIRETY  OF WEST VIRGINIARD PROGRAM WHICE FUL VENDOR VISA PURCHASING	: A CH
	IN THE BID AND CONDITI AND OTHER L TO POLITICA VIRGINIA. PRICES, TER POLITICAL S	HIS REFUSAL ONS OF THE OCAL GOVERN L SUBDIVISI IF THE VEND MS, AND CON UBDIVISIONS ICATE SUCH REJUDICE TH	S: UNLESS THE TO EXTEND THE P BID TO COUNTY, S MENT BODIES, THE ONS OF THE STATE OR DOES NOT WISH DITIONS OF THE B OF THE STATE, T REFUSAL IN HIS B E AWARD OF THIS	RICES, TERMS, CHOOL, MUNICIPAL BID SHALL EXTEN OF WEST TO EXTEND THE ID TO ALL HE VENDOR MUST ID. SUCH REFUSA CONTRACT IN ANY	מנ
IGNATURE	7,		VERSE SIDE FOR TERMS AND CO	DATI	
ITLE	Canvel	FEIN F. LOA	TELEPHONE	304-372-9875	10-22-07
PRESIDENT	Γ	rem 5	55-0540441	ADDRESS CHANG	ES TO BE NOTED ABOVE



HOOK

**PRESIDENT** 

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

304-372-9875

Request for Quotation

708EC00

40	PAGE	呼
	5	

ADDRESS CORRESPO	NDENCE TO ATTENTION OF:
ЛОНИ ЈОНИЅТОИ	
304-558-2402	

Ö

FAIRPLAIN TRACTOR SALES INC PD BOX 787

RIPLEY WV 25271

\*709043435

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 **BRUSHY FORK ROAD** BUCKHANNON, WV 26201 304-472-1750

DATE PRINTED TERMS OF SALE SHIP VIA F.O.B. FREIGHTTERMS 07/23/2007 ID OPENING DATE 09/05/2007 BID OPENING TIME 01:30PM CAT LINE QUANTITY UOP ITEM NUMBER UNIT PRICE NO. AMOUNT VENDOR PREFERENCE CERTIFICATE CERTIFICATION AND APPLICATION\* IS HEREBY MADE FOR PREFERENCE IN ACCORDANCE WITH WEST VIRGINIA CODE, 5A-3-37 (DOES NOT APPLY TO CONSTRUCTION CONTRACTS). APPLICATION IS MADE FOR 2.5% PREFERENCE FOR THE REASON CHECKED: BIDDER IS AN INDIVIDUAL RESIDENT VENDOR AND ) HAS RESIDED CONTINUOUSLY IN WEST VIRGINIA FOR FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR BIDDER IS A PARTNERSHIP, ASSOCIATION OR CORPORA-TÍON RESIDENT VENDOR AND HAS MAINTAINED ITS HEAD-QUARTERS OR PRINCIPAL PLACE OF BUSINESS CONTINUOUSLY IN WEST VIRGINIA FOR FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR 80% OF THE OWNERSHIP INTEREST OF BIDDER IS HELD BY ANOTHER INDIVIDUAL, PARTNERSHIP, ASSOCIATION OR CORPORATION RESIDENT VENDOR WHO HAS MAINTAINED ITS HEADQUARTERS OR PRINCIPAL PLACE OF BUSINESS CONTINUOUSLY IN WEST VIRGINIA FOR FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR BIDDER IS A CORPORATION NONRESIDENT VENDOR WHICH HAS AN AFFILIATE OR SUBSIDIARY WHICH EMPLOYS A MINIMUM OF ONE HUNDRED STATE RESIDENTS AND WHICH HAS MAINTAINED ITS HEAQUARTERS OR PRINCIPAL PLACE OF BUSINESS WITHIN WEST VIRGINIA CONTINUOUSLY FOR THE FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION. APPLICATION IS MADE FOR 2.5% PREFERENCE FOR THE REASON CHECKED: SEE REVERSE SIDE FOR TERMS AND CONDITIONS GNATURE DATE 304-372-9875 10-22-07

55-0540441

ADDRESS CHANGES TO BE NOTED ABOVE



State of West Virginia Request 101
Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

### Request for p

708EC001

RFQ NUMBER

ADDRESS CORRESPONDENCE TO ATTENTION OF

JOHN JOHNSTON 304-558-2402

**\*709043435** 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION P ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

DATE PRINT	ED	TER	MS OF SALI	E		SHIP VIA			F.O.B			FREIGHT TERMS
07/23/	2007											
BID OPENING DATE:		09/05/	2007				BID	OPEN	ING T	IME	01:3	30PM
	faup:	MITY  BIDDER	UOP IS A		DENT		NHO			THAT,		AMOUNT
	ARE RE THE ST PRECED OR	SIDENT ATE CO ING SU	S OF NTINU	WEST OUSLY ION O	VIRGI FOR F THI	NIA WH THE TV S BID;	łO HAV ∤O YEA ;	E RE RS I	SIDED MMEDI	ATELY		
	MINIMU NONRES WHICH OF BUS OF ONE DURING 75% OF SUBSID	IDENT MAINTA INESS HUNDR THE L THE E	NE HU VENDO INS I WITHI ED ST IFE O MPLOY EMPL	NDRED R WIT TS HE N WES ATE R F THE EES O	STAT H AN ADQUA T VIR ESIDE CONT R BID ARE	E RESI AFFILI RTERS GINIA NTS WI RACT, DERS' RESIDI	IDENTS LATE OF PRESENTE OF PRESENTE OF AVERTE OF AVERTE OF AVERTE OF AVERTE OF AVERTE OF AFFILE	OR R SU INCI YING TIFI ERAG IATE F WE	IS A IBSIDI PAL P G A MI ES TH GE AT E'S OR EST VI	ARY LACE NIMUM IAT, LEAST		
	YEARS BIDDER DETERM FAILED PREFER PURCHA ORDER BIDDER AND TH AGENCY	IMMEDI UNDER INES TO CO ENCE, SING T ISSUEI IN AN AT SUC OR DE	ATELY STAND HAT A NTINU THE S O: ( ; DR H PEN DUCTE PURCH	PREC S IF BIDD E TO ECRET A) RE (B) A NT NO ALTY D FRO ASE O	EDING THE S ER RE MEET ARY M SCING SSESS T TO WILL M ANY RDER.	SECRETA CEIVII THE RI THE (S A PEI EXCEE) BE PA V UNPA	ISSION ARY OF NG PRE EQUIRE DER TH CONTRA NALTY D 5% O ID TO ID BAL	TAX FERE MENT E DI CT C AGAI F TH THE ANCE	THIS  ( & RE ENCE H IS FOR IRECTO OR PUR INST S HE BIL CONTR	EVENUE RAS R SUCH DR OF RCHASE SUCH D AMOUNT RACTING	NT	
		SE ANY SING I D REVE	REAS	ONABL ON AN O DIS RIATE	Y REC D AUT CLOSE INFO	QUESTE THORIZ TO T DRMATI	D INFO ES THE HE DIR ON VER	RMAT DEF ECTO RIFY	TION T PARTME DR OF ING TH	TO THE ENT OF		
IGNATURE			•	<u> </u>	2-6-2-6-2-6-1-1-1-2-1-1-1-1-1-1-1-1-1-1-	DE FOR TER	MS AND CO	NOITION	<b>VS</b>	al	ATE	
NGNATURE	Car	1011:	917.	whi			30	<del>14-372-</del>	<b>-</b> 9875			10-22-07
PRESIDENT		F	EIN		5 <del>-</del> 054044	1			ADDF	RESS CHAN	IGES T	O BE NOTED ABOVE



RIPLEY WV

State of West Virginia
Department of Administration
Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Request for Quotation

708EC001

١.	^		L I		,	_		k r	_	_	٠.	
J	U	Ħ	N		J	U	Н	N	Þ	1	9	ŧ
z	n	1.	_	E	=	0	_	~	Z.	n	3	

ADDRESS CORRESPONDENCE TO ATTENTION OF:

**\*709043435** 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

25271

P

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRIN	ITED	TE	RMS OF SA	LE	SHIP	VIA	1	FOB	FREIGHT TERMS
07/23/									
JID OPENING DATE		09/05	/2007	and the second	o managana	BID	<u>OPI</u>	ENING TIME O	1:30PM
LINE	QUA	YHTY	UOP	NO.	ITEM NO	MBER		UNIT PRICE	AMOUNT
	THAT S TAXES	UCH I Paid	NFORMA NOR AN	TION Y OTH	DOES NOT	CONTAIN MATION D	TI	XES, PROVIDED HE AMOUNTS OF MED BY THE TAX	
	CODE 6 CERTIF THAT I CONTAI TERM O	1-5-3 ICATE F A C! NED W: F THE	IS TROUTER OF THIN CONTR	DER H UE AN T IS THIS ACT,	EREBY CER D ACCURAT ISSUED TO	RTIFIES TE IN AL D BIDDER ATE CHAN TLL NOTI	THA L F AN GES	RESPECTS; AND ND IF ANYTHING S DURING THE THE	
				BIDDE	R: FAIRPLAI	IN TRACTOR S	ALE:	S. INC	_
				DATE:	OCTOBER	22,2007	 		
				SIGNE	p. Car	mest -	1	Frsher	_
				TITLE	PRESID	DENT			
	IN EIT ARE EN	HER "A TITLEI M 5% F	N" OR O TO R PREFER	"B", Eceiv	OR BOTH "	A" AND Ay Requ	"B" EST	NSIDERATION(S) WHICH YOU UP TO THE	
				NOT	ICE				
	A SIGNE	ED BII	MUST	BE S	UBMITTED	TO:			
	DE	EPART	IENT O		INISTRATI	ļ			
SIGNATURE	lanoi	יאג אי	' 7 sa		VERSE SIDE FOR T	TEI EDUONE		72-9875 DATE	10-22-07
TILE PRESIDENT	>		EIN		-0540441	1	T	<del></del>	10-22-07 S TO BE NOTED ABOVE



RIPLEY WV

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130 Charleston, WV 25305-0130

## Request for Quotation

RECNUMBER 708EC001

1	 PAG	3E
	_	
		Я

ADDRESS CORRESPONDENCE TO ATTENTION OF: NOTZNHOL NHOL 304-558-2402

\*709043435 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 P BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRINT	ED	TERI	MS OF SAL	E	SHIP VIA		F.O.B.		MEIGHILIERWS
07/23/							NEUTHO TIM	<u> </u>	30PM
D OPENING DATE:	55/00/01/50/00 1500/02	09/05/	2007	ane en en en		BID (	PENING TIM		AMOUNT
LINE	B 2	URCHAS UILDIN 019 WA	G 15 SHING	TON S	ON TREET, EAS		UNIT PRIC		
	THE BI THE EN	VELOPE	LD CO OR T	NTAIN HE BI	THIS INFO	ORMATIO BE CON	N ON THE FA	ACE OF	
	BUYER:			33					
	RFQ. N	10.:		708E	C001				
	BID OF	PENING	DATE	AND T	IME				
	PLEASI TO COI	E PROVI	IDE A	FAX N	NUMBER IN ING YOUR B 304-372-2713	ID:	IS NECESS	ARY	
	CONTA	CT PERS	SON (F	LEASI	E PRINT CL			· <b>-</b> -	
PIGNATURE	,	7			EVERSE SIDE FOR T		04-372-9875	DATE	10-22-07
SIGNATURE		and	11	tro	lu_	3			
PRESIDENT	<u> </u>	•	FEIN	Ĺ	55-0540441		ADDRE	SS CHANGES	TO BE NOTED ABOVE



State of West Virginia
Department of Administration
Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

Þ

Ţ

RFQ NUMBER 708EC001

<u> </u>		_	_	_
		٠		
	_ :	7		

**\*709043435** 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

RIPLEY WV 25271 ADDRESS CORRESPONDENCE TO ATTENTION OF

NOTSNHOL NHOL 304-558-2402

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRIN	ITED	TER	MS OF SA	LE		SHIP VIA			F.O.B.		FREIGHTTERMS
07/23/	/2007					<u> ele ale e alega populatione data a l</u>				20001	
ID OPENING DATE	: Personales acce	09/05/	2007	A T	4		BID	OPE	NING TIME	0]	L:30PM
LINE	QUAN	VIIIY	UOP	CAT NO.		ITEM NUMB	di teriteri de distribuida.		UNIT PRICE		AMOUNT
			<u>edual proposition</u>								
	*****	THIS	IS T	HE EN	D OF	RFQ	708EC	001	. <b>***** To</b> T	AL:	\$79,995.00
		:									
i											
				SEE REV	ERSE SID	E FOR TERM	AS AND CON	DITION	48	****	
NATURE	Cano	11 1	17,	Min			EPHONE			ATE	10.00.00
LE PRESIDENT		FEIN	<u>, , , , , , , , , , , , , , , , , , , </u>	55_	0540441		<u> </u>	<del>50+</del> .	<u></u>	GE6	10-22-07 TO BE NOTED ABOVE
	N DESDO			20-	0240441				ADDRESS CHAN	GE3	IO DE MOTED ABOVE

#### WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS EQUIPMENT DIVISION

#### PROCUREMENT SPECIFICATIONS NO. 131-1-F

#### OPEN END CONTRACT

#### 2 WHEEL DRIVE UTILITY TRACTOR WITH UNIVERSAL MID MOUNTED ARTICULATED BOOM MOWER/ GRASS ROTARY MOWER/SIDE FLAIL MOWER

#### 1.0 PURPOSE

It is the purpose of these specifications to describe a 2 Wheel Drive Utility Tractor with Universal Mid Mounted Articulated Boom Mower constructed in a manner that will also allow a Short Boom 60 Inch Grass Rotary Mower or 74 Inch Side Flail Mower to use the same frame work as the Boom Mower (hereinafter referred to as a "tractor/mower" or a "unit") to be purchased for use by the West Virginia Division of Highways (DOH) on an Open End Contract basis.

#### 2.0 BIDDING PROCEDURES

The current purchasing procedures regarding bidding as established by the Department of Administration, Purchasing Division, shall apply. Failure to submit the "Request for Quotation" forms, complete in its entirety and according to directions indicated, may subject the bidder to disqualification. Each bid submitted shall also be accompanied by a Bidder's Evaluation Report completed in detail. Addendums in order, along with exception sheets, should be with Bidder's Evaluation Report. FAILURE TO SUBMIT THE BIDDER'S EVALUATION REPORT, COMPLETE IN ITS ENTIRETY, MAY RESULT IN AUTOMATIC DISQUALIFICATION.

#### 3.0 SPECIFICATIONS

The specifications named herein, mandatory and non-mandatory, establish the acceptable level of quality only and are not intended to reflect a preference or favor any particular brand or vendor.

#### 3.1 EXCEPTIONS TO NON-MANDATORY SPECIFICATIONS

Exception to a non-mandatory unit specification may be made by the bidder, providing the exception is not available from the manufacturer. Any such exception must be noted on the bidder's evaluation report and should be accompanied by supporting documentation/literature from the manufacturer. Any exception must be indicated on a separate attachment to the bidder's evaluation report and labeled as "Exception to Specifications". The state reserves the right to determine whether the stated exception does or does not reduce the quality and performance of the unit. Failure to provide information for any exceptions may be grounds for rejection of the bid. The state reserves the right to waive minor irregularities in bids or specifications in accordance with §148-1-4(f) of the WV Legislative Rules and Regulations.

#### 3.2 MANDATORY SPECIFICATIONS

All specifications preceded by "shall and/or must" or are stated as a "minimum and/or maximum" are mandatory. Any bid failing to meet any mandatory item shall be immediately disqualified. Failure to respond in the appropriate evaluation section may also be grounds for immediate disqualification at the discretion of the State.

(NOTE: Mandatory specifications have been typed in **bold** print.)

A mandatory pre-bid conference is scheduled for this equipment purchase as stated in the RFQ. Vendors having products with variations or exceptions in specified mandatory items are expected to address any such variations or exceptions during the pre-bid conference. The State shall review and consider any such variation or exception, and may at its sole discretion, issue an addendum to change mandatory specifications deemed to be in the State's best interest. Bids from any vendor failing to attend the mandatory pre-bid shall be disqualified. Bids containing any variation or exception to a mandatory specification that was not addressed during the pre-bid conference and accepted by the issuance of an Addendum shall be disqualified.

#### 4.0 REPRESENTATIVE UNIT FOR TEST

The successful vendor must (if specified) provide DOH one (1) completed representative unit to be observed and evaluated on each order to insure compliance with specification. If requested, the time period for testing and evaluation shall be seven (7) working days following receipt of the unit. DOH will incur no obligation for deterioration of surfaces, finishes, seals, and mechanical or electrical parts on the unit resulting from operation and testing within the limits of these specifications; nor will DOH incur obligation for damage to the unit resulting from failure to meet specifications when due care and attention is given by DOH and testing is done within the limits of these specifications. Failure of the pilot unit to satisfactorily meet specifications as bid shall be cause for cancellation of the purchase order, and return of the delivered unit along with all associated equipment to the vendor at the vendor's expense.

#### 4.1 CONDITION OF UNIT(S) UPON DELIVERY

All units must arrive at the prescribed delivery point having been completely preserviced with oil, lubricants, and coolant. All prescribed precautions pertaining to first operations and break-in of the unit are to be posted conspicuously on the unit for ready observance by the operator.

#### 4.2 DELIVERY

Delivery point of the completely assembled representative unit will be the DOH, Equipment Division, Route 33 at Brushy Fork Road, Buckhannon, West Virginia (26201)

The vendor is responsible for guaranteeing delivery of the completed units within the time specified and agreed to by the State. Delivery is preferred within 90 days. The vendor is responsible for establishing and coordinating delivery terms with allied manufacturers or suppliers. Delivery terms shall be stated in the bid and the State

reserves the right to accept or negotiate such terms. Failure to reach an agreement may result in rejection of the bid. The successful bidder shall provide their manufacturer's confirmation of the order to the WVDOH contact person within seven (7) working days after receiving the approved purchase order.

A completed pilot model for inspection must be provided within 45 calendar days after the date of the purchase agreement by the successful vendor.

Delivery is an integral part of this specification and failure to comply will be cause to initiate a D.O.T. Administrative Form WV-82, Vendor Performance Form. The WV-82 Form will provide a means of officially notifying the Purchasing Division and the vendor of unsatisfactory performance; such as late deliveries, poor service, inadequate parts supplies, etc.

The decision to initiate subject Form will be at the sole discretion of the D.O.H. Commissioner's established Equipment Review Board.

Issuance of the WV-82 Vendor Complaint Form on unsatisfactory delivery against any vendor will be cause to refuse to consider similar items from those vendors on future Request For Quotations.

(NOTE: Delivery time could be altered due to labor strikes, severe inclement weather conditions, etc.)

- 5.0 AWARD CRITERIA
- DOH will recommend the award in accordance with the RFQ evaluation criteria described in the requisition. The award shall be made to the lowest complete unit cost vendor that meets or exceeds the specifications.

Prices for the units shall be in quantities of 1-5, 6-10, 11-20, and 21 and over for the complete units and option of tractor only, boom mower only, grass rotary mower only, and/or side flail mower only. However, for evaluation purposes, we will use the complete unit quantities 1-5 for the 2 wheel drive utility tractor with universal mid mounted articulated boom mower/grass rotary mower/side flail mower. The successful vendor for the complete unit of 2 wheel drive will also be awarded the options of tractor only, boom mower only, grass rotary mower only and side flail mower only. Evaluation and award is based on the complete unit. DOH reserves the right to place multiple orders in any quantity.

- 6.0 SPECIFICATIONS AND GUIDELINES GENERAL
- 6.1 IDENTIFICATION OF THE UNIT BEING PROPOSED

The bidder must identify the unit by manufacturer, model, series, and year of manufacture, in the bid to enable identification by DOH in the manufacturer's specifications of the proposed unit. The bidder will submit complete descriptive literature of the proposed unit, to establish that the bid is the manufacturer's most current model, including latest engineering improvements, which have been, or will imminently be, regularly advertised and sold on the open market. The unit specified herein and offered to be manufactured after January 1, 2007 and be clearly identified and marked with date of manufacture.

#### 6.2 OPERATING AND SERVICE MANUALS AND PARTS LISTS

An operator's manual must be included with each unit upon delivery. A "line sheet" (if applicable) and Equipment Preventative Maintenance Questionnaire (as shown in X6.2 of the Bidder's Evaluation Report) must be with pilot unit upon delivery. In addition, there must be 12 service, shop, or maintenance manuals; ten (10) to be distributed to the Districts and two (2) for the Equipment Division. Also, there must be 14 parts manuals; ten (10) to be distributed to the Districts and four (4) for Equipment Division use. CD ROM is preferred in lieu of parts manuals.

### \* NOTE: MANUALS SHALL BE DELIVERED UPON COMPLETION OF DELIVERY OF TOTAL UNITS. FAILURE TO DO SO WILL DELAY PAYMENT.

#### 6.3 TRAINING:

Manufacturers and/or dealers will be required to stage a thorough seminar on the subjects of Preventative Maintenance, Operator and Mechanic Training. In order to keep the operators and mechanics updated, the successful vendor shall conduct training with each purchase order against this open end contract. Training is preferred within 2 working days after delivery of the pilot unit on the individual purchase order.

Manufacturers and/or dealers shall be required to furnish the Training Academy with one (1) Operator's Manual to be shipped direct to Letha Lamb, WVDOH Training Academy, Post Office Box 610, Buckhannon, West Virginia 26201 prior to delivery of the pilot.

The seminar to be held at the W. Va. Division of Highways, Equipment Division, Buckhannon, West Virginia.

#### 6.4 PREVENTIVE MAINTENANCE AND OPERATOR PROCEDURES:

Manufacturers and/or dealers will be required to submit to the Equipment Division, in addition to the operating and service manuals, booklets and pamphlets explaining the Preventive Maintenance and Operator Procedures to be used by the operators of this equipment, and must include such things as daily prestart inspection procedure, service schedule, and routine maintenance required, safety precautions, etc.

The successful vendor shall furnish all training aids; i.e., videos, projectors, etc. required in conducting the training

#### 6.5 WARRANTY AND SERVICE POLICY

The Manufacturers warranty or service policy is to apply to the unit. Such warranty or service policy is to be recognized at any authorized unit dealer, representing manufacturer of proposed unit throughout the State of West Virginia. The applicable warranty or service policy will not be contingent upon obtaining routine service, lubrication, and servicing of the unit from factory authorized agencies. It will be the responsibility of the bidder to have available labor to repair or replace any defective replacement parts, components and materials, and to have available those replacement parts, components, and/or materials found to be defective during the terms of the

warranty period. The bidder should state the labor rates, locations where parts will be stocked, availability of parts, and discounts offered for parts, when terms of the warranty offer a pro-rated cost for parts and labor. In addition, the successful bidder should offer field work to repair or replace defective parts, components, and materials found to be defective during the terms of the warranty and should provide mechanic's travel rates, mileage charges, field mechanic rates, and any surcharge for miscellaneous items, if applicable, for field work during the warranty period. Submit to Division of Highways any technical or engineering improvements during the term of the warranty. The unit must be accompanied upon delivery by the unit's manufacturer's executed warranty or service policy.

See Exceptions Below:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the complete tractor and mower unit or for each option if purchased individually

If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions.

THE "WARRANTY AND SERVICE POLICY QUESTIONNAIRE" ATTACHED IN THE BIDDER'S EVALUATION REPORT MUST BE COMPLETED IN ITS ENTIRETY BY THE SUCCESSFUL BIDDER OR MANUFACTURER PRIOR TO DELIVERY OF THE PILOT MODEL. (SEE SECTION X6.5 OF BIDDER'S EVALUATION REPORT).

#### 6.6 EVALUATION COMMITTEE REQUIREMENTS

Detailed component specifications, product literature, component models, required for specification compliance determination by the Evaluation Committee should be provided with each bid. Any information supplied that is contrary to/or conflicting with the specifications and/or attached Bidders Evaluation Report may be sufficient cause for rejection of bid.

#### 6.7 UNSPECIFIED ACCESSORIES & FEATURES

All parts, equipment, accessories, material, design and performance characteristics not specified herein, but which are necessary to provide a complete unit, must be furnished with each unit and required to conform to strength, quality of material, and quality of workmanship to those which are advertised and provided to the market in general by the unit industry

All parts and accessories advertised and regularly supplied as standard shall be included, except those which would represent duplication of these specified, and except those which, by specification, are not to be furnished. All standard safety features, required by Federal and State Law, shall be included.

7.10.2

	THE CITE OF THE CASE OF THE CA
7.0	SPECIFICATIONS OF THE QUOTED UNIT – 2 WHEEL DRIVE UTILITY TRACTOR:
7.1	Tractor dry weight (without ballast):- 8,000 lbs. minimum
7.2	Wheelbase to be approximately 94 inches
7.3	Unit to be: 2 wheel drive
74	Tilt up hood with manufacturers approved prop system
75	Unit to be equipped with manufacturers lockable side panels
7.6.	All daily services to be done from ground level
7 7	Engine:
7.7.1	Manufacturers water cooled, diesel powered engine
7.7.2	72 PTO horsepower minimum
7.7.3	Manufacturers standard governor with engine key shut off, wire sealed by manufacturer
78	Engine Lubrication System:
7 8.1	Full pressure lubrication with oil filter and oil by pass system
7.8.2	Engine oil cooler
7.8.3	Engine must be wet sleeved
7.9	Engine Cooling System:
7.9.1	Pressurized cooling system with thermostat and by pass, supplied with Dex Cool Extended Life protected to a freeze point of -34 degrees F.
7.9.2	Cooling system to be equipped with a coolant recovery tank and sight glass
7.10	Air Induction System:
7.10.1	Dry type dual element (2 stage) air cleaner with self dumping valve to be provided

Dash mounted air filter restriction indicator with light that is operator visible when service is required

- 7.11 Exhaust System: Muffler to be under hood with manufacturers approved vertical exhaust with rain and 7.11.1 weather protection Electrical System: 7.12 Unit electrical system to be manufacturers noise suppression wiring, 12 volts negative 7.12.1 ground Neutral start switch (for safety purposes) shall be provided 7.12.2 7.13 Charging System: Charging system to be manufacturer heavy duty for model bid 7.13.1 7.14 Engine Fuel System: Dual stage filtering to be provided 7.14.1 Unit to be provided with a fuel water separator 7.14.2 If fuel tank is exposed, manufacturers skid plate to be provided. (Manufactured in a 7.14.3 manner that shall give the fuel tank maximum protection) 7.15 Lighting System: Two (2) high-low beam head light (halogen) with manufacturers heavy duty console 7.15.1 mounted switch Four (4) roof mounted work lights; two (2) front and two (2) rear 7.15.2 Fender mounted rear tail lights and turn signals to be shock mounted 7.15.3 Four (4) roof mounted flashing warning lights; two (2) front and two (2) rear (See 7.15.4 Diagram #1) Unit to be provided with console and dome lighting 7.15.5
- 7.15.7 Low profile high intensity dual flash strobe light mounted in front center of cab roof with brush guard and must meet Target Tech Model Multi-Flash 5X, 12/48

Unit to have seven (7) terminal out socket to provide lighting for towed equipment

VDC, 11 Joules, generating no more than .10 UV of interference on a radio receiver with 12 db of quieting.

7.15.8 OSHA approved back up alarm to be provided on unit.

7.15.6

17	7.16	Unit Instrumentation:
	7.16.1	Tachometer
	7.16.2	Speedometer
	7.16.3	Hourmeter operable from engine operation not key switch
	7.16.4	Coolant temperature indicator with audible buzzer or warning light
	7.16.5	Oil pressure indicator with audible buzzer or warning light
	7.16.6	Hydraulic oil temperature indicator with audible buzzer or warning light, to warn operator when manufacturers recommended hydraulic oil temperature is exceeded
	717	Clutch:
	7.17.1	Wet type, manufacturers heaviest duty available
	7 18	Transmission to be of the following design and arrangement:
	7.18.1	Power shift design mechanically controlled with left hand reverser.
	7.18.2	16 forward speeds
	7.18.3	16 reverse speeds
	7.18.4	Speed ranges to be 1.5 – 20 MPH
	7.18.5	Transmission manual shift lever to be console mounted
	7.19	Differential to have the following features:
	7.19.1	Differential to be manufacturers heavy duty
	7.19.2	Manufacturers differential lock engagement and disengagement capability
	7.19.3	On the go differential lock engagement and disengagement capability
	7.20	Axle:
	7.20.1	Front Axle:
	7.20.1.	Front axle to be manufacturers heavy duty for use with boom mounted mower

- 7 20.1.2 Front axle 20 degrees oscillation (approximate)
- 7.20.2 Rear Axle:
- 7 20 2.1 Rear axle to be approximately 3 inches in diameter

7.21	Planetary Final Drives:
7.21.1	In board type
722	Tractor Hydraulic System to be as follows:
7.22.1	Hydraulic system to provide sufficient pressure and flow to operate all tractor functions at peak efficiency
7222	Tractor to have control valves with three (3) detent position and flow
7.,22.,3	Hydraulic hoses that can be coupled and uncoupled under pressure
7.23	Brakes to be as follows:
7.23.1	Recommended manufacturers emergency braking system shall be provided
7.23.2	Hydraulic actuated service brakes
7.23.3	Must be wet type disk brakes
7.23.4	Must be self adjusting and equalizing
7.24	Wheels and Tires:
7.24.1	Front tires: 10.00 x 16 - 6 ply F2 tread
7.24.2	Rear tires 18.4 x 30 - 8 ply R1 tread
7.25	Three Point Hitch:
7.25.1	Hitch should be electro-hydraulically operated
7.25.2	Hitch must have external switch to control raising and lowering from rear of tractor for safety purposes
7.25.3	Three point hitch to be a category 2 type
7254	Hitch lift capacity to be approximately 4,630 lbs at 24 inches behind lift point
7.26	Cab and Related Accessories:
7.26.1	Cab shall be OSHA approved ROPS
7.26.2	Cab to be insulated and pressurized
7.26.3	Cab to be mounted by the manufacturer
7.26.	Cab unit to be equipped with heater, defroster, and air conditioning to be installed by the manufacturer

7.26.5	Cab shall have safety glass, tinted at all locations
7.26.6	Cab to have two (2) lockable entry doors keyed alike; one (1) left and one (1) right
7.26.7	Seat to be cloth covered type protected with scotchguard (or equal) and equipped with a seat belt
7.26.8	Seat to have a height and weight adjustment and swivel left and right 20 degrees (approximate) for easier operation.
7.26.9	Seat to be equipped with adjustable arm rests
7.26.10	Cab and tractor to be provided with a type of non-skid step (or steps) and hand holds for safety purposes
7.26.11	Unit to be equipped with a tilt/telescoping steering wheel
7.26.12	Unit to be equipped with a first aid kit mounted inside of cab
7.26.13	Tool box to be provided, weather resistant, lockable, and mounted for operator convenience
7.26.14	Cab unit to have front and rear windshield wipers and washers
7.26.15	Left and right side rear view mirrors and in cab rear view mirror to be provided
7.26.16	All features that are considered to be manufacturers standard equipment that are not specifically addressed above shall be provided
7.26.17	Unit shall be delivered to WVDOH with all manufacturers recommended safety related decals and safety features intact.
7.27 PT	O Requirements:
7.27.1	540 PTO R.P.M.
7.27.2	PIO can be engaged and disengaged on the go
7.28 Pai	nt:
7.28.1	The tractor is to be painted manufacturers standard color.

8.0 SPECIFICATIONS – 20 FOOT UNIVERSAL MID MOUNTED ARTICULATED HYDRAULIC POWERED BOOM MOWER:

The purpose of these specifications is to describe a 20 Foot Universal Mid Mounted Articulated Hydraulic Powered Boom Mower with Universal Frame and Hitch Assembly that will allow the use of a 60 Inch Side Mounted Short Arm Rotary Grass Mower or a 74 Inch Side Mounted Flail.

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the boom mower.

If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions.

- 8.1 Frame:
- Frame shall be mid mounted to underside of tractor utilizing a modular center weldment with attaching rails adequately secured to the front bolster and rear axle (specifically excluding frame work bolting to the bell housing of the tractor).
- Frame to be of modular construction from alloy steel.
- 8.1.3 Frame mount shall provide for unrestricted movement of the boom and offer limited obstructions to forward vision.
- Fore and aft boom swing spindle pin bottom of pin to ground distance minimum 28 inches
- Unit to be counterweighted to maintain the most possible ground pressure of tires on opposite side of mower during all reach out, up, and down operations of boom with specified head.
- 8.2 Hydraulic Reservoir:
- Manufacturer's properly sized hydraulic oil reservoir that is capable to operate all mower functions including forward, aft, up, down, and rotary head.
- 8.2.2 Tank to have a built-in oil level sight glass and thermometer
- Hydraulic filter capable of providing suitable filtration for system
- 8.2.4 Tank shall be equipped with a shut off valve for closing when changing filter or hoses and for draining of tank
- 8.2.5 Unit shall be equipped with front piston type pump(s) to operate <u>all</u> mower functions (boom, rotary glass and flail) at maximum operation within manufacturer's temperature range excluding the use of the tractor hydraulics.
- 8.2.6 Hydraulic GPM shall be manufacturers specified to operate all mower functions at maximum efficiency

8.2.7	Front pump(s) shall be idle during transport
8.2.8	All circuit hoses to be a minimum of 1 inch four wire braid
8.2.9	All hoses shall be routed through conduit and securely fastened for best brush protection
8.2.10	Deck hoses to be four (4) wire braid fitted with cordura sleeving for brush protection
8.2.11	Mower controls to be a five (5) section valve controlled through a single electronic joystick
8.2.12	Valve shall allow a minimum of four (4) functions simultaneously
8.2.13	The swing, lift, and dipper sections to have individual relief valves to give breakaway protection
8.2.14	Mower cutter to have a 6 second emergency shut down
8215	Mower head motor should take 6 seconds to wind up to full RPM for a "no-shock-load startup"
8.2.16	Cylinders to be mounted in such a way that breakaway forces are transmitted to the barrel side of cylinder and not the rod side
83 Bo	om Rest:
8.3.1	A boom rest shall be mounted to mower frame to cradle boom during transport
8.3.2	Boom rest to take pressure off all cylinders when in transport
8.3.3	When in stow, tractor and mower to be approximately 103 inches with 50 inch rotary and approximately 12 foot high
8.4 Saf 8.4.1	ety Cage:  A safety cage shall be installed on right side and top of operator's position and a sloping guard or rail over entire hood area
8.4.2	Cage to be constructed of expanded metal and permanently mounted to tractor
8.4.3	A 1/2 inch lexon safety glass window shall be a part of the safety cage. This window is to cover the door window and be hinged mounted so that it and the tractor window can be cleaned. No bungee straps and shall meet OSHA safety standards.

8.5 Boom:

21

- 8.5.1 Boom shall be two (2) piece design with all pivot points having replaceable steel bearings
- 8.5.2 Pivot pins to be a minimum of 1 1/2 inch diameter

8.5.3	Inner boom shall be made of 6 inch x 6 inch x 3/8 inch steel tubing minimum 50,000 lb/sq. inch yield strength or 6 inch x 8 inch x 1/4 inch – minimum 70,000 lb. sq. inch yield strength
8.5.4	Dipper boom shall be made of 5 inch x 5 inch x 3/8 inch steel tubing minimum 50,000 lb./sq. inch yield strength or 4 inch x 6 inch x 1/4 inch – minimum 70,000 lb/sq inch yield strength
8.5.5	All hinge points shall be T-1 steel reinforcement
85.6	Boom swing from stow position to be approximately 140 degrees forward
857	Boom reach up to be approximately 18 feet 6 inches
858	Boom reach out to be approximately 21 feet from tractor centerline to outside edge or cutting blade arc
8.5.9	Boom reach down to be approximately 13 feet 6 inches below tractor ground level
8.5.10	Boom mower head to be capable of mowing within 6-10 inches of rear tractor tire allowing tractor to stay further out of traffic lane
8.6 Br 8.6.1	ush Head: Cutting width approximately 50 inches
8.6.2	Top deck to be A606 alloy steel or equal
8.6.3	Side skirts a minimum of 3/8 inch steel
86.4	Top deck to be reinforced with channel frame with a reinforced spindle mount plate
8 6.5	Deck to have replaceable full length skid shoes
8.6.6	Spindle bearings to be tapered roller type in a sealed housing
8.6.7	Blades to be a minimum of 4 inch wide x 5/8 inch thick double edge tempered steel and full swing 360 degrees
8.6.8	Blade bolts to be minimum 1 $1/8$ inch x 3 heat treated, Grade 8 shoulder bolt with a castel nut and roll pin
8.6.9	Mower to be direct drive, splined and totally enclosed excluding chain or flex couplers
8.6.10	Motor to be cast steel and be sized to match the hydraulic pump proposed by the mower manufacturer
8.6.11	A front safety shield, hydraulic actuated, center feed metal door operational from joystick control

23 8 6.13 Rear shield to be rubber/fabric material 8.7 Complete unit shall be delivered with all manufacturers' safety features intact. Mower to be manufacturer's standard color 8.8 8.9 Unit shall be interchangeable with short boom rotary grass mower and 74 inch side mounted flail mower. SPECIFICATIONS OF THE QUOTED UNIT ARE AS FOLLOWS – SIDE MOUNTED 90 HYDRAULICALLY POWERED 60 INCH ROTARY MOWER (GRASS ROTARY MOWER): It is the purpose to describe a Side Mounted Hydraulically Powered 60 Inch Rotary Mower (Grass Rotary Mower). A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the grass rotary mower. If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions. 9.1 Mower Lift Assembly: Mower capable of mowing from 90 degrees up to 90 degrees down. 911 9.1.2 Mower to be capable of approximately raising 17 inches vertically, 6 inches below grade. 9.2 Deck: Cutting width: 5 feet (60 inches) 921 922 Deck material (preferred) 9221 Deck: 1/4 inch 9222 Reinforcing frame: 4 inch x 9 inch channel 9223 Side skirt: 3/8 inch thick 9224 Skid shoes: Full length, replaceable Trash Deflector: Chain, full length standard front and rear 9225 9.3 Spindle: 93.1 Should be alloy steel, tapered roller bearings, bottom in oil bath 9.3.2 Spindle housing should be cast steel unibody

Cutter deck rotation to be approximately 160 degrees

8.6.12


- 9.4 Motor To Spindle Drive:
- 9.4.1 Splined coupler, direct drive enclosed. (Specifically excluding chain or dodge couplers)
- 9.5 Blade Bar and Blades:
- 9.5.1 Single leaf approximately 1 1/4 inch x 6 inch x 27 inch
- 9.5.2 Blades: Full swing 360 degrees, approximately 1/2 inch x 4 inch x 20 1/8 inch heat treated up draft, alloy steel
- 9.5.3 Blade bolts: Forged with nut and lock washer, heat treated shouldered
- 9.6 Optional Equipment:
- 9.6.1 Tail wheel assembly
- 9.6.2 Tires to be laminated
- 9.6.3 Unit shall be interchangeable with 20 foot boom brush mower and 74 inch side mounted flail mower.
- Wet blade system: If vendor has optional wet blade system for extended and short booms, please quote prices.
- 9.7 Paint:
- 9.7.1 The Manufacturer's recommended paint preparation and standard color to be provided.
- 9.8 Vendor must certify that unit offered will meet or exceed the "Occupational Safety and Health Act of 1970" or subsequent changes that are in effect at time of manufacture of unit.
- 9.9 Advertising: Only one (1) manufacturer name plate, which must include model number, may appear on exterior of unit. Logos created through the stamping or casting process of manufacturer are also acceptable. No logo will interfere with the department's striping and logo.
- 9 10 Preventive Maintenance and Operators Orientation/Training:
- 9.10.1 The manufacturer or dealer shall provide preventive maintenance/operator orientation seminar to be conducted at the Equipment Division,
  Buckhannon. The successful vendor shall furnish all training aids; i.e., videos, projectors, etc. required in conducting the training.

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the side flail mower.

If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions.

- 10.1 Mower shall have electronic positive wing transport lock, activated from inside cab (no exceptions)
- 10.2 Shoulder mower shall have electric on/off control with starter interrupt within easy reach of operator.
- 10.3 Mower cutter bar to have a 6 second emergency shut down
- 10.4 The mower head shall take 6 seconds to wind up to full RPM, no shock
- 10.5 Width of swath to be 74 inches minimum
- 10.6 Cutting height shall be adjustable from 1/2 inch to 6 inches
- 10.7 Cutter shaft to be 5 inch O.D. x 4 inch I.D. certified D.O.M. steel tube
- 10.8 Cutter shaft bearings must be high speed double roller bearing, self aligning, greasable with labyrinth type self purging seal
- 10.9 Severe duty 4 oz. flail knives
- 10.10 Drive system must be direct drive (Use of belt system not acceptable)
- 10.11 Cutter housing to be constructed entirely of T-1 steel
- 10.12 Rear roller to be 6 inches diameter, 1/4 inch wall with greasable 1 1/4 inch bronze bushings
- 10.13 Hydraulic motor to be commercial series with double tapered roller bearings for superior support to input shaft
- 10.14 Electronic joystick to be adjustable, analog proportional 2 axis control (cable control not acceptable)
- 10.15 All hinge pins to be heat treated 4140 steel or equal
- 10.16 Tilt cylinder to be mounted to a parallel linkage to allow continuous head angle throughout the full range of lift and 200 degrees at head tilt
- 10.17 Cylinders must be heavy duty type with welded barrel and be externally threaded for screw on gland retainer rings

- 10.18 Cylinders must be internally cushioned on both ends of travel and have Teflon piston seals (non cushioned and or tie rod cylinders not acceptable)
- 10.19 Tilt cylinder minimum 3 inches I.D. x 3/16 inch wall with 1 inch rod
- 10.20 Lift cylinder minimum 3 inches I.D. x 3/16 inch wall with 1 inch rod
- 10.21 Unit shall be interchangeable with short boom rotary grass mower and boom brush mower
- 10.22 Paint:
- The Manufacturer's recommended paint preparation and standard color to be provided.
- 10.23 Vendor must certify that unit offered will meet or exceed the "Occupational Safety and Health Act of 1970" or subsequent changes that are in effect at time of manufacturer of unit.
- 10.24 Advertising: Only one (1) manufacturer name plate, which must include model number, may appear on exterior of unit. Logos created through the stamping or casting process of manufacturer are also acceptable. No logo will interfere with the Department's striping and logo.
- 10 25 Preventive Maintenance and Operators Orientation/Training:
- The Manufacturer or Dealer shall provide preventive maintenance/operator orientation seminar to be conducted at the Equipment Division,
  Buckhannon. The successful vendor shall furnish all training aids; i.e. videos, projectors, etc., required in conducting the training.

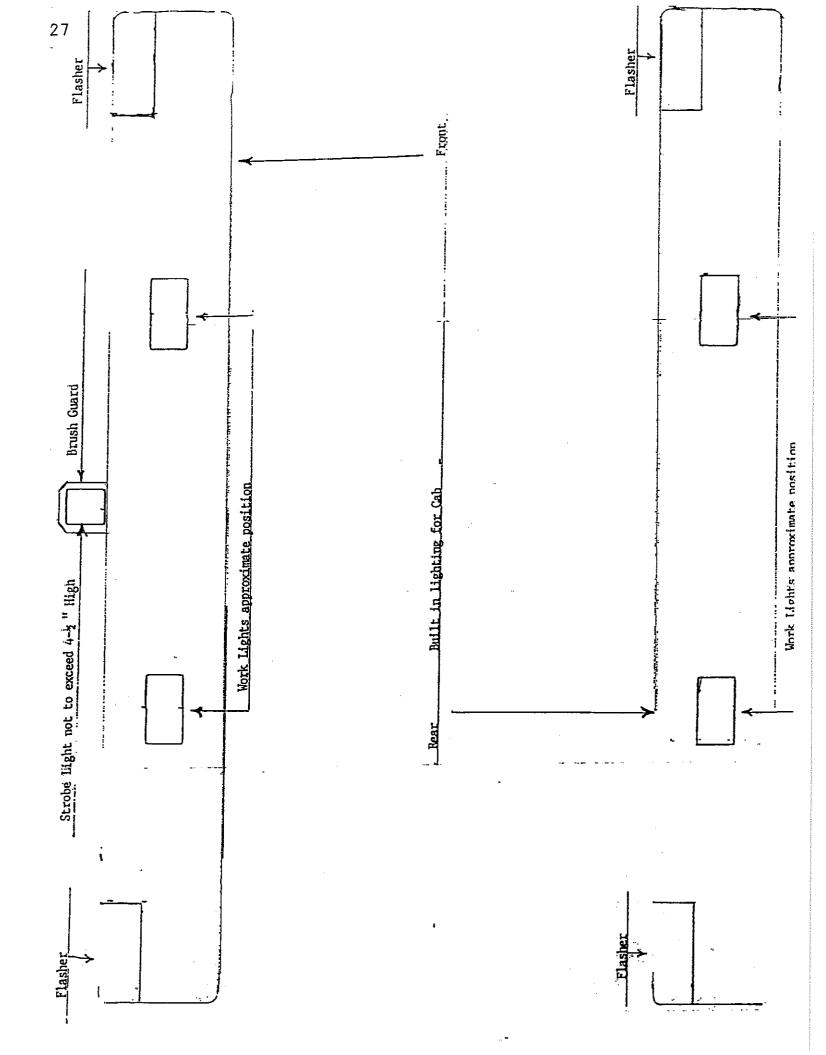

# WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS EQUIPMENT DIVISION

#### BIDDER'S EVALUATION REPORT

## PROCUREMENT SPECIFICATIONS FOR OPEN END CONTRACT NO. 131-1-F

# OPEN END CONTRACT 2 WHEEL DRIVE UTILITY TRACTOR WITH UNIVERSAL MID MOUNTED ARTICULATED BOOM MOWER/ GRASS ROTARY MOWER/SIDE FLAIL MOWER

NOTE TO BIDDER: Procurement Specification No. 131-1-F, Paragraph 2.0 recommends the completion and submittal of this Report with your bid. Purpose of this Report is to enable the West Virginia Division of Highways Evaluation Committee to make full and fair evaluation of the bid. Addendums in order, along with exception sheets, should be with Bidder's Evaluation Report. FAILURE TO SUBMIT THIS REPORT, COMPLETE IN HTS ENTIRETY, MAY SUBJECT THE BIDDER TO DISQUALIFICATION.

	Reference Requisition No.: 708EC001	
	Bidder's Name: FAIRPLAIN TRACTOR SALES, INC.	
	Address: P.O. BOX 787 RIPLEY, WV 25271	
	Telephone Number: (304) 372-9875	
	Years Bidder has been registered to do business with the State of West Virginia: 31	YRS
	Years Company has been an authorized dealer for proposed unit:  31	YRS.
X3.2	Have you complied with all mandatory specifications noted in <b>bold</b> print? X YES	_NO
X4.2 <b>X4.2.1</b>	DELIVERY:  Delivery date of completed representative unit:  120  Calendar Days After  Purchase Agreement	Date of
X4.2.2	Purchase A	of Agreement

NOTE: Vendors can complete Bidder's Evaluation Report at Purchasing's Web Site www.state.wv.us/admin/purchase

### X5.0 AWARD CRITERIA;

X5.1	Prices for COMPLETE 2 WHEEL DRIVE UNIT in qu	1-5	per unit
		6-10	per unit
		11-20	per unit
		21 and over	per unit
	OPTIONS: 2 WHEEL DRIVE		
	Utility Tractor Only:	1-5	per unit
	Other fractor Only.	6-10	per unit
		11-20	per unit
		21 and over	per unit
	Universal Mid Mounted Articulated Boom Mower Only:	1-5 6-10 11-20 21 and over	per unit per unit per unit per unit per unit
	Grass Rotary Mower Only:	1-5 6-10 11-20	per unit per unit per unit
		21 and over	per unit
	Side Flail Mower Only:	1.5	per unit
	•	6-10	per unit
		11-20	per unit
		21 and over	per unit

	AGCO LT85A 2008	
	Is descriptive literature, fully describing proposed unit attached to your bid? X YES	NO
	If not, why?	
2	Will the required number of service manuals, and complete parts list be delivered to the Equipment Division at Buckhannon upon completion of delivery of total units?	
	X YES	TATION.

### EQUIPMENT PREVENTATIVE MAINTENANCE QUESTIONNAIRE

THIS FORM MUST BE COMPLETED IN ITS ENTIRETY BY SUCCESSFUL BIDDER OR MANUFACTURER'S TECHNICAL REPRESENTATIVE PRIOR TO DELIVERY OF PILOT MODEL TO THE WVDOH.

DESCRIPTION:				MAK	Œ:		
MODEL:			YEAR:	PURCHASE AMOUNT:			
				FUEL IYPE:			
	COOLING SYSTE	M CAPACITY:	V				
BELTS:	DESCRIPTION:			PART NUMB	BERS:		
GVW:		AXLE CAPAC	IIY:FRONI:			REAR:	
TIRES:	FRONT MAKE &	SIZE:					
	REAR MAKE & S	IZE:	Land to the second seco				
DIMENSIO	ONS OF UNIT:	LENGIH:		WIDIH:	and the second of the second o	LENGTH:	
VENDOR CONTACT PERSON:		·		PHONE:			
PARTS:							
BATTERY MAKE:		MODEL:		CCA			
TOP OR SE SPARK PL FUEL PUN ALTERNA	IDE POST: LUGS OR FUEL INJI MP OR INJECTION I ATOR MAKE:	ECTORS MAKE: _ PUMP MAKE:		PART# MODEL: PART#:	1 50 4400		
TURBO C	HARGER MAKE:			PART #:	ATTOO A ANTI	AL:	
TRANS M HYDRAU	IAKE: LIC PUMP MAKE: _	MODI	4.;	MODEL:	AUTUMMANUM		
FILTERS	MAKE	PART NO	LUBI	RICANT	MANUFACT	URER TYPE	
AIR OUTE FUEL PRI FUEL SEC	er		POW HYD DIFF	NSMISSION_ ER STEERING RAULIC ERENTIALS			
HYDRAU	_ <del></del> -,		COO:	LANT			
OTHER	· · · · · · · · · · · · · · · · · · ·		OTH	ER			

X6.3	TRAINING:
	Will training seminar be conducted on Preventive Maintenance, Operator and Mechanic Training
	Will you conduct training with each purchase order against this open end contract?
	Will training be conducted within 2 working days from the delivery of the pilot unit on the individual purchase order? X_YESNO
	If NO, explain time frame
	Will an Operator's Manual be furnished directly to Letha Lamb, Training Academy prior to the delivery of the pilot?  YESNO
X6.4	If you are the successful vendor, will you furnish all training aids, i.e., videos, projectors, required in conducting the training?  X YESNO
X6.4.1	Will all manuals, booklets, etc. explaining preventive maintenance, operator procedures, and service schedule be delivered with each unit?  If NO, explain
X6.5	WARRANIY AND SERVICE POLICY
	Will the warranty and service you provide comply with all areas as stated in Section 6.5 of specifications  _XYESNO
	Is warranty literature attached?
	Is a minimum two (2) year bumper to bumper basic parts and labor warranty included?  X YES NO
	Describe:  SEE ATTACHED WARRANTY TERMS AND CONDITIONS
	Is there a three (3) year bumper to bumper basic parts and labor warranty available <u>x YES NO</u>
	Describe: (Include cost and conditions)
	SEE ATTACHED WARRANTYT TERMS AND CONDITIONS

# THIS FORM MUST BE COMPLETED IN ITS ENTIRETY BY THE SUCCESSFUL BIDDER OR MANUFACTURERS TECHNICAL REPRESENTATIVE PRIOR TO DELIVERY OF PILOT MODEL TO THE WVDOH (If additional lines are needed, make copies of form.)

Define the terms of the standard warranty. If not offered, so state (Attach copy)  2 YFARS FROM DATE OF PURCHASE (SEE ATTACHED SHEET)					
2. Dei	footurer's representativ	be performed at DOH facilities and warranty service to be performed at see facility. List name and location of manufacturer's representative.  Y WILL BE PERFORMED AT DEALERSHIP			
3. Lis	n	ventories that are within the State of West Virginia. Also, list availability levels, if			
4. Du	ring the term of warrar r will sell the parts to c	nty, list the guarantee discount to manufacturer's published list price for parts that			
A. B. C.	Terms: Net 30Manufacturer's published list price less:10% discountTerms: Net 60Manufacturer's published list price less:10% discountTerms: Net 90Manufacturer's published list price less:10% discount				
	uring the term of warran ways?	nty, will all manufacturers or engineering improvements be submitted to Division ofXYESNO			
6. Du	uring the term of warrar	nty, list the guaranteed rates charged for repair to the unit			
A	Shop Rate	\$_65.00 per mechanic hour			
В.	Travel Time Charge (Specify if one-way)				
C.	Mileage Charge (Specify if one-way	\$ .25 per vehicle mile  X; port to port X			
D.	Field Mechanic Rate	\$ 65.00 per mechanic hour			
E.	Specify period of tir	ne that prices are in effect: 1 YEAR			
Ŧ	Surcharge for misce	illaneous items:%			

X6.6	EVALUATION COMMITTEE REQUIREMENTS	34
	Is all component specifications, product literature, component me Committee bid determination?	odels provided for EvaluationXYESNO
<b>X</b> 6.7	Will all parts, equipment, accessories, material, design and p specified herein, but which are necessary to provide a comple and conform in strength, quality of material, and quality of v advertised and provided to the market in general by the unit	vorkmanship to those which are
X6.7.1	Are all parts and accessories adequate and regularly supplied those which may be duplications of specifications herein, and to be furnished?	l as standard to be included except except these by specification are noX_YESNO
X6.7.2	Are all standard safety features that are required by Federal	and State statutes of law included? _X_YESNO
X7.0	SPECIFICATIONS OF THE QUOTED UNIT - UTILITY TRA	CTOR
	The bidder should complete the following schedule in order for tunit to the specifications. Should the bidder except a requirement the basis that such feature is not offered by the manufacturer. The discretion as to whether the bidder's substitution meets the requirement.	it, then such exception may be only on ne Division will have the sole
	Manufacturer: AGCO Mod	el: <u>LT85A</u>
X7.1	Tractor dry weight (without ballast): 8,980 lbs.	
X7.2	Wheelbase: 105.5 inches	
X7.3	Is unit 2 wheel drive	X YES NO
<b>X</b> 7.4	Is the hood tilt up with manufacturers approved prop system	YES NO
X7.5	Is unit equipped with manufacturers lockable side panels	YESNO
X7.6	Can all daily services be done from ground level	X YES NO
X7.7	Engine:	
X7.7.1	Is engine manufacturers water cooled, diesel powered	YES NO
	Manufacturer: AGCO · Model: 44	DT
VH 5 1	DTO Horsenower' 85	

计加工组组组工作

X7.7.3	Manufacturers standard governor with engine key shut off, wir	e seale X	d by ma YES	nufacture NO	er ·
X7.8 En	gine Lubrication System:				
X7 8.1	Full pressure lubrication with oil filter and oil by pass system	X_	_YES_	NO	,
X7 8.2	Engine oil cooler	<u> X</u>	YES _	NO	
X7.8.3	Is engine wet sleeved	X_	_YES _	NO	ı
X7.9 En	gine Cooling System:				
X7 9.1	Pressurized cooling system with thermostat and by pass, supplied protected to a freeze point of -34 degrees F	ied wit	h Dex C YES _	Cool Exten	nded Life
X7.9.2	Is cooling system equipped with a coolant recovery tank and si	ght gla	assX	YES	NO
X7.10 Ai	r Induction System:				
X7.101	Dry type dual element (2 stage) air cleaner with self dumping v	valve	X	YES	NO
X7.10.2	Dash mounted air filter restriction indicator with light that is of required	perator	visible X	when ser YES	vice is NO
X7.11 Ex	haust System:				
X7.11.1	Is muffler under hood with manufacturers approved vertical exprotection	xhaust		n and we	
X7.12 EI	ectrical System:			_ 120	100
X7.12.1	Is unit electrical system manufacturers noise suppression wirin	ıg, 12 v	volts neg	gative gro	ound NO
X7.12.2	Is neutral start switch (for safety purposes) provided		X_	YES_	NO
X7.13 CI	narging System:				
X7.13.1	Is charging system manufacturers heavy duty for model bid Manufacturer: Model:AK3355		X	YES	NO
X7.14 Er	ngine Fuel System:				
X7.14.1	Is dual stage filtering provided		X	YES	NO
X7.14.2	Is unit provided with a fuel water separator		X	YES	NO
X7.14.3	If fuel tank is exposed, is manufacturers skid plate provided	, mari	. X	YES_	NO
	Is it manufactured in a manner that shall give the fuel tank	z mayı	<u></u>	YES	NO

X7.15 Li	ghting System:			
X7.15.1	Two (2) high-low beam head light (halogen) with manufacturers heavy	y duty	console m YES	ounted switch NO
X7.15.2	Four (4) roof mounted work lights: two (2) front and two (2) rear	X	YES	NO
X7.15.3	Fenders mounted rear tail lights and turn signals shock mounted	X	_YES	NO
X7.15.4	Four (4) roof mounted flashing warning lights; two (2) front and two (	<ol> <li>rear</li> </ol>	X_ YE	ESNO
X7.15.5	Unit provided with console and dome lighting	_X	YES	NO
X7.15.6	Unit has seven (7) terminal out socket to provide lighting for towed eq	uipme	nt <u>X</u> Y	ESNO
X7.15.7	Low profile high intensity dual flash strobe light mounted in front brush	cente	r of cab ro _YES	oof with NO
	Does it meet Target Tech Model Multi-Flash 5X, 12/48 VDC, 11 John 10 UV of interference on a radio receiver with 12 db of quiet	oules, ting	generating X_YES_	g no more NO
	Manufacturer: <u>PSF-AMBER</u> Model: <u>920ASH</u>			
X7.15.8	OSHA approved back up alarm provided on unit	<u> X</u>	_YES	NO
X7.16 U	nit Instrumentation:			
X7.16.1	Tachometer	X	YES	NO
X7.16.2	Speedometer	X	_ YES	NO
X7.16.3	Hourmeter operable from engine operation not key switch	X	_YES	NO
X7.16.4	Coolant temperature indicator with audible buzzer or warning light		_YES	
X7.16.5	Oil pressure indicator with audible buzzer or warning light	X	_YES	NO
X7.16.6	Hydraulic oil temperature indicator with audible buzzer or warning li- manufacturers recommended hydraulic oil temperature is exceeded	ght, to	warn oper YES	ator when NO
X7.17 C	lutch:			
X7.17.1	Wet type, manufacturers heaviest duty available	<u>X</u>	YES	NO
	Manufacturer and Model: GIMA 0D161MM			
Х7.18 Т	ransmission of the following design and arrangement:			
V7 10 1	Power shift design mechanically controlled with left hand reverser	X	_ YES	NO

X7.182	16 forward speeds X YES NO
X7 18.3	16 reverse speeds X YES NO
X7.18.4	Speed ranges 1.5 – 20 MPH X YES NO
X7.18.5	Transmission manual shift lever is console mounted YES NO
X7 19 Di	fferential has the following features:
X7.19.1	Differential manufacturers heavy duty
X7.19.2	Manufacturers differential lock engagement and disengagement capability X YES NO
X7.19.3	On-the-go differential lock engagement and disengagement capabilityX YESNO
X7.20 Az	xle:
X7.20.1	Front Axle:
X7.20.1.3	Front axle manufacturers heavy duty for use with boom mounted mower X YESNO
X7.20.12	2 Front axle 55 degree oscillation
X7.20.2	Rear Axle:
X7.20.2.	Rear axle 2.8 inches in diameter
X7.21 P	lanetary Final Drives:
X7.21.1	In board type YESNO
X7 22 T X7 22 1	Tractor Hydraulic System:  Hydraulic system provides sufficient pressure and flow to operate all tractor functions at peak  X YES NO  efficiency
	Pressure and flow: 2900 PSI 26 GPM
X7.22.2	Tractor has control valves with three (3) detent position and flow X YESNO
X7.22.3	SEE ADDENDUM NO. 2  Hydraulic hoses can be coupled and uncoupled under pressure  X YESNO
X7.23 <b>X7.23.</b> 1	T 1 footuvore amergency offaking system provides
	Manufacturer and Model: LEVER ACTUTED 3 DISC BALL & RAMP
X7.23.	
X7.23.	3 Wet type disc brakes YESNO

X7.23.4	Self adjusting and equalizing	_X	YES	NO
	eels and Tires:  Front Tires: 10:00 X 16			
	Rear Tires: 18.4 X 30		<del></del>	
X7.25 Thr	ee Point Hitch:			
X7.25 1	Hitch electro-hydraulically operated	X	YES	NO
	Hitch has external switch to control raising and lowering from real purposes	r <b>of tr</b> a	ector for sa	fety _NO
X7.25.3	Three point hitch is a category 2 type	Х	YES	NO
X7.25.4	Hitch lift capacity 7000 Ibs. at 24 inches behind lift point			
X7.26 Cal	and Related Accessories:			
X7.26.1	Cab has OSHA approved ROPS		YES	
X7.26.2	Cab is insulated and pressurized	X	YES	_NO
X7.26.3	Cab mounted by the manufacturer	X	_ YES	NO
X7.26.4	Cab unit equipped with heater, defroster, and air conditioning installed	l by ma	anufacturer _YES	_NO
X7.26.5	Cab has safety glass, tinted at all locations	X	_YES	_NO
X7.26.6	Cab has two (2) lockable entry doors keyed alike: one (1) left and one	(1) rig	tht _x_ YE	S NO
X7.26.7	Seat is cloth covered type protected with scotchguard (or equal) and e	quippe X	d with a sea YES	t belt _NO
X7.26.8	Seat has a height and weight adjustment and swivel left and right 30		rees for easi _YES	
X7.26.9	Seat equipped with adjustable arm rests	X	_ YES	_ NO
X7,26.10	Cab and tractor provided with a type of non-skid step (or steps) and h	and ho	lds for safet YES	y purposes _NO
X7.26.11	Unit equipped with a tilt/telescoping steering wheel	X	_ YES	_NO
X7.26.12	Unit equipped with a first aid kit mounted inside of cab	X	_ YES	_NO
X7,26.13	Tool box provided, weather resistant, lockable, and mounted for oper	ator co	onvenience YES	_NO

X7.26	14 Cab unit has from and rear windshield vipers and washers	Х	718	NO
X7.26	15 Left and right side rear view mirrors and in cab rear view mirror provide	à x	(YES	NO NO
	16 All features that are considered manufacturers standard equipment	that		cifically
X7.26.3	17 Unit will be delivered to WVDOH with all manufacturers recommer and safety features intact	X	safety rela YES	ted decals _NO
X7.27	PTO:			
X7.27.1	PTO RPM: <u>540/1000</u>			
X7.27.2	2 PTO can be engaged and disengaged on-the-go	X	YES	МО
X7.28	Paint:			
X7.28.1	1 Tractor is painted manufacturers standard color	X	YES	_NO
	Manufacturer: TIGER Model: TRB-50-CLRSP  Is a minimum two (2) year bumper to bumper basic parts and labor wa boom mower?	Arm I X	Rotary Gras YES	s Mower or NO
	Describe:  2 YEAR OR 20000HOURS/ VISIT PER STANDARD WARRANTY POLICY			
	Is a three (3) bumper to bumper basic parts and labor warranty available  Describe (include costs and conditions):			
	3 YEAR OR 3000 HOURS/\$250.00 DEDUCTIBLE/VISIT PER STANDARD WARRANYT P	ULICY		
X8.1	Frame:			•
X8.1.1	Is frame mid mounted to under side of tractor utilizing a modular cattaching rails adequately secured to the front bolster and rear axle frame work bolting to the bell housing of the tractor)	e (spe	ecifically ex	

X8.1.2	Is frame modular construction from alloy steel	χ	YES	NO
X8.1.3	Does frame mount provide for unrestricted movement of the boon obstructions to forward vision		offer limited	
X8.1.4	Fore and aft boom swing spindle pin bottom of pin to ground dista	ince _	28 j	nches
X81.5	Is unit counterweighted to maintain the most possible ground pressure mower during all reach out, up and down operations of boom with spe	cified l	s on opposit read YES	
X82 H	ydraulic Reservoir:			
X8 2.1	Manufacturer's properly sized hydraulic oil reservoir that is capable to including forward, aft, up, down, and rotary head		e all mower YES	
X82.2	Tank has a built-in oil level sight glass and thermometer	X	YES	_ ИО
X8.2.3	Hydraulic filter capable of providing suitable filtration for system	Х	YES	NO
X8.2.4	Tank is equipped with a shut off valve for closing when changing the draining of tank		r hoses and YES	
X8.2.5	Unit is equipped with front piston type pump(s) to operate all move grass and flail) at maximum operation within manufacturer's tem use of the tractor hydraulics  SEE ADDENDUM NO. 2	peratu	re range ex	cluding the
X8.2.6	Hydraulic GPM:46 Is it manufacturers specified to op maximum efficiency		ll mower f	
X8.2.7	Front pump(s) are idle during transport	Χ	YES	_NO
X8.2.8	All circuit hoses inch wire braid			
X8.2.9	All hoses routed through conduit and securely fastened for best br		rotection YES	_NO
X8210	Deck hoses four (4) wire braid fitted with cordura sleeving for brush p		on YES	_NO
X8.2.11	Mower controls five (5) section valve controlled through a single election SEE ADDENDUM NO. 2	-	oystick YES	NO
X8.2.12	Valve allows 5 functions simultaneously			
X8.2.13	Swing, lift, and dipper section have individual relief valves to give bre		y protection YES	ı _NO

X8214	Mower cutter has a 6 second emergency shut down	Х	YES	NO
X8 2 15	Mower head motor takes 6 seconds to wind up to full RPM for a no-sl	ock-lo	oad-startup YES	NO
X8.2.16	Cylinders mounted in such a way that breakaway forces are transmitted and not the rod side	d to th	e barrel sid YES	c of cylinder NO
X83 Bo	om Rest:			
X8.3.1	A boom rest is mounted to mower frame to cradle boom during tr		rt _YES	NO
X8.3.2	Boom rest takes pressure off all cylinders when in transport	Х	_ YES	_ NO
X8.3.3 X8.4 Sa	When in stow, tractor and mower 103 inches with 50 inch rotar SEE ADDENDUM NO. 2 fety Cage:	y and _	12 foot	high
X8.4.1	Safety cage is installed on right side and top of operator's position over entire bood area	and a	a sloping g _ YES	uard or rail NO
X8.4.2	Cage is constructed of expanded metal and permanently mounted to t	ractor	<u>x</u> YES	NONO
X8.4.3	A 1/2 inch lexon safety glass window is part of the safety cage	X	_YES	NO
	This window covers the door window and hinged mounted so that it a cleaned  SEE ADDENDUM NO.2	and the	tractor win	ndow can be NO
	Are there any bungee straps  Meets OSHA safety standards  YES X NO  YES NO			
X8.5 Be	oom:			
X8.5.1	Is boom two (2) piece design with all pivot points having replaces			
X8.5.2	Pivot pins 15 inch diameter		YES	110
X8,5.3	Inner boom made of inch x inch inch steel tul	oing		
	Minimum lb/sq. inch yield strength			
X8.5.4	Dipper boom made of inch x inch x inch steel	tubin	g	
	Minimum No. 2 lb/sq. inch yield strength			
X8.5.5	All hinge points are T-1 steel reinforcement X	_YES	SNO	)
X8.5.6	Boom swing from stow position 140 degrees forward			

X8 5.7	Bonn reach in . 1846"
<u> </u>	Boom reach out: 21' from tractor centerline to outside edge or cutting blade are
X8.5.9	Boom reach down: 13.5' below nactor ground level
X8510	Boom mower head capable of mowing within $10^\circ$ inche: of rear fractor the allowing fractor to stay further out of traffic lane $\chi = \chi S = S C$
X86 Br	ush Nead:
X86.1	Cutting width: 50 inches
X8.6.2	Top deck made of 100k pst MATERIAL
X8.6.3	Side skirts 3/8 inch steel
X8.6.4	Top deck reinforced with channel frame with a reinforced spindle mount plateYESχ_NO
X8.6.5	Deck has replaceable full length skid shoes YES NO
X8.6.6	Spindle bearing are tapered roller type in a sealed housing X YES NO
X8.6.7	Blade are 4 inches wide x 5/8 inches thick double edge tempered steel and full swing 360 degree X YES NO
X8.6.8	Blade bolts 1 1/8 inch x 3 heat treated, grade 8 shoulder bolt with a castel nut and roll pin X YES NO
X869	Mower is direct drive, splined and totally enclosed excluding chain or flex couplers YESX NO
X8.6.10	Motor is cast steel and sized to match the hydraulic pump proposed by mower manufacturer
X8.6.11	Front safety shield, hydraulic actuated, center feed metal door is operational from joystick control  X YES NO
X8.6.12	Cutter deck rotation 160 degrees
X8.6 13	Rear shield rubber/fabric material YES NO
X8.7 C	Complete unit will be delivered with all manufacturers' safety features intact X YESNO
X88 N	NO lower is manufacturer's standard color YES NO
	Init is interchangeable with short boom rotary grass mower and 74 inch side mounted flail  y YESNO

X9 0	SIDE MOUNTED HYDRAULICALLY POWERED 60 INCH ROTARY MOWER (GRASS ROTARY MOWER):
	Manufacturer: TIGER Model: TSR-60
	Is a minimum two (2) year bumper to bumper basic parts and labor warranty included with the grass rotary mower?
	ls a three (3) year bumper to bumper basic parts and labor warranty available X YESNO  Describe (include costs and conditions):
	3 YEAR OR 3000 HOURS/\$250.00 DEDUCTIBLE/VISIT PER STANDARD WARRANTY POLICY
X9.1	Mower Lift Assembly:
X9.1.1	Mower capable of mowing from 90 degrees up to 48 degrees down
X9.1.2	Mower capable of raising 17 inches vertically 6 inches below grade
X9.2	Deck:
X9.2.1	Cutting width:60
X9.2.2 X9.2.2	Deck material:  1 Deck: inch
X9.2.2	2 Reinforcing frame: inch x inch channel DECK IS MULTI-LAYERED MIN 110K FULLY ENCLOSED RIB
X9 2 2	CONCTRUCTION F /22 CTFF
X9.2.2	
X9.2.2	.5 Trash deflector: Chain, full length standard front and rear YES NO
X9.3	Spindle:
X9.3.1	Alloy steel, tapered roller bearings, bottom in oil bath YES NO
X9.3.2	Spindle housing cast steel unibody YES NO

X9 4	Мо	tor to Spindle Drive:
X941		Splined coupler, direct drive enclosed (specifically excluding chain or dodge couplers)
X9.5	Bla	ide Bar and Blades:
X9 5 1		Single leaf 1.1/4 inch x _6 inch x _27 inch
X9.5.2		Blades: Full swing 360 degrees X YES NO
		Size 1/2 inch x 4 inch x20 1/8 inch heat treated up draft, alloy steel x YES NO
X9.5 3		Blade bolts: Forged with nut and lock washer, heat treated shouldered X YES NO
X9.6	Ор	tional Equipment:
X9.6.1		Tail wheel assemblyNO
X9.6.2		Tires are laminatedX YES NO
X9.6.3	}	Unit is interchangeable with 20 foot boom brush mower and 74 inch side mounted flail mower YYESNO
X9.6.4	ļ	Do you have a wet blade system for extended and short booms YES X NO
		If so, cost: WE HAVE SPRAY BAR AVAILABLE
X9.7	Pa	int:
X9 7.	1	Manufacturer's recommended paint preparation and standard color X YES NO
X9.8	Do	oes unit meet or exceed OSHA requirements X YES NO
X9.9	A	dvertising: Does unit comply with advertising requirementsX_YESNO
X9.10	) Pr	eventive Maintenance and Operating Orientation/Training:
X9.10	9.1	Describe orientation seminar and will you furnish all training aids
		VIDEO AND SERVCE MANUAL

## X10.0 74 INCH SIDE FLAIL MOWER:

	Manufacturer: TIGER Model: TSF-75			
	Is a minimum two (2) year bumper to bumper basic parts and labor we side flail mower?  Describe:		ity include YES	
	2 YEAR OR 2000 HOURS/VISIT PER STANDARD WARRANTY POLICY			
	Is a three (3) year bumper to bumper basic parts and labor warranty availab	le	YES _	NO
	Describe (include costs and conditions):			<u> </u>
	3 YEARS OR 3000 HOURS/\$250.00 DEDUCTIBLE/VISIT PER STANDARD WARRANTY POL	ICY		
X10.1	Does mower have electronic positive wing transport lock, activated fro		side cab _YES	NO
X10.2	Does shoulder mower have electric on/off control with starter interrup operator		hin easy re _YES	
X10.3	Does mower cutter bar have a 6 second emergency shut down	Χ	_ YES	NO
X10.4	Does mower head take 6 seconds to wind up to full RPM, no shock	X	_YES	NO
X105	Width of swath 75 inches			
X10.6	Is cutting height adjustable from 1/2 inch to 6 inches	Χ	_YES	NO
X10.7	Cutter shaft 4 3/4 inch O.D. x 3/8 inch I.D. certified D.O.M. steel tube	X	_ YES	NO
X10.8	Are cutter shaft bearings high speed double roller bearing, self alignin type self purging seal		easeable w _YES	•
X10.9	Severe duty 4 oz. flail knives X YES NO			
X10.10	Is drive direct drive X YES NO			
X10.1	I Is cutter housing constructed entirely of T-1 steel YES X NO	80	K	
X10.12	2 Rear roller 6 inches diameter, 1/4 inch wall with greaseable		h bronze b YES	
X10.13	Is hydraulic motor commercial series with double tapered roller bearings to shaft		perior supp _ YES	-

X10 14 Is electronic joystick adjustable, analog proportional 2 axis control	χ	Alls .	N()
X10.15 Are all hinge pins heat treated X YES NO Steel:			
X10 16 Tilt cylinder mounted to a parallel linkage to allow continuous head angle the lift and 200 degrees at head tilt			c full range of
X10.17C ylinders are heavy duty type with welded barrel and be externally thr retainer rings			rew on gland NO
X10.18 Cylinders are internally cushioned on both ends of travel and have Tef	lon p X	iston so YES_	ealsNO
X10.19 Tilt cylinder 3 inches I.D. x 3/16 inch wall with 1 inch rod			
X10.20 Lift cylinder $\frac{3}{}$ inches LD x $\frac{3/16}{}$ inch wall with $\frac{1}{}$ inch rod			
X10.21 Unit is interchangeable with short boom rotary grass mower and boom			ver NO
X10.22 Paint:			
X10.22.1 Manufacturer's recommended paint preparation and standard color	_X	YES _	NO
X10.23 Does unit meet or exceed OSHA requirements YESNO			
X10.24 Does unit comply with advertising requirements YES NO			
X10 25 Preventive Maintenance and Operators Orientation/Training:			
X10.25.1 Describe orientation seminar and will you furnish all training aids			
VIDEO/ SERVICE MANUAL			
			<del>-</del>

#### AGREEMENT ADDENDUM

WV-96 Rev 5/94

ACCEPTED BY

In the event of conflict between this addendum and the agreement this addendum shall control:

- 1 ARBITRATION Any references to arbitration contained in the agreement are hereby deleted. Disputes arising out of the agreement shall be presented to the West Virginia Court of Claims
- 2 HOLD HARMLESS Any clause requiring the Agency to indemnify or hold harmless any party is hereby deleted in its entirety
- 3 GOVERNING LAW The agreement shall be governed by the laws of the State of West Virginia. This provision replaces any references to any other State's governing law.
- 4 TAXES Provisions in the agreement requiring the Agency to pay taxes are deleted. As a State entity, the Agency is exempt from Federal, State and local taxes and will not pay taxes for any Vendor including individuals, nor will the Agency file any tax returns or reports on behalf of Vendor or any other party
- 5 PAYMENT Any references to prepayment are deleted Payment will be in arrears
- 6 INTEREST Should the agreement include a provision for interest on late payments the Agency agrees to pay the maximum legal rate under West Virginia law All other references to interest or late charges are deleted
- 7 RECOUPMENT Any language in the agreement waiving the Agency's right to set-off counterclaim recoupment, or other defense is hereby deleted
- 8 ' FISCAL YEAR FUNDING Service performed under the agreement may be continued in succeeding fiscal years for the term of the agreement contingent upon funds being appropriated by the Legislature or otherwise being available for this service. In the event funds are not appropriated or otherwise available for this service, the agreement shall terminate without penalty on June 30. After that date the agreement becomes of no effect and is null and void. However, the Agency agrees to use its best efforts to bave the amounts contemplated under the agreement included in its budget. Non-appropriation or non-funding shall not be considered an event of default.
- 9 STATUTE OF LIMITATION Any clauses limiting the time in which the Agency may bring suit against the Vendor, lessor, individual, or any other party are deleted
- 10 <u>SIMILAR SERVICES</u> Any provisions limiting the Agency's right to obtain similar services or equipment in the event of default or non-funding during the term of the agreement are hereby deleted.
- 11 ATTORNEY FEES The Agency recognizes an obligation to pay attorney s fees or costs only when assessed by a court of competent jurisdiction Any other provision is invalid and considered null and void
- 12 ASSIGNMENT Notwithstanding any clause to the contrary the Agency reserves the right to assign the agreement to another State of West Virginia agency, board or commission upon thirty (30) days written notice to the Vendor and Vendor shall obtain the written consent of Agency prior to assigning the agreement
- 13 <u>LIMITATION OF LIABILITY</u> The Agency, as a State entity, cannot agree to assume the potential liability of a Vendor. Accordingly, any provision limiting the Vendor's liability for direct damages or limiting the Vendor's liability under a warranty to a certain dollar amount or to the amount of the agreement is hereby deleted. In addition, any limitation is null and void to the extent that it precludes any action for injury to persons or for damages to personal property.
- 14. RIGHT TO TERMINATE Agency shall have the right to terminate the agreement upon thirty (30) days written notice to Vendor
- 15 <u>TERMINATION CHARGES</u> Any provision requiring the Agency to pay a fixed amount or liquidated damages upon termination of the agreement is hereby deleted. The Agency may only agree to reimburse a Vendor for actual costs incurred or losses sustained during the current fiscal year due to wrongful termination by the Agency prior to the end of any current agreement term
- 16 RENEWAL Any reference to automatic renewal is hereby deleted. The agreement may be renewed only upon mutual written agreement of the parties
- 17 <u>INSURANCE</u> Any provision requiring the Agency to insure equipment or property of any kind and name the Vendor as beneficiary or as an additional insured is hereby deleted
- 18 RIGHT TO NOTICE Any provision for repossession of equipment without notice is hereby deleted. However, the Agency does recognize a right of reposses-
- 19 ACCELERATION Any reference to acceleration of payments in the event of default or non-funding is hereby deleted
- 20 AMENDMENTS All amendments, modifications, alterations or changes to the agreement shall be in writing and signed by both parties. No amendment, modification, alteration or change may be made to this addendum without the express written approval of the Purchasing Division and the Attorney General

STATE OF WEST VIRGINIA	VENDOR
Spending Unit:	Company Name: FAIRPLAIN TRACTOR SALES, INC.
Signed:	Signed: Canoll 977 isher
Title:	Title: PRESIDENT
Date:	Date: 10-22-07

708£CXX)1

### STATE OF WEST VIRGINIA Purchasing Division

## PURCHASING AFFIDAVIT

West Virginia Code §5A-3-10a states: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owned is an amount greater than one thousand dollars in the aggregate

#### DEFINITIONS:

Purchasing Affidavlt (Revised 04/15/07)

'Debt' means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Debtor" means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions "Political subdivision" means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. "Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount

EXCEPTION: The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

LICENSING: Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY: The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendors should visit www.state.wv.us/ admin/purchase/privacy for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and are in compliance with the requirements as stated

Vendor's Name:	FAIRPLAIN TRACTOR SALES, INC.			
Authorized Signature	: Carull M7 ishw	Date:	OCTOBER 22, 2007	



VENDOR

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

JULIAN -- -7-1

## Request for Quotation

AFO NUMBER 708EC001

1

RFQ COPY TYPE NAME/ADDRESS HERE

FAIRPLAIN TRACTOR SALES, INC. P.O. BOX 787

RIPLEY, WV 25271

ADDRESS CORRESPONDENCE TO ATTENTION OF:

JOHN JOHNSTON 304-558-2402

DIVISION OF HIGHWAYS S H EQUIPMENT DIVISION p ROUTE 33 BRUSHY FORK ROAD T O BUCKHANNON, WV 26201

304-472-1750

ADDRESS CHANGES TO BE NOTED ABOVE

		119/26	/2007		1	BII	OPENING TI	ME L	1 . ~ 7 / T-17/A
OPENING DATE:	QUAN	555	uop	CAT NO	ITEM NUI	A Roman Local St	UNIT PRICE	at rechented.	1:30PM AMOUNT
		:		ADI	ENDUM NO.	1			
	BID OF	PENING	DATE	AND	TIME CHAN	IGED			
	FROM:	09/0	5/07	AT 1:	30 P.M.				
	TO:	09/2	6/07	AT 1:	30 P.M.				
	PAGE 4	<u> </u>	DELET	E: E	URCHASING	CARD A	CCEPTANCE.		
	ADDENI CHANGE	OUM #2 IS TO	WILL THE S	BE I PECIF	SSUED AT ICATIONS.	A LATER	DATE WITH	;	
7.	NO OTH	IER CH	ANGES	•					
001		-	EA		020-66				\$79,995.00
	2 WHEE	L DRI	VE UT	ILITY	TRACTOR,	WITH M	OWERS		Ψ,2,333600
				,					
	****	THI	s is	THE E	ND OF RFQ	708E	C001 *****	TOTAL:	: \$ <u>79,995.00</u>
ATURE /)	roll			SEERE	VERSE SIDE FOR T	ERMS AND COL	NDITIONS		

55-0540441

# GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

- 1. Awards will be made in the best interest of the State of West Virginia.
- The State may accept or reject in part, or in whole, any bid.
- 3. All quotations are governed by the West Virginia Code and the Legislative Rules of the Purchasing Division
- Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee
- All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
- 6. Payment may only be made after the delivery and acceptance of goods or services
- 7. Interest may be paid for late payment in accordance with the West Virginia Code.
- 8. Vendor preference will be granted upon written request in accordance with the West Virginia Code.
- 9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes
- 10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
- The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
- Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
- 13. BANKRUPTCY: In the event the vendor/contractor files for bankruptcy protection, this contract is automatically null and void, and is terminated without further order
- HIPAA Business Associate Addendum The West Viginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (http://www.state.wv.us/admin/purchase/vrc/hipaa.htm) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160 103) and will be disclosing Protected Health Information (45 CFR §160 103) to the vendor.

#### **INSTRUCTIONS TO BIDDERS**

- 1. Use the quotation forms provided by the Purchasing Division
- 2. SPECIFICATIONS: Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as EQUAL to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
- Complete all sections of the quotation form.
- 4. Unit prices shall prevail in cases of discrepancy.
- 5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
- BID SUBMISSION: All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications.

#### SIGNED BID TO:

Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

SIGN IN SHEET RFQ# 708ECOO!

Firm & Representative Name:

Phillip A. Complete Pennsboro, W. 2045 F\_ 659-3371

Mailing Address:

Phone, Fax, & E-Mail:

E-mail paske 1 chotmoil com

2 Fairplain Trador PO.Box 287 P. 304-3729875

Genc Fisher Riply W.Oa. 35971 F 304-372-2713

E-mail Tractor Sales @ Wire Line

ROLAND DESCENDER Servere GA 30024 F 678-422396

E-mail Roland, ESSIEMBERO ASCOCOED

4 Ligen Corporation 3301 N. Louise P605-336-7900 Les Slunecka Siony Falls, SD 57/07 F 605-731-0472

E-mail /5/4 necka @tiger-mon

Brias Didyany

5 PLAMO INDUSTRIC 1502 EAST WALNUT P SOO 305 7259

529427+ 7455 F 465-693-6436

E-mail boundary ealand -

Please print or write legibly!

Your fax # is essential to contact you timely!

	SIGN IN SHEET  RFQ #	
Firm & Representative Name:		e, Fax, & E-Mail:
MODEM	240 STEVBERYILLE AVE	P 746-439-2725
TOM BRILL	CAMBRIDGE, EH	F 740 432-2048
	E-mail	
2 Middleton Trade Sales	2032 Fannor Ave	P (304) 366-4690
Zach Marsh	Fairmont NV 26554	F (304) 366-4648_
	E-mail	
3. Diamond Mouras	27134 PARKLANED	
Tim Schursh	SOUX FAlls, SD. E-mail	F417 759-2175
	E-mail	time dismontingues.
4 Alamo SALES CORP	150ZE-WAINNT	P 1-830-305-700/
Roug RAKER	SEGUIN TX 78155	F 1-317-865-7187
<del></del>	E-mail	Stake @ Glamo - Indus Me Con
5 Crap militure 80		
Tokas Alicas	ment 668 Pinc Crest Drive Bidwell OHIO 45619	Fight meets a CARCE.
	E mail	7

Please print or write legibly!

Your fax # is essential to contact you timely!

SIGN IN SHEET RFQ# 708FC001 Date: 8/23/07

Firm & Representative Name:

Mailing Address:

Phone, Fax, & E-Mail:

1 JOHN CARMICHNEL 6777 MERRITTS CREEDIN 304->36-2120

CARMICHAEL ED INC HUNTINGTON WU25701 F 304-302-2302

E-mail JOHNCARMICHAEL & CAREO

2. TON REDDISH

2964 BROWFORD AR P 614-876-5489

JOHN DOORE CO. HILLIAMO OH 43026 F 614-876-7875

E-mail Revisition QJOUNDSON. Co.

3 PAUL ReMaine 2000 JUAN Doere RUN P 585-245-2652

John Obere Co.

Cary, NC 22573 F309-749-2667

E-mail demarepaul ajohn deen com.

4 Bob Moassier 2628 Monseney Dr P 724-941-9356

Souw Brans Prashwas la 1529 F 1 11 9358

E-mail

in Boyers 2132 Farment Clar P 34-44-90

Metas French Farmat 101 21554 F 366-4698

E-mail John to M. Alkitow TOKSTE

Please print or write legibly!

Your fax # is essential to contact you timely!



> EXDOR

State of West Virginia
Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Request for Quotation

RFO NUMBER 708EC001

ADDRESS CORRESPONDENCE TO ATTENTION OF MOTENHOL NHOL 304-558-2402

\*802150249

605-368-5865

FAIRPLAIN TRACTOR SALES, INC. P.O. BOX 787

**RIPLEY, W 25271** 

B H P

T O

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

DATE PRINT	ED TER 72007	MS OF SALE	SHIP VIA	F.O.B	-REIGHT TERMS
BID OPENING DATE:		/2007	-BID	OPENING TIME	01:30PM
LINE	YTTKAUD	UOP CAT.	ITEM NUMBER	UNITPRICE	AMOUNT
			DUM NO 2		
	CHANGES TO	THE SPECIF	ICATIONS PER THE	ATTACHED.	
	BID OPENING	DATE AND	TIME REMAINS 09/	26/07 @1:30 P.M	
	NO OTHER CE	ANGES .			
0001	-	EA	020-66		\$79,995.00
	2 WHEEL DRI	VE UTILITY	TRACTOR, WITH M	owers	\$13,333,00
	***** TH]	S IS THE	ND OF RFQ 708E	C001 ***** TOTA	11: \$7 <u>9,995.00</u>
			EVERSE SIDE FOR TERMS AND CO	NUCTIONS	
SIGNATURE /	2011 20 7	ishin	TELEPHONE	(304) 372–9875	E 10-22-07
TITLE	j.	EIN		ADDRESS CHANG	ES TO BE NOTED ABOVE
PRESIDENT	EN RESPONDING	TO RFQ, INSER	RT NAME AND ADDRESS	IN SPACE ABOVE LABE	LED 'VENDOR'

## ADDENDUM NO. 2 708EC001

#### OPEN END CONTRACT

# 2 WHEEL DRIVE UTILITY TRACTOR WITH UNIVERSAL MID MOUNTED ARTICULATED BOOM MOWER/GRASS ROTARY MOWER/SIDE FLAIL MOWER

#### CHANGES TO SPECIFICATIONS:

4.2 DELIVERY (2<sup>nd</sup> Paragraph 2<sup>nd</sup> Sentence)

FROM:

Delivery is preferred within 90 days

TO:

Delivery is preferred within 180 calendar days after receipt of order

4.2 DELIVERY (3<sup>rd</sup> Paragraph)

FROM:

A completed pilot model for inspection must be provided within 45 calendar days after the date of the purchase agreement by the successful vendor.

TO:

A completed pilot model for inspection must be provided within 120 calendar days after the receipt of order by the successful vendor.

6.5 WARRANTY AND SERVICE POLICY 2<sup>nd</sup> Paragraph

FROM:

See Exceptions Below:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the complete tractor and mower unit or for each option if purchased individually.

TO:

See Exceptions Below:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse is required for the complete tractor and mower unit or for each option if purchased individually.

65 WARRANTY AND SERVICE POLICY 3<sup>rd</sup> Paragraph

#### FROM:

If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions.

TO:

If a three (3) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse is available, please quote for tractor and each of the mowers individually with cost and conditions during this period.

#### FROM:

7.17.1 - Wet type, manufacturers heaviest duty available

TO:

7.17.1 - Clutch system shall be equal to a John Deere Permaclutch 2

#### FROM:

7.18.1 - Power shift design mechanically controlled with left hand reverser

TO:

7.18.1 - Shall be power shift design equal to John Deere Powerquad Plus 16/16

#### FROM:

7 22.2 - Tractor to have control valves with three (3) detent position and flow

TO:

7.22.2 - Tractor to have control valve(s) with three (3) detent position and flow

8.0 SPECIFICATIONS – 20 FOOT UNIVERSAL MID MOUNTED ARTICULATED HYDRAULIC POWERED BOOM MOWER:
(2<sup>ND</sup> Paragraph)

#### FROM:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the boom mower.

TO:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse is required for the boom mower.

(3<sup>RD</sup> Paragraph)

DELETE:

If a three (3) year bumper to bumper basic parts and labor warranty is available, please quote so along with all costs and conditions

#### FROM:

8.2.5 Unit shall be equipped with front piston type pump (s) to operate <u>all</u> mower functions (boom, rotary glass and flail) at a maximum operation within manufacturer's temperature range excluding the use of the tractor hydraulics.

TO:

8.25 Unit shall be equipped with front piston type pump to run mower heads and may have stacked gear pump to operate fore, aft, up, and down. These pumps shall operate all mower functions (boom, rotary grass, and flail) at maximum operation within manufacturer's temperature range excluding the use of the tractor hydraulics.

#### FROM:

8.2.11 Mower controls to be a five (5) section valve controlled through a single electronic joystick.

TO:

8.2.11 Mower controls shall be a five (5) section valve controlled through a single electronic joystick.

8.3.3 When in stow, tractor and mower to be approximately 103 inches with 50 inch rotary and approximately 12 foot high.

TO:

8.3.3 When in stow, tractor and mower to be a maximum 103 inches with 50 inch rotary and approximately 12 foot high.

#### FROM:

8.4.3 A 1/2 inch lexan safety glass window shall be a part of the safety cage. This window is to cover the door window and be hinged mounted so that it and the tractor window can be cleaned. No bungee straps and shall meet OSHA safety standards.

TO:

8.4.3 A 3/8 inch lexan safety glass window shall be part of the safety cage. This window is to cover the door window and be hinged mounted so that it and the tractor window can be cleaned. No bungee straps and shall meet OSHA safety standards.

#### FROM:

8 5 3 Inner boom shall be made of 6 inch x 6 inch x 3/8 inch steel tubing minimum 50,000 lb/sq. inch yield strength or 6 inch x 8 inch x 1/4 inch – minimum 70,000 lb. sq. inch yield strength.

TO:

8.5.3 Inner boom shall be made of 6 inch x 6 inch x 3/8 inch steel tubing minimum 50,000 lb/sq. inch yield strength or 6 inch x 6 inch x 1/4 inch — minimum 70,000 lb. sq. inch yield strength.

#### FROM:

8.5.4 Dipper boom shall be made of 5 inch x 5 inch x 3/8 inch steel tubing minimum 50,000 lb/sq. inch yield strength or 4 inch x 6 inch x 1/4 inch – minimum 70,000 lb/sq. inch yield strength.

TO:

8.5.4 Dipper boom shall be made of 5 inch x 5 inch x 3/8 inch steel tubing minimum 50,000 lb/sq. inch yield strength or 5 inch x 5 inch x 1/4 inch – minimum 70,000 lb/sq. inch yield strength.

8.5.10 Boom mower head to be capable of mowing within 6-10 inches of rear tractor tire allowing tractor to stay further out of traffic lane.

TO:

- 8.5.10 Boom mower head shall be capable of mowing within 6-10 inches of rear tractor tire allowing tractor to stay further out of traffic lane.
- 9.0 SPECIFICATIONS OF THE QUOTED UNIT ARE AS FOLLOWS SIDE MOUNTED HYDRAULICALLY POWERED 60 INCH ROTARY MOWER (GRASS ROTARY MOWER):

  (2<sup>nd</sup> Paragraph)

FROM:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the grass rotary mower.

TO:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse is required for the grass rotary mower.

#### FROM:

9.1 1 Mower capable of mowing from 90 degrees up to 90 degrees down

TO:

9.1.1 Mower capable of mowing from 90 degrees up to 48 degrees down

9.5.3 Blade bolts: Forged with nut and lock washer, heat treated shouldered

TO:

9.5.3 Blade bolts: Must be forged with nut and lock washer, heat treated shouldered or shall have nut that will allow cotter pin to lock bolt and nut together.

FROM:

9.6 Optional Equipment

10.

9.6 Additional Equipment

FROM:

961 Tail wheel assembly

10:

9.61 Unit shall have tail wheel assembly

FROM:

9.6.2 Tires to be laminated

TO:

9.6.2 Unit shall have laminated tires

10.0 SPECIFICATIONS OF THE QUOTED UNIT – 74 INCH SIDE FLAIL MOWER (1<sup>st</sup> Paragraph)

#### FROM:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for the side flail mower.

#### TO:

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse is required for the side flail mower.

#### DELETE:

10.10 Drive system must be direct drive (Use of belt system not acceptable)

#### FROM:

10.16 Tilt cylinder to be mounted to a parallel linkage to allow continuous head angle throughout the full range of lift and 200 degrees at head tilt

IO:

10.16 Tilt cylinder to be mounted to a parallel linkage to allow continuous head angle throughout the full range of lift.

## ADDENDUM NO. 2

### 708EC001

## OPEN END CONTRACT

2 WHEEL DRIVE UTILITY TRACTOR WITH UNIVERSAL MID MOUNTED ARTICULATED BOOM MOWER/GRASS ROTARY MOWER/SIDE FLAIL MOWER

CHANG	GES TO BIDDER'S EVALUATION REPORT:
X4.2	DELIVERY
FROM: X4.2.1 1	Delivery date of completed representative unit:calendar days after date of purchase agreement
TO: X4.2.1 J	Delivery of completed representative unit: <u>120</u> calendar days after receipt of Order
FROM:	
X4.2.2 I	Delivery date of balance of completed units: calendar days after date of purchase agreement
TO:	
X4.2.2 I	Delivery date of balance of completed units: 180 calendar days after receipt of order

## 5.0 AWARD CRITERIA:

FROM:

X5.1	Prices for COMPLETE 2 WHEEL DRIVE UNIT in quantities:						
		1-5	per unit				
		6-10	per unit				
		11-20	per unit				
		21 and over	per unit				
	OPTIONS:						
	2 WHEEL DRIVE						
	Utility Tractor Only:	1-5	per unit				
	•	6-10	per unit				
		11-20	per unit				
		21 and over	per unit				
	Universal Mid Mounted Articulated Boom M	Mower Only:					
		1-5	per unit				
		6-10	per unit				
		11-20	per unit				
		21 and over	per unit				
	Grass Rotary Mower Only:						
		1-5	per unit				
		6-10	per unit				
		11-20	per unit				
		21 and over	per unit				
	Side Flail Mower Only:						
	· ·	1-5	per unit				
		6-10	per unit				
		11-20	per unit				
		21 and over	per unit				
		<b></b>					

grass rotary mower and side flail r warranty in quantities:		
	1"3	per unit
	6-10	per unit
	11-20	per unit
	21 and over	per unit
OPTIONS:		
2 WHEEL DRIVE		
Utility Tractor Only:	1-5	per unit
	6-10	per unit
	11-20	per unit
	21 and over	per unit
Plus 3 year bumper to bumper basic p	arts and labor warranty excludi	ng normal wea
items and misuse:	\$	per unit
Universal Mid Mounted Articulated E	Joan Mayyer Oul	ner mengelada dah dah karasa dibank perpenser dalam daya
The state of the s		per unit
		per unit
	11-20	per unit
	21 and over	ner unit

Grass Rotary Mower Only:  Plus 3 year bumper to bumper basic parts and labor items and misuse:	6-10 11-20 21 and over	per unit g normal wear
Side Flail Mower Only:  Plus 3 year bumper to bumper basic parts and labor	1-5 6-10 11-20 21 and over	per unit per unit per unit per unit
items and misuse:	\$	per unit
WARRANTY AND SERVICE 2 <sup>nd</sup> Paragraph		
FROM: Is a minimum two (2) year bumper to bumper b included?		or warranty SNO
TO: Is a minimum two (2) year bumper to bumper b excluding normal wear items and misuse include	asic parts and labo	

X6.5

FRO: Is a t	aragraph M: hree (3) year bumper to bumper parts and labor warranty availableYESNO ribe: (Include cost and conditions):
	irce (3) year bumper to bumper basic parts and labor warranty excluding normal items and misuse available?
Desc	ribe: 3 YEARS OR 3000 HOURS/\$250.00 DEDUCTIBLE/VISIT PER STANDARD
	WARRANTY POLICY
FROM: X7.17.1	Wet type, manufacturers heaviest duty availableYESNO Manufacturer and Model:
TO: X7.17.1	Is clutch system equal to a John Deere Permaclutch 2 X YES NO  Manufacturer and Model: GIMA ODI61MM
FROM: X7.18.1	Power shift design mechanically controlled with left hand reverserYESNO
TO: X7.18.1	Power shift design equal to John Deere Powerquad Plus 16/16X_YESNO
	Manufacturer and Model: MF 16X16 FULL SYNCHRONIZED POWER SHUTTLE WITH 2-SPEED POWER SHIFT
FROM: X7.22.2	Tractor has control valves with three (3) detent position and flowYESNO
TO: X7.22.2	Tractor has control valve(s) with three (3) detent position and flow x YES NO

7.75 753 7				
FROM:				,
included r	num two (2) year bum with the boom mower?		arts and labor wal	
TO:				
Is a minin		per to bumper basic p		
excluding	normal wear items an	d misuse included with	n the boom mower	
Describe:	2 YEARS OR 2000 HOURS	/VISIT PER STANDARD WAR	RANTY POLICY	
		OUNTED ARTICULAT	ED HYDRAULIC	POW
BOOM M				
3 <sup>nd</sup> Paragr	ph			
FROM:				
	3) year humper to hum	per basic parts and labor	r warranty availabl	e?
ib a tince t	of join bumpor to bam.	por outil parts and race.	YES	
	nclude costs and condit	ions):		
Describe(i		, . <u></u>		
Describe(i				
Describe(i				
·				
IO: TO:	3) year bumper to bum	per basic parts and labo	ı warranty excludir	ng norn
IO: IO: Is a three	3) year bumper to bum and misuse available o		r warranty excludir	
IO: IO: Is a three wear item	and misuse available of		Y_YES	NO

FROM:			
od)	it is equipped with front piston type pump(s) to op om, rotary grass and flail) at maximum operation operature range excluding the use of the tractor by	within manufact	urer's
10:			
X8 2 5 <b>I</b> s u	mit equipped with front piston type pump(s) to ru	n mower heads XYES	NO
Doe	es it have stacked gear pump to operate fore, aft, up a	nd down YES	NO
ma	these pumps operate <u>all mower functions</u> (boom, sximum operation within manufacturer's temperate tractor hydraulics	· —	ling the use of
FROM:			
X8.2.11	Mower controls five (5) section valve controlled joystick	through a single o	
TO:			
X8.2.11	Are mower controls five (5) section valve cont electronic joystick	rolled through a	
FROM: X8.3.3 Wh	nen in stow, tractor and mowerinches with in	nch rotary and	_ foot high
TO:			
	hen in stow, tractor and mower is maximum 103 i proximately 12 foot high	W 1973 CX	

TROM	l:		
X8 4 3	A 1/2 inch lexan safety glass window is part of the safety cage. This window covers the door window and hinge mounted so that		
	window can be cleaned	YLS_	NO
	Are there any bungee straps	YES	NO
	Meets OSHA safety standards	YES YES_	_NO
TO: X8 4.3	A 3/8 inch lexan safety glass window is part of the safety cage	YES	NO
	This window covers the door window and hinge mounted so that window can be cleanedX_	it and the tra YES	
	Are there any bungee straps	_ YESX_	_NO
	Meets OSHA safety standards	YES	_NO
FROM X8.53	Inner boom made ofinch x inch inch steel tubing  Minimum lb/sq inch yield strength		
IO:	Topow hoom is 6 inch w 6 inch w 2/0 inch at 14 1	50 000 H	/- :1·
A0.3.3	Inner boom is 6 inch x 6 inch x 3/8 inch steel tubing minimum yield strength $\chi$	m 50,000 fb./ YES	
	OR	1100	_ ```
	6 inch x 6 inch x 1/4 inch minimum 70,000 lb. sq. Inch yield s	strength YES	_NO
FROM X8.5.4	l: Dipper boom made of inch x inch x inch steel tu Minimum lb. sq. inch yield strength	bing	
TO:			
	Dipper boom is made of 5 inch x 5 inch x 3/8 inch steel tubin sq. in yield strength  OR	ig minimum _YES	
	5 inch x 5 inch x 1/4 inch minimum 70,000 lb/sq. in. yield str	ength	
	X		NO

FRO	M:		
X8 5	10 Boom mower head capable of mowing within inches of rear tractor tire allowing tractor to stay further out of traffic lane YLSNO		
TO: X8 5	10 Boom mower head is capable of mowing within 6-10 inches of rear tractor tire allowing tractor to stay further out of traffic laneX_YESNO		
9.0	SIDE MOUNTED HYDRAULICALLY POWERED 60 INCH ROTARY MOWER (GRASS ROTARY MOWER):  2 <sup>nd</sup> Paragraph		
	FROM: Is a minimum two (2) year bumper to bumper basic parts and labor warranty included with the grass rotary mower? YESNO Describe:		
	Is a minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse included with the grass rotary mower?		
	3rd Paragraph FROM:		
	Is a three (3) year bumper to bumper basic parts and labor warranty available? YESNO Describe(include costs and conditions):		
	Is a three (3) year bumper to bumper basic parts and labor warranty available?  YES NO		
	Is a three (3) year bumper to bumper basic parts and labor warranty available? YESNO  Describe(include costs and conditions):  TO: Is a three (3) year bumper to bumper basic parts and labor warranty excluding normal		

X911-N	O CHANGI;	
Мо	ower capable of mowing from degrees up to	degrees down
FROM: X9.5.3 Bla	ide bolts: Forged with nut and lock washer, heat tr	eated shouldcredYESNO
TO: X9 5.3 Bla will	de bolts are forged with nut and lock washer, heat lallow cotter pin to lock bolt and nut together	treated shouldered or has nut thatXYESNO
X96 NO	CHANGE REQUIRED	
FROM: X9.61	Tail wheel assemblyYESNO	
TO: X9 6.1	Unit has tail wheel assembly	XYESNO
FROM: X9.62	Tires are laminated YES NO	
IO: X9.6.2	Unit has laminated tires	X_YESNO

10.0	74 INCH SIDI. FLAII. MOWER: 1" Paragraph
	FROM:
	Is a minimum two (2) year humper to humper basic parts and labor warranty included with the side flail mower? YES_NO  Describe:
	TO:
	Is a minimum two (2) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse included with the side flail mower? X_YESNO
	Describe: 2 YEAR OR 2000 HOURS/VISIT PER STANDARD WARRANTY POLICY
3rd Pa	ragraph
	FROM:
	Is a three (3) year bumper to bumper basic parts and labor warranty available?
	Describe(include costs and conditions):
	TO:
	Is a three (3) year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse available on the side flail mower? X YESNO
	Describe: 3 YEARS OR 3000 HOURS/\$250.00 DEDUCTIBLE/VISIT PER STANDARD WARRANTY POLICY

X10 10 DLLTTT:	Is drive direct drive	YES _	NO			
FROM:						
X10 16	Tilt cylinder mounted to a parallel linkage to allow continuous head angle throughout the full range of lift and 200 degrees at head tiltYESNO					
TO:						
X10.16	Till cylinder mounted to a	a parallel linka	ge to allow o	continu	uous head	angle
	throughout the full range	of lift	_	Χ	YES	NO



State of West Virginia Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Request for

REGNUMBER ( & EC (.

PAG	

ADDRESS CORRESPONDENCE TO ATTENTION OF

JOHN JOHNSION 304 558 2402

**AENDOÜ** 

\*709043435 304 - 372 - 9875 FAIRFLAIN TRACTOR SALES INC PO POX 787

RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION SHIP ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WY 26201

304-472-1750

DATE PRINT		TERMS OF S	ALE	SHIP VIA	F.O.B.	FREIGHT TERMS
09707	/2007	4.6.16.6.16.6.6	<b>-</b>	7. 7. 7	OFENING TIME	01:30PM
BID OPENING DATE:		1 09/26/200	7	PJL	OPENTING THE	01.30F11
LINE	ALLO	NTITY UOP	CAT :NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	ADDIT REPLA PAGE BID C	PION TO THE ACE PAGE 11 DPENING DATE THER CHANGE	ADDEN SPECE OF AND	DUM NO. 3 FICATIONS. DENDUM NO. 2 WITH ME REMAINS THE 020-66 Y TRACTOR, WITH ME	TH THE ATTACHED  SAME  COWERS  EC001 ****** TOTA	\$79,995.00
SIGNATURE	7?	11 110	~/ -/	EVERSE SIDE FOR TERMS AND C TELEPHONE	lDA'	TE 10.00.07
TITLE POLCTOEVE	Lane	SI JII	shu		304-372-9875	10-22-07
PRESIDENT		FEIN	55-0540	441	ADDRESS CHANG	GES TO BE NOTED ABOVE

## - A & ARD (RHTRIA j- () ](): Prices for COMPLETE 2 WHEEL DRIVE UNIT (tractor, articulated boom mower, $\lambda 5.1$ grass rotary mower and side flail mower) including mandatory minimum 2 year warranty in quantities: 1-5 per unit 6-10 per unit 11-20 \_\_\_\_ per unit 21 and over \_\_\_\_\_ per unit OPTIONS: 2 WHEEL DRIVE \_\_\_\_\_ per unit 1-5 Utility Tractor Only: 6-10 \_\_\_\_\_ per unit 11-20 \_\_\_\_\_ per unit 21 and over \_\_\_\_\_ per unit Plus 3 year bumper to bumper basic parts and labor warranty excluding normal wear \$ \_\_\_\_\_ per unit items and misuse: Universal Mid Mounted Articulated Boom Mower Only: \_\_\_\_ per unit 1-5 per unit 6-10 11-20 \_\_\_\_\_ per unit 21 and over \_\_\_\_ per unit Plus 3 year bumper to bumper basic parts and labor warranty excluding normal wear items and misuse:

ADDRESS CHANGES TO BE NOTED ABOVE



TITLE

State of West Virginia Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for [ AFG NUMSER

708EC001

ADDRESS CORRESPONDENCE TO ATTENTION OF

иотгинос инос 304-558-2402

\*709043435 MODERA PO BOX 787

304-372-9875 FAIRPLAIN TRACTOR SALES INC

RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD Ď BUCKHANNON, WV 26201 304-472-1750

DATE PHINTED TERMS OF SALE SHIP VIA FREIGHTTERMS FOB. 09/20/2007 BID OPENING DATE: 09/26/2007 BID OPENING TIME 01:30PM QUANTITY LINE UOP UNIT PRICE AMOUNT ITEM NUMBER NO. ADDENDUM NO. 4 BID OPENING DATE AND TIME CHANGED FROM: 09/26/2007 AT 1:30 P.M. TO: POSTPONE UNTIL FURTHER NOTICE ADDENDUM NO 5 WILL BE ISSUED AT A LATER DATE WITH CHANGES TO PRICING OF OPTIONS. NO OTHER CHANGES. 0001 EΑ 020-66 \$79,995,00 1 2 WHEEL DRIVE UTILITY TRACTOR, WITH MOWERS \$79,995.00 THIS IS THE END OF REQ 708EC001 \*\*\*\*\* TOTAL: BEE REVERSE SIDE FOR TEPMS AND CONDITIONS SIGNATURE TELEPHONE 304) 372-9875 10-22-07

PRESIDENT 55-0540441 WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Request for Quotation

Ö

RFQ NUMBER 708EC001

ADDRESS CORRESPONDENCE TO ATTENTION OF:

NOTENHOL NHOL 304-558-2402

VENDOR

PRESIDENT

\*709043435 304-372-9875 FAIRPLAIN TRACTOR SALES INC PO BOX 787

RIPLEY WV 25271

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201 304-472-1750

DATE PRINTED TERMS OF SALE SHIP VIA F.O.B. FREIGHT TERMS 10/05/2007 <del>10/24/2007</del> GPE<del>NING TIME</del> <del>01:30PM</del> BID OPENING DATE: LINE QUANTITY UOP ITEM NUMBER UNIT PRICE AMOUNT NO. ADDENDUM NO. 5 CHANGES TO THE BIDDER'S EVALUATION REPORT ATTACHED. BID OPENING DATE AND TIME CHANGED FROM: POSTFONE UNTIL FURTHER NOTICE 10/24/07 AT 1:30 P.M. TO: NO OTHER CHANGES 0001 EΑ 020-66 \$79,995.00 2 WHEEL DRIVE UTILITY TRACTOR, WITH MOWERS \$79,995.00 IS THE END OF REQ THIS 708Ed001 \*\*\*\*\* TOTAL: SEE REVERSE SIDE FOR TERMS AND CONDITIONS. SIGNATURE

TELEPHONE

55-0540441

(304) 372-9875

DATE

ADDRESS CHANGES TO BE NOTED ABOVE

10-22-05

#### ADDENDUM #5

### 708EC001

## OPEN END CONTRACT

2 WHEEL DRIVE UTILITY TRACTOR WITH UNIVERSAL MID MOUNTED ARTICULATED BOOM MOWER/GRASS ROTARY MOWER/ SIDE FLAIL MOWER

CHANGES TO BIDDER'S EVALUATION REPORT:

:						
AWARD CRITERIA:						
Prices for <u>COMPLETE 2 WHEEL DRIVE UNIT</u> (tractor, articulated boom a grass rotary mower and side flail mower) including mandatory minimum 2 years.						
		cluding mandatory m	inimum 2 year			
warranty in quantitie	es:	1 =				
			per unit			
			per unit			
			per unit			
TO 1	1 boole meets and	21 and over	per unit			
	bumper basic parts and	\$	ng normai wear			
items and misuse:			per unit			
OPTIONS:	, = = = = = = = = = = = = = = = = = = =					
2 WHEEL DRIVE						
Utility Tractor Only:		1-5	per unit			
Office Tractor Only.		6-10	per unit			
		-	per unit			
		21 and over				
F						
Plus 3 year bumper to	bumper basic parts and	labor warranty excludi	ng normal wear			
items and misuse:	1	\$	_ per unit			
Universal Mid Mount	ed Articulated Boom Mo	ower Only:				
		1-5	per unit			
		6-10	per unit			
			per unit			
		21 and over	per unit			
Diag 2 harman on to	bumper basic parts and	labor warranty evoludi	ng normal wea			
items and misuse:	bumper basic parts and	\$	ner unit			
nems and misuse.			Por error			
Grass Rotary Mower	Only:	1-5	per unit			
Class Roan's 11201101	<i>-</i>	6-10	per unit			
		11-20	per unit			
		21 and over				
			*			
Plus 3 year humner to	bumper basic parts and	labor warranty excludi	ing normal wea			
items and misuse:	Cambar annia Lama anna	\$	per unit			
memis and misuse.		Ψ				

	g normal wear per unit
1-20 1 and over varranty excluding	per unit per unit g normal wear per unit ated boom mower,
l and over	per unit g normal wear per unit ated boom mower,
tractor, articul	g normal wear per unit ated boom mower,
(tractor, articul	per unit ated boom mower,
(tractor, articul	per unit ated boom mower,
	ated boom mower, inimum 2 year
	ınımum 2 year
д шанаатогу ш	
\$79,995.00	per unit
\$79,995.00	per unit
\$79,995.00	per unit
over_\$79,995.00	per unit
varranty excludin	o normal wear
3,500.00	
\$36 <i>4</i> 13 go	ner unit
\$36,413.90 \$36 413 90	per unit
\$36,413.90	per unit
	- ~
\$36,413.90 \$36,413.90	per unit per unit per unit
	y <del></del>

	1-5		00.00	_ per u	nit WIT	H hydrau	lics and	controls
		\$23,0	34.00	_per u	nit LES	S hydraul	ics and c	ontrols
	6-10	\$32,00	00.00	per ur	it WITI	H hydraul	lics and o	controls
		\$23,00	34.00			S hydraul		
	11-20	\$32,00 \$23,03				H hydrau S hydraul		
	21 and		32,000.00 23,034.00			H hydrau S hydraul		controls controls per u
Plus 3 year bu items and mis		bumpe	r basic pa	rts and		arranty e _1,600.0		normal wea _ per unit
Grass Rotary	Mower	Only: 1-5	\$18,000 \$ 9,025		4			
Grass Rotary	Mower	-		.00	per un	iit LESS it WITH	hydrauli hydrauli	ics and controls a
Grass Rotary	Mower	1-5	\$ 9,025 \$18,000	.00	per un per un per un per un per un	nit LESS nit WITH nit LESS nit WITH	hydrauli hydrauli hydrauli hydraul	cs and controcs and contr
Grass Rotary	Mower	1-5 6-10 11-20	\$ 9,025 \$18,000 \$ 9,025 \$18,000 \$ 9,025 over \$18.	.00	per un per un per un per un per un per un	nit LESS it WITH nit LESS nit WITH nit LESS nit WITH	hydrauli hydrauli hydrauli hydraul hydrauli	cs and contr cs and contr cs and contr ics and cont
Grass Rotary	ımper to	1-5 6-10 11-20 21 and	\$ 9,025 \$18,000 \$ 9,025 \$18,000 \$ 9,025 over \$18, \$ 9,	.00 .00 .00 .00 .00 .000.00	per un per un per un per un per un per un per un labor w	nit LESS nit WITH nit LESS nit WITH nit LESS nit WITH nit LESS	hydrauli hydrauli hydrauli hydrauli hydrauli hydrauli	cs and controls an

## Side Flail Mower Only:

1-5	\$17,478.00	per unit WITH hydraulics and controls
	\$ 8,500.00	per unit LESS hydraulics and controls
6-10	\$17,478.00	per unit WITH hydraulics and controls
0-10	\$ 8,500.00	per unit LESS hydraulics and controls
-	Ψ 0,300,00	_ per aint 2255 m, araunes aira comicos
11-20	\$17,478.00	per unit WITH hydraulics and controls
-	\$ 8,500.00	per unit LESS hydraulics and controls
21 and	over <u>\$17,478.00</u>	per unit WITH hydraulics and controls
	\$ 8,500.00	per unit LESS hydraulics and controls
	\$ 8,500.00	per unit LESS hydraulics and controls

A DES STATE OF WEST VIRGINIA

PURCHASING CONTINUATION SHEET

Buyer Page Req cr F O No.

JJ-33 5 708E0001

Requisition No.: 708ECO01

#### ADDENDUM ACKNOWLEDGEMENT

I hereby acknowledge receipt of the following checked addendum(s) and have made the necessary revisions to my proposal, plans and/or specifications, etc.

Addendum No.'s:

No. 1 \_\_\_\_x

No. 2 \_\_\_\_x

No.. 3 X

No. 4 X

No. 5 X

I understand that failure to confirm the receipt of the addendum(s) may be cause for rejection of bids.

Canoel & Fisher Signature

FAIRPLAIN TRACTOR SALES, INC.

Company

OCTOBER 22,2007

Date



## LT85a Tier III Specifications

MAKE	AGCO
	<del></del> -
Model	LT85a AGCO
Manufacturer	AGCO
PERFORMANCE	05 @ 2200
PTO HP @ Rated Engine RPM	85 @ 2200
PTO HP @ STD PTO RPM	INA
Fuel Usage (Gph) @ STD PTO RPM	INA
Max DBHP @ Engine RPM	INA
Fuel Usage (Gph) - Max DBHP	INA
Hp. Hr/Gal @ Maximum DBHP	INA
PTO Max Torque Rise %	INA
Fuel Tank Capacity-Std/Opt (US Gallons)	40
ENGINE	
Type	AGCO 44 CTA
# of Cylinders/Injection/Fuel	4/Direct/Diesel
Aspiration/Charge Cooling	Turbocharged
Type of Cooling	Liquid
Bore x Stroke (Inches)	4.25 x 4 72
Total Displacement (CID/Liters)	269 (4 4L)
Compression Ratio	18.5:1
Starting Aid	Grid Heater
ELECTRICAL SYSTEM	
Total Battery CCA	2 600 CCA
Alternator Amperage (Std / Opt)	80 / 120
CLUTCH	007 120
	Mot Multi Dino/7
Type/Number of Discs	Wet Multi-Disc/7
Actuation/Diameter (Inches)	Electro-Hydraulic/12
TRANSMISSION	A. ( . ( O
Type	Auto-4 Semi-Powershift
Type of Gears/Ranges	4sm x 4ps
Speeds Forward/Reverse	16F x 16R
Number of P/S Speeds-F/R	4F x 4R
Reverser Transmission (Std/Opt)	Standard PowerShuttle
Creeper Transmission (Std/Opt)	Optional
BRAKES & FINAL DRIVES	
Type of Final Drives	Planetary
Type of Brakes	Inboard Wet Disc
Method of Actuation	Hydraulic
Type of Differential Lock	Wet Multi-Disc
Control	Electro-Hydraulic
PTO	
Type	Independent
Speeds (Rpm)	540/1000
Economy	Opt. 540E
Control	Electro-Hydraulic
Type of Clutch	Wet Multi-Disc
PTO Option (Shaft Diameter-Speeds)	1 3/8" - 540/1000
Front PTO	N/A
TIORETTO	I VI/A



# LT85a Tier III Specifications

4WD FRONT AXLE	
Controls	Electro-Hydraulic
Method of Engagement	Wet Multi-Disc
Type of Differential Lock	Sliding Couple
Shaft Shield	Standard PowerShuttle
Differential Lock Control	Electro-Hydraulic
Open Axle Shaft Joints	Yes
Max Steering Angle (Degrees)	55
HYDRAULICS-STANDARD	
System Type	Dual Element, Open Center
Pump (#/Type)	2/Gear
Total Pump Flow (Gpm)	34 6
Flow @ Remotes (Gpm)	26
Operating Pressure (Psi)	3050
Remotes (Std/Opt)	2/4
HYDRAULICS-OPTIONAL	
System Type	Dual Element, Open Center
Pump (# /Type)	2/Gear
Total Pump Flow (Gpm)	23.6
Flow @ Remotes (Gpm)	15
Operating Pressure (Psi)	2700
Remotes (Std/Opt)	2/4
HYDRAULICS-OPTIONAL 2	
	Closed Center Load Sens-
System Type	ing
Pump (# /Type)	Axis Pump
Total Pump Flow (Gpm)	29
Flow @ Remotes (Gpm)	29
Operating Pressure (Psi)	2900
Remotes (Std/Opt)	2/4
THREE POINT HITCH	
ASAE Category	II
Type of Control	Electronic
Type of Draft Sensing	Lower Link
Stabilizers	Telescopic
Telescopic Lower Links	Standard
Lift Capacity @ 24" (Lbs)	7817
Optional Lift Capacity @ 24" (Lbs)	9189
Front Three Point Hitch	None
Front Lift Capacity	N/A
2WD DIMENSIONS & WEIGHT	
Wheelbase (In)	105.3
Overall Length w/ front weights (In)	174
Min Overall Width (In)	77
Height Over Cab (In)	106.5
Tire Size - Front	10.00 x 16
Treadwidth - Front (In)	59 0 - 93 0
Tire Size - Rear	16.9R34
Treadwidth - Rear (In)	60.2 - 84.4
Drawbar Ground Clearance (In)	15
Approximate Shipping Weight (Lb)	9140
( ) control configured control (may)	÷ · · •



## LT85a Tier III Specifications

4WD DIMENSIONS & WEIGHT	
Wheelbase (in)	105.3
Overall Length w/ front weights (In)	173 9
Min Overall Width (In)	79
Height Over Cab (In)	106.5
Tire Size - Front	13.6R24
Treadwidth - Front (In)	61.7 - 80.7
Tire Size - Rear	16.9R34
Treadwidth - Rear (In)	60 - 117.6
Drawbar Ground Clearance (In)	14.9
Approximate Shipping Weight (LB)	9500
OPERATOR AREA	
Chassis type (straddle or platform)	Flat Platform
Type of Operator Area (ROPS cab or ROPS)	Both
Cab Sound Level dB(A)	INA
Cab Glass Area (FT <sup>2</sup> )	61
Cab Doors (Std/Opt)	2
Cab Suspension	N/A
Cab Suspension Type	N/A
Steering type	Hydrostatic
Steering Wheel Adjust (Tilt/Telescope)	Tilt/Telescope
Transmission Control Location	RH Console/Left Column
Seat Suspension (Mechanical/Air)	Mech. Std./Air Opt
,	•

<sup>\*</sup>Turning Radius is without brakes on both 2WD and 4WD tractors. Front wheel drive is also disengaged on 4WD tractors.

Every attempt has been made to ensure the accuracy, but AGCO assumes no responsibility for authenticity of data. The data presented for AGCO and/or competitive equipment are obtained from various sources, including manufacturers publications and Nebraska

<sup>\*</sup> MFG. Rating



## TIER III

LT85A

#### STANDARD EQUIPMENT

#### F.O.B. Baltimore, Maryland

#### Performance

- · New Style Hood
- · 85 PTO HP\* (63 4 kW) @ 2200 RPM
- 105 Engine HP\* @2200 RPM \*Manufacturer's Estimate

#### Engine

- AGCO 4.4L (269 cu. in.) 4 Cylinder Turbocharged Aftercooled Diesel Engine with Common Rail Injection and Electronic Engine Management
- · Under-Hood, Dry Type Dual Element Air Cleaner
- Under-Hood Muffler with Vertical Exhaust "A" Post Exhaust on Cabs
- · Standard Grid Heater
- · 34 3 Gallon (130L) Fuel Capacity

#### **Electrical System**

- · Two 600 CCA Battery
- 80 Amp Alternator
- · Ignition Key with Safety Start and Engine Shut-Off

#### **Power Train**

- Auto 4 Transmission (16F/16R Speeds) with Multifunction Powershuttle and Wet Multi Disc Clutch
- Rear Axle: Inboard Planetary Axle with Electro-Hydraulic Actuated Differential-Lock
- Brakes: Independent Hydraulic Oil Cooled Disc Brakes with Mechanical Adjustment
- Independent 540/1000 RPM PTO

#### Axle and Wheels

- Telescopic Front Axle (2wd)
- · Center Differential Front Axle (PFA)
- Flanged Type Rear Axle
- · Front and Rear Offset Pressed Steel Wheels

#### **Hydraulics**

- · Hydrostatic Steering
- Open Center System with 26 4 Total GPM (100L) at Remotes
- Two Double Acting Remote Valves
- 3-pt Linkage: Electronic Draft Control (ELC mouse)
- 3-pt Cat II with Telescopic Link Ends
- 3-pt Lift Capacity @ 24" 7817 lbs (3545 kg)

#### Instruments

- · Analog Instrument Panel
- Digital Readout of PTO & Forward Travel Speeds
- · Tachometer / Hour Meter
- Fuel Gauge
- Coolant Temperature Gauge
- · Warning / Information Lights
- Engine and Transmission Service Indicator
- Speed Charts MPH / KPH

#### Lighting

- · Two Halogen Headlights with Dimmer Switch
- Front and Rear Halogen Field Flood Lights (Cab Model only)
- Two Fender Tail Lights
- Four Amber Flashing Lights with Turn Signals

#### Miscellaneous

- Deluxe Cab with Heater, Air Conditioner, Tinted Glass, Front Windshield Wiper/Washer, Sunshade, and Two Non Telescoping Exterior Side Mirrors
- · Steering: Tilt, Telescopic
- Mechanical Spring Suspension Seat with Arm Rest and Seat Belt
- In Cab Electrical Socket
- Audio Speakers, Antenna and Wiring for Radio, but Less Radio
- · Folding ROPS 2 Post
- · Steering: Tilt, and Telescopic
- · Mechanical Spring Suspension Seat

#### **ENGINE SYSTEM**

AGCO LTA series tractors are now equipped with the all new AGCO™ engine. Two different 4.4L AGCO™ engines power the two models in the LTA series. The LT75A comes equipped with the AGCO™ 44 DT engine, a 100 ISO HP turbocharged engine, while the larger LT90A comes packaged with the turbocharged and intercooled AGCO™ 44 DWA engine, which produces 110 ISO HP.

The 4.4L AGCO™ Engine is Tier II emission standards-compliant, and based on a SisuDiesel engine design specifically for demanding off-road and agricultural machinery applications. SisuDiesel engines are known worldwide for their robust construction, reliability, and high torque.



#### New AGCO™ Engines


The new 4.4L AGCO™ engines have numerous improved features over previous engines. Some of these features include wet cylinder liners, Bosch VE10 mechanical injection pumps, reduced emissions, and an air-to-air intercooled engine available in the LT90A.

Model	PTO Horse- power	Engine	ISO Engine Horsepower	Aspiration	Injection
LT75 <i>A</i>	75	AGCO™ 4.4L, 269 ci	100	Turbocharged	Mechanical Bosch VE30
LT90 <i>A</i>	90	AGCO™ 4.4L, 269 ci	110	Turbocharged/ Intercooled	Electronic Bosch VP30

# FEATURES AND BENEFITS AGCO® LTA SERIES


### **Wet Cylinder Liners with Mid Supports**

AGCO™ engines feature wet cylinder liners that are centrally supported and replaceable. By efficiently cooling the top end of each cylinder liner, engine heat is reduced, thus allowing greater power. The central support meanwhile reduces vibration by 75 percent, which reduces wear on the cylinders and cylinder liners, and reduces engine noise. Blow by, oil consumption and particle emissions are also significantly reduced.



#### **Fractured Piston Rods**

The big end of the connecting rod is fracture-split, making the rough-edged big end hold better. The connecting rod can thus be made 17 percent lighter, which reduces vibration and increases the durability of engine.



#### **Reinforced Large Capacity Oil Pan**

The structural features of the new oil pan give added strength to the block and add additional benefits for effective vehicle installation. This narrow oil pan, in conjunction with a narrower engine block, allows for a tighter turning radius and improved operator's line of sight.

