



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**GSD086434**

PAGE  
**1**

ADDRESS CORRESPONDENCE TO ATTENTION OF  
**KRISTA FERRELL**  
**304-558-2596**

**Stonhard**  
**406 Railroad Avenue**  
**Charleston, WV 25302**  
**Attn: Ryan Blake**

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				

BID OPENING DATE: **09/23/2008** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	JB		360-20		
<p>INSTALLATION OF POLYMER FLOOR SEALER, BLDG#5</p> <p>REQUEST FOR QUOTATION</p> <p>THE WEST VIRGINIA PURCHASING DIVISION FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF GENERAL SERVICES, IS SOLICITING BIDS TO PROVIDE THE AGENCY WITH ALL LABOR, MATERIALS, EQUIPMENT, AND SUPPLIES FOR THE INSTALLATION OF A POLYMER FLOOR SEALER ON THE 11TH FLOOR OF BUILDING 5 LOCATED ON THE WEST VIRGINIA STATE CAPITOL COMPLEX IN CHARLESTON, WEST VIRGINIA PER THE ATTACHED SPECIFICATIONS.</p> <p>A MANDATORY PRE-BID MEETING WILL BE HELD ON TUESDAY, SEPTEMBER 9, 2008 AT 10:00 AM. CONTRACTORS ATTENDING THIS MEETING ARE ASKED TO ASSEMBLE IN THE LOBBY OF BUILDING 6 ON THE CAPITOL COMPLEX. A WALK THROUGH OF THE SECURE PROJECT SITE WILL BE CONDUCTED AFTER THIS MEETING. ALL PRIME/GENERAL CONTRACTORS WISHING TO SUBMIT A BID FOR THIS PROJECT MUST ATTEND THIS MEETING. SUBCONTRACTORS AND MATERIAL SUPPLIERS ARE WELCOME TO ATTEND, HOWEVER, ATTENDANCE IS NOT MANDATORY. ANY PRIME/GENERAL CONTRACTOR FAILING TO ATTEND THIS MEETING WILL BE DISQUALIFIED FROM BIDDING ON THIS PROJECT. NO ONE PERSON MAY REPRESENT MORE THAN ONE VENDOR.</p> <p>TECHNICAL QUESTIONS FOR THIS PROJECT MUST BE SUBMITTED IN WRITING TO KRISTA FERRELL IN THE WEST VIRGINIA PURCHASING DIVISION VIA FAX AT 304-558-4115 OR VIA</p>						

*[Handwritten notes and signatures]*

*[Handwritten notes: OFFER APPROVED]*

RECEIVED  
 08 SEP 30 AM 11:45  
 PURCHASING DIVISION  
 STATE OF WV

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *[Signature]* TELEPHONE: **304-395-4322** DATE: **9-29-08**

TITLE: *[Signature]* FEIN: **56-0184790** ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

*[Handwritten stars]*

**GENERAL TERMS & CONDITIONS  
REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)**

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the *West Virginia Code* and the *Legislative Rules* of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee.
5. All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the *West Virginia Code*.
8. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, this Contract may be deemed null and void, and terminated without further order.
14. **HIPAA Business Associate Addendum:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.
15. **West Virginia Alcohol & Drug-Free Workplace Act:** If this Contract constitutes a public improvement construction contract as set forth in Article 1D, Chapter 21 of the West Virginia Code ("The West Virginia Alcohol and Drug-Free Workplace Act"), then the following language shall hereby become part of this Contract: "The contractor and its subcontractors shall implement and maintain a written drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act, as set forth in Article 1D, Chapter 21 of the West Virginia Code. The contractor and its subcontractors shall provide a sworn statement in writing, under the penalties of perjury, that they maintain a valid drug-free work place policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act. It is understood and agreed that this Contract shall be cancelled by the awarding authority if the Contractor: 1) Fails to implement its drug-free workplace policy; 2) Fails to provide information regarding implementation of the contractor's drug-free workplace policy at the request of the public authority; or 3) Provides to the public authority false information regarding the contractor's drug-free workplace policy."

---

**INSTRUCTIONS TO BIDDERS**

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in cases of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications:  
Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130,  
Charleston, WV 25305-0130



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER
GSD086434

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF
KRISTA FERRELL 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
08/21/2008				
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>EMAIL AT KRISTA.S.FERRELL@WV.GOV. TECHNICAL QUESTIONS MAY ALSO BE SUBMITTED DURING THE MANDATORY PRE-BID MEETING. DEADLINE FOR ALL TECHNICAL QUESTIONS IS THURSDAY SEPTEMBER 11, 2008 AT THE CLOSE OF BUSINESS. ALL TECHNICAL QUESTIONS RECEIVED WILL BE ANSWERED BY ADDENDUM AFTER THIS DEADLINE.</p> <p>QUESTIONS CONCERNING THE ACTUAL PROCESS BY WHICH A VENDOR MAY SUBMIT A BID TO THE STATE OF WEST VIRGINIA ARE NOT CONSIDERED TO BE TECHNICAL QUESTIONS AND MAY BE SUBMITTED AT ANY TIME PRIOR TO THE BID OPENING AND IN ANY FORMAT.</p> <p>EXHIBIT 5</p> <p>NOTICE TO PROCEED: THIS CONTRACT IS TO BE PERFORMED WITHIN 30 CALENDAR DAYS AFTER THE NOTICE TO PROCEED IS RECEIVED. UNLESS OTHERWISE SPECIFIED, THE FULLY EXECUTED PURCHASE ORDER WILL BE CONSIDERED NOTICE TO PROCEED.</p> <p>CANCELLATION: THE DIRECTOR OF PURCHASING RESERVES THE RIGHT TO CANCEL THIS CONTRACT IMMEDIATELY UPON WRITTEN NOTICE TO THE VENDOR IF THE MATERIALS OR WORKMANSHIP SUPPLIED ARE OF AN INFERIOR QUALITY OR DO NOT CONFORM WITH THE SPECIFICATIONS OF THE BID AND CONTRACT HERE IN.</p> <p>WAGE RATES: THE CONTRACTOR OR SUBCONTRACTOR SHALL PAY THE HIGHER OF THE U.S. DEPARTMENT OF LABOR MINIMUM WAG RATES AS ESTABLISHED FOR KANAWHA COUNTY, PURSUANT TO WEST VIRGINIA CODE 21-5A, ET, SEQ. (PREVAILING WAGE RATES APPLY TO THIS PROJECT)</p> <p>ARBITRATION: ANY REFERENCES MADE TO ARBITRATION OR INTEREST FOR PAYMENTS DUE (EXCEPT FOR ANY INTEREST</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 3

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				

BID OPENING DATE: 09/23/2008 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>REQUIRED BY STATE LAW) CONTAINED IN THIS CONTRACT OR IN ANY AMERICAN INSTITUTE OF ARCHITECTS DOCUMENTS PERTAINING TO THIS CONTRACT ARE HEREBY DELETED.</p> <p>WORKERS' COMPENSATION: VENDOR IS REQUIRED TO PROVIDE A CERTIFICATE FROM WORKERS' COMPENSATION IF SUCCESSFUL</p> <p>ALL OF THE ITEMS CHECKED BELOW WILL BE A REQUIREMENT OF THIS CONTRACT:</p> <p>(XX) INSURANCE: SUCCESSFUL VENDOR SHALL FURNISH PROOF OF COMMERCIAL GENERAL LIABILITY INSURANCE PRIOR TO ISSUANCE OF CONTRACT. UNLESS OTHERWISE SPECIFIED IN THE BID DOCUMENTS, THE MINIMUM AMOUNT OF INSURANCE COVERAGE REQUIRED IS \$250,000.</p> <p>) BUILDERS RISK INSURANCE: SUCCESSFUL VENDOR SHALL FURNISH PROOF OF BUILDERS RISK - ALL RISK INSURANCE IN AN AMOUNT EQUAL TO 100% OF THE AMOUNT OF THE CONTRACT.</p> <p>(XX) BONDS: FIVE PERCENT (5%) OF THE TOTAL AMOUNT OF THE BID PAYABLE TO THE STATE OF WEST VIRGINIA, SHALL BE SUBMITTED WITH EACH BID AS A BID BOND. THE SUCCESSFUL BIDDER SHALL ALSO FURNISH A PERFORMANCE BOND AND LABOR MATERIAL BOND FOR 100% OF THE AMOUNT OF THE CONTRACT. BONDS MAY BE PROVIDED IN THE FORM OF A CERTIFIED CHECK, IRREVOCABLE LETTER OF CREDIT, OR BOND FURNISHED BY A SOLVENT SURETY COMPANY AUTHORIZED TO DO BUSINESS IN THE STATE OF WEST VIRGINIA. A LETTER OF CREDIT SUBMITTED IN LIEU OF A PERFORMANCE AND LABOR &amp; MATERIAL BOND WILL ONLY BE ALLOWED FOR PROJECTS UNDER \$100,000. PERSONAL OR BUSINESS CHECKS ARE NOT ACCEPTABLE IN LIEU OF THE 5% BID BOND, PERFORMANCE BOND, OR LABOR AND MATERIAL BOND.</p> <p>) MAINTENANCE BOND: A TWO (2) YEAR MAINTENANCE BON</p>						

Beam 7701  
2

13.50 / per thousand

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 4

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
COVERING THE ROOFING SYSTEM WILL BE A REQUIREMENT OF THE SUCCESSFUL VENDOR.						
REV. 11/00						
EXHIBIT 7						
DOMESTIC ALUMINUM, GLASS & STEEL IN PUBLIC WORKS PROJECTS						
IN ACCORDANCE WITH WEST VIRGINIA CODE 5-19-1 ET., SEQ., EVERY CONTRACT FOR CONSTRUCTION, RECONSTRUCTION, ALTERATION, REPAIR, IMPROVEMENT OR MAINTENANCE OF PUBLIC WORKS, WHERE THE COST IS MORE THAN \$50,000 AND, IN THE CASE OF STEEL ONLY, WHERE THE COST OF STEEL IS MORE THAN \$50,000 OR WHERE MORE THAN 10,000 POUNDS OF STEEL ARE REQUIRED, THE STATE WILL ACCEPT ONLY ALUMINUM GLASS, OR STEEL PRODUCTS PRODUCED IN THE UNITED STATES. IN ADDITION, ITEMS OF MACHINERY OR EQUIPMENT PURCHASED FOR USE AT THE SITE OF PUBLIC WORKS SHALL BE MADE OF DOMESTIC ALUMINUM, GLASS OR STEEL, UNLESS THE COST OF THE PRODUCT IS LESS THAN \$50,000 OR LESS THAN 10,000 POUNDS OF STEEL ARE USED IN PUBLIC WORKS PROJECTS.						
FOREIGN MADE ALUMINUM, GLASS OR STEEL PRODUCTS MAY BE ACCEPTED ONLY IF THE COST OF DOMESTIC PRODUCTS IS FOUND TO BE UNREASONABLE. SUCH COST IS UNREASONABLE IF IT IS 20% OR MORE HIGHER THAN THE BID PRICE FOR FOREIGN MADE PRODUCTS. IF THE DOMESTIC ALUMINUM, GLASS OR STEEL PRODUCTS TO BE SUPPLIED OR PRODUCED IN A "SUBSTANTIAL LABOR SURPLUS AREA", AS DEFINED BY THE UNITED STATES DEPARTMENT OF LABOR, FOREIGN PRODUCTS MAY BE SUPPLIED ONLY IF DOMESTIC PRODUCTS ARE 30% OR MORE HIGHER IN PRICE THAN THE FOREIGN MADE PRODUCTS.						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 5

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
08/21/2008				
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>IF, PRIOR TO THE AWARD OF A CONTRACT UNDER THE ABOVE PROVISIONS, THE SPENDING OFFICER OF THE SPENDING UNIT DETERMINES THAT THERE EXISTS A BID FOR LIKE FOREIGN ALUMINUM, GLASS OR STEEL THAT IS REASONABLE AND LOWER THAN THE LOWEST BID DOMESTIC PRODUCTS, THE SPENDING OFFICE MAY REQUEST, IN WRITING, A REEVALUATION AND REDUCTION IN THE LOWEST BID FOR SUCH DOMESTIC PRODUCTS. ALL VENDORS MUST INDICATE IN THEIR BID IF THEY ARE SUPPLYING FOREIGN ALUMINUM, GLASS OR STEEL.</p> <p>REV. 3/88</p> <p>EXHIBIT 9</p> <p>NOTICE FOR ISSUANCE &amp; ACKNOWLEDGEMENT OF CONSTRUCTION PROJECT ADDENDA</p> <p>THE ARCHITECT/ENGINEER AND/OR AGENCY SHALL BE REQUIRED TO ABIDE BY THE FOLLOWING SCHEDULE IN ISSUING CONSTRUCTION PROJECT ADDENDA FOR STATE AGENCIES:</p> <p>(1) THE ARCHITECT/ENGINEER SHALL PREPARE THE ADDENDUM AND A LIST OF ALL PARTIES THAT HAVE PROCURED DRAWINGS AND SPECIFICATIONS FOR THE PROJECT. THE ADDENDUM AND LIST SHALL BE FORWARDED TO THE BUYER IN THE STATE PURCHASING DIVISION. THE ARCHITECT/ENGINEER SHALL ALSO SEND A COPY OF THE ADDENDUM TO THE STATE AGENCY FOR WHICH THE CONTRACT IS ISSUED.</p> <p>(2) THE BUYER SHALL SEND THE ADDENDUM TO ALL INTERESTED PARTIES AND, IF NECESSARY, EXTEND THE BID OPENING DATE. ANY ADDENDUM SHOULD BE RECEIVED BY THE BUYER WITHIN FOURTEEN (14) DAYS PRIOR TO THE BID OPENING DATE.</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 6

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

RFQ COPY

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOF	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>(3) ALL ADDENDA SHOULD BE FORMALLY ACKNOWLEDGED BY ALL BIDDERS AND SUBMITTED TO THE STATE PURCHASING DIVISION. THE SAME RULES AND REGULATIONS THAT APPLY TO THE ORIGINAL BIDDING DOCUMENT SHALL ALSO APPLY TO AN ADDENDUM DOCUMENT. THE ONLY EXCEPTION MAY BE FOR AN ADDENDUM THAT IS ISSUED FOR THE SOLE PURPOSE OF CHANGING A BID OPENING TIME AND/OR DATE.</p> <p>REV. 11/96</p> <p>EXHIBIT 10</p> <p>ADDENDUM ACKNOWLEDGEMENT</p> <p>I HEREBY ACKNOWLEDGE RECEIPT OF THE FOLLOWING CHECKED ADDENDUM(S) AND HAVE MADE THE NECESSARY REVISIONS TO MY PROPOSAL, PLANS AND/OR SPECIFICATION, ETC.</p> <p>ADDENDUM NOS :</p> <p>NO. 1 . . . . .</p> <p>NO. 2 . . . . .</p> <p>NO. 3 . . . . .</p> <p>NO. 4 . . . . .</p> <p>NO. 5 . . . . .</p> <p>I UNDERSTAND THAT FAILURE TO CONFIRM THE RECEIPT OF THE ADDENDUM(S) MAY BE CAUSE FOR REJECTION OF THE BIDS.</p> <p>VENDOR MUST CLEARLY UNDERSTAND THAT ANY VERBAL</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 7

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS		
08/21/2008						
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM				
LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>REPRESENTATION MADE OR ASSUMED TO BE MADE DURING ANY ORAL DISCUSSION HELD BETWEEN VENDOR'S REPRESENTATIVES AND ANY STATE PERSONNEL, IS NOT BINDING. ONLY THE INFORMATION ISSUED IN WRITING AND ADDED TO THE SPECIFICATIONS BY AN OFFICIAL ADDENDUM IS BINDING.</p> <p>..... SIGNATURE</p> <p>..... COMPANY</p> <p>..... DATE</p> <p>REV. 11/96</p> <p>CONTRACTORS LICENSE</p> <p>WEST VIRGINIA STATE CODE 21-11-2 REQUIRES THAT ALL PERSONS DESIRING TO PERFORM CONTRACTING WORK IN THIS STATE MUST BE LICENSED. THE WEST VIRGINIA CONTRACTORS LICENSING BOARD IS EMPOWERED TO ISSUE THE CONTRACTORS LICENSE. APPLICATIONS FOR A CONTRACTORS LICENSE MAY BE MADE BY CONTACTING THE WEST VIRGINIA DIVISION OF LABOR CAPITOL COMPLEX, BUILDING 3, ROOM 319, CHARLESTON, WV 25305. TELEPHONE: (304) 558-7890.</p> <p>WEST VIRGINIA STATE CODE 21-11-11 REQUIRES ANY PROSPECTIVE BIDDER TO INCLUDE THE CONTRACTORS LICENSE NUMBER ON THEIR BID.</p> <p>BIDDER TO COMPLETE:</p> <p>CONTRACTORS NAME: ..... STANDARD</p> <p>CONTRACTORS LICENSE NO.: WV020826</p>						
SEE REVERSE SIDE FOR TERMS AND CONDITIONS						
SIGNATURE		TELEPHONE		DATE		
TITLE		FEIN		ADDRESS CHANGES TO BE NOTED ABOVE		

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'





State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

**Request for  
 Quotation**

RFQ NUMBER
GSD086434

PAGE
8

ADDRESS CORRESPONDENCE TO ATTENTION OF
KRISTA FERRELL 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				
BID OPENING DATE: 09/23/2008		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UQP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>THE SUCCESSFUL BIDDER WILL BE REQUIRED TO FURNISH A COPY OF THEIR CONTRACTORS LICENSE PRIOR TO ISSUANCE OF A PURCHASE ORDER/CONTRACT</p> <p>APPLICABLE LAW</p> <p>THE WEST VIRGINIA STATE CODE, PURCHASING DIVISION RULES AND REGULATIONS, AND THE INFORMATION PROVIDED IN THE "REQUEST FOR QUOTATION" ISSUED BY THE PURCHASING DIVISION IS THE SOLE AUTHORITY GOVERNING THIS PROCUREMENT.</p> <p>ANY INFORMATION PROVIDED IN SPECIFICATION MANUALS, OR ANY OTHER SOURCE, VERBAL OR WRITTEN, WHICH CONTRADICTS OR ALTERS THE INFORMATION PROVIDED FROM THE SOURCES AS DESCRIBED IN THE ABOVE PARAGRAPH IS VOID AND OF NO EFFECT.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT IS AUTOMATICALLY NULL AND VOID, AND IS TERMINATED WITHOUT FURTHER ORDER.</p> <p>REV. 1/2005</p> <p>NOTICE</p> <p>A SIGNED BID MUST BE SUBMITTED TO:</p> <p>DEPARTMENT OF ADMINISTRATION          PURCHASING DIVISION          BUILDING 15          2019 WASHINGTON STREET, EAST          CHARLESTON, WV 25305-0130</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 GSD086434

PAGE  
 9

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 KRISTA FERRELL  
 304-558-2596

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DEPARTMENT OF ADMINISTRATION  
 GENERAL SERVICES DIVISION  
 BUILDING FIVE - HIGHWAYS  
 1900 KANAWHA BOULEVARD, EAST  
 CHARLESTON, WV  
 25305 304-558-2317

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
08/21/2008				

BID OPENING DATE: 09/23/2008 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:  SEALED BID  BUYER: KRISTA FERRELL-FILE 21  REQ. NO.: GSD086434  BID OPENING DATE: 09/23/2008  BID OPENING TIME: 1:30 PM  PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID:  ----- 304-344-2028 -----  PLEASE PRINT OR TYPE NAME OF PERSON TO CONTACT CONCERNING THIS QUOTE:  ----- RYAN BLAKE -----   ***** THIS IS THE END OF RFQ GSD086434 ***** TOTAL: _____						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

**REQUEST FOR QUOTATIONS #GSD086434  
FLOOR SEALER BLDG 5, 11th FLOOR BOILER PLANT**

Location: WV State Capitol Complex  
Building Five  
1900 Kanawha Boulevard East  
Charleston, WV 25305

For: WV Department of Administration  
General Services Division  
1900 Kanawha Boulevard East  
Building One, Room MB60  
Charleston, WV 25305

All inquiries for specification clarification shall be addressed to:

Krista Ferrell, Senior Buyer  
Purchasing Division  
P. O. Box 50130  
Charleston, West Virginia 25305-0130  
Phone: (304) 558-2596  
Fax: (304) 558-4115  
Krista.S.Ferrell@wv.gov

The Department of Administration, General Services Division (GSD) invites you to submit a quotation for all material, equipment and labor services to perform the installation of a polymer floor sealer to the Boiler Plant Eleventh Floor level of Building 5 located on the Capitol Complex in Charleston, West Virginia.

**Pre-Bid Meeting:**

A mandatory pre-bid meeting for this project is scheduled for Tuesday, September 9, 2008 at 10:00 a.m. Contractors attending the meeting shall assemble in the lobby of Building Six on the Capitol Complex, after which a walk-through of the secure project site will be conducted.

Any services contracted for prior to receipt of the signed purchase order and written notice-to-proceed letter shall be at the Bidder's risk.

Successful Bidder will be given thirty (30) calendar days from the written notice to proceed to complete the project.

The Bidder agrees that this Bid shall not be withdrawn for a period of ninety (90) consecutive calendar days following the date for receipt of bids.

## GENERAL SPECIFICATIONS

1. All work will be performed in compliance with all applicable safety regulations. Subject to verification and inspection by GSD safety representatives.
2. Work schedules will be reviewed and approved by GSD. Contractor will be afforded access as required to complete work on schedule.
3. Scheduled work may not begin until successful vendor has received a signed purchase order and notice to proceed letter.
4. Any areas identified requiring asbestos abatement will be completed by GSD under a separate abatement/ re-insulation contract.
5. Two copies (one original and one copy) of invoice will be submitted for payment and shall be mailed to the following address:

General Services Division  
1900 Kanawha Blvd. E.  
Building 1, Room MB-60  
Charleston, WV 25305  
Attn: Business Manager

## DETAILED SPECIFICATIONS

Provide all labor, materials, equipment, tools, supplies to prepare, repair and coat surfaces with polymer sealer. Area of coverage is approximately 18,000 square feet of usable surface which has been reduced by space occupied by Air Handler Units, locker rooms, supervisor's office, lunch room and boiler platform (space under metal grating IS INCLUDED to be covered by polymer ) Exact footage is subject to contractor verification and is provided for estimation purposes only.

The contractor will:

Provide a no odor, 100% solids, abrasion-resistant, two component clear floor sealer, specifically formulated to provide sealing and dust proofing for all types of cement and mineral substrates. Product shall be applied by roller, brush or squeegee. Product must penetrate and seal porous concrete to provide a hard wearing, non-dusting, cleanable surface which will also minimize (out-gassing and to ensure optimum interface bonding between the surface and to allow bonding of an additional specific color based, 100% solids, no VOC's , odor free, two part advanced polymer finish coat.

Provide a specific color top or final coat (color selection board to be provided upon request of the Owner, within five (5) working days) to consist of an advanced, high-performance, two component polymer system for floor (new or used concrete) protection. Product to be used shall be of 100% solids, no VOC's, and odor free polymer composite. Product will be traffic and abrasion resistant, oil and chemical resistant, withstand and resist detergent cleaning. The product shall be applied by brush, roller or squeegee to manufacturer specification and to obtain a super high gloss finish and be able to incorporate non-skid aggregates to provide a highly durable, slip resistant surface where

000LS

18-19 mts 012  
to tel system

required. Finished product shall produce a seamless surface. Product shall be applied at a rate or uniform film thickness of approximately 12 mils over the coverage area.

Contractor will further provide, for containment ramp area designation, a color specific (safety yellow) coating of the same durable 100% solids, two component, polymer system that protects all types concrete, rigid plastics, tiles, wood, and metal surfaces from chemical and corrosion attack and remain aesthetically pleasing. Product will be applied at a rate or film thickness of 6-7 mils.

Also to be provided for under boiler and condensate tank grating areas a single part, water based, moisture resistant, non toxic, non flammable ceramic-filled, liquid membrane which dries to durable, seamless, moisture resistant flexible skin. Product will provide a barrier coat for concrete, metal tile, stone, plastic, wood and withstand dry temperatures of up to 200 degrees Celsius

*Product Technical specifications*

*Clear Floor Sealer*

Shelf Life	Indefinite	
Compressive strength	14,000 psi or greater	ASTM D-695 Test Method
Flexural Strength	9,500 psi or greater	ASTM D-790 Test Method
Hardness Shore-D Method	80 or greater	ASTM D-2240 Test

Adhesion-to prepared cementitious surfaces is greater than the cohesive strength of the substrate

*Top or Finish Coat: Enecon Eneclad FPS 2000, or equal*

Shelf Life	Indefinite	
Compressive Strength	11,000 psi or greater	ASTM C-695 Test Method
Flexural Strength	9,000 psi or greater	ASTM D-790 Test Method
Hardness Shore-D	86 or greater	ASTM-D-2240
Abrasion resistance	35 mg / 1000 cycles or greater	ASTM D-4060

Floor preparation shall include removal of all existing paint or coating materials, scale and loose concrete to be removed by grinding and rough sanding type floor grinder. Machine shall use a diamond insert cutter to attain a profile that meets or exceeds ASTM-C-81 Standard Practice for Surface Preparation of Concrete. All cracks must be saw-cut using abrasive blade and cleaned to remove all dust and debris before installing coating system.

JEFF BEAN  
2-5

**ADDITIONAL INFORMATION:**

1. Contract will be awarded to the qualified bidder with the lowest overall cost for project. "Qualified bidder" is defined as one that has met all WV licensing or registration requirements to include WV Contractors License as applicable.
2. Successful vendor must be registered or be willing to become registered with The WV State Purchasing Division. This may require payment of an annual fee of \$125.00. For information on vendor registration contact WV Vendor Registration at (304) 558-2311.
3. Vendor must guarantee payment of applicable prevailing wage rates as directed by wage schedule for Kanawha County from the West Virginia Dept. of Labor.
4. Successful Vendor will be required to complete and return Purchasing Affidavit
5. Successful bidder must be registered with WVFIMS by submission of W9 request for taxpayer identification. For information on W9 submission contact 558-4587.
6. All bidders must possess a valid State of West Virginia Contractor's License and that number must appear on the bid.

**BID FORM**

Total Bid to Provide all labor, materials, equipment, tools, supplies to prepare, repair and coat surfaces with polymer sealer, as specified above:

$$\text{TOTAL BID} = \$ \underline{87,750.00} \text{ or } \$ 4.88/\text{ft}^2$$

*Base*

$$\text{Total Bid} = \$ \underline{70,000.00} \text{ or } \$ 3.88/\text{ft}^2$$

*Alternate*

**STONHARD**

One Park Ave  
 Maple Shade, NJ 08052  
 856/779-7500  
 FAX: 856/321-7510

Mr. Roger Wines  
 WV General Services Division  
 Capital Bldg. 1  
 1900 Kanawha Blvd. East  
 Charleston, WV 25305

Project Name: **Building 5 - 11th Floor Mechanical Room Floor**

September 29, 2008

Re: Quote Number: **4003436**

Dear Mr. Roger Wines:

Thank you for the opportunity to work with you on the Building 5 - 11th Floor Mechanical Room Floor project at WV General Services Division, Capital Bldg. 1, 1900 Kanawha Blvd. East, Charleston WV 25305. For this project, Stonhard proposes the following scope of work and pricing:

	Area Name	Size	Product
BASE	Mechanical Room	18,000 sq ft	STONKOTE GS4 COLOR TBD
ALTERNATE	Mechanical Room - Alternate to specified system	18,000 sq ft	STONFLEX LTE PEWTER

**Area Name: MECHANICAL ROOM**

**Conditions of Use (Mechanical Room):**

- There are no spillages specified. However if spillages do occur, they are not to exceed the Chemical Resistance Guides of the quoted products. The spillages occur over 100% of the floor through normal operations on a daily basis.
- The floor is mopped with general purpose cleaner occasionally at a temperature of 100° F.
- The floor is subject to cart traffic on rubber wheels with a maximum load of no more than 5,000 lbs.

**Warranty (Mechanical Room):**

- Stonhard warrants that the installed products will bond to the substrate and be free from defects in materials and workmanship for a period of 90 days from the date of completion, and that the warranty is void if the areas are exposed to other use, conditions and traffic.

**Pricing (Mechanical Room):**

- \$87,750.00 based on prevailing wage labor.

**Area Name: MECHANICAL ROOM - ALTERNATE TO SPECIFIED SYSTEM**

**Scope of Work (Mechanical Room - Alternate to specified system):**

- Stonflex LTE - is a nominal 40 mil thick flooring system designed for positive side waterproofing

applications such as mechanical rooms and mezzanine floors.

**Conditions of Use (Mechanical Room - Alternate to specified system):**

- There are no spillages specified. However if spillages do occur, they are not to exceed the Chemical Resistance Guides of the quoted products. The spillages occur over 100% of the floor through normal operations on a daily basis.
- The floor is mopped with general purpose cleaner occasionally at a temperature of 100° F.
- The floor is subject to cart traffic on rubber wheels with a maximum load of no more than 5,000 lbs.

**Warranty (Mechanical Room - Alternate to specified system):**

- Stonhard warrants that the installed products will bond to the substrate and be free from defects in materials and workmanship for a period of 1 year from the date of completion, and that the warranty is void if the areas are exposed to other use, conditions and traffic.

**Pricing (Mechanical Room - Alternate to specified system):**

- \$70,000.00 based on prevailing wage labor.

**Pricing Assumes:**

- The following is a list of requirements needed to ensure a successful completion of this project:
- Lighting - The area must have adequate lighting in order to install the specified Stonhard product.
  - Heat - A minimum substrate and material temperature of 60F must be maintained in the area to ensure proper curing.
  - Electricity - The area must have 220v/60 amp/3 phase or 440v/30 amp/3 phase power.
  - Trash removal - A dumpster or equivalent means of trash removal must be provided.
  - Material storage - The material must be stored in a dry, heated location in or around the area.
  - Accessibility - Area must be free of all moveable equipment and trades prior to Stonhard's arrival.
  - Customer to accept, offload and store material in a dry, heated area.
  - Customer to unload material.
  - Removal of existing floor will be a very dusty process. All equipment removal, replacement, and/or protection is the responsibility of the customer.
  - "Coatings only" have a 90-day adhesion-only warranty.
  - Not responsible for damages caused by hydrostatic and/or osmotic pressure.
  - If floor is blastraced on coating only installation, please note that the blastrac pattern may appear through the coating.

**Options:**

Area 2 is a voluntary alternate for a preferred system used in mechanical rooms. This system will not require the removal of existing system where it is bonded to the substrate.

**Special Terms and Conditions:**

- Please be advised that with regard to area one, removal of existing topping will likely leave a rough substrate the contours of which will be evident through the coating.

**General Terms & Conditions: The following terms and conditions are hereby made a part of this Agreement.**

**1. RESPONSIBILITIES OF STONHARD:**

- a. Stonhard has visually inspected the project site prior to the commencement of work and agrees to the



contract work based on the existing nature of the project site as it appears and is represented by the Customer. In the event that concealed conditions are revealed which would materially change the nature of the contract work, Stonhard is entitled to cease work until such time as the contract sum has been adjusted equitably to compensate for such change.

b. Stonhard shall keep the premises free from the accumulation of waste material or rubbish which results from the execution of its work. In no event shall Stonhard be responsible for any unclean conditions caused by others.

c. Upon request by the Customer, Stonhard will furnish certificates of Workman's Compensation Insurance and Liability Insurance.

d. Stonhard shall make all necessary arrangements to have any excess Stonhard products picked up after completion of the contract work.

## 2. RESPONSIBILITIES OF CUSTOMER:

a. Customer has conducted an investigation of the project site prior to the commencement of work and represents that the existing nature and condition of the project site is as it appears and that there are no other concealed conditions which would materially change the nature of the contract work.

b. Customer shall have the project site swept clean and made free of all obstructions, and shall remove all food items, organic materials and other products stored at or near the project site to prevent any contamination or spoilage that may occur and shall make the project site available for Stonhard at the agreed upon date and time in which the contract work is to commence.

c. Customer shall provide Stonhard, at no charge, all necessary utility services required for the proper execution of the contract work. The Customer shall further provide Stonhard with a dumpster or other reasonable alternative in which Stonhard may dispose of its waste and rubbish.

d. Customer shall provide and maintain a minimum continuous temperature of 60 degrees Fahrenheit at the floor level of the project site and provide a similarly suitable warm and dry area for storage of Stonhard's products and equipment during the course of the work.

e. Customer shall insure that no other work or tasks will be contemporaneously performed in the work area by the Customer, other trades or subcontractors once Stonhard has commenced performance of its work.

f. Customer, upon completion of work by Stonhard, shall protect Stonhard's work from damage caused by the Customer, their workmen or subsequent contractors.

## 3. PAYMENTS:

a. Payment of Invoices - All invoices are due Net 30 Days from Invoice Date.

b. Cancellation Charges - Any cancellation of a confirmed order will result in a cancellation fee of not less than 15% of the contract amount. Payment terms will be due Net 10 Days after receiving written notice of cancellation. If written notification is not given to Stonhard at least seven (7) days prior to commencement of work, Stonhard will be entitled to an additional re-scheduling fee of not less than 10% of the contract amount.

4. LIMITATION OF LIABILITIES: The parties acknowledge that in the event repairs need to be performed to the contract work, Stonhard's liability shall be limited to furnishing the labor and the materials necessary to reinstall the defective areas. Unless otherwise agreed in writing signed by an authorized agent of Stonhard, Stonhard's obligation to furnish the labor and materials necessary to reinstall the defective areas shall terminate one (1) year after the completion of the original contract work. Stonhard shall not be liable for damages to the contract work resulting from ordinary wear and tear, gouging, impact, failure of the Customer to protect the work as outlined in Section 2.f, the occurrence of reverse impact or the effects of osmotic or hydrostatic pressure or moisture vapor transmission. The parties further acknowledge that Stonhard shall not be responsible for any consequential or incidental damages resulting from any breach of warranty.

5. EFFECT OF DEFAULT: In the event of a default by the Customer of any of the covenants or conditions of this Agreement, Stonhard shall be entitled to the following remedies to all other rights and remedies afforded by

09/29/2008

WV General Services Division, Quote 4003436

Page 4 of 6

law:

a. Right to Stop Work - Stonhard shall have the right to stop work if any payments due are not made as provided under this Agreement.

b. Cost of Performance - If Stonhard is entitled to stop work as outlined in subparagraph (a) above, it shall have the right to bill the Customer for the work rendered up to the date of the stoppage and for materials shipped to the project site.

c. Additional Work - Any additional costs to Stonhard resulting from failure of the Customer to provide site conditions as outlined in Sections 2.a, 2.b, 2.c, 2.d, 2.e and 2.f shall be paid by the Customer.

d. Interest on Unpaid Balances - In the event any payments due hereunder become in default, Customer agrees that any and all such sums shall accrue Interest at the rate of twelve percent (12%) per annum.

e. Attorney's Fees - If Stonhard is required to initiate legal action to collect any amounts due and owing or to foreclose on any liens filed on the work, such costs and fees that Stonhard may recover include any and all prelitigation expenses, including attorney's fees incurred in attempting to recover said amounts.

6. GOVERNING CLAUSE: This Agreement shall be governed by and construed in accordance with the laws of the State of New Jersey.

7. ENTIRE AGREEMENT: This Agreement shall constitute the entire Agreement between the parties and the parties acknowledge that there are no other verbal or written Agreements, understandings or customs affecting the Agreement.

8. AUTHORIZED AGENCY: All contracts and purchase orders must be signed by an authorized agent of Stonhard. This may be accomplished through a Division Office or Corporate Headquarters. No other parties engaging in such contracts or purchase orders will be acting as an agent for Stonhard.

9. Quote valid for 90 days.


**Pricing Summary**

- Mechanical Room **\$87,750.00** based on prevailing wage \_\_\_\_\_  
labor
- Mechanical Room - Alternate to specified **\$70,000.00** based on prevailing wage \_\_\_\_\_  
system labor
- ~~• If both areas are installed at the the same time, the price would be **\$82,452.11**  
based on prevailing wage labor.~~

Thank you for the opportunity to present you with this Stonhard proposal. If this proposal meets with your approval please initial the appropriate line(s) above, sign below and fax to my attention. Or if you prefer to utilize your own Purchase Order, please reference Quote #4003436 and send a copy to my attention at the above address.

If you have any questions, please contact me at One Park Ave Maple Shade, NJ 08052 856/779-7500 FAX: 856/321-7510. I look forward to working with you on this upcoming project.

Sincerely,  
Stonhard, Division of StonCor Group, Inc.



Ryan Blake  
Territory Manager

Accepted By:

\_\_\_\_\_  
STONHARD, Division of StonCor Group, Inc.

\_\_\_\_\_  
Mr. Roger Wines

\_\_\_\_\_  
09/29/2008

09/29/2008  
WV General Services Division, Quote 4003436  
Page 6 of 6

Chuck Hatcher, Area Manager

**HT PRIMER****PRODUCT DATA****DESCRIPTION**

Stonhard HT Primer is a two-component, epoxy based priming system. It is applied to a properly prepared surface prior to the application of the appropriate Stonhard overlayment. The use of HT Primer ensures a secure bond between the substrate and the overlayment, reduces absorption of the overlayment's liquids (epoxy resin/curing agent) and makes the application of the overlayment easier.

**USES, APPLICATIONS**

Stonhard HT Primer is designed for use with Stonclad HT, for coating only purposes, and Stonset HG5. See the Primer Selection Guide to make the appropriate selection.

**PACKAGING**

HT Primer is supplied in units for easy handling. Each unit consists of:

- 1 carton containing:
  - 6 foil bags of Part A (curing agent)
  - 6 poly bags of Part B (resin)

**COVERAGE**

One unit of HT Primer will cover approximately 600 sq. ft./55.75 sq. m of relatively smooth surface. A batch of HT Primer is made up of one foil bag of Part A and one poly bag of Part B. Each batch will cover approximately 100 sq. ft./9.29 sq. m. Since each batch has been proportioned to cover a specific area, the installer should make certain that each single batch is NOT used to cover a larger area. Also, on very rough surfaces, a batch of HT Primer may not cover a full 100 sq. ft./9.29 sq. m. The rougher the surface, the less total area a batch will cover. It is important to get complete coverage without leaving pools of HT Primer material in depressions.

**STORAGE CONDITIONS**

Store both components of HT Primer at or above 60°F/16°C in a dry area. Avoid excessive heat. Do not freeze. The shelf life is 3 years in the original, unopened container.

**SUBSTRATE PREPARATION**

Proper preparation is critical to ensure an adequate bond. The substrate must be dry and free of all wax, grease, oils, fats, soil, loose or foreign materials and laitance. Laitance and unbonded cement particles must be removed by mechanical methods, i.e., abrasive blasting or scarifying. Other contaminants may be removed by scrubbing with a heavy-duty industrial detergent (Stonkleen DG9) and rinsing with clean water. The surface must show open pores throughout and have a sandpaper texture. For recommendations or additional information regarding substrate preparation, contact Stonhard's Technical Service Department.

**MIXING**

**Note:** Do not start mixing until the surface is properly prepared and dry, with the temperature of both the HT Primer and the surface at least 60°F/16°C.

Empty the contents of Part A (curing agent) and Part B (resin) into a clean mixing container. Mix with a slow-speed drill and Jiffy Mixer for 1 1/2 to 2 minutes.

**POT LIFE**

After mixing, HT Primer has a working time of approximately 35 minutes at 77°F/25°C. The working time may vary depending upon ambient and surface conditions.

**APPLYING**

HT Primer may be applied by a rubber squeegee, a brush or a medium nap roller. It is important to obtain the proper coverage and not allow the material to puddle in holes or depressions. Application of the appropriate Stonhard overlayment must be completed BEFORE the primer cures. If the primer cures before the overlayment is applied, the area must be re-primed. The open time for HT Primer is approximately 3 hours at 77°F/25°C.

## RECOMMENDATIONS

- Minimum ambient and surface temperatures are 60°F/16°C at time of application.
- Apply only to a clean, sound and properly prepared substrate.
- Clean tools immediately with either scouring pads and water, or mineral spirits. Hardened material will require mechanical removal.

## PRECAUTIONS

- Both liquid Parts A and B are skin and eye irritants; avoid contact. The use of a NIOSH/MSHA approved respirator, safety goggles and rubber gloves is recommended.
- In case of contact, immediately flush the area with copious amounts of clean water for at least 15 minutes and seek medical attention. Wash skin with soap and water.
- Use only with adequate ventilation.

## NOTES

- Material Safety Data Sheets for HT Primer are available upon request.
- When used in conjunction with Stonchem 341 in potable water applications the material should be applied at 6 mils and allowed to cure for a minimum of 5 hours.
- A staff of technical service engineers is available to assist with application or to answer questions related to Stonhard's products.
- Requests for technical literature or service can be made through local sales representatives and offices, or corporate offices located worldwide.

### IMPORTANT:

Stonhard believes the information contained here to be true and accurate as of the date of publication. Stonhard makes no warranty, expressed or implied, based on this literature and assumes no responsibility for consequential or incidental damages in the use of the systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only. We further reserve the right to modify and change products or literature at any time and without prior notice.

12/05  
Rev. 12/05


# STONHARD

A Division of **StonCOR** Group, Inc.

[www.stonhard.com](http://www.stonhard.com)

### Worldwide Offices:

USA	800-257-7953	Mexico	(52)-55-9140-4500	Europe	(32)-2-720-8982	Africa	(27)-11-254-5500
Canada	905-430-3333	South America	(54-3327)-44-2222	Middle East	(971)-4-3470460	Asia	(86)-1360-1692227

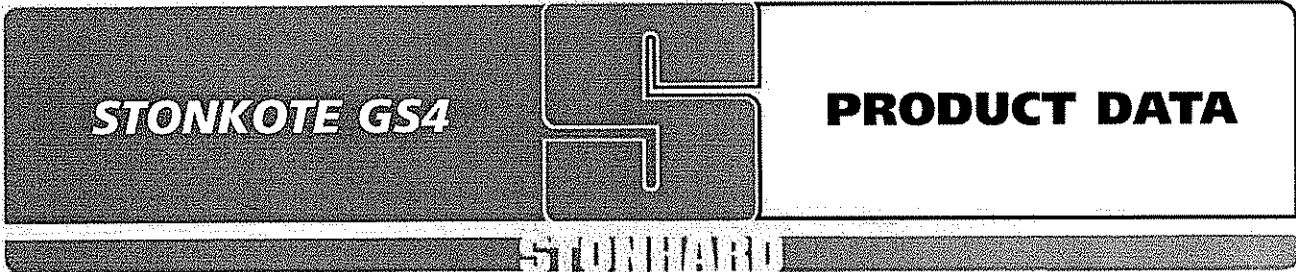

**PRODUCT DESCRIPTION**

Stonkote GS4 is a two-component, 100% solids, general service, epoxy coating. It is formulated to increase abrasion and chemical resistance while improving cleanability. Stonkote GS4 is easily applied and hardens to an attractive gloss finish.

**USES, APPLICATIONS**

Stonkote GS4 is a general service coating designed for use whenever a high solids, corrosion resistant, gloss coating is required. It may be applied on various substrates to both vertical and horizontal surfaces. Some applications of Stonkote GS4 are:

- In conjunction with various Stonhard flooring systems
- Protection of concrete surfaces exposed to abrasive or corrosive environments
- For substrates requiring a protective coating that is easily cleaned and maintained

**PRODUCT ADVANTAGES**

- 100% solids
- Long-term abrasion and corrosion resistance
- Excellent bond strength assures good adhesion
- Protects against moisture penetration
- Bonds to many different substrates
- Durable, gloss finish permits easy cleaning and maintenance
- Factory proportioned packaging ensures consistent, high quality, simplified mixing

**PACKAGING**

Stonkote GS4 is packaged in units for easy handling. Each unit consists of one carton containing:  
 4 foil bags of Part A (curing agent)  
 4 poly bags of Part B (resin)

**COVERAGE**

Approximately 400 sq. ft./37.16 sq. m per unit at 4 mil thickness over a porous substrate.

**PHYSICAL CHARACTERISTICS**

<b>Percent Solids</b> .....	100%
<b>Pot Life</b> .....	35 minutes
(@ 77° F/25° C)	
<b>Suggested Number of Coats</b> .....	One
<b>Coverage</b> .....	400 sq. ft./37.16 sq. m per unit
(@ 4.0 mil, DFT)	
<b>Cure Rate</b> .....	8 hours
(@ 77° F/25° C)	
	for tack-free surface
	24 hours minimum
	for normal operations
<b>Temperature Limitations</b> .....	140° F/60° C
	continuous exposure
	200° F/93° C
	intermittent exposure
<b>Fire Resistance of Dry Film</b> . . .	Self-Extinguishing

**Note:** The above physical properties were measured in accordance with the referenced standards. Samples of the actual coating were used as test specimens.

**STORAGE CONDITIONS**

Store all components of Stonkote GS4 between 60 to 85° F/16 to 29° C in a dry area. Avoid excessive heat and do not freeze. The shelf life is 3 years in the original, unopened container.

**COLOR**

Stonkote GS4 is available in Clear and 14 standard colors. Custom colors are available upon request.

**SUBSTRATE PREPARATION**

**Preparing Stonhard Flooring Systems**

Before coating a Stonhard floor, all trowel marks and surface imperfections must be removed to produce a smooth surface. Grind the floor using a floor grinder with medium stones and vacuum using an industrial wet/dry vacuum to remove all dust particles. The Stonhard floor is now ready to be coated with Stonkote GS4.

### **Preparing Concrete Substrates**

Proper preparation is critical to ensure an adequate bond. The substrate must be dry and free of all wax, grease, oils, fats, soil, loose or foreign materials and laitance. Laitance and unbonded cement particles must be removed by mechanical methods, i.e., abrasive blasting or scarifying. Other contaminants may be removed by scrubbing with a heavy-duty industrial detergent (Stonkleen DG9) and rinsing with clean water. The surface must show open pores throughout and have a sandpaper texture. For recommendations or additional information regarding substrate preparation, contact Stonhard's Technical Service Department.

### **PRIMING**

For use over a Stonhard floor, no primer is necessary. For use over a concrete substrate, Stoncrest GS3 or HT Primer are recommended to ensure maximum product performance.

### **MIXING**

Stonkote GS4 is supplied in factory proportioned quantities. To achieve thorough and proper mixing, the Stonkote GS4 must be mechanically mixed using a heavy-duty, slow-speed drill (400 to 600 rpm) with a Jiffy Mixer. Empty the contents of Part B into a mixing container and pre-mix to assure the suspension of solids. Add Part A and continue to mix to a uniform consistency for 1 to 2 minutes. Avoid high speed mixing that will entrain air into the mix. Thorough mixing of the two components is required.

### **POT LIFE**

After mixing, Stonkote GS4 has a working time of approximately 35 minutes at 77°F/25°C. The working time may vary depending on ambient and surface conditions.

### **APPLYING**

Stonkote GS4 can be applied at ambient temperatures of 60 to 85°F/16 to 29°C and humidity below 80%. The GS4 must be applied immediately after mixing the two components. Stonkote GS4 is applied with a rubber squeegee and medium nap roller. The roller is used to remove squeegee lines and smooth out the surface. A brush may be used where necessary. Stonkote GS4 may be applied at variable thicknesses ranging from 4 to 6 mil minimum dry film thickness. Each additional coat may be applied when the surface is tack-free, which is about 8 hours. Any questions regarding the application of Stonkote GS4 should be directed to Stonhard's Technical Service Department.

### **CURING**

The surface of Stonkote GS4 will be tack-free in 8 hours at 77°F/25°C. The coated area may be put back in service in 24 hours. Ultimate physical characteristics will be achieved in 7 days.

### **RECOMMENDATIONS**

- Apply only on a clean, sound and properly prepared substrate.
- Minimum ambient and surface temperatures are 60°F/16°C at the time of application.
- Do not use water or steam in the vicinity of the application. **Moisture can seriously affect the working time and properties of the material.**
- Application and curing times are dependent upon ambient and surface conditions.

### **PRECAUTIONS**

- Toluene and Xylene solvents are recommended for clean up of the unreacted Stonkote GS4 material. Use these materials only in strict accordance with manufacturer's recommended safety procedures. Dispose of waste materials in accordance with government regulations. The reacted material will require mechanical means of removal.
- The use of safety goggles and imperious gloves is required.
- In case of contact, flush the area with copious amounts water for 15 minutes and seek medical attention. Wash skin with soap and water.
- Use only with adequate ventilation.

### **NOTES**

- For environments not referenced in the Chemical Resistance Guide, consult Stonhard's Technical Service Department for recommendations.
- Material Safety Data Sheets for Stonkote GS4 are available upon request.
- A staff of technical service engineers is available to assist with product application or to answer questions related to Stonhard's products.
- Requests for technical literature or service can be made through local sales representatives and offices, or corporate offices located worldwide.



## CHEMICAL RESISTANCE GUIDE

The purpose of this guide is to aid in determining the potential value of Stonkote GS4 when exposed to the damaging effects of corrosive chemical environments.

## RATING CODE

E - Excellent  
G - Good  
NR - Not Recommended  
OS - Suitable for use where "occasional spillages" occur, when flushing with water immediately follows.

### ACIDS

	RATING		RATING
Acetic - 5%	G	Hypochlorous - 5%	E
Acetic - 20%	OS	Lactic - up to 20%	OS
Acetic - Glacial	NR	Maleic - 30%	G
Benzoic - Sat.	E	Maleic - 40%	OS
Boric - Sat.	E	Nitric - 10%	G
Butyric - 10%	OS	Nitric - 30%	OS
Chromic - 10%	G	Oleic	G
Chromic - 20%	OS	Oxalic - Sat.	E
Citric - 50%	E	Perchloric - 35%	G
Cresylic	OS	Phosphoric - up to 50%	OS
Diglycolic	G	Picric - Sat.	E
Fatty	G	Phthalic	G
Fluoboric	G	Succinic - Sat.	E
Formic - up to 10%	OS	Sulfuric - 20%	E
Heptanoic	OS	Sulfuric - 50%	G
Hydrochloric - 15%	G	Sulfuric - 70%	OS
Hydrochloric - 37%	OS	Tannic - Sat.	G
Hydrofluoric - 10%	OS	Tartaric - Sat.	E

### ALKALIES AND SALTS


Stonkote GS4 is rated Good to Excellent when exposed to most alkalies and salts.

### SOLVENTS AND OTHER CHEMICALS

	RATING		RATING
Acetone	NR	Linseed Oil	G
Alcohol (Methyl)	OS	Methyl Ethyl Ketone	NR
Alcohol (Ethyl, Propyl, Isopropyl, Butyl)	G	Methylene Chloride	NR
Benzene	OS	Milk	E
Carbon Tetrachloride	OS	Mineral Spirits	G
Corn Oil	E	Naphtha	G
Cyclohexane	G	Oils - Cutting	G
Denatured Alcohol	G	Oils - Mineral	E
Ethylene Glycol	G	Oils - Vegetable	G
Ether	OS	Perchloroethylene	G
Formaldehyde	G	Skydrol	G
Gasoline	E	Sucrose - Sat. (Sugar)	E
Glycerine	E	Toluene	OS
Hydrogen Peroxide - 10%	G	Trichloroethylene	NR
JP5 Jet Fuel	G	Urea	G
Juices - Fruit	E	Vinegar (Household)	G
Juices - Vegetable	E	Water	E
Lard	G	Xylene	OS

**Note:** This data is based on laboratory tests performed under carefully controlled conditions. (All solutions are at ambient temperatures.) No warranty can be expressed or implied regarding the accuracy of this information as it will apply to actual plant operation or job site use. Plant operations and job site uses vary widely, and the individual results obtained are affected by the specific conditions encountered, which are beyond our control.

**STONFLEX LTE**



**PRODUCT DATA**

STONHARD

**PRODUCT DESCRIPTION**

Stonflex LTE is a nominal 40 mil/1 mm thick flooring system designed for positive side waterproofing applications such as mechanical rooms and mezzanine floors. It is comprised of:

- ✓ **Standard Primer/SL Primer**  
A wet-on-wet application of Stonhard's penetrating epoxy primers for free-flowing floor systems
- ✓ **Stonproof ME7**  
A two-component, free-flowing, 100% solids, urethane, elastomeric waterproof membrane
- ✓ **Stonkote GS4**  
A two-component, 100% solids, general purpose, epoxy coating

**USES, APPLICATIONS**

Stonflex LTE is a specially formulated flooring system designed to provide a waterproof membrane in a variety of light duty applications. This system exhibits elongation properties to provide superior crack bridging capabilities and vibration protection, while providing excellent wear and chemical resistance.

**SUBSTRATE**

Stonflex LTE, in conjunction with Standard Primer and SL Primer, is suitable for application over properly prepared concrete, metal or wood. It is not recommended over quarry tile, asphalt, mastic, gypsum-based products, or extremely rough substrates.

**OPTIONS**

**Cove Base**

Provides an integral seal at the joint between the floor and the wall. Cove bases in heights from 2 to 6 in./5 to 15 cm are available.

**PACKAGING**

Stonflex LTE is packaged in units for easy handling. Each unit consists of:

**Stonproof ME7**

- 2 cartons each containing:
  - 2 foil bags of isocyanate (curing agent)
  - 2 poly bags of polyol (resin)

**PHYSICAL CHARACTERISTICS**

<b>Tensile Strength</b> . . . . .	1,200 psi
(ASTM D-412)	
<b>Elongation</b> . . . . .	200%
(ASTM D-412)	
<b>Hardness</b> . . . . .	70
(ASTM D-2240, Shore A)	
<b>Bond Strength</b> . . . . .	>400 psi
(ASTM D-7234)	(100% concrete failure)
<b>Theoretical Coverage</b> . . . . .	300 sq. ft./27.87 sq. m
<b>Pot Life</b> . . . . .	30 to 35 minutes
(@ 77° F/25° C)	
<b>Cure Rate</b> . . . . .	8 to 10 hours
(@ 77° F/25° C)	for tack-free surface
	24 hours
	for normal operations
<b>Abrasion Resistance</b> . . . . .	0.06 gm
(ASTM D-4060, CS-17)	
<b>Water Absorption</b> . . . . .	0.1%
(ASTM C-413)	

**Note:** The above physical properties were measured in accordance with the referenced standards. Samples of the actual floor system, including binder and filler, were used as test specimens.

**Stonkote GS4**

- 0.75 cartons containing:
  - 4 foil bags of Stonkote GS4 amine
  - 4 poly bags of Stonkote GS4 resin

**COVERAGE**

Each unit of Stonflex LTE will cover approximately 300 sq. ft./27.9 sq. m of surface at a nominal 40 mil/1 mm.

**STORAGE CONDITIONS**

Store all components of Stonflex LTE between 60 to 85° F/16 to 30° C in a dry area. Avoid excessive heat and do not freeze. The shelf life for epoxy primers/coatings is 3 years; the shelf life for Stonproof ME7 is 2 years in the original, unopened container.

**COLOR**

Stonflex LTE is available in 12 standard colors. Custom colors are available upon request.

## SUBSTRATE PREPARATION

Proper preparation is critical to ensure an adequate bond. The substrate must be dry and free of all wax, grease, oils, fats, soil, loose or foreign materials and laitance. Laitance and unbonded cement particles must be removed by mechanical methods, i.e., abrasive blasting or scarifying. Other contaminants may be removed by scrubbing with a heavy-duty industrial detergent (Stonkleen DG9) and rinsing with clean water. The surface must show open pores throughout and have a sandpaper texture. For recommendations or additional information regarding substrate preparation, contact Stonhard's Technical Service Department.

## APPLICATION

Application of the Stonflex LTE system is accomplished as follows:

1. Stonproof ME7 is mixed in accordance with the prescribed directions. The freshly mixed material is applied over cured Standard/SL Primer using specially designed squeegees and rollers.
2. Stonkote GS4 is applied over cured Stonproof ME7 using a rubber squeegee and a medium nap roller to uniformly distribute the material and promote a smooth surface.
3. See the Stonflex LTE Directions for further details.

## RECOMMENDATIONS

- DO NOT attempt to install material if the temperature of the Stonflex LTE components and substrate are not within 60 to 85°F/16 to 30°C. **The cure time and application properties of the material will be severely affected.**
- DO NOT use water or steam in the vicinity of the application. **Moisture can seriously affect the working time and other properties.**
- The use of NIOSH/MSHA approved respirators and safety glasses is recommended.
- Avoid contact with all liquid Parts A and B as they may cause skin and/or eye irritation. Workmen should cover hands with rubber gloves.
- Use only with adequate ventilation.

## NOTES

- Procedures for maintenance of the flooring system during operations are described in the Stonclad Cleaning Procedures.
- Specific information regarding chemical resistance is available in the Stonkote GS4 Product Data sheet.
- Material Safety Data Sheets for Stonflex LTE are available upon request.
- A staff of technical service engineers is available to assist with installation or to answer questions related to Stonhard flooring products.
- Requests for technical service or literature can be made through local sales representatives and offices, or corporate offices located worldwide.

### IMPORTANT:

Stonhard believes the information contained here to be true and accurate as of the date of publication. Stonhard makes no warranty, expressed or implied, based on this literature and assumes no responsibility for consequential or incidental damages in the use of the systems described, including any warranty of merchantability or fitness. Information contained here is for evaluation only. We further reserve the right to modify and change products or literature at any time and without prior notice.

7/07

Rev. 6/07

# STONHARD


A Division of **StonCOR**, Inc.

[www.stonhard.com](http://www.stonhard.com)

### Worldwide Offices:

USA	800-257-7953	Mexico	(52)-55-9140-4500	Europe	(32)-2-720-8982	Africa	(27)-11-254-5500
Canada	905-430-3333	South America	(54-3327)-44-2222	Middle East	(971)-4-3470460	Asia	(86)-21-54665118

# STONKOTE GS4



# PRODUCT DATA

## PRODUCT DESCRIPTION

Stonkote GS4 is a two-component, 100% solids, general service, epoxy coating. It is formulated to increase abrasion and chemical resistance while improving cleanability. Stonkote GS4 is easily applied and hardens to an attractive gloss finish.

## USES, APPLICATIONS

Stonkote GS4 is a general service coating designed for use whenever a high solids, corrosion resistant, gloss coating is required. It may be applied on various substrates to both vertical and horizontal surfaces. Some applications of Stonkote GS4 are:

- In conjunction with various Stonhard flooring systems
- Protection of concrete surfaces exposed to abrasive or corrosive environments
- For substrates requiring a protective coating that is easily cleaned and maintained

## PRODUCT ADVANTAGES

- 100% solids
- Long-term abrasion and corrosion resistance
- Excellent bond strength assures good adhesion
- Protects against moisture penetration
- Bonds to many different substrates
- Durable, gloss finish permits easy cleaning and maintenance
- Factory proportioned packaging ensures consistent, high quality, simplified mixing

## PACKAGING

Stonkote GS4 is packaged in units for easy handling. Each unit consists of one carton containing:  
4 foil bags of Part A (curing agent)  
4 poly bags of Part B (resin)

## COVERAGE

Approximately 400 sq. ft./37.16 sq. m per unit at 4 mil thickness over a porous substrate.

## PHYSICAL CHARACTERISTICS

<b>Percent Solids</b> .....	100%
<b>Pot Life</b> .....	35 minutes
(@ 77° F/25° C)	
<b>Suggested Number of Coats</b> .....	One
<b>Coverage</b> .....	400 sq. ft./37.16 sq. m per unit
(@ 4.0 mil, DFT)	
<b>Cure Rate</b> .....	8 hours
(@ 77° F/25° C)	for tack-free surface
	24 hours minimum
	for normal operations
<b>Temperature Limitations</b> .....	140° F/60° C
	continuous exposure
	200° F/93° C
	intermittent exposure
<b>Fire Resistance of Dry Film</b> . . .	Self-Extinguishing

**Note:** The above physical properties were measured in accordance with the referenced standards. Samples of the actual coating were used as test specimens.

## STORAGE CONDITIONS

Store all components of Stonkote GS4 between 60 to 85° F/16 to 29° C in a dry area. Avoid excessive heat and do not freeze. The shelf life is 3 years in the original, unopened container.

## COLOR

Stonkote GS4 is available in Clear and 14 standard colors. Custom colors are available upon request.

## SUBSTRATE PREPARATION

### *Preparing Stonhard Flooring Systems*

Before coating a Stonhard floor, all trowel marks and surface imperfections must be removed to produce a smooth surface. Grind the floor using a floor grinder with medium stones and vacuum using an industrial wet/dry vacuum to remove all dust particles. The Stonhard floor is now ready to be coated with Stonkote GS4.

### **Preparing Concrete Substrates**

Proper preparation is critical to ensure an adequate bond. The substrate must be dry and free of all wax, grease, oils, fats, soil, loose or foreign materials and laitance. Laitance and unbonded cement particles must be removed by mechanical methods, i.e., abrasive blasting or scarifying. Other contaminants may be removed by scrubbing with a heavy-duty industrial detergent (Stonkleen DG9) and rinsing with clean water. The surface must show open pores throughout and have a sandpaper texture. For recommendations or additional information regarding substrate preparation, contact Stonhard's Technical Service Department.

### **PRIMING**

For use over a Stonhard floor, no primer is necessary. For use over a concrete substrate, Stoncrest GS3 or HT Primer are recommended to ensure maximum product performance.

### **MIXING**

Stonkote GS4 is supplied in factory proportioned quantities. To achieve thorough and proper mixing, the Stonkote GS4 must be mechanically mixed using a heavy-duty, slow-speed drill (400 to 600 rpm) with a Jiffy Mixer. Empty the contents of Part B into a mixing container and pre-mix to assure the suspension of solids. Add Part A and continue to mix to a uniform consistency for 1 to 2 minutes. Avoid high speed mixing that will entrain air into the mix. Thorough mixing of the two components is required.

### **POT LIFE**

After mixing, Stonkote GS4 has a working time of approximately 35 minutes at 77° F/25° C. The working time may vary depending on ambient and surface conditions.

### **APPLYING**

Stonkote GS4 can be applied at ambient temperatures of 60 to 85° F/16 to 29° C and humidity below 80%. The GS4 must be applied immediately after mixing the two components. Stonkote GS4 is applied with a rubber squeegee and medium nap roller. The roller is used to remove squeegee lines and smooth out the surface. A brush may be used where necessary. Stonkote GS4 may be applied at variable thicknesses ranging from 4 to 6 mil minimum dry film thickness. Each additional coat may be applied when the surface is tack-free, which is about 8 hours. Any questions regarding the application of Stonkote GS4 should be directed to Stonhard's Technical Service Department.

### **CURING**

The surface of Stonkote GS4 will be tack-free in 8 hours at 77° F/25° C. The coated area may be put back in service in 24 hours. Ultimate physical characteristics will be achieved in 7 days.

### **RECOMMENDATIONS**

- Apply only on a clean, sound and properly prepared substrate.
- Minimum ambient and surface temperatures are 60° F/16° C at the time of application.
- Do not use water or steam in the vicinity of the application. **Moisture can seriously affect the working time and properties of the material.**
- Application and curing times are dependent upon ambient and surface conditions.

### **PRECAUTIONS**

- Toluene and Xylene solvents are recommended for clean up of the unreacted Stonkote GS4 material. Use these materials only in strict accordance with manufacturer's recommended safety procedures. Dispose of waste materials in accordance with government regulations. The reacted material will require mechanical means of removal.
- The use of safety goggles and imperious gloves is required.
- In case of contact, flush the area with copious amounts water for 15 minutes and seek medical attention. Wash skin with soap and water.
- Use only with adequate ventilation.

### **NOTES**

- For environments not referenced in the Chemical Resistance Guide, consult Stonhard's Technical Service Department for recommendations.
- Material Safety Data Sheets for Stonkote GS4 are available upon request.
- A staff of technical service engineers is available to assist with product application or to answer questions related to Stonhard's products.
- Requests for technical literature or service can be made through local sales representatives and offices, or corporate offices located worldwide.

DATE (MM/DD/YY)

CLE-001697237-04

# ADDITIONAL INFORMATION

**PRODUCER**

MARSH USA INC.  
216-837-1700  
200 PUBLIC SQUARE  
SUITE 1100  
CLEVELAND, OH 44114-1824  
Attn: LIZ ENSLEY

34482 -00000-CAS08-08-09 110

**INSURED**

RPM INTERNATIONAL INC.  
& ITS SUBSIDIARIES (SUB: STONHARD)  
STONHARD, A DIVISION OF STONCOR GROUP, INC.  
2628 PEARL ROAD  
MEDINA, OH 44258

67

### COMPANIES AFFORDING COVERAGE

COMPANY

E

COMPANY

F

COMPANY

G

COMPANY

H

**TEXT**

THE GENERAL LIABILITY AND AUTOMOBILE PHYSICAL DAMAGE PLACEMENT IS A DIRECT PLACEMENT. MARSH MANAGEMENT SERVICES (VERMONT) MANAGES THE CAPTIVE INSURER INDICATED HERE. MARSH USA INC. HAS ONLY ACTED IN THE ROLE OF A CONSULTANT TO THE CLIENT WITH RESPECT TO THIS PLACEMENT, WHICH IS INDICATED HERE FOR YOUR CONVENIENCE.

**CERTIFICATE HOLDER**

WV GENERAL SERVICES DIVISION  
1900 KANAWHA BLVD. EAST  
CHARLESTON, WV 25305

Marsh USA Inc.  
Kevin J. Robinson

*Kevin J. Robinson*

**MARSH**

**CERTIFICATE OF INSURANCE**

CERTIFICATE NUMBER  
CLE-001697237-04

PRODUCER  
MARSH USA INC.  
216-937-1700  
200 PUBLIC SQUARE  
SUITE 1100  
CLEVELAND, OH 44114-1824  
Attn: LIZ ENSLEY

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER OTHER THAN THOSE PROVIDED IN THE POLICY. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES DESCRIBED HEREIN.

**COMPANIES AFFORDING COVERAGE**

- COMPANY  
A FIRST CONTINENTAL SERVICES CO.
- COMPANY  
B ZURICH AMERICAN INSURANCE COMPANY
- COMPANY  
C National Union Fire Insurance Company of Pittsburgh, PA
- COMPANY  
D AMERICAN ZURICH INSURANCE COMPANY

INSURED  
RPM INTERNATIONAL INC.  
& ITS SUBSIDIARIES (SUB: STONHARD)  
STONHARD, A DIVISION OF STONCOR GROUP, INC.  
2628 PEARL ROAD  
MEDINA, OH 44258

67

**COVERAGES** This certificate supersedes and replaces any previously issued certificate for the policy period noted below. THIS IS TO CERTIFY THAT POLICIES OF INSURANCE DESCRIBED HEREIN HAVE BEEN ISSUED TO THE INSURED NAMED HEREIN FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THE CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, CONDITIONS AND EXCLUSIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

CO LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
A	GENERAL LIABILITY	GL-01-001/2008	04/01/08	04/01/09	GENERAL AGGREGATE \$ 3,000,000
	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY				PRODUCTS - COMP/OP AGG \$ 9,000,000
	<input type="checkbox"/> CLAIMS MADE <input checked="" type="checkbox"/> OCCUR				PERSONAL & ADV INJURY \$ 1,000,000
	OWNER'S & CONTRACTOR'S PROT				EACH OCCURRENCE \$ 1,000,000
					FIRE DAMAGE (Any one fire) \$ 1,000,000
					MED EXP (Any one person) \$ 1,000
B	AUTOMOBILE LIABILITY	BAP 9258789-01	04/01/08	04/01/09	COMBINED SINGLE LIMIT \$ 2,000,000
	<input checked="" type="checkbox"/> ANY AUTO				BODILY INJURY (Per person) \$
	<input type="checkbox"/> ALL OWNED AUTOS				BODILY INJURY (Per accident) \$
	<input checked="" type="checkbox"/> SCHEDULED AUTOS				PROPERTY DAMAGE \$
	<input checked="" type="checkbox"/> HIRED AUTOS				AUTO ONLY - EA ACCIDENT \$
	<input checked="" type="checkbox"/> NON-OWNED AUTOS				OTHER THAN AUTO ONLY: \$
C	GARAGE LIABILITY	BE 5380777	04/01/08	04/01/09	EACH ACCIDENT \$
	<input type="checkbox"/> ANY AUTO				AGGREGATE \$
					EACH OCCURRENCE \$ 5,000,000
					AGGREGATE \$ 5,000,000
D	EXCESS LIABILITY	WC 9258788-01 (AOS) WC 9258790-01 (HI, IJ, WI)	04/01/08	04/01/09	<input checked="" type="checkbox"/> UMBRELLA FORM
	OTHER THAN UMBRELLA FORM				<input checked="" type="checkbox"/> WC STAT-TORY LIMITS <input type="checkbox"/> OTH-ER
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY				EL EACH ACCIDENT \$ 1,000,000
	THE PROPRIETARY PARTNERS/EXECUTIVE OFFICERS ARE: <input checked="" type="checkbox"/> INCL <input type="checkbox"/> EXCL				EL DISEASE-POLICY LIMIT \$ 1,000,000
A	OTHER	APD-02-0002/2008	04/01/08	04/01/09	EL DISEASE-EACH EMPLOYEE \$ 1,000,000
	AUTO PHYSICAL DAMAGE				COMP & COLLISION DED. \$2,500

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/SPECIAL ITEMS  
EVIDENCE OF INSURANCE For Installation of Epoxy Flooring at WV General Services Div., 1900 Kanawha Blvd. East, Charleston, WV  
Job Quote #: 04003436

**CERTIFICATE HOLDER**  
  
WV GENERAL SERVICES DIVISION  
1900 KANAWHA BLVD. EAST  
CHARLESTON, WV 25305

**CANCELLATION:**  
SHOULD ANY OF THE POLICIES DESCRIBED HEREIN BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE INSURER AFFORDING COVERAGE WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED HEREIN, BUT FAILURE TO MAIL SUCH NOTICE SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER AFFORDING COVERAGE, ITS AGENTS OR REPRESENTATIVES, OR THE ISSUER OF THIS CERTIFICATE.  
AUTHORIZED REPRESENTATIVE  
Marsh USA Inc.  
BY: Kevin J. Robinson  
MM1(3/02)  
VALID AS OF 09/30/08

*Kevin J. Robinson*

# CONTRACTOR LICENSE

Authorized by the

## West Virginia Contractor Licensing Board

**Number:** WV020826

**Classification:**

MASONRY

STONCOR GROUP INC  
PO BOX 308  
MAPLE SHADE, NJ 08052-0308

**Date Issued**

DECEMBER 05, 2007

**Expiration Date**

DECEMBER 05, 2008

Authorized Company Signature

*Michael A. Carl*

Chair, West Virginia Contractor  
Licensing Board

**WEST VIRGINIA  
CONTRACTOR  
LICENSING  
BOARD**

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.