

VENDOR

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Pay 50120 Post Office Box 50130 Charleston, WV 25305-0130

RFQ NUMBER DNR211111

ADDRESS CORRESPONDENCE TO ATTENTION OF

FRANK WHITTAKER 304-558-2316

304-744-1321 *709034932 **GENERAL TRUCK SALES** PO BOX 8557

SOUTH CHARLESTON WV 25303

DIVISION OF NATURAL RESOURCES SH-p (IN CARE OF) SURPLUS PROPERTY T O 2700 CHARLES AVENUE DUNBAR, WV 25064 766-2626

DATE PRIN	TED	TEI	RMS OF SAI	Ē	SHIP	/ΙΑ	F.O.B.		FREIGHT TERMS
02/23/									
BID OPENING DATE	:	03/22/	2011	,	•	BID	OPENING TIME	01	:30PM
LINE	QUAN	NTITY	UOP	CAT. NO	ITEM NUI	MBER	UNIT PRICE		TNUOMA
0001	TRUCKS	2 , OVEF	EA ONE	}	070-51 APACITY		83,125		166,250
	THE WE SOLICI OR EQUIPMENT FRANK AT FRA DEADLI 4:00 PADDEND BANKRU FOR BA CONTRA	ST VIF TING E AL TRU CHNICA WHITTA NK.M.W NE FOR M. ALL UM AFT PTCY: NKRUPT CT NUL	GINIA BIDS F ICKS P L QUE KER I HITTA TECH ER TH IN T CY PR L AND	DIVI OR TW ER TH STION N THE KERAW TECHN NICAL E DEA HE EV OTECT	SION OF NO (2) 201 E ATTACHE S MUST BE WV PURCH V.GOV OR ICAL QUES QUESTION DLINE. ENT THE VION, THE	ATURAL 1 FREIG D SPECI SUBMIT ASING D VIA FAX TIONS I S WILL ENDOR/C STATE M	FOR THE AGGE RESOURCES, IS HTLINER M2 10 FICATIONS. TED IN WRITIN IVISION VIA E AT 304-558-4 S 03/07/2011 BE ADDRESSED ONTRACTOR FIL AY DEEM THE SUCH CONTRACT	G TO MAIL 115. AT BY	
	THE ACI	DEL/BR CEPTAB ED TO ULAR B ATES S TURE A ATION ON OF VE MIN ORDANC	AND/S LE LE REFLE RAND HOULD ND SP FOR A THE OR IR E WIT	PECIF VEL O CT A OR VE SO S ECIFI NY AL BID. REGUL H SEC	F QUALITY PREFERENC NDOR. VE TATE AND CATIONS. TERNATES THE STAT ARITIES I	ONLY A E OR FA NDORS W INCLUDE FAILUR MAY BE E RESER N BIDS 1-4(F)	HO ARE BIDDIN PERTINENT E TO PROVIDE GROUNDS FOR VES THE RIGHT OR SPECIFICAT OF THE WEST	G ION 20	PEOENED I MAR 22 ANIO: 57
SIGNATURE	1 1		<u> </u>	SEE REV	/ERSE SIDE FOR TI	TELEPHONE		DATE	2 100 10017
TITLE Jack	,		EIN		}	3	04-744-1321		3/22/2011
SALES	REP.		550	177745	ĺ		ADDRESS CH	ANGES T	O BE NOTED ABOVE



VENDOR

State of West Virginia Department of Administration **Purchasing Division** 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER DNR211111 PAGE 2

ADDRESS CORRESPONDENCE TO ATTENTION OF:

FRANK WHITTAKER

304-558-2316

***709034932** 304-744-1321 GENERAL TRUCK SALES PO BOX 8557

SOUTH CHARLESTON WV 25303

DIVISION OF NATURAL RESOURCES S H (IN CARE OF) P SURPLUS PROPERTY 2700 CHARLES AVENUE Ţ DUNBAR, WV 25064 766-2626

DATE PRIN		l th	IMS OF SAL	<u> </u>	SHIP VIA	F.O.B.	FREIGHTTERMS
	02/23/2011 BID OPENING DATE: 03/22/2011		B.T.n.	OPENING TIME	01:30PM		
LINE	QUAN		UOP	CAT.	ITEM NUMBER	UNIT PRICE	AMOUNT
	A SIGN D P B 2 C	ED BID EPARTM URCHAS UILDIN 019 WA HARLES	MUST ENT O ING D G 15 SHING TON,	BE S F ADM IVISI TON S WV 2	ICE UBMITTED TO: INISTRATION	N ON THE FACE (
	SEALED BUYER: RFQ. N		7.707.70.		44 DNR211111	•	
	BID OP				03/22/2011 1:30 PM		
					UMBER IN CASE IT NG YOUR BID: 304-744-7852	IS NECESSARY	
•	CONTAC	T PERS	ON (P		PRINT CLEARLY):	JACKIE CUMMINGS	
SIGNATURE,	(7		<u> </u>	TELEDITORIE		O3/22/2011
SALES R		FE	550	177745	<u> </u>		GES TO BE NOTED ABOVE

Truck

2011 Freightliner M2 106 or equal

Truck must meet the following specifications:

- New conventional cab truck with a minimum GVWR of 38,000 pounds
- Wheel base: 170 inches
- Minimum 80,000psi yield strength steel frame, reinforcement of 50/80,000 frame
- Engine: Turbo charged diesel with a minimum of 300 horsepower and a minimum 860 ft lb. of torque. Also must have an engine compression brake (not exhaust)
- Transmission: Eaton Fuller 10-speed manual with provisions for power takeoff or equal. Control pad to be dash mounted.
- Front Axle: Minimum 12,000 pound capacity with a minimum of 12,000 pound capacity leaf springs and heavy duty shocks.
- Rear Axle: Minimum 26,000 pound capacity (Dana or equal), driver operated locking differential. Gear ratio should be so that the maximum speed is 75 miles per hour. Axle to be single speed.
- Brakes: Air, cam type anti-lock drum brakes with air compressor that has a minimum rating of 13
 CFM. Must also have air dryer and moisture ejector systems. Dust shields on rear brakes.
 Automatic slack adjusters on front and rear brakes. Automatic limiting valves on front brakes.
- Batteries: Dual 12 volt with a minimum 1,850 CCA
- Alternator: 12 volt with a minimum of 160 amp output
- Wheels: Steel disc 10 hole, 22.5 x 8.25 front and rear
- Tires: Front: 11R22.5 G (14 ply) radial tubeless highway tread

Rear: 11R22.5 G (14 ply) radial tubeless mud and snow tread

Spare same as front

- Vehicle to have the following equipment:
 - Reverse warning beeper
 - Front tow hooks (2)
 - Single horizontal exhaust system
 - Pedestal mount dual trumpet air horn with weather shields
 - o AM/FM radio
 - Circuit breakers
 - Low oil pressure/high water temp indicator, with light and alarm
 - Minimum two speed intermittent wipers
 - o Air Brake Pressure Gauge
 - Wrench to fit front and rear lugs
 - Electric high idle switch
 - Engine block heater
 - o Dual step fuel tanks with a minimum 50 gallon each capacity (mounted under cab)
 - Factory tinted glass

- Cruise control
- Dual minimum 6" x 15" (maximum 8" X 17") heated exterior side mirrors
- o English gauge cluster with electric speedometer
- o Tachometer
- o Electric hour meter mounted in cluster
- Cloth material high back air suspension drivers and passenger seats
- o RH/LH minimum 8" spot mirrors (mounted under primary mirrors)
- o Integral air conditioning
- O Auxiliary driving/fog lights to be mounted in or on the bumper
- Cab assist entry handles (both sides)
- o Full width steel bumper
- Halogen headlamps
- Fiberglass tilt hood
- Auxiliary 12 volt plug mounted on dash
- Cab Insulation to provide reduction of noise and heat from the engine
- Color: Dark forest green metallic or equal

Bed Specs:

- Steel platform type with a minimum 15-ton single cylinder hydraulic scissor hoist.
- Air shift PTO control to be mounted on dash of cab.
- Hoist pump control lever cable type not acceptable, to be mounted in an easily accessible location to the outside rear of cab on driver's side.
- Platform is to be 13 feet long by 8 feet wide, constructed of 3/16 smooth steel to be welded to bed sills. Cross members shall extend to and be welded to side rails except where cross member may interfere with wheel clearance. Bed cross members to be 4" x 1/5", 11 gauge steel channel on 12 inch centers and welded to bed sills. Front and rear cross members and every one in between to be braced to bed sill with 1/4" steel plates, triangular in shape with 6" edges. One edge of plate to be welded to sill and the other edge welded to underside of cross member to extend 6" toward outside of bed.
- Side rails and ends to be 6" high and to be 12 gauge metal. Bed sills to be 7"
 construction channel, sufficient height to allow enough clearance for the use of tire
 chains on a fully loaded truck.
- Bed to be mounted 8" from rear of cab. Bed to have clearance and marker lights and mud flaps that comply with WV state law.

Note: Manufacturer's standard warranty and service policy to be included and shall be honored by all the manufacturer's authorized dealers.

West Virginia Division of Natural Resources Wildlife Resources Section

PRICING SHEET

Item	Quantity	Description	Unit Price	Amount
1	2	2011 Freightliner M2 106 or equal, trucks	\$83,125.00	\$166,250.00



WORLDWIDE EQUIPMENT, INC. CHARLESTON DIVISION

3100 MacCorkle Ave. SW P.O. Box 8557 South Charleston, WV 25303 Office (304) 744-1321 Fax (304) 744-7852

March 22, 2011

Frank Whittaker
Department of Administration
Purchasing Division
Building 15
2019 Washington Street East
Charleston, WV 25302-0130

RE: DNR211111 2 Trucks Over 1 Ton Capacity

Mr. Whittaker,

Thank you for this opportunity to submit a proposal on the state's vehicle needs.

Please find attached the vehicle summary for a 2011 Kenworth T370, a Godwin body, and brochures on the Paccar PX 8 engine and the Kenworth T370.

Deviations from your bid specs are:

- 188" wheelbase to meet horizontal exhaust specifications
- 22.5X8.25 steel disc wheels 5 hole instead of 10
- 12R22.5 G (16 ply) tires to meet GVW specifications
- Dual 45 gallon tanks instead of 50
- Hood is a 4 piece Metton instead of fiberglass
- Bed is 14' instead of 13'
- Pump control is inside cab at the door area of the drivers side instead of outside

Thank you again for this opportunity.

Jack Cummings

Sales Representative



Worldwide Equipment W011 73 WE Drive

DNR per State of WV

Prestonsburg, Kentucky United States 41653

Phone: (606) 874-2772 Phone: Fax: Fax:

Email: Jack.Cummings@thetruckpeople.comContact Email:

Prepared for:

Vehicle Summary

	Unit	Chassis	
Model:	T300 Series Conventional.	Fr Axle Load (lbs):	12000
Туре:	FULL TRUCK	Rr Axle Load (lbs)	26000
Description:	DNR - Freightliner Spec	G.C.W. (lbs):	38000
	Application	Road Conditions:	
Intended Serv.:	Local pickup & delivery. Vehicles which haul	Class A (Highway)	90
Commodity:	General freight	Class B (Hwy/Mtn)	10
		Class C (Off-Hwy)	00
	Body	Class D (Off-Road)	00
Туре:	Flatbed	Maximum Grade:	6
Length (ft):	13.0	Wheelbase (in):	188
Height (ft):	12.0	Fr Axle to BOC (in):	68
Max Laden Weight	(lbs): 4000	Cab to Axle (in):	120
		Cab to EOF (in):	191
	Trailer		
No. of Trailer Axles	. 0		
Type:	0.0	Special Box	
Length (ft):	0.0	Special Req. U.S. Domestic Registry, 50-State	
Height (ft): Kingpin Inset (in):	0.0	0.5. Domestic Registry, 50-State	
Corner Radius (in):	0		
Come Radius (iii).	0		
	Restrictions		
Length (ft):	120		
Width (in):	102		
Height (ft):	13.5		
Approved by:		Date:	

Note: All sales are F.O.B. designated plant of manufacture.

PAICCAIR FINANCIAL Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com.

PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.
Difficional and portornation and are in any abilities of the property of the p

Printed: 3/22/2011 8:32:25 AM Complete Model Number:

Effective Date: Jan 1, 2011 Quote/DTPO/CO:

Prepared by: Jack Cummings Version Number:

Model Number: T300 Series Conventional.

Quote/DTPO/CO: Q40801030

Version Number: 26.03

36181-8D55-0600 Page 1 of 8



Worldwide Equipment W011 73 WE Drive

DNR per State of WV

Prestonsburg, Kentucky United States 41653

Phone:

(606) 874-2772

Phone: Fax:

Fax: Email:

Jack.Cummings@thetruckpeople.comContact Email:

D	rai	12	ro/	1 f	۸,	••
_ [l ear	ы	rec		OI	

		Fiepaied ioi.	
Data	Code	Description	Weight
Model			200000000000000000000000000000000000000
0000310	0	T300 Series Conventional. Electric Door locks LH/RH; Ignition & doors keyed alike; Single electric horn; Single-piece windshield; Electric windshield wipers, 2-speed plus intermittent; Electric windshield washers; Steering wheel 18in. 4-spoke; Glovebox door with locking latch; Dash-mounted cruise control with switches; Turn signal switch with column-mounted dimmer; Standard dash panels include gray w/ burl wood accents; Slate Gray interior primary color; Dark Slate Gray seat color; Floormat; Inside sunvisor, LH/RH; Door courtesy lights; Under-dash center console with 1 cup holder, 1 ashtray & 1 lighter.	9,759
0070006	0	T370 Class 7: medium-duty Conventional.	0
0080050	0	CARB Idle Emissions Reduction Feature for PX-6 & PX-8.	0
0090016	0	Medium-duty 4x2 manual.	0
0091090	0	General freight	0
0093005	0	Local pickup & delivery. Vehicles which haul freight, typically operating within a 100-mile radius, on public streets & highways, & other paved surfaces, including limited Class C roads. Includes package & freight delivery, as well as fuel oil or petroleum distribution, etc. Road usage: minimum 3% Class B, do not code for Class D.	0
0095140	0	Flatbed	0
0098025	0	U.S. Domestic Registry, 50-State	0
Engine & E	Eauipme	ent	
0129300		PACCAR PX-8 300 2010 300@2000 285@2200 860@1400. Includes turbo exhaust brake, no code is used. Diagnostic Plug for data link, Oil Cooler, Aluminum Flywheel Housing. N09020 P02 YesCruise Control Auto Resume N09040 P04 NoAuto Engine Brake in Cruise N09060 P06 YesGear Down Protection N09100 P11 NoEngine Protection Shtdwn N09120 P14 76Max Vehicle Speed in Top Gea N09140 P19 65Max Cruise Control Speed N09160 P26 1400Max PTO Speed N09180 P10 NoIdle Shtdwn N09200 P32 8Idle Shtdwn Time N09220 P33 NoIdle Shtdwn Override	555

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR

Printed:

3/22/2011 8:32:25 AM

Complete

Model Number:

T300 Series Conventional.

Effective Date:

Jan 1, 2011

Quote/DTPO/CO:

Q40801030

Prepared by:

Jack Cummings

Version Number:

26.03



Data	Code	Description	Weight
1000158	0	Prospector version 26.0 supersedes version 25.1.	0
1002060	S	Air compressor: Cummins 18.7 CFM, ISC,ISL, ISM & ISX, PX-6, PX-8 & Westport GX.	0
1031130	S	Air Cleaner: Dry-type firewall mounted w/filter restriction indicator.	0
1121200	S	Cooling module: 1000 square inches T170/T270/T370/T470.	0
1247130	0	Horizontal crossover SCR for PX-8 w/ horizontal tailpipe below RH rail.	13
1323109	0	Fleetguard filter/Water separator FS1003 w/WIF (water in fuel) sensor. For PACCAR PX-8 or Cummins ISL engines.	0
1504006	0	Block heater, PACCAR PX-6 & PX-8 750 watt for PX-6 & 1000 watt for PX-8 engines.	2
1700149	0	Retarder Jacobs for PX-8/ISL w/2-way switch. Replaces the standard turbo brake for PX-8 engines.	57
1816161	0	Alternator: Bosch 160 amp, brush type only.	0
1821270	0	Batteries: 2 PACCAR AGM GP31 threaded post (1850). 12-VOLT LIGHT SYSTEM W/CIRCUIT PROTECTION	0
1836100	S	Starter: PACCAR 12 volt electrical system. W/ centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0
ransmiss 2051362		utch Transmission: Fuller RT8908LL 10-speed.	291
2240035	O	Clutch: Eaton Fuller 14in. medium-duty manual adjustment 606-1000. Includes manual adjusting clutch cover, extended grease fitting for clutch bearing and cross shaft, and synthetic lubricant for the transmission.	0
	0	Driveline: 2 SPL170XL 1 centerbearing requires 3500057 interaxle driveline.	70
2406452		requires 3000007 interaxie drivenire.	
2406452	0	One heavy-duty centerbearing crossmember. This option upgrades an existing crossmember. The cost does not include the centerbearing and bracket. Crossmember location will be in accordance with Kenworth engineering standards, using the major components specified on the DTPO.	11
TOLK TO THE REAL PROPERTY OF THE PROPERTY OF T	& Equip	One heavy-duty centerbearing crossmember. This option upgrades an existing crossmember. The cost does not include the centerbearing and bracket. Crossmember location will be in accordance with Kenworth engineering standards, using the major components specified on the DTPO.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

3/22/2011 8:32:25 AM Jan 1, 2011

Jack Cummings

Complete

Model Number: Quote/DTPO/CO: Version Number: T300 Series Conventional. Q40801030 26.03

36181-8D55-0600 Page 3 of 8



Weight	Description	Code	Data
0	Air Brake: 14,600 lb. package includes 16-1/2 x5 brakes, cast drums, aluminum 10-bolt hub pilot LMS hubs, hubcaps, oil seals & automatic slack adjusters. For use w/ 22-1/2in. wheels.	S	2701000
12	Front Springs: Taperleaf 12K w/ shock absorber for use on 2010+ chassis w/ 22.5in. wheels only.	0	2863015
0	Single power steering gear: 13.2K TRW THP60 for air brakes. Use only w/ 2010+ chassis.	S	2893071
	ment	Equipn	Rear Axle 8
324	Single Dana Spicer S26-190 rear axle; 26K capacity rated at 26K. Single rear axle.		3061190
0	Rear Axle Ratio - 3.58.	0	3200358
0	Single rear brakes included w/rear hub package.	S	3300000
0	26K air brake package includes 16-1/2x7 in. brakes, cast drums, iron 10-bolt hub pilot hubs, slack adjusters and oil seals for use w/ 22.5 in. wheels.	0	3403003
0	Spring Brake: 3030 high output single.	S	3485009
11	Dustshields for drum brakes: all rear axles.	0	3490047
0	Bendix 4S/4M anti-lock brake system. Current generation ECU is Bendix ABS 6.	S	3495226
28	Wheel Differential Lock for Dana Spicer Axles S21-170, S23-170, S23-190, S26-190 S26-190 & S30-190; adds D to the end of the axle part number.	0	3531001
119	Rear suspension: single Reyco 79KB 26K. Multileaf helper spring medium-duty. Unladen Height: 11.3 in. Laden Height: 8.2 in.	0	3646417
41	Heavy-duty rear suspension crossmembers for Reyco 79KB. This replaces the T3 standard.	0	3836315
		els	ires & Who
41	Front tires: Bridgestone R250F 12R22.5 16PR. 42.7 in. diameter, all position. 19.8 in. SLR.	0	4077107
136	Rear tires: Bridgestone M843 12R22.5 16PR. 43.4 in. diameter, all position. On/off highway. 25/32 tread depth. 20.2 in. SLR. Code is priced per pair of tires.	0	4277388
0	Rear Tire Quantity: 4	0	4900004
0	Front wheel: Accuride 50487PW 22.5x8.25 steel white e-coat, hub pilot mount. 7400lb. maximum rating. 5-hand hole.	S	5042255
0	Rear wheel:Accuride 50487PW 22.5x8.25 steel white e-coat, hub pilot mount. 7400 lb. maximum rating. 5-hand hole. Code is priced per pair of wheels.	S	5242255
0	Rear Wheel/Rim Quantity: 4	0	5900004

Frame & Equipment

Unpublished options may require review/approval. Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.							
Printed:	3/22/2011 8:32:25 AM	Complete	Model Number:	T300 Series Conventional.			
Effective Date:	Jan 1, 2011	-	Quote/DTPO/CO:	Q40801030			
Prepared by:	Jack Cummings		Version Number:	26.03			

36181-8D55-0600 Page 4 of 8



Data	Code	Description	Weight
6054250	O	Frame Rails: 10-5/8 x 3-1/2 x 5/16 in. Steel to 308 in. Truck frame weight is 2.91 lbin. per pair of rails. Section modulus is 14.80 cu.in., RBM is 1,776,000 in-lbs per rail. 120,000 PSI yield. Heat treated. Frame rail availability may be restricted based upon application, axle/suspension capacity, fifth wheel setting, or component/dimensional specifications. The results of the engineering review may result in a change to the requested frame rail. If a change is required Kenworth Application Engineering will advise the dealer of the appropriate material specification for a substitute rail.	172
6279005	0	Locate Partial Frame Inserts under cab to end-of-frame.	0
6289325	O	Partial Steel Insert: 10-5/8 in. or 10-3/4 in. steel over 10 ft to 25 ft or partial 2nd insert for 11-5/8 in. steel rail. Adds 1,149,000 in-lb to main rail RBM. Truck insert weight is 2.05 lbin. per pair of rails.	570
6308710	S	Bumper: Aerodynamic, Painted. Requires a bumper setting code.	0
6319409	S	40.9 in. Bumper setting. Requires a bumper code.	0
6321005	0	Removable Front Tow Hooks: 2.	15
6390103	S	Front mudflaps.	0
6404406	S	Battery box: Steel parallel under w/ aluminum diamond plate cover w/ step w/ aluminum step brackets.	0
6409906	0	In-Cab battery box location: Under rider seat.	0
6490096	0	One bolted aluminum crossmember for center frame: Replacing T3 standard.	-11
6490098	0	One bolted aluminum crossmember for rear frame: Replacing T3 standard.	-11
6490430	0	One bolted rear cab crossmember: Replacing T3 standard.	17
6679915	0	Customer-installed bulkhead and/or headache rack.	0
6742009	S	Square end-of-frame w/ o crossmember;non-towing.	0
Fuel Tanks	& Equip		
7130045		Fuel Tank: 45 US gallon, rectangular steel w/ step under replacement.	0
7132045	O	Fuel Tank: 45 US gallon, rectangular steel w/ step under add. Multiple tank installations include a fuel equalization system w/ dual draw and return lines with a splitter valve located within 6 inches behind the cab. Single draw and return is an option in some cases.	119
7722007	0	Rectangular DEF tank. 6.6 gallons of useable volume. The tank will be located just forward of the under cab component on the side you specified, but will not be displayed in the Prospector graphic. Required capacity is calculated by fuel capacity of the vehicle and is a minimum of 6% by volume. This capacity will accommodate two diesel re-fillings for every DEF re-filling.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

3/22/2011 8:32:25 AM Jan 1, 2011

Jack Cummings

Complete

Model Number: Quote/DTPO/CO: T300 Series Conventional. Q40801030

Version Number: 26.03

36181-8D55-0600 Page 5 of 8



Data	Code	Description	Weight
7889603	0	DEF tank location is on the RH.	0
7910045	0	Location: 45 gal fuel tank RH under cab	0
7920045	0	Location: 45 gal fuel tank LH under cab	0
Cab & Equ	inmant		
8024310		Cab: Curved Glass Conventional. C500 includes heavy-duty reinforcements. Cab Includes aluminum & fiberglass fully hucked cab w/ all aluminum bulkhead doors & continuous stainless steel piano-style door hinges. Single electric horn. Incandescent exterior lights include diagnosable bulb detection and warning. Trailer cable on tractors includes integrity detection. Standard features include multiplex wiring for interior lights, automated pre-trip inspection, short and open check diagnostics, and programmable daytime running lights. Warning alarm will sound when lights are left on.	0
8090310	S	Hood: Sloped aerodynamic hood includes grill & separate bumper.	0
8108010	S	Cab heater: W/integral defrosters & A/C 45,000 btu cab heater. No sleeper heater/AC. Includes 5 mode rotary control. T660 include filter media.	0
8205045	0	Flip valve: On dash for single speed PTO. Customer-installed. Includes indicator light & piping.	2
8205093	0	Information for customer-installed PTO Chelsea 880 8-bolt.	0
8282009	S	Instrument package: Includes speedometer, tachometer, fuel gauge, engine coolant temperature gauge, engine oil pressure, voltmeter. Class 8 also includes primary & secondary air reservoir gauges & an air application gauge. DEF level gauge and warning lamp are included with 2010 engines. Engine hour meter and outside air temperature readouts are standard. Primary read out will be MPH. Add 8240620 to switch primary scale to KPH in Canada.	0
8330003	S	Cab interior: Pinnacle. Includes vinyl headliner & cab back panel, slate gray interior, dark slate gray seats, floormats, LH/RH inside sunvisor & door courtesy lights.	0
8410091	0	Driver seat: Kenworth Air cushion Plus HB cloth. Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6- 23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted and includes a map pocket. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

3/22/2011 8:32:25 AM

Complete

Model Number: Quote/DTPO/CO: Version Number: T300 Series Conventional. Q40801030 26.03

tive Date: Jan 1, 2011 Quote/DTF ared by: Jack Cummings Version Nu

Page 6 of 8



Data	Code	Description	Weight
8460091	0	Rider seat: Kenworth Air cushion Plus HB cloth. Standard features includes 7 in. fore and aft slide adjustment w/isolator, 6- 23 degree recline, air suspension with cover, dual armrests, and single chamber air lumbar support. Seat cushion is 20 inches wide w/ 2-position tilt and 2-position front cushion extension. Seat material has a horizontal stitch pattern and is 2-tone in color. Seat back is carpeted. Seat is manufactured by National. Includes inside visor and retractable 3-point matching seat belts. Black seat belts for T700, gray on all other models.	0
8601406	0	Kenworth radio: AM/FM/weather band. W/LED lighting.	4
8700083	O	Under-dash center console: W/2 cup holders, 1 ashtray, 1 lighter, 1 12V outlet & a storage compartment.	0
8700154	0	Self cancelling turn signal: W/head light dimmer switch.	. 0
8800200	S	Cab access contoured grabhandles, LH/RH.	0
8832112	S	Daylite doors, includes RH peeper window. Ignition and doors are keyed alike. Electric locks are standard on both cab doors.	0
8841618	0	Dual rectangular air horn 23 in. LH & RH top of roof. Includes air horn covers.	11
8850235	Ο	Dual convex mirror 9 in. w/ offset mounting below regular mirror.	0
8850300	S	Single convex mirror 8-1/2 in. x 4-7/16 in. located on rider side.	0
8865001	0	Mirror: Dual Kenworth aerodynamic heated mirrors 7 in. x 13 in. w/ chrome shell, LH/RH convex mirrors 5 in. x 7 in. heated. Mirror brackets set for 8 1/2 ft load width. switch located on door pad.	26
8871438	S	Rear cab stationary window 17 in. x 36 in.	0
8879200	S	Manual LH & electric-powered RH door window. Switch located on door.	0
Lights & In	strumen	ıts	
9010801		Headlamps: Low beam dual complex reflector, high beam halogen.	0
9020164	S	Marker Lights: with small round base, Five cab roof mounted.	0
9030010	S	Turn Signal Lights: Mounted on fender	0
9070138	S	Combination Stop, Tail, Turn & Backup Lights RH & LH.	0
9090126	Ō	Electric Backup Alarm: Meets SAE J994 & OSHA requirements.	4

Unpublished options may require review/approval.
Oripublished options may require reviewapprovat.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

3/22/2011 8:32:25 AM Jan 1, 2011 Complete

Model Number: Quote/DTPO/CO: T300 Series Conventional. Q40801030

Jack Cummings

Version Number:

26.03



Data	Code	Description	Weight
9090312	0	Body Builder Harness: Provides harness to extend tail, turn, stop & marker light circuits from standard body builder connector BOC to the end-of-frame. There is a plug on the chassis end & the opposite end is just wires.	0
9090845	0	Circuit Breakers: Replacing fuses. Does not apply to any 5-amp fuse box position. Breakers include stop/brake/turn, tail lamp, high & low beams, marker/clearance lamps, horn, fuel heat, gauges, wipers, air dryer, HVAC controls, panel lamps.	0
Air Equipm			_
9101210	S	Air Dryer: Bendix AD-IS heated.	0
9102040	0	Moisture ejection valve: Two Bendix DV-2 drain valves on service tanks use w/ AD-IS only. Heated.	0
Extended V			
9200113	0	Severe Service Medium-duty Warranty: 1-year/ unlimited miles.	0
9210211	0	2010 EPA medium duty Surcharge \$7000.	0
Miscellaneo	ous		
9490003		Additional lead time required for off highway & /or speciality component truck.	0
Paint			
9700000	0	Paint color number. N97020 A - L0367EB DK GREEN MET N97200 FRAME N0001EA BLACK N97700 BUMPER N0001EA	0
9943119	S	Imron solid 1 color non-sleeper Spec A.	0
9964086	0	Aerodynamic bumper painted same as frame without base coat clear coat: single stage	0
9965510	S	Base coat/clear coat. The Kenworth Color Selector contains additional instructions, as well as information on Kenworth paint guidelines and surface finish applications. Kenworth is standard with Dupont Imron Elite paint.	0
Total Weigh	t		12388

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval. Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: Effective Date: 3/22/2011 8:32:25 AM Jan 1, 2011 Complete

Model Number: Quote/DTPO/CO: T300 Series Conventional. Q40801030

Prepared by:

Jack Cummings

Version Number:

26.03

Page:

R&S-Godwin Truck Body Co., LLC 5168 US HWY 23 BOUTH IVEL, KY 41642 (606) 874-2151

Sold To:

WWE-GENERAL TRUCK SALES CORP 3100 MACCORKLE AVENUE PO BOX 8557

SOUTH CHARLESTON, WV 25303-8557

Confirm To:

Customer P.O.

JACK CUMMINGS

Ship VIA

F.O.8.

Quote

Body Model #:

Reference:

Truck Make:

Truck Model:

Truck Serial #:

Trailer VIN:

Truck CT #::

Body Color:

Trück Color:

Body Type:

NET 30 DAYS

Amount

item Number

NEED

P Series Body

INSTALLATION: Installed LENGTH: 156

PIVOT: 132"

OUTSIDE WIDTH: 98

LONGSILLS: 7" Channel (12.25 lb/ft) X-MEMBERS: Steel 4" Channel (5.4 lb/ft)

EXTRA X-MEM: Two DECK; 3/16" High Tonsile

STAKE POCKETS: Inside Pockets

RACKS: None

FLAT BAR: None

/MISC

FENDER/BOTTOM RAIL MAT: 6" Channel (6.2 lb/ft)

AIR SHIFT PTO AND PUMP CONTROLS (DIRECT MOUNT PTO) MOUNT PTO CONTROL IN

EXCEPTION TO BID SPECS.

/MISC

CS6628T CHAMPION CONVERSION HOIST W/O SUBFRAME /16.8 TON RATING/13'BODY W/18"OVERHANG / 6 1/2" MOUNTING HEIGHT--EXCEPTION TO BIDM SPECS

Nonstandard Option

INTER-CO FREIGHT

POW YOU MAY DEDUCT FROM PRICE (-) \$225.02 FOR 7 DAY PAYMENT.

AUTHORIZATION SIGNATURE:

Net Order: 0.00 Less Discount: 0.00 Freight: 0.00 Seles Tax: 7,500,82

Order Total:

7,500.82

Customer Number: 00-0560227 Hoist Serial #: Pump Serial #1

Order Number: 0023692

Order Date: 3/21/2011 Salesperson: William Lyons

Susp. 1 Serial #: Susp. 2 Serial #:

Susp. 3 Serial #: Transmission:

Chasis ETA: Prod. Date:

Compl. Date: Truck Location:

Ship To:

WWE-GENERAL TRUCK SALES CORP 3100 MACCORKLE AVENUE

PO BOX 8557 SOUTH CHARLESTON, WV 25303-8557

Outside Seles Rep. William Lyons

ALL ORDERS SUBJECT TO CREDIT APPROVAL-QUOTES VALID FOR 30 DAYS

Ordered 1.00

BULKHEAD HGT: 64 BULKHEAD MAT: 10 Gauge High Tensile

WINDOW: 16 x 20 REAR LIGHTS: 1 REAR OVAL LIGHTS: 0 MID RAIL TURN: NO BOTTOM SIDE LIGHTS: 2

FRONT FLAPS: 20 x 20 Rubber Flaps

LADDER: Steel One Stirrup PAINT: DuPont Imron Elite

DASH AND PUMP CONTROL ON STAND IN CAB AT DOOR AREA OF DRIVER'S SIDE-

4"STRUCTURAL CHANNEL CROSOMEMBERS ON 12"CENTER (ILO) FORMED--EXCEPTION TO

BID SPECS


Nonstandard Option





MZ Q Z M S

Powered by Quality

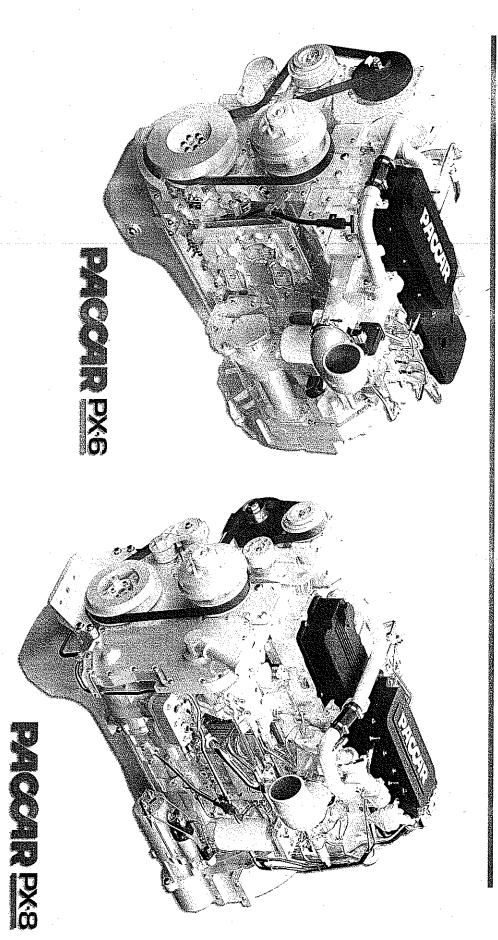

2010 MEDIUM DUTY ENGINES

State of West Virginia

VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1.	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preced-
	ing the date of this certification; or , Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or ,
	Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; or,
2. _X	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
3.	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
4.	Application is made for 5% resident vendor preference for the reason checked: Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; or,
5.	Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; or,
6.	Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.
require agains or ded	understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the ements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty st such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency ucted from any unpaid balance on the contract or purchase order.
author the red deema	omission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and izes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid quired business taxes, provided that such information does not contain the amounts of taxes paid nor any other information ed by the Tax Commissioner to be confidential.
	r penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true ccurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate less during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.
Bidde	r: GENERAL TRUCK SALES / WORLDWIDE Signed: James
Date:	03/22/2011 Title: SALES REP.
*Check	any combination of preference consideration(s) indicated above, which you are entitled to receive.

RFQ No.	DNR211111
TEG NO.	DIMYTTITI

STATE OF WEST VIRGINIA Purchasing Division

PURCHASING AFFIDAVIT

West Virginia Code §5A-3-10a states: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Debtor" means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions. "Political subdivision" means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. "Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

EXCEPTION: The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

Under penalty of law for false swearing (West Virginia Code §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

WITNESS THE FOLLOWING SIGNATURE

General Truck Sales Corporation 3100 MacCorkle Ave SW South Charleston, WV 25303 My Commission Expires July 13, 2017

Purchasing Affidavit (Revised 12/15/09)