



VENDOR

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

#### Solicitation

NUMBER

PAGE

1

DNR213098

ADDRESS CORRESPONDENCE TO ATTENTION OF

GUY NISBET 304-558-8802

BY ORDER

DIVISION OF NATURAL RESOURCES VARIOUS LOCALES AS INDICATED

REQ COPY
TYPE NAME/ADDRESS HERE
VERDEINC.
2300 N. SCENIC HUTY
LAKE WHEE FL 53898

DATE PRINTED 04/09/2013 01:30PM K BID OPENING DATE: BID OPENING TIME 05/01/2013 CAT QUANTITY ฯดบ ITEM NUMBER UNIT PRICE AMOUNT: LINE REQUEST FOR QUOTATION (RFQ) THE WEST VIRGINIA PURCHASING DIVISION FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCE (WVDNR), IS SOLICITING BIDS TO PROVIDE THE AGENCY WITH SEVEN (7) TRAILERS, PER THE ATTACHED TERMS & CONDITIONS AND SPECIFICATIONS. 0001 LS 070-69 GOOSENECK, TANDEM-AXLE, DOVETAIL TRAILER WV. DIVISION OF NATURAL RESOURCES SHORT MOUNTAIN WMA, DISTRICT 2 DNR OFFICE ROMNEY (HAMPSHIRE COUNTY), WV. AUGUSTA? 0002 070-59 LS 10 6' X 12' DUAL-AXLE CARGO TRAILER WV. DIVISION OF NATURAL RESOURCES 05/01/13 09:51:15 AM DISTRICT 3 DNR OFFICE 'West Virginia Purchasing Division FRENCH CREEK (UPSHUR COUNTY), WV. TELEPHONE SIGNATURE TITLE ADDRESS CHANGES TO BE NOTED ABOVE 36-3783054 NESIDENT



VENDOR

TITLE

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

## Solicitation

SH-P TO

NUMBER
DNR213098

PAGE --

ADDRESS CORRESPONDENCE TO ATTENTION OF

GUY NISBET 304-558-8802

BY ORDER

DIVISION OF NATURAL RESOURCES VARIOUS LOCALES AS INDICATED

ADDRESS CHANGES TO BE NOTED ABOVE

REQ COPY
TYPE NAME/ADDRESS HERE
VERSE INC.
SEE FROM MOE

04/09/	2013				1 3 7 0 D M
BID OPENING DATE:	05/0 QUANTITY	1/2013 UOP 0	BID PAT ITEM NUMBER	OPENING TIME 0	L:30PM AMOUNT
0003	6'4" X 12'	LS 1 UTILITY	070-59 TRAILER	1795	1795
	DISTRICT 3	DNR OFFI	TURAL RESOURCES TO THE COUNTY), WV.		
0004	6'4" X 12'	LS 1 UTILITY	070-59 TRAILER	4 1795	1795
	DISTRICT 3	OFFICE	TURAL RESOURCES  JR COUNTY), WV.		g G
0005	6' X 10' D	LS 1 UAL-AXLE	070-61 , DUMP TRAILER	5,195	× 5195
5	SUMMERSVIL	LE WMA HO	TURAL RESOURCES QTS. DLAS COUNTY), WV.		
SIGNATURE			TELEPHONE		

FEIN



NOOZWA

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

#### Solicitation

NUMBÉR

PAGE

DNR213098

ADDRESS CORRESPONDENCE TO ATTENTION OF:

GUY NISBET 304-558-8802

304-558-

SHIP TO

DIVISION OF NATURAL RESOURCES VARIOUS LOCALES AS INDICATED BY ORDER

REQ COPY
TYPE NAME/ADDRESS HERE

VER PRIOR PROE

DATE PRIN	reo .								
04/09/								12.2	
BID OPENING DATE:	ray visa a .	05/01/	2013	1000 C 1000	ACCESS AND ACCESS OF ACCESS OF	BID	OPENING TIME	01	: 30PM
LINE	QUAI	YTITY	UOP	CAT, NO.	MUM MBTI	BER	UNIT PRICE		AMOUNT
0006	COREN	l ECV T	LS		070-69 DUAL-WH	EL NO	PS89	<u></u>	8895
	WV. DI MC CLI	VISION NTIC W	OF N MA (MAS	ATURA ON CO	L RESOURCI UNTY), WV	ES	VETAIL TRAIL	ER	& LYAT
		VISION		-AXLE	070-69 , DOVETAII L RESOURCI		ER	>	0775
		W (POC			UNTY), WV				\$ 31 77R-
	****				D OF RFQ	DNR213	098 ***** 1		71,0-10
SIGNATURE	201	<u> </u>	- 11.44.0 M 17.1		34421403411341134113411341	TELEPHONE	in the state of th	DATE	
TITLE	H-(-	l <sub>F</sub>	EIN	-			ADDDESS	CHANGES	TO BE NOTED ABOVE



#### SPECIFICATIONS

- 1. PURPOSE AND SCOPE: The West Virginia Purchasing Division is soliciting bids on behalf of Division of Natural Resources to establish a contract for the one time purchase of seven (7) trailers. All items will have minimum one year warranty. This award may be split if it is in the best interest of the Division of Natural Resources.
- DEFINITIONS: The terms listed below shall have the meanings assigned to them below. Additional definitions can be found in section 2 of the General Terms and Conditions.
  - 2.1"Contract Item" means trailers.
  - 2.2"Pricing Page" means the page upon which Vendor should list its proposed price for the Contract Items in the manner requested. The Pricing Page is either included on the last page of this RFQ or attached hereto as Exhibit A.
  - 2.3"RFQ" means the official request for quotation published by the Purchasing Division and identified as DNR213098.
- 3. GENERAL REQUIREMENTS:
  - 3.1 Mandatory Contract Item Requirements: Contract Item must meet or exceed the mandatory requirements listed below.
    - 3.1.1 Item #1 Gooseneck, tandem-axle, dovetail trailer. All items must be new (2012 or 2013 model year). Trailer must meet the following specifications:
      - 3.1.1.1 Must have a bed length of between 23' (minimum) and 25' (maximum) which includes a 4' or 5' floating dovetail.
      - 3.1.1.2 Must have a bed width between 96" (minimum) and 102" (maximum).
      - 3.1.1.3 Must have a minimum load capacity of 14,000 lbs.
      - 3.1.1.4 Must have a mainframe constructed of a minimum 10" I- 12" / Beam (minimum 12 lbs./ft.).
      - 3.1.1.5 Must have cross members constructed of a minimum 3" 
        channel on a maximum of 16" centers.

	3.1.1.6	Must have side rails constructed of a minimum 5" channel with stake pockets a minimum of every two feet with rub rails.	246	`
	3.1.1.7	Must have a minimum two 7,000-lb. axles with electric brakes.	<b>/</b>	
	3.1.1.8	Must have a minimum 2" treated hardwood decking.	/	
	3.1,1.9	Must have an adjustable 2 5/16" ball coupler.	$\checkmark$	
	3.1.1.10	Must have dual drop leg jacks.	/	
	3.1.1.11	Must have 5' adjustable self-supporting ramps with spring assist.	$\checkmark$	
	3.1.1.12	Must have a minimum four 235 85 R16 10-ply radial tires (load range E).	V	
	3.1.1.13	Must have four 16" x 8" lug wheels.	/	
	3.1.1.14	Must have US DOT approved lights and wiring.	<b>V</b>	
	3.1.1.15	Must have a lockable chain box located on frame or tongue of trailer.	1	
	3.1.1.16	Must have a spare tire (same size as above) and wheel with lockable mounting bracket.	$\checkmark$	
	3.1.1.17	Must have multi-leaf slipper spring suspension with equalizer.	$\checkmark$	
	3.1.1.18	Must have safety chains.	· 🗸	
	3.1.1.19	Must have a seven-way RV electric plug.	$\checkmark$	
-	Item #2	6' x 12', dual-axle, heavy-duty, cargo trailer with the foll	owing	

3.1.2 Item #2 - 6' x 12', dual-axle, heavy-duty, cargo trailer with the following specifications: All items must be new (2012 or 2013 model year). United Model XLMTV-612 or equivalent.

3.1.2.1 Must have dual torsion axles - Dexter or equivalent (not spring axles).



3.1.2.2	Must have a minimum .030 smooth aluminum (glued <pre> exterior).</pre>
3.1.2.3	Must have a minimum 6 1/2' interior height.
3.1.2.4	Must have a minimum 15" radial tires.
3.1.2.5	Must have a minimum 16" center cross members; roof $\checkmark$ bows and wall posts.
3.1.2.6	Must have a minimum 5mm white vinyl wall liner.
3.1.2.7	Must have a minimum of four heavy-duty D-rings.
3.1,2.8	Must have a minimum 3/4" plywood floor.
3.1.2.9	Must have US DOT-approved LED clearance and tail $$ lights.
3.1.2.10	Must have two 12 volt dome lights with wall switch.
3.1.2.11	Must have bright aluminum 16" tall down both side walls (gravel guard).
3.1.2.12	Must have aluminum on front V-nose and front corners (gravel guard).
3.1.2.13	Must have aluminum tread plate fenders.
3.1.2.14	Must have a minimum .030 smooth aluminum (glued exterior).
3.1.2.15	Must have a rear ramp-style door.
3.1.2.16	Must have a RV-style door – minimum 32" x 64" located on either side of trailer.
3.1.2.17	Must have fold down jacks.
and the same of th	the state of the s

3.1.3 (Item #3 - 6' 4" x 12', utility trailer with the following specifications: All items must be new (2012 or 2013 model year). Gatormade 6' 4" x 12' utility trailer or equivalent.

3.1.3.1	Must have a minimum interior bed width of 6' and 4' in $\checkmark$ length.
3.1.3.2	Must have minimum width of 6' 4" between fenders and fenders must be installed.
3.1.3.3	Must have minimum of 3500 pound axles EZ lube hubs $$ or equal.
3.1.3.4	Must have a minimum G.A.W.R. of 2,990 pounds.
3.1.3.5	Must have a minimum 2" x 2" x 1/8" angle top rail frame.
3.1.3.6	Must have minimum 3" x 2" x 3/16" angle main frame and $\sqrt{3}$ x 2" x 3/16" angle crossmembers.
3.1.3.7	Must have minimum tongue of 4" channel "V" style $$ integral with frame or equivalent.
3.1.3.8	Must have minimum 2" x 2" x 1/8" angle upright rails that $\sqrt{\ }$ are 12" high or equal.
3.1.3.9	Must have minimum multi-leaf springs or equal.
3.1.3.10	Must have minimum 2" treated pine boards screwed into $\checkmark$ crossmembers.
3.1.3.11	Must have minimum 3" x 2" x 50" ramp expanded metal √ tailgate installed.
3.1.3.12	Must have four-way flat plug, US DOT legal LED stop, $$ turn, license plate light and license plate holder.
3.1.3.13	Must have minimum 5 lug rims, 205/75R15 6 ply tires $\checkmark$ and matching spare tire and rim.
3.1.3.14	Must have a 2" coupler, safety chains, and 2,000-lb. \( \square\) tongue jack.
3.1.3.15	Must be sandblasted and powder coated paint in black $$ color.

- 3.1.4 (Item #4) 6' 4" x 12', utility trailer with the following specifications: All items must be new (2012 or 2013 model year). Gatormade 6' 4" x 12' utility trailer or equivalent.
- SAME HS H3
- 3.1.4.1 Must have a minimum interior bed width of 6' and 4' in length.
- 3.1.4.2 Must have minimum width of 6' 4" between fenders and fenders must be installed.
- 3.1.4.3 Must have minimum of 3500 pound axles EZ lube hubs or equal.
- 3.1.4.4 Must have a minimum G.A.W.R. of 2,990 pounds.
- 3.1.4.5 Must have a minimum 2" x 2" x 1/8" angle top rail frame.
- 3.1.4.6 Must have minimum 3" x 2" x 3/16" angle main frame and 3" x 2" x 3/16" angle crossmembers.
- 3.1.4.7 Must have minimum tongue of 4" channel "V" style integral with frame or equivalent.
- 3.1.4.8 Must have minimum 2" x 2" x 1/8" angle upright rails that are 12" high or equal.
- 3.1.4.9 Must have minimum multi-leaf springs or equal.
- 3.1.4.10 Must have minimum 2" treated pine boards screwed into crossmembers.
- 3.1.4.11 Must have minimum 3" x 2" x 50" ramp expanded metal tailgate installed.
- 3.1.4.12 Must have four-way flat plug, US DOT legal LED stop, turn, license plate light and license plate holder.
- 3.1.4.13 Must have minimum 5 lug rims, 205/75R15 6 ply tires and matching spare tire and rim.
- 3.1.4.14 Must have a 2" coupler, safety chains, and 2,000 lb. tongue jack.

3.1.4.15 Must be sandblasted and powder coated paint in black 3.1.5 (Item  $\#5 \stackrel{>}{\sim} 6' \times 10'$ , dual-axle, dump trailer with the following specifications: All items must be new (2012 or 2013 model year). Homesteader Model 710 LX, 7000 lb. GVW or equivalent. Must have a minimum interior bed width of 6' and 10' in 3.1.5.1 3,1.5.2 Must have minimum of two 3500-pound axles with electric brakes and EZ lube hubs or equal. 3.1.5.3 Must have a minimum of ten-gauge steel floor and / minimum of twelve-gauge steel sides. Must have a minimum of 2" x 6" steel tubing main frame. 3.1.5.4 Must have hydraulic cylinder installed and equipped with 3.1.5.5 remote controls. Must be pre-wired for truck and include deep cycle 3.1,5.6 battery (minimum of 680 cold cranking amps at 32F) with battery charger. Must have LED stop, turn, and illuminated license plate ✓ 3.1.5.7 lights. Must have a minimum 205/75/D15 radial tires (8 ply). 3.1.5.8 Must have US DOT approved lights and wiring. 3.1.5.9 3.1.5.10 Must have seven-way RV electric plug. 3.1,5.11 Must have a 2 5/16" coupler, safety chains, tongue jack, v and tailgate installed. 3.1.5.12 Must be primed and painted black color. 3,1,5.13 Must have a minimum of 7,000 pound GVWR capacity.

must meet the following specifications:

3.1.6 (Item #6)- Gooseneck, tandem-axle, dual-wheel, dovetail trailer. Trailer

3.1.6.1	Must have a bed length of between 21' and 25' which includes a 4' or 5' dovetail.				
3,1.6.2	Must have a bed width between 96" and 102".				
3.1.6.3	Must have a minimum load capacity of 14,000 lbs. and VGVWR of 20,000 lbs.				
3.1.6.4	Must have a mainframe constructed of a minimum 10" I- V IZ II Beam (minimum 12 lbs./ft.).				
3.1.6,5	Must have cross members constructed of a minimum 3"   channel on a maximum of 16" centers.				
3.1.6.6	Must have side rails constructed of a minimum 5" /z +6 1/ channel with stake pockets a minimum of every two feet with rub rails.				
3.1.6.7	Must have a minimum of two, 10,000-lb. oil bath axles $\checkmark$ with electric brakes.				
3.1,6.8	Must have a minimum 2" treated hardwood decking.				
3.1.6.9	Must have an adjustable 2 5/16" ball coupler.				
3.1.6.10	Must have dual drop-leg jacks, minimum support of √ 10,000 lbs. each.				
3.1.6.11	Must have 5' adjustable self-supporting ramps with spring $\checkmark$ assist.				
3.1.6.12	Must have a minimum of eight, 235 85 R16 10-ply radial / tires (load range E).				
3.1.6.13	Must have eight, 16" x 8" lug wheels.				
3.1.6.14	Must have US DOT approved lights and wiring.				
3.1.6.15	Must have a spare tire (same size as above) and wheel $\sqrt{}$ with lockable mounting bracket.				
3.1.6.16	Must have multi-leaf slipper spring suspension with				

3.1.6.17	Must have safety chains.
3.1.6.18	Must have a seven-way RV electric plug.
	Gooseneck, tandem-axle, dovetail trailer. All items must be new 2013 model year). Trailer must meet the following specifications:
3.1.7.1	Must have a bed length of between 23' (minimum) and 25' (maximum) which includes a 4' or 5' floating dovetail.
3.1.7.2	Must have a bed width between 96" (minimum) and 102" / (maximum).
3.1.7.3	Must have a minimum load capacity of 14,000 lbs.
3.1.7.4	Must have a mainframe constructed of a minimum 10" I- 12 Beam (minimum 12 lbs./ft.).
3,1.7.5	Must have cross members constructed of a minimum 3" $\checkmark$ channel on a maximum of 16" centers.
3.1.7.6	Must have side rails constructed of a minimum 5" $$ channel with stake pockets a minimum of every two feet with rub rails.
3.1.7.7	Must have a minimum two 7,000-lb. axles with electric √ brakes.
3.1.7.8	Must have a minimum 2" treated hardwood decking.
3.1.7.9	Must have an adjustable 2 5/16" ball coupler.
3.1.7.10	Must have dual drop leg jacks.
3.1.7.11	Must have 5' adjustable self-supporting ramps with spring $\checkmark$ assist.
3.1.7.12	Must have a minimum four 235 85 R16 10-ply radial tires $$ (load range E).
3.1.7.13	Must have four 16" x 8" lug wheels.
3.1.7.14	Must have US DOT approved lights and wiring.

3.1.7.15 Must have a lockable chain box.

- 3.1.7.16 Must have a spare tire (same size as above) and wheel with lockable mounting bracket.
- V
- 3.1.7.17 Must have multi-leaf slipper spring suspension with vegualizer.
- 3.1.7.18 Must have safety chains.
- 3.1.7.19 Must have a seven-way RV electric plug.

#### 4. CONTRACT AWARD:

- 4.1 Contract Award: The Contract is intended to provide Agencies with a purchase price for the Contract Items. The Contract shall be awarded to the Vendor that provides the Contract Items meeting the required specifications for the lowest overall cost for each item as shown on the Pricing Pages.
- 4.2 Pricing Page: Vendor should complete the Pricing Page by including price per line item that includes delivery charges. Vendor should complete the Pricing Page in full as failure to complete the Pricing Page in its entirety may result in Vendor's bid being disgualified.

Notwithstanding the foregoing, the Purchasing Division may correct errors as it deems appropriate. Vendor should type or electronically enter the information into the Pricing Page to prevent errors in the evaluation.

#### 5. PAYMENT:

**5.1Payment:** Vendor shall accept payment in accordance with the payment procedures of the State of West Virginia.

#### 6. DELIVERY AND RETURN:

- 6.1 Shipment and Delivery: Vendor shall ship the Contract Items immediately after being awarded this Contract and receiving a purchase order. Vendor shall deliver the Contract Items within 30 working days (or by June 1, 2013, whichever comes first) after receiving a purchase order. Contract Items must be delivered to Agency the following locations:
  - 6.1.1 Item #1 WV Division of Natural Resources, Short Mountain Wildlife Management Area, District 2 DNR Office, Romney, WV (Hampshire County); Contact Rich Rogers (304-822-3551) for delivery instructions.

- 6.1.2 Item #2 WV Division of Natural Resources, District 3 DNR Office, French Creek, WV (Upshur County); Contact Gene Thorn (304-924-6211) for delivery instructions.
- 6.1.3 Item #3 WV Division of Natural Resources District 3 DNR Office, French Creek, WV (Upshur County); Contact Bob Knight (304-924-6211) for delivery instructions.
- 6.1.4 Item #4 WV Division of Natural Resources District 3 Office, French Creek, WV (Upshur County); Contact Bob Knight (304-924-6211) for delivery instructions.
- 6.1.5 Item #5 WV Division of Natural Resources, Summersville Wildlife Management Area Headquarters, Summersville, WV (Nicholas County); Contact Bob Knight (304-924-6211) for delivery instructions.
- 6.1.6 Item #6 WV Division of Natural Resources, McClintic Wildlife Management Area, Point Pleasant, WV (Mason County); Contact Kem Shaw (304-675-0871) for delivery instructions.
- 6.1.7 Item #7 WV Division of Natural Resources, Handley Wildlife Management Area, Woodrow, WV (Pocahontas County); Contact Shawn Head (304-637-0245) for delivery instructions.
- 6.2 Late Delivery: The Agency placing the order under this Contract must be notified in writing if the shipment of the Contract Items will be delayed for any reason. Any delay in delivery that could cause harm to an Agency will be grounds for cancellation of the Contract, and/or obtaining the Contract Items from a third party.
  - Any Agency seeking to obtain the Contract Items from a third party under this provision must first obtain approval of the Purchasing Division.
- **6.3 Delivery Payment/Risk of Loss:** Vendor shall deliver the Contract Items F.O.B. destination to the Agency's location.
- 6.4Return of Unacceptable Items: If the Agency deems the Contract Items to be unacceptable, the Contract Items shall be returned to Vendor at Vendor's expense and with no restocking charge. Vendor shall either make arrangements for the return within five (5) days of being notified that items are unacceptable, or permit the Agency to arrange for the return and reimburse Agency for delivery expenses. If the original packaging cannot be utilized for the return, Vendor will supply the Agency with appropriate return packaging upon request. All returns of unacceptable items shall be F.O.B. the Agency's location. The returned product

shall either be replaced, or the Agency shall receive a full credit or refund for the purchase price, at the Agency's discretion.

6.5 Return Due to Agency Error: Items ordered in error by the Agency will be returned for credit within 30 days of receipt, F.O.B. Vendor's location. Vendor shall not charge a restocking fee if returned products are in a resalable condition. Items shall be deemed to be in a resalable condition if they are unused and in the original packaging. Any restocking fee for items not in a resalable condition shall be the lower of the Vendor's customary restocking fee or 5% of the total invoiced value of the returned items.

# DNR213098 WV DIVISION OF NATURAL RESOURCES PRICING PAGE EXHIBIT A

ITEM NO.	QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
11	1	Gooseneck, Tandem-Axle, Dovetail Trailer	6795-	$\rightarrow$
2	1	6' x 12' Dual-Axle, Heavy-Duty, Cargo Trailer	NO BID	
3	11	6' 4" x 12' Utility Trailer	1795-	>
4	1	6' 4" x 12' Utility Trailer	1795 -	>
5	11	6' x 10' Dual-Axle Dump Trailer	5195 -	\$
6	1	Gooseneck, Tandem-Axle, Dual-Wheel, Dovetail Trailer	8895-	>
77	1	Gooseneck, Tandem-Axle, Dovetail Trailer	6795-	⇒ .

Note: Delivery must be made within thirty (30) days of purchase order award. 40 Eus Lors

Each line item must include delivery charges to the designated areas listed below.

Items are to be delivered to the following locations:

#### Item #1

WV Division of Natural Resources
Short Mountain WMA Headquarters
Augusta, WV (Hampshire County)
Contact Rich Rogers (304-822-3551) for delivery instructions

#### Item #2

WV Division of Natural Resources
West Virginia Wildlife Center
French Creek, WV (Upshur County)
Contact Gene Thorn (304-924-6211) for delivery instructions

#### Item #3

WV Division of Natural Resources
West Virginia Wildlife Center
French Creek, WV (Upshur County) 770
Contact Bob Knight (304-924-6211) for delivery instructions


# DNR213098 WV DIVISION OF NATURAL RESOURCES MANUFACTURER'S PAGE FY2013 Trailers

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding "or equal" brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request for Quotation.

ITEM NO.	EQUIPMENT	MANUFACTURER	MODEL SHORE FLAT BECK SHORE
1	23-25' Gooseneck, tandem- axle, dovetail trailer	PJ TRAILERS	TSRZ5 FZBS FK
2	6' x 12', dual-axle, heavy- duty, cargo trailer	- NO BID -	
3	6' 4" x 12' utility trailer	PJ. TORAILER	77 XIZ CHANNEL UTILITY
4	6' 4" x 12' utility trailer	11	11
5	6' x 10', dual-axle, dump trailer	1/	78" MEDIUM DUTY DUMP
6	21-25' Gooseneck, tandem- axle, dual-wheel, dovetail trailer	. 11	FD RZS AZBS FK
7	23-25' Gooseneck, tandem- axle, dovetail trailer	11	SEE #   ABOUTE.



## Classic Flatdeck with Singles

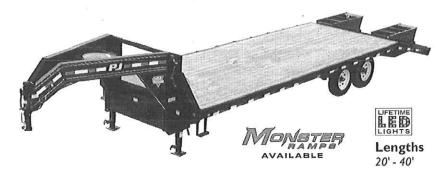

#### **Standard Features**

- · 15,680 lb. G.V.W.R.
- 7,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.) 3" Channel Crossmembers 16" on Center
- · Safety Chains
- · 2 Drop Leg Jacks (10,000 lb.)
- 2 Posi-lube Brake Axles (7,000 lb.)
- 6 Leaf Slipper Spring Suspension
- · 4 16" White Spoke Wheels
- · 4 235/80R16 Radial Tires (3,520 lb.)
- · Rubrail & Stake Pockets
- Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- · Side Steps on Both Sides
- Front Toolbox (GN Only)
- · 8' Ramps w/ Holders

#### Notes.


- · 30' and up, upgrade to triple axle recommended
- · 30' and up, upgrade to 19 lb. I-Beam recommended

- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- · Frame Bridge Standard on 30' and up.

- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- · 102" Wide Deck
- DOT Approved Flushmount Lifetime LED
- Amber Side Turn Flashers
- Sealed Wire Harness
- · Sand Blasted, Acid Washed, Powder Coated

## POWDER PU COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

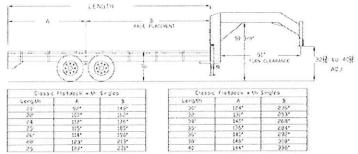

### Weights

	Length	Axles	Est. Base Weight:
Comment of the last	20'	2 - 7000	4440 lbs / 2014 kg
	22'	2 - 7000	4720 lbs / 2141 kg
	25'	2 - 7000	5100 lbs / 2313 kg
	28'	2 - 7000	5440 lbs / 2468 kg
	30'	2 - 7000	5900 lbs / 2676 kg
	30'	3 - 7000	6380 lbs / 2894 kg





AIR RIDE SUBPENSION AVAILABLE



Also Available with a Bumper Pull or Pintle Coupler.

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

#### Coupler Options

GN 2 5/16" Round (25,000 lb.) w/Toolbox \* Rigid mount 2-5/16 (25,000 lb.) GN 2 5/16" Round (30,000 lb.) w/ Toolbox GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx

3" Pintle Eye - Face-mount (36,000 lb.) GN 2 5/16" Square (30,000 lb.) w/ Toolbox

GN 2 5/16" Square (25,000 lb.) w/Toolbox

#### Axle Options

- (2) 7,000# Electric / Spring \*
- (2) 7,000# Electric / Torsion
- (2) 7,000# Elec/Hyd Disk / Spring
- (2) 7,000# Elec/Hyd Disk / Torsion
- (3) 7,000# Electric / Spring
- (3) 7,000# Electric / Torsion
- (2) 7,000# Load Range G 14ply Tires Electric / Spring
- (2) 7,000# Load Range G | 4ply Tires Electric | Torsion
- (2) 7,000# Load Range G | 4ply Tires Elec/Hyd Disk / Spring
- (2) 7,000# Load Range G | 4ply Tires Elec/Hyd Disk / Torsion
- (3) 7,000# Load Range G | 4ply Tires Electric | Spring
- (3) 7,000# Load Range G 14ply Tires Electric / Torsion
- Consult Your Sales Rep. for Additional Available Axles

#### Tail Options

Straight Deck w/ 8' Slide-in Ramps \*

- 5' Dovetail w/ 5' Slide-in Ramps
  5' Dovetail w/ 2 Flip-over Ramps
- 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Adjustable Dovetail w/ Slide in Ramps
- 5' Adjustable Dovetail w/ Stand Up Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail w/ 2 Flip-over Monster Ramps

#### **Other Options**

3/16" Diamond Plate Steel Floor & 4 D-Rings Mud Flaps Single Wheel Deckover

Pipetop Rail

Cold Weather Wiring Harness (7-Way RV)

16 lb. I-Beam Main Frame

Plate for Winch Spare Tire Mount

6" Taller GN Riser

Douglas Fir Lumber

1/4" Diamond Plate Steel Floor 2

Under Frame Tie Down Flat

19 lb. l-Beam Main Frame, Riser & Neck

22 lb. I-Beam Main Frame, Riser & Neck 2

12"oc Crossmembers

I Pair D-Rings

Rough Oak Floor

Weld-On Strap Ratchets (2)

Hydraulic Jacks (12,000 lb.) 2

Receiver Hitch

Goodyear 14 Ply Tire MUST ADD TO REG 14 PLY COST

4" Ratchets every 4ft w/ Slide Track

Side Mount Wood Rack

I I ga Diamond Plate Steel Floor & 4 D-Rings

Front Toolbox (PH Only)

Frame Bridging

Diamond Plate Ramp Bottoms

Torque Tube

Deck on the Neck 8x8 ft

Side-mount Toolbox

Winch 12VDC (12,000 lb.)


2-speed Jacks (12,000 lb.) HD Semi Trailer 2x Jacks (25,000 lb.)

Ramp Support Arms

- \* Standard Feature
- <sup>2</sup> Special Order Option: Requires additional lead-time



## Single Axle Channel Utility 60", 77", & 83" Deck Widths (U6, U7, U8)

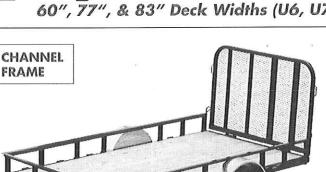

Widths 60", 77", 83"

Lengths 8'-14'

77"x 12'(U7) Pictured with 4' Spring Assist Gate Option

#### Standard Features

- · 2,990 lb GVWR
- · 3,500 lb GAWR
- · 2" Bulldog Coupler
- · Safety Chains
- · Pipe Mount Swivel Jack
- · Accu-Lube Axle I Idler
- · 4 Leaf Double Eye Spring Suspension
- · New 15" White Spoke Wheels
- New ST 205/75R15 Radial Tires
- Stake Pockets (12 & 14ft)
- · Tread Brite Removeable Aluminum Fenders
- · 4" Channel Frame & Tongue
- 2 1/2" x 2 1/2" x 3/16" Angle Crossmembers
- 2" x 2" Removable Side Rail

- · Treated Pine Deck
- · DOT Approved Flush Mount Lights
- · Molded Wire Harness (12 & 14ft )
- · Sand Blasted
- · Acid Washed
- · Powder Coated

## POWDER PU COATED

At PJ Trailers, every trailer we build is powder A powder coat finish is far superior to paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most

## Weights

Model	Length	Axles	Est. Base Weight,
U6 (60")	8'	1 - 3500	740 lbs / 336 kg
U6 (60'')	10'	I - 3500	800 lbs / 363 kg
U6 (60")	12'	I - 3500	940 lbs / 426 kg
U6 (60")	14'	1 - 3500	1040 lbs / 472 kg
U7 (77")	10'	1 - 3500	980 lbs / 445 kg
U7 (77")	12'	1 - 3500	1060 lbs / 481 kg
U7 (77")	14'	1 - 3500	I I 80 lbs / 535 kg
U8 (83")	10'	I - 3500	1000 lbs / 454 kg
U8 (83")	12'	I - 3500	I I 00 lbs / 499 kg
U8 (83")	14'	1 - 3500	1240 lbs / 562 kg

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

#### **Popular Options**



Side Mount ATV Ramps



2" Pipetop Removeable Sideralls



Regular Sides w/ Solid Metal

#### **Coupler Options**

2"A- Frame \* 2 5/16" A- Frame 2 5/16"Adjustable 3" Pintle Eye

#### **Axle Options**

(1) 3,500 lb One Idler / Spring \* (2) 3,500 lb One Brake / Spring

(1) 5,200# Electric / Spring (83" Only)

#### **Tail Options**

Straight Deck \*

2' Dovetail w/ 5' Slide-in Ramps (12 ft & up)

BRAKE

2' Dovetail w/ 2 Fold-up Ramps

2' Dovetail wl 4' Fold-up Gate

Straight Deck w/ 2 Fold-up Ramps

4' Dovetail w/ 2 Fold-up Ramps

Straight Deck w/ 4' Fold-up Gate

Straight Deck w/ 5' Slide-in Ramps (12 ft & up)

Tilt Deck (Single Axle Only)

2' Dovetail

Straight Deck w/ Bi-Fold Gate

2' Dovetail w/ Bi-Fold Gate

4' Dovetail w/ Bi-Fold Gate

#### **Other Options**

Side Mount ATV Ramps (12ft or Longer)

2 Flush Mount D- Rings

Expanded Metal Floor

2" Removable Pipe Side Rail

Rub Rail

Steel Floor wl 4 D-rings

Spare Tire Mount + TRE

Rear Support Jacks

16" Cross Members

Regular Sides w/ Solid Metal


#### **Landscape Options**

2ft Expanded Metal Sides 4ft Expanded Metal Sides Front Tool Cage 4ft Side Gate ( 14ft or Longer )



<sup>\*</sup> denotes a standard feature

#### Available in 60", 77", & 83" Widths





## 78" Medium Duty Dump (D2)







Lengths 10'& 12'

#### **Standard Features**

- · 9,900 lb. G.V.W.R.
- 5,200 lb. x 2 G.A.W.R.
- · 2 5/16" A Frame Coupler
- · Safety Chains
- I Drop Leg Jack (7,000 lb.)
- 2 Posi-lube Brake Axle (5,200 lb.)
- 6 Leaf Slipper Spring Suspension
- 4 15" White Spoke Wheels
- · 4 225/75R15 Radial Tires (lb.)
- · Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- · Treadplate Steel Fenders
- Toolbox
- · Barn Door Gate
- 40° Dump Pitch

- 12VDC Hydraulic Pump
- 5" x 30" Hydraulic Cylinder
- · 12' Control Cable
- 5" Channel Main Frame & Tongue
- · 3" Channel Crossmembers
- · 10ga. Steel Bed
- 78" Wide Bed
- 18" 12ga Steel Sides
- DOT Approved Flushmount Lights
- · Sealed Wire Harness w/ 7-Way RV Plug
- Sand Blasted, Acid Washed, Powder Coated
- Interstate (TM) Deep Cycle Battery

## POWDER PJ COATED

At P] Trailers, every trailer we build is powder coated with Sherwin-Williams \*\* Powder Coat. A powder coat finish is far superior to conventional paint. It is extremely durable and does not easily crack, chip, or peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.

#### **Coupler Options**

BP 2 5/16" A-Frame \*

BP 2 5/16" Adjustable (14,000 lb.)

3" Pintle Eye - Channel-mount (21,000 lb.)

#### **Axle Options**

- (2) 3,500# Electric / Spring
- (2) 5,200# Electric / Spring \*
- (2) 5,200# Surge/Hyd Drum w/ Surge Cplr/Spg
- (2) 7,000# Electric / Spring

#### **Tail Options**

Split Gate \*
Split / Spreader Gate

#### **Color Options**

Black Powdercoat \*
Equipment Yellow Powdercoat

Grey Powdercoat Red Powdercoat

White Powdercoat

#### **Other Options**

Cold Weather Wiring Harness (7-Way RV)
Upgrade to 235/80 R16 on 52k Axles
24" Dump Sides
Solar Battery Charger
Battery Charger 12V
12"oc Crossmembers
Power Up/Down & Gravity Down Upgrade

Mount Only for Spare Tire

Ramps

Scissor Lift

Spare Tire and Mount (Bumper Pull)

#### Notes:

3.5k Axles Available on 10'
MAX GVWR 10,400 with Correct Options

\* denotes a standard feature


#### Weights

Length	Axles	Est. Base Weight;
10'	2 - 5,200	2760 lbs / 1252 kg
12'	2 - 5,200	3000 lbs / 1361 kg

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights



## Classic Flatdeck with Duals

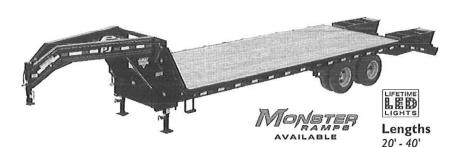

#### Standard Features

- · 22,400 lb. G.V.W.R.
- 10,000 lb. x 2 G.A.W.R.
- 2 5/16" Gooseneck Ball Coupler (25,000 lb.)
- · Safety Chains
- 2 Drop Leg Jacks (10,000 lb.)
- · 2 Oil Bath Brake Axles (10,000 lb.)
- 6 Leaf Slipper Spring Suspension
- · 8 16" Grey Dual Wheels w/ 8 on 6.5" BP
- · 8 16" 235/80R16 Radial Tires (3,090 lb.)
- · Rubrail & Stake Pockets
- · Electric Breakaway Kit w/ Charger
- DOT Reflective Tape
- · Side Steps on Both Sides
- Front Toolbox (GN Only)
- · 8' Ramps w/ Holders

#### Notes:

- · 25' and up includes 19 lb. I-Beam Frame, Riser & Neck
- · Pintlehooks must upgrade to 19 lb. I-Beam

- 12" x 14 lb. I-Beam Main Frame, Riser & Neck
- · Frame Bridge Standard on 30' and up.
- 3" Channel Crossmembers 16" on Center
- 2 x 6 x 1/8" Square Tubing Outer Deck Frame
- 2" Treated Pine Lumber Deck
- · 102" Wide Deck
- DOT Approved Flushmount Lifetime LED
- Amber Side Turn Flashers
- Sealed Wire Harness
- · Sand Blasted, Acid Washed, Powder Coated


## POWDER PL COATED

At PJ Trailers, every trailer we build is powder coated with Sherwin-Williams™ Powder Coat. A powder coat finish is far superior to conventional paint. It is peel as conventional paint does. Powdercoating also helps prevent rust & corrosion making it the longest lasting and most durable finish on the market.









Corne fertine etc bees			Garre	Fisharch +1	. 5
Length		1 1	Length	1	
20	90.*	14.8"	34	140*	-1
48	100*	14.8"	15	135*	
24	3537	176*	34.	140	
25	115*	195*	39	148*	
24	324"	154"	1,	144"	
59	1235	252			
37	124*	236"			
3.0	1816	24.97			

## Weights

1000	Length	Axles	Est. Base Weight.
	20'	2 - 10000	5340 lbs / 2422 kg
	22'	2 - 10000	5480 lbs / 2486 kg
1	25'	2 - 10000	6200 lbs / 2812 kg
	28'	2 - 10000	6860 lbs / 3112 kg
	30'	2 - 10000	7100 lbs / 3221 kg

	Length	Axles	Est. Base Weight,
	32'	2 - 10000	7320 lbs / 3320 kg
	34'	2 - 10000	7640 lbs / 3465 kg
7	36'	2 - 10000	8020 lbs / 3638 kg
	38'	2 - 10000	8500 lbs / 3856 kg
	40'	2 - 10000	8920 lbs / 4046 kg

† Weights are estimated for base trailer only, PJ Trailers makes no guarantee regarding the accuracy of estimated weights

GN 2 5/16" Round (25,000 lb.) w/ Toolbox \* BP 2 5/16" Adjustable (25,000 lb.) GN 2 5/16" Round (30,000 lb.) w/ Toolbox GN Load-Leveling 2 5/16" Square (30,000 lb.) & Tbx 3" Pintle Eye - Face-mount (36,000 lb.) GN 2 5/16" Square (30,000 lb.) w/ Toolbox GN 2 5/16" Square (25,000 lb.) w/Toolbox

#### **Axle Options**

- (2) 10,000# Air / Spring
- (2) 10,000# Elec / Spring \*

Coupler Options

- (2) 10,000# Elec / Torsion
- (2) 10,000# Elec/Hyd Disk / Spring
- (3) 10,000# Elec / Spring
- (2) 12,000# Air / Spring
- (2) 12,000# Elec / Spring
- (2) 12,000# Elec/Hyd Disk / Spring
- (3) 12,000# Elec / Spring
- (2) 12,000#, 14ply Air / Spring
- (2) 12,000#, 14ply Elec / Spring
- (2) 12,000#, 14ply Elec/Hyd Disk / Spring
- (2) 16,000# 17.5" wheel, Air / Spring
- (2) 16,000# 17.5" wheel, Elec / Spring
   Consult Your Sales Rep. for Additional Available Axles

#### **Tail Options**

Straight Deck w/ 8' Slide-in Ramps \*

- 5' Dovetail w/ 5' Slide in Ramps
- 5' Dovetail wl 2 Flip-over Ramps 5' Split Pop-up Dove w/ 5' Slide-in Ramps
- 5' Center Pop-up Dove w/ 2 Flip-over Ramps
- 5' Dovetail w/ 3 Flip-over Ramps
- 5' Dovetail wl 2 Flip-over Monster Ramps

#### **Other Options**

Cold Weather Wiring Harness (7-Way RV) Hutch suspension H9700-Underslung Tandem Axle 2 AL-KO Axles 2

Hutch suspension H9700-Underslung Triple Axle 2

Plate for Winch

Spare Tire Mount

6"Taller GN Riser Douglas Fir Lumber

1/4" Diamond Plate Steel Floor 2

Under Frame Tie Down Flat

19 lb. l-Beam Main Frame, Riser & Neck

22 lb. I-Beam Main Frame, Riser & Neck 2

12"oc Crossmembers I Pair D-Rings

Rough Oak Floor

Weld-On Strap Ratchets (2)

Hydraulic Jacks (12,000 lb.) Incl. Front Toolbox 2 Receiver Hitch

Goodyear G Rated Tires

4" Ratchets every 4ft w/ Slide Track

6" Axle Spread (Longer Equalizer)

72" Axle Spread

Steel Floor & 4 D-Rings (Cut Fenders)

Front Toolbox (PH Only)

Frame Bridging

Diamond Plate Ramp Bottoms

Torque Tube

Deck on the Neck 8x8 ft Side-mount Toolbox

Winch 12VDC (12,000 lb.) Incl. Front Toolbox

2-speed Jacks (12,000 lb.)

HD Semi Trailer 2x Jacks (25,000 lb.) No Frt T/box Ramp Support Arms

\* Standard Feature

<sup>2</sup> Special Order Option: Requires additional lead-time



Also Available with a Bumper Pull or Pintle Coupler.