



State of West Virginia  
Department of Administration  
Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

## Solicitation

NUMBER

DNR213099

PAGE

1

ADDRESS CORRESPONDENCE TO ATTENTION OF:

GUY NISBET  
304-558-8802

\*709043435 304-372-9875  
FAIRPLAIN TRACTOR SALES INC  
1169 RIPLEY RD

RIPLEY WV 25271-8710

DIVISION OF NATURAL RESOURCES  
VARIOUS LOCALES AS INDICATED  
BY ORDER

DATE PRINTED

04/10/2013

BID OPENING DATE:

05/07/2013

BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				REQUEST FOR QUOTATION (RFQ)		
				THE WEST VIRGINIA PURCHASING DIVISION FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES (WVDNR), IS SOLICITING BIDS TO PROVIDE THE AGENCY WITH MISCELLANEOUS FARM IMPLEMENT EQUIPMENT, PER THE TERMS AND CONDITIONS AND THE SPECIFICATIONS AS ATTACHED.		
0001	1	LS		020-41		
				EIGHT FOOT, REAR MOUNTED CUTTER BLADE	\$3,100.00	\$3,100.00
				WV. DIVISION OF NATURAL RESOURCES SHORT MOUNTAIN WMA DISTRICT 2 DNR OFFICE ROMNEY (HAMPSHIRE COUNTY), WV.		
0002	1	LS		020-41		
				EIGHT FOOT, REAR MOUNTED CUTTER, BLADE	\$3,100.00	\$3,100.00
				WV. DIVISION OF NATURAL RESOURCES NATHANIEL MOUNTAIN WMA DISTRICT 2 OFFICE ROMNEY (HAMPSHIRE COUNTY), WV.		

05/06/13 02:52:01 PM  
West Virginia Purchasing Division

SIGNATURE

*Carol M. Fisher*

TELEPHONE

304-372-9875

DATE

05/01/2013

TITLE

PRESIDENT

FEIN

55-0540441

ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
Department of Administration  
Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

Solicitation

NUMBER  
DNR213099

PAGE

2

ADDRESS CORRESPONDENCE TO ATTENTION OF:

GUY NISBET  
304-558-8802

V  
E  
N  
D  
O  
R

\*709043435 304-372-9875  
FAIRPLAIN TRACTOR SALES INC  
1169 RIPLEY RD  
RIPLEY WV 25271-8710

S  
H  
I  
P  
T  
O

DIVISION OF NATURAL RESOURCES  
VARIOUS LOCALES AS INDICATED  
BY ORDER

DATE PRINTED

04/10/2013

BID OPENING DATE:

05/07/2013

BID OPENING TIME

01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0003	1	LS		020-41 SIX FOOT, ROTARY CUTTER WV. DIVISION OF NATURAL RESOURCES ELK RIVER WMA SUTTON (BRAXTON COUNTY), WV.	4,250.00	4,250.00
0004	1	LS		020-41 SIX FOOT, ROTARY CUTTER WV. DIVISION OF NATURAL RESOURCES POTOMAC WMA JUDY GAP (PENDLETON COUNTY), WV.	4,250.00	4,250.00
0005	1	LS		020-41 TEN AND ONE-HALF FOOT, FOLDING, HALF-WING, ROTARY WV. DIVISION OF NATURAL RESOURCES HILLCREST WMA NEW MANCHESTER (HANCOCK COUNTY), WV.	12,866.00	12,866.00

SIGNATURE

*Carol M Fisher*

TELEPHONE

304-372-9875

DATE

05/01/2013

TITLE

PRESIDENT

FEIN

55-0540441

ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'





State of West Virginia  
Department of Administration  
Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

Solicitation

DNR213099

3

ADDRESS CORRESPONDENCE TO ATTENTION OF:

GUY NISBET  
304-558-8802

V  
E  
N  
D  
O  
R

\*709043435 304-372-9875  
FAIRPLAIN TRACTOR SALES INC  
1169 RIPLEY RD

RIPLEY WV 25271-8710

S  
H  
I  
P  
T  
O

DIVISION OF NATURAL RESOURCES  
VARIOUS LOCALES AS INDICATED  
BY ORDER

DATE PRINTED

04/10/2013

BID OPENING DATE:

05/07/2013

BID OPENING TIME

01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0006	1	LS		020-41	3,895.00	3,895.00
	SICKLE BAR MOWER					
	WV. DIVISION OF NATURAL RESOURCES LEWIS WETZEL WMA JACKSONBURG (WETZEL COUNTY), WV.					
0007	1	LS		020-41	3,300.00	3,300.00
	110 GALLON, 3 POINT SPRAYER					
	WV. DIVISION OF NATURAL RESOURCES GREEN BOTTOM WMA HEADQUARTERS GREEN BOTTOM (CABELL COUNTY), WV.					
***** THIS IS THE END OF RFQ DNR213099 ***** TOTAL:						\$34,761.00

SIGNATURE

*Carroll M Fisher*

TELEPHONE

304-372-9875

DATE

05/01/2013

TITLE

PRESIDENT

FEIN

55-0540441

ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

WV DIVISION OF NATURAL RESOURCES  
PRICING PAGE  
EXHIBIT A

ITEM NO.	QUANTITY	DESCRIPTION	UNIT PRICE	AMOUNT
1	1	LANDPRIDE RBT 4096 8-foot, rear-mounted, heavy-duty blade	\$ 3100.00	\$ 3100.00
2	1	LANDPRIDE RBT 4096 8-foot, rear-mounted, heavy-duty blade	\$ 3100.00	\$ 3100.00
3	1	RCF 3672 LANDPRIDE 6-foot, heavy-duty, rotary cutter	\$ 4250.00	\$ 4250.00
4	1	RCF 3672 LANDPRIDE 6-foot, heavy-duty, rotary cutter	\$ 4250.00	\$ 4250.00
5	1	RC65-10 LANDPRIDE 10 1/2 foot, folding-deck, half-wing rotary cutter	\$ 12,866.00	\$ 12,866.00
6	1	FARM KING 7H Sickle bar mower	\$ 3895.00	\$ 3895.00
7	1	DEMCO SPRAYER 150 GAL 110-gallon, 3-point sprayer	\$ 3300.00	\$ 3300.00
<b>TOTAL</b>				\$ 34,761.00

Note: Delivery must be made within thirty (30) days of purchase order award.

Each line item must include delivery charges to the designated areas listed below.

Items are to be delivered to the following locations:

**Item #1**

WV Division of Natural Resources  
Short Mountain WMA Headquarters  
District 2 DNR Office, Romney WV (Hampshire County)  
Contact Rich Rogers (304-822-3551) for delivery information

**Item #2**

WV Division of Natural Resources  
Nathaniel Mountain WMA Headquarters  
District 2 DNR Office, Romney WV (Hampshire County)  
Contact Rich Rogers (304-822-3551) for delivery information

**Item #3**

WV Division of Natural Resources  
Elk River WMA Headquarters  
Sutton, WV (Braxton County)  
Contact Rob Silvester (304-924-6211) for delivery information



WV DIVISION OF NATURAL RESOURCES  
MANUFACTURER'S PAGE  
FY2013 Implements

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding "or equal" brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request for Quotation.

ITEM NO.	EQUIPMENT	MANUFACTURER	MODEL
1	8-foot, rear-mounted, heavy duty blade	LANDPRIDE	RBT4096
2	8-foot, rear-mounted, heavy duty blade	LANDPRIDE	RBT4096
3	6-foot, heavy-duty rotary cutter	LANDPRIDE	RCF3672
4	6-foot, heavy-duty rotary cutter	LANDPRIDE	RCF3672
5	10 ½ foot, folding-deck half-wing rotary cutter	LANDPRIDE	RC65-10
6	Sickle bar mower	FARM KING	7H
7	110-gallon, 3-point sprayer	DEMCO	150 GAL

CERTIFICATION AND SIGNATURE PAGE

By signing below, I certify that I have reviewed this Solicitation in its entirety; understand the requirements, terms and conditions, and other information contained herein; that I am submitting this bid or proposal for review and consideration; that I am authorized by the bidder to execute this bid or any documents related thereto on bidder's behalf; that I am authorized to bind the bidder in a contractual relationship; and that to the best of my knowledge, the bidder has properly registered with any State agency that may require registration.

FAIRPLAIN TRACTOR SALES, INC

(Company)

Carroll G. Fisher

(Authorized Signature)

CARROLL G. FISHER, PRESIDENT

(Representative Name, Title)

304-372-9875

(Phone Number)

304-372-2713

(Fax Number)

05/01/2013

(Date)



## State of West Virginia

# VENDOR PREFERENCE CERTIFICATE

Certification and application\* is hereby made for Preference in accordance with *West Virginia Code*, §5A-3-37. (Does not apply to construction contracts). *West Virginia Code*, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the *West Virginia Code*. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1. ☒ **Application is made for 2.5% resident vendor preference for the reason checked:**  
☒ Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; or,  
☐ Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or,  
☐ Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; or,
2. ☒ **Application is made for 2.5% resident vendor preference for the reason checked:**  
☒ Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
3. ☐ **Application is made for 2.5% resident vendor preference for the reason checked:**  
☐ Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
4. ☒ **Application is made for 5% resident vendor preference for the reason checked:**  
☒ Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; or,
5. ☒ **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**  
☒ Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; or,
6. ☐ **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**  
☐ Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.
7. ☐ **Application is made for preference as a non-resident small, women- and minority-owned business, in accordance with *West Virginia Code* §5A-3-59 and *West Virginia Code of State Rules*.**  
☐ Bidder has been or expects to be approved prior to contract award by the Purchasing Division as a certified small, women- and minority-owned business.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (*West Virginia Code*, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: FAIRPLAIN TRACTOR SALES, INC.

Signed: Carol M. Fisher

Date: 05/01/2013

Title: PRESIDENT

**ADDENDUM ACKNOWLEDGEMENT FORM**  
**SOLICITATION NO.:** DNR213099

**Instructions:** Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

**Acknowledgment:** I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

**Addendum Numbers Received:**

(Check the box next to each addendum received)

- |   |  |
|---|--|
| <input type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6  |
| <input type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7  |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8  |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9  |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

FAIRPLAIN TRACTOR SALES, INC

Company

Carroll H Fisher

Authorized Signature

5/1/13

Date

NO KNOWN ADDENDA AS OF 05/01/2013

**NOTE:** This addendum acknowledgment should be submitted with the bid to expedite document processing.



RFQ No. DNR213099STATE OF WEST VIRGINIA  
Purchasing Division**PURCHASING AFFIDAVIT**

**MANDATE:** Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

**EXCEPTION:** The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**DEFINITIONS:**

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.


"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

**AFFIRMATION:** By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

**WITNESS THE FOLLOWING SIGNATURE:**Vendor's Name: FAIRPLAIN TRACTOR SALES, INCAuthorized Signature: Carroll M. Fisher Date: 05/01/2013State of West VirginiaCounty of Jackson, to-wit:Taken, subscribed, and sworn to before me this 1<sup>st</sup> day of May, 2013.My Commission expires Sept 26, 2021.

AFFIX SEAL HERE

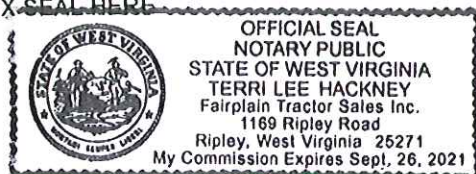

NOTARY PUBLIC

Terri L. Hackney

Purchasing Affidavit (Revised 07/01/2012)



RBT 4096

pg. 14



items 1+2

Box Scrapers  
Landscape Rakes  
Post Hole Diggers  
Quick-Hitches  
Powered Rakes  
Disc Harrows  
Soil Pulverizers  
Scarifiers  
Rear Blades  
Ditcher  
Core Aerator  
Crimper  
Spreaders

# DIRT WORKING TOOLS

THE AUTHORITY IN TRACTOR MOUNTED WORK TOOLS



## ☀ For a Super Finish Start with Land Pride.

**L**and Pride's excellent reputation began with its "dirt working" line of implements. Regardless of the size, be it a 4' Rear Blade to an 8' Disc Harrow, we treat them the same. Whatever your selection, we strive for the same quality in the implement that is used to "play" around the hobby farm and keep the gravel drive in shape, to the implement used in heavy farming or construction.

With subcompact and compact tractors finding their way for so many uses, those same uses require many of the implements we offer. Landscapers and nurseries need rakes, blades, boxscrapers and post hole diggers. Cities and parks are constantly reshaping ball fields or aerating soccer fields. Commercial builders find our heavy duty Retractable Boxscrapers ideal for the stresses and long hours they must endure.

There is no doubt we have a great line-up of products to fit a host of needs. We have a great line-up of services that stand behind our products. Top quality Operator Manuals are supplied to each owner for every single product. Parts Manuals are free on line at [www.landpride.com](http://www.landpride.com), a parts department second to none, and a strong dealer network from coast to coast.

We take pride in our products and workmanship. We want you to get what you are paying for, and at Land Pride we strive to achieve that every day.

▶ Land Pride Quick-Hitch Systems, available in a Cat. 1 Tractor 3-Point Hitch or Cat. 1 or 2 non-PTO Skid Steer Hitch, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch Systems logo to denote applicable products.

**Quick Hitch**  
SYSTEM



## Dirt Working Tools Index

Post Hole Diggers	3-4	Box Scrapers	21-23
Powered Rakes	6-8	Soil Pulverizers	24-25
Hitches	10	Disc Harrows	26-28
Spreaders	11	Core Aerator	29
Rear Blades	12-17	Straw Crimper	30
Landscape Rakes	18-20	Ditcher	31
Scarifiers	19-20		



## Two sizes: Perfect for doing it yourself!

### PD10 SERIES

15 - 30 HP — 6" 9" 12" Augers

Our 10 and 15 Series Post Hole Diggers are sized just right for sub compact and compact tractors. Suited for fence building around the homestead or light landscaping in town, these utility diggers can dig hole after hole and not get tired! The auger, gearbox and driveline are protected from tough ground by a shear bolt breakaway in the driveline. The 2 7/8" tubing used for the yoke and boom can handle any torque load the auger can deliver.

#### PD10


- Cat. 1 hitch
- 2" Output shaft
- Shear-pin protection
- 6", 9", 12" augers
- 30" Auger length
- 45" Boom length

#### PD15

- Cat. 1 hitch
- 2" Output shaft
- Shear-pin protection
- 6", 9", 12" augers
- 48" Auger length
- 59" Boom length

#### Options

- Auger alignment handle
- Hydraulic down pressure kit
- Storage stand

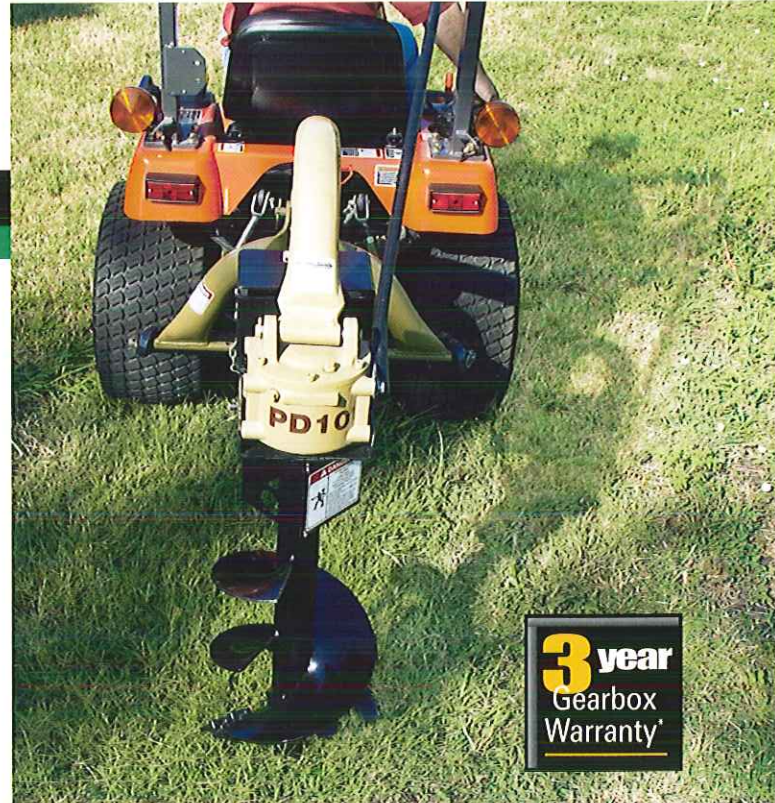

The PD10 has a shorter boom and auger giving sub compact tractors the necessary ground clearance to properly transport the Post Hole Digger.

### Which Post Hole Digger is right for you?

#### SUGGESTED HORSEPOWER

10 SERIES	15 SERIES	25 SERIES	30 SERIES	35 SERIES
15-30 HP	20-40 HP	PTO = 25-55 HP Hyd = 5-10 gpm	Hyd = 10-20 gpm	PTO = 30-75 HP Hyd = 10-25 gpm



### PD15 SERIES

20 - 40 HP — 6" 9" 12" Augers

Our Post Hole Digger storage stand helps you attach and remove the digger from the tractor in a more efficient manner. Manhandling a Post Hole Digger by yourself is next to impossible. With our innovative Post Hole Digger stand, one person hook and unhook becomes a reality!






# ☀ Ideal for Landscaping.

**5** year  
Gearbox  
Warranty\*

## ☀ PD25 SERIES

25 - 55 HP — 6" - 24" Augers

Our PD25 and PD35 Series Post Hole Diggers offer additional power for those tougher jobs. Ideal for working all day long on demanding commercial jobs, we have the horsepower to match up to the job and to your tractor. Both models use the same boom, yoke and augers. The difference is in the gearbox. Rated at 55 HP for the PD25 and 75 HP for the PD35, these units are perfect for the commercial landscaper to the professional fence builder.

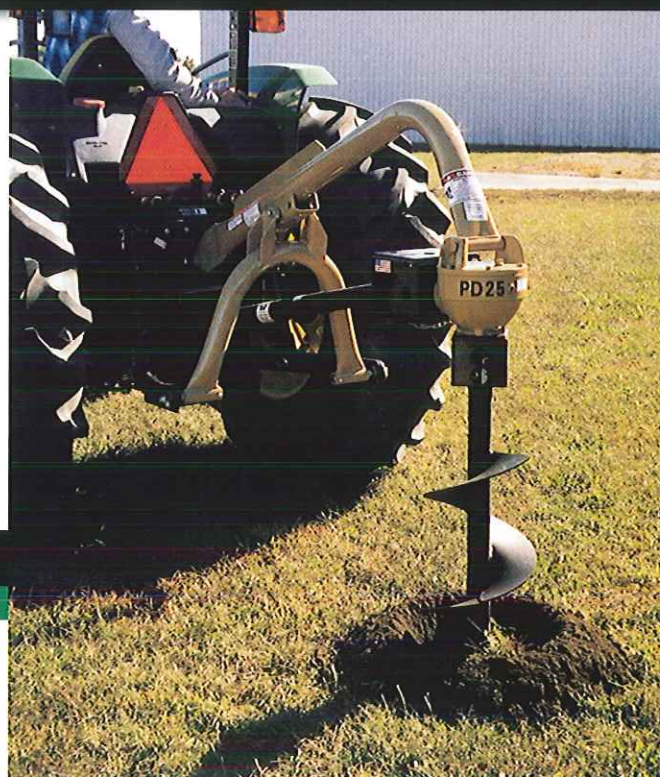

PD25

- Cat. I or II hitch
- 2 7/8" Yoke tubing
- 2" Gearbox output shaft
- Cat. 3 driveline with shear-pin or radial pin protection
- 3 1/2" Reinforced boom tubing
- Replaceable hardened steel points



# ☀ Built for tough, industrial jobs.

## ☀ PD35 SERIES

30 - 75 HP — 6" - 24" Augers

**5** year  
Gearbox  
Warranty\*



Cast steel teeth are replaceable, and are positioned for maximum digging performance.





## HD25 SERIES

5 - 12 GPM — 6" - 24" Augers

The hydraulic driven bucket mount Post Hole Digger is easily bolted to the side of your front end loader bucket. The hydraulics on the bucket can be used as additional force in digging through heavy soil. Available in HD25 or HD35 Series.

## HD35 SERIES

10 - 25 GPM — 6" - 24" Augers

The hydraulic driven, 3-point tractor mounted Post Hole Digger uses the tractor hydraulics to turn the auger; no driveline to hassle with! You can also reverse the auger direction, easing the strain on the auger when extracting it from the ground. Available in HD25 or HD35 Series.



## SA30 SERIES

10 - 20 GPM — 9" - 36" Augers

## SA35 SERIES

15 - 25 GPM — 9" - 36" Augers

- 2" Hex or 2-9/16" output shaft
- Planetary gearbox
- Use skid steer to push auger into ground
- High torque output
- Up to 36" auger

**5 year**  
Gearbox & Motor  
Warranty\*

## Post Hole Digger Specifications

Model Number	PD10	PD15	PD25/PD35	HD25/35	SA30/35
Hitch	Category I	Category I	Category I or II	Cat. I or II, or bucket mount	Skid Steer Plate
Yoke (cm)	2-7/8" (7.30) Tubing	2-7/8" (7.30) Tubing	2-7/8" (7.30) Tubing	2-7/8" (7.30) Tubing	2-7/8" (7.30) Tubing
Boom (cm)	2-7/8" (7.30) Tubing	2-7/8" (7.30) Tubing	3-1/2" (8.89) Reinforced Tubing	3-1/2" (8.89) Reinforced Tubing	3-1/2" (8.89) Reinforced Tubing
Gearbox	30 HP max	40 HP max	55 HP max/75 HP max	3:18:1	SA25: 10-20 GPM
GPM rating	N/A	N/A	N/A	HD25: 5-12 GPM HD35: 10-25 GPM	SA35: 15-25 GPM
Output Shaft (cm)	2" (5.08)	2" (5.08)	2" (5.08)	2" (5.08)	2" Hex or 2-9/16" OD
Input RPM	540 Tractor at 300 RPM	540 Tractor at 300 RPM	540 Tractor at 300 RPM		
Driveline	Category 2	Category 2	Category 3	Hydraulic	Hydraulic
Hydraulic Hose	N/A	N/A	N/A	Standard on 3-Point; 2 each 24' length optional on bucket mount	Standard
Component Protection	Shear-Pin	Shear-Pin	Shear-Pin or Radial Pin**	N/A	N/A
Max Auger RPM	94	94	94/75	109/105	97/85
Auger Length	30"	48"	48"	48"	48" (9' is 42" length)
Auger Sizes	6", 9" or 12"	6", 9" or 12"	6", 9", 12", 15", 18" or 24"	6", 9", 12", 15", 18" or 24"	9", 12", 15", 18", 24" or 36"
Flighting 6", 9", 12"			Semi-Double		
Flighting 15", 18", 24", 36"			Double		
Options	7" or 14" Auger extension Hydraulic cylinder down pressure kit (Applies approx. 500 lbs. of force) Auger alignment handle, Storage stand			Hydraulic cylinder down pressure kit on 3-point only 3-pt Storage stand	

\*See dealer for complete warranty information.

\*\*Radial Pin recommended on auger sizes of 15" and above.

Models shown may or may not include options.  
Design and specifications subject to change.




# ☀ Prepare soil quickly while reducing the labor.

## ☀ SR25 SERIES


11 GPM@2200 psi – 72"

The **Skid Steer Mounted Powered Rake** can clean up construction sites, tear out unwanted growth, level and grade, and work up the soil to leave a picture perfect seedbed. Designed to attach to most late model skid steer units, a powered rake is a great way to increase your investment in your skid steer.

- Hydraulic driven roller operates in two directions of travel
- Choice of scrolled roller or carbide tipped studded roller
- Angle 15° left & right, forward or reverse
- 2" x 8" Angle cylinder
- Adjustable material control deflector
- End panels work as a boxscraper
- Ball bearings on roller
- Air tires with sealant
- 3/4" Roller bearings and spacer height adjustment

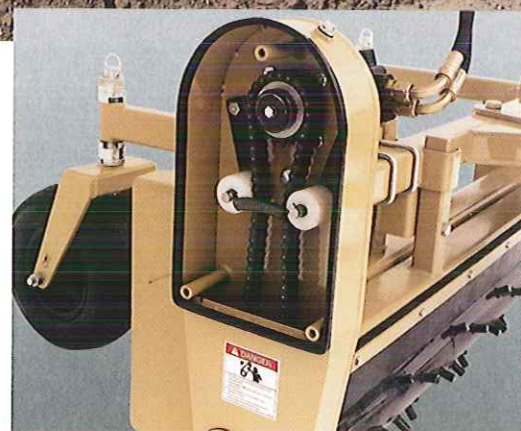

#50 Double continuous chain is held tight by a double roller system. Keeping constant and consistent pressure on the chain reduces whipping in extreme conditions.

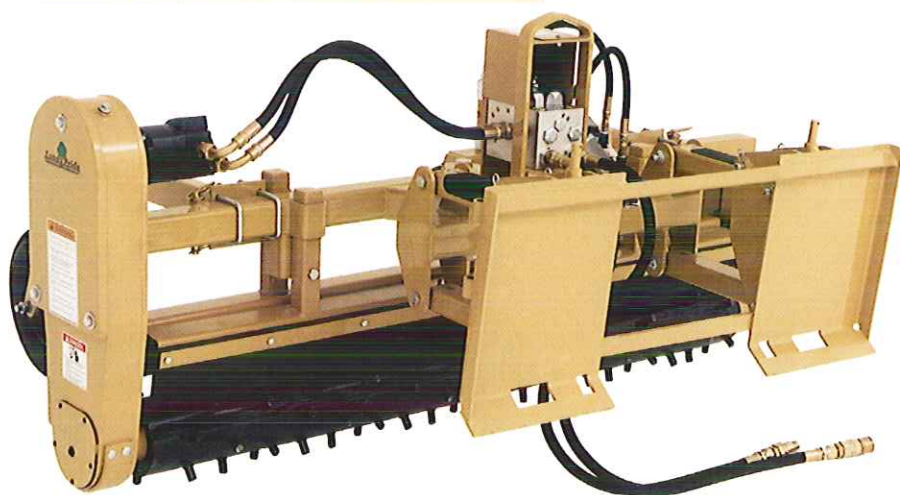

SR2572



The optional scrolled roller will windrow rocks and other debris, leaving an excellent seedbed.



## 15 Series Powered Rake Specifications

Model Number	PR1560	PR1572
Working Width	60"	72"
Hitch	Cat. 1	
Gearbox	540 RPM, Ball Bearings, Cast Iron Housing, Drain Plug	
Primary Driveline	Cat. 3 with Slip-Clutch	
Secondary Driveline	Cat. 4 Heavy-Duty	
Material Control Deflector (cm)	1/2" x 6" (1.27 x 15.24) Heat Treated Reversible Blade	
Roller (cm)	9-3/8" (23.83) Diameter with 3/4" x 1-1/2" (1.91 x 3.81) Carbide Tipped Studs or 8-3/16" (20.8) Diameter with Scrolled Bars	
Drive Chain	#50 Double Continuous Roller Chain, High Tensile, Enclosed in Oil Bath	
Angle Adjustment	15° Left and Right	
Angle Cylinder (cm)	2" x 8" (5.08 x 20.32)	
End Plates	Standard	
Gauge Wheels (cm)	16.5" x 6.5" (41.91 x 16.51) Air Tires with Sealant and 3/4" (1.91) Roller Bearings and Spacer Height Adjustment	
Skid Shoes	Replaceable	
Machine Weight (kg)	970 lbs.(441)	

## Skid Steer Powered Rake Specifications

Model Number	SR2572
Hydraulics Required	11 GPM @2200 psi
Material Control Deflector (cm)	2 each - 1/2" x 5" Hard Urethane (1.27 x 12.70)
Roller (cm)	9-3/8" (23.83) Diameter with 3/4" x 1-1/2" (1.91 x 3.81) Carbide Tipped Studs or 8-3/16" (20.8) Diameter with Scrolled Bars
Roller Speed	Variable from 180 to 260 RPM
Drive Chain	#50 Continuous Roller Chain, High Tensile, Enclosed in Oil Bath
Angle Adjustment	15° Left 7 Right, Forward or Reverse
Angle Cylinder (cm)	2" x 8" (5.08 x 20.32)
Gauge Wheels (cm)	16.5" x 6.5" (41.91 x 16.51) Air Tires with Sealant and 3/4" (1.91) Roller Bearings and Spacer Height Adjustment
Skid Shoes	Replaceable
Machine Weight (kg)	900 lbs.(409)


## 25 Series Powered Rake Specifications

Model Number	PR2572	PR2596
Hitch	Category I, Floating Top Clevis	
Non-Angled Width (cm)	81-1/4" (206)	105-1/4" (267)
Non-Angled Working Width (cm)	72" (183)	96" (244)
Non-Angled Length (cm)	64-1/2" (164)	
Overall Height (cm)	44" (112)	
Machine Weight (kg)	988 lbs. (449)	1123 lbs. (510)
Minimum HP Required	Approximately 30 PTO*	Approximately 35 PTO*
Maximum HP	60 PTO	
Gearbox	Cast Iron • 540 RPM	
Intermediate Driveline	Category 3 with Slide Collar Connection Constant Velocity Double "U" Joint with Belleville Washer Slip-Clutch	
Angle Adjustment	20 Degrees Left or Right • Heavy Duty Cast Iron Pivot Hydraulic or Manual Ratchet with Shear Bolt	
Deflector Blade (cm)	1/2" x 6" (1.27 x 15.24) Heat Treated Beveled • Adjustable • Floating • Reversible	
Roller Tube (cm)	1/4" Wall • 6-1/2" Diameter • 8 Spiraled Bars (6.4 Wall • 16.5 Diameter)	
Depth Control (cm)	2 each, 6.5" x 13" (16.5 x 33) Air Tires with Sealant Roller bearings and spacer height adjustment	
Roller RPM	227 RPM	
Drive Chain	#50 Double Strand High Tensile • Idler Enclosed in Oil Bath	
Danish Tines (cm)	3 Rows • 8" (20.3) Spacing • Hydraulic or Manual Operation	
Options	Cylinder Diverter Valve	

\* Front Weights may be required.

Models shown may or may not include options.  
Design and specifications subject to change.

# The "True Timesavers"

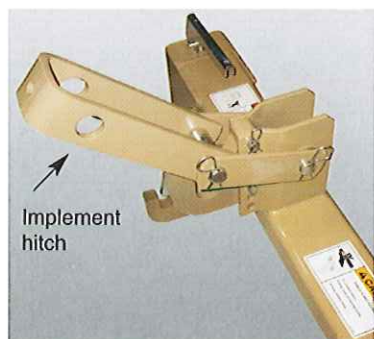

Implement  
hitch

An optional link is available for implements that have a swiveling top link.

## **QH15 SERIES**

Hitch — Cat. 1 3-Point

Land Pride's Category 1 Quick-Hitch attaches to the tractor 3-point allowing you to easily hook on to implements, some without ever leaving the tractor seat. The Skid Steer Hitch enables you to operate Cat. 1 or 2 non-PTO tractor implements with your skid steer loader. Our Quick-Hitch Systems, designed in accordance with ASAE specifications, fit most Land Pride products and are a real time saver when working on multiple projects.


Look for the  to denote applicable products.



## **SH35 SERIES**

Hitch — Cat. 1 or 2

Automatic lock on  
lower 3-point

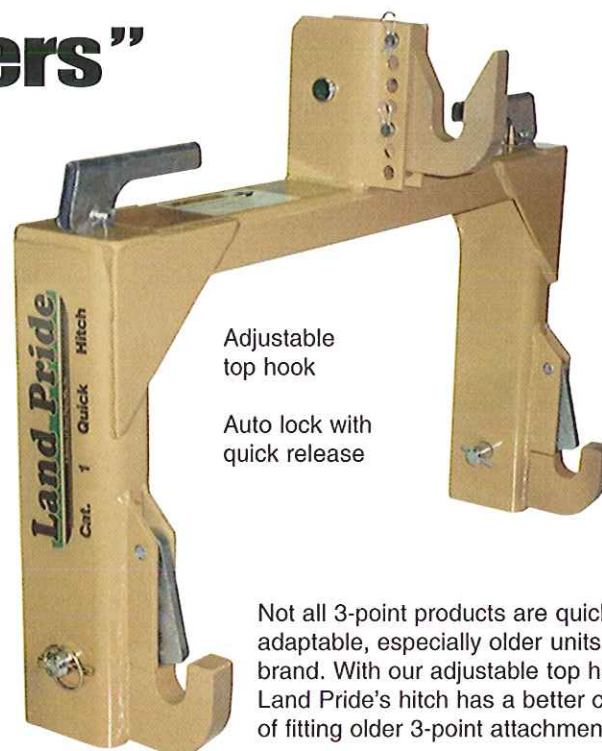


Adjustable  
top hook

Auto lock with  
quick release

Not all 3-point products are quick hitch adaptable, especially older units of any brand. With our adjustable top hook, Land Pride's hitch has a better chance of fitting older 3-point attachments.

## **Cat. 1 Quick-Hitch Specifications**

Model Number	QH15
Hitch	Cat. 1 3-Point
Overall Width	30-5/8"
Overall Height	22-5/16"
Overall Length	9-1/2"
Weight	70 lbs.
Lock	Automatic on Lower 3-point arms

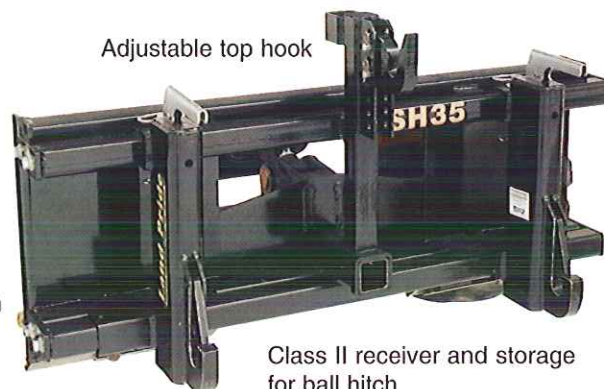

Adjustable top hook

Class II receiver and storage  
for ball hitch

## **Skid Steer 3-Pt. Hitch Specifications**

Model Number	SH35
Hitch	Cat. 1 or 2
Overall Width	46-3/8"
Overall Height	25"
Weight	250 lbs.
Lock	Automatic on Lower 3-Point Hooks



## ☀ Spreading made fast and easy

Featuring an all-steel frame, frontal splashplate and three available hopper sizes, Land Pride Broadcast Spreaders fit most landscape, nursery, hobby farm, sod farm and municipality uses. The smooth, seamless inner wall allows material, ranging from fertilizer to seed and sand, to flow freely for complete clean-out.

Delivery is adjustable to spread on the left, right or with full width of 54 ft. allowing you to cover large areas in one pass.

### ☀ FS SERIES

Cat. 1 – 500 700 1000


- Cat. 1 hitch
- Spin-type broadcast for even spreading
- 14 Gauge, one piece steel hopper is seamless for accurate and consistent emptying
- Shielded driveline
- Plated spinner vanes to protect from corrosive material
- Adjustable delivery patterns
- Stainless steel orifice doors
- Plated adjustment levers



A built in tow hook handles up to 1200 pounds; just right for hauling extra sacks of fertilizer or seed.



Optional vinyl cap with elastic and buckle to keep wind and rain out, and material in.



Our agitator is standard equipment and is useful when spreading powder type materials that tend to bridge.

## Which Spreader is right for you?

### HOPPER CAPACITY

**FS500**

350 lbs.

**FS700**

563 lbs.

**FS1000**

673 lbs.



## ☀ Broadcast Spreader Specifications

Model Number	FS500	FS700	FS1000
Capacity (kg)	350 lbs. (158.7)	563 lbs. (255)	673 lbs. (305)
Overall Dimensions (cm)	5.85 cu.ft. 37.2" x 40.4" (94.49cm x 102.62)	9.38 cu.ft. 44" x 46" (111.76 x 116.48)	11.22 cu.ft. 46.8" x 46.8" (118.87cm x 118.87)
Loading Height (cm)	3' 3" (99.06)	3' 4" (101.60)	3' 7" (109.22)
Weight (empty)(kg)	118 lbs. (53.63)	128 lbs. (58.18)	139 lbs. (63.18)
3-Point Attachment		Category 1	
Net Spreadable Granular Width (cm)		23' - 54' (701.04 - 1645.92)	
Transmission Ratio		1:1	
Minimum Tractor H.P.	15 HP	18 HP	20 HP
Range of Spreading Possibility (lbs/acres)		44 - 890	

Models shown may or may not include options.  
Design and specifications subject to change.





## RB05 SERIES

17 - 25 HP — 48" 60"

- Cat. 0 with Cat. 1 pins
- 5 Forward angles, 5 reverse angles
- 10" Offset left or right
- 13 1/2" Moldboard height
- 1/4" Moldboard thickness
- 3/8" x 3" Heat treated cutting edge
- Landscape Rake adaptable



Whether the job is landscaping, construction, snow removal, feedlot cleaning or irrigation ditching, Land Pride offers a wide range of Rear Blades to suit your needs.

Land Pride Rear Blades feature rolled moldboards to keep material flowing and reversible heat treated cutting edges to give twice the life. Heavy-duty A-frames and mainframes have been designed to give maximum strength and durability. All kingpins are constructed of solid steel and are sized to match the HP requirements of each blade.

With simple manual adjustments, our Blades angle to move material off to the side, tilt to dig or grade slopes and offset to get at hard to reach places. **Hydraulic angling, tilt and offset are available on the RBT40, RBT45 and RBT55 Series Blades.** Land Pride also offers many options to meet your job requirements including side plates to move bulk material and skid shoes to lengthen blade life and prevent damage to the working area.



### Which Blade is right for you?

MAXIMUM HORSEPOWER

05 SERIES	15 SERIES	25 SERIES	35 SERIES	40 SERIES	45 SERIES	55 SERIES
25 HP	40 HP	60 HP	80 HP	100 HP	110 HP	180 HP



## RB15 & RBT15 SERIES

17 - 40 HP — 60" 72" 84"

- Cat. 1 hitch
- 7 Forward angles, 5 reverse angles
- Offset 12" left or right
- 5 tilt positions (RBT Series)
- 14" Moldboard height will move as much dirt as you can handle
- 1/4" Moldboard thickness is just right for 40 HP work
- Reversible cutting edge for twice the life
- Optional skid shoes are great when blading snow
- Landscape Rake adaptable
- Optional storage stand



RBT15 Series has tilt capabilities for those small landscape jobs.



## RB25 SERIES

25 - 60 HP — 72" 84" 96"

- Cat. 1 hitch
- 9 Forward positions
- 5 Reverse positions
- 5/16" Moldboard thickness
- 1/2" x 6" Heat treated, reversible cutting edge for twice the wear
- Skid shoes and side plates available
- Optional gauge wheel
- Landscape Rake adaptable
- Optional storage stand



**Quick Hitch**  
SYSTEM

## RB35 SERIES

35 - 80 HP — 72" 84" 96"

**Quick Hitch**  
SYSTEM

The 2" x 2" x 3/8" angle iron reinforcement provides the moldboard with additional strength on the 84" and 96" models.



RB3584

- Cat. 1 & 2 hitch
- 9 Forward positions, 5 reverse positions
- 5 Tilt positions
- 12" Offset left or right
- Optional hydraulic offset cylinder
- 17 1/2" Moldboard rolls the material for less drag
- 5/16" Moldboard thickness
- Retractable parking stand for one man hook-up
- Optional gauge wheel for more precise grading
- Landscape Rake adaptable
- Reversible cutting edge gives twice the life
- Side plates and skid shoes available for aiding in grading



The heavy-duty turntable housing fits snug to keep wear to a minimum and to extend the life of the threaded shaft.



**Ideal for ditching,  
road grading &  
all-around farm use**



## **RBT40 SERIES**

65 - 100 HP — 84" 96" 108"

- Cat. 1 or 2 hitch
- Hydraulic adjustments with hose and fittings
- Angle up to 45°
- Offset up to 30" left or right
- Tilt up to 15°
- 17" Moldboard precisely formed to roll dirt ahead
- 5/16" Blade thickness
- 3 1/8" Solid steel kingpin handles high torque loads
- Fully welded main frame for stability
- Retractable parking stand for storage and ease of hook-up
- Optional skid shoes and side plates
- Reversible cutting edge for longer wear
- An optional cylinder cushion valve is available to help protect the blade and cylinders in the event an obstruction is hit.



Make changes  
**On The Go**  
with our 3-Way  
Hydraulic Rear  
Blades

**QUICK HITCH**  
SYSTEM



Skid shoes and end plates are ideal aides for large grading jobs.





## RB45 SERIES

70 - 110 HP — 96" 108"

- Cat. 2, Quick hitch adaptable
- Manual or hydraulic adjustments
- 7 Forward positions, 7 reverse positions
- Offset left or right
- Rolled moldboards for proper material flow
- 19" Moldboard height
- 1/4" Moldboard thickness
- 3/16" Reinforcement channel on moldboard
- Reversible cutting edge lengthens blade life
- Fully welded main frame with reinforcements eliminates twisting
- Retractable parking stand enables one man hook-up



The heavy-duty RB45 pivot housing features 5/8" thick material and a 2 1/4" kingpin.



## RBT45 SERIES

70 - 125 HP — 96" 108"

- Cat. 2 or 3. Quick Hitch adaptable
- Manual or hydraulic adjustments
- Angle up to 45°
- Tilt up to 15°
- Offset up to 35"
- Grease points in front pivot, angling and tilt shafts keep movements fluid
- Formed 5/16" x 19" moldboard with fully welded boxed reinforcement
- Reversible cutting edge
- Fully welded reinforced main frame
- Retractable parking stand for ease of hook-up



Optional cushion valve protects cylinders and blade components during extreme impacts. For use on RBT40 & 45 Models.



RBT45 features a 1" thick plate steel turntable, 3/8" thick tilt pivot bushing and a 4" solid kingpin.

Other options include single or double hydraulic gauge wheels, side plates for holding dirt in, and skid shoes for blade protection.

Make changes  
**On The Go**  
with our 3-Way  
Hydraulic Rear  
Blades




☀ **They don't  
come any tougher.**

☀ **RB55 SERIES**

90 - 180 HP — 108" 120"

- Cat. 2 and 3 hitch
- Hydraulic adjustments with hoses
- 7 Forward and reverse positions up to 45°
- Tilt 20° left or right
- Offset up to 23"
- Formed 19" moldboard
- 5/16" Reinforced moldboard thickness
- Reversible cutting edge
- Fully welded reinforced main frame tackles the toughest conditions
- Retractable parking stand
- Grease points in front pivot shaft eliminates "freezing up"
- Optional skid shoes and side plates

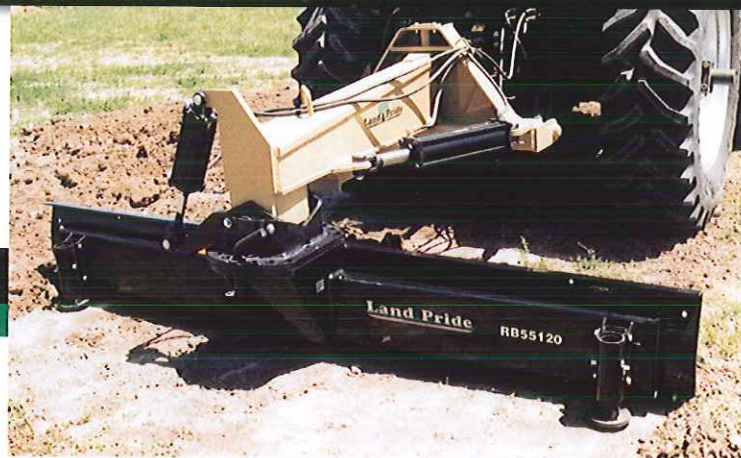

Shown with optional skid shoes.



RB55120



RBT55 pivot weldment features a 1" plate steel turntable, 1/2" thick tilt pivot bushing and a 4" solid kingpin.



The massive RB55 pivot housing features 1" thick material and a 4" solid steel kingpin for superior performance under high torque loads.



Shown with optional end plates.

☀ **RBT55 SERIES**

90 - 180 HP — 96" 108" 120"

- Angle up to 45°
- Tilt up to 30°
- Offset up to 33" left or right
- Optional skid shoes and side plates
- Optional hardened wear edges for ditching
- Optional double selector valve for tractors with less than three sets of hydraulic ports



Optional single or dual gauge wheels add accuracy and simplify grading operations.

Make changes  
**On The Go**  
with our 3-Way  
Hydraulic Rear  
Blades



## Rear Blade Specifications

Model Number	RB0548	RB0560	RB1560	RB1572	RB1584	RB2572	RB2584	RB2596	RB3572	RB3584	RB3596
Blade Width (cm)	48" (122)	60" (152)	60" (152)	72" (183)	84" (213)	72" (183)	84" (213)	96" (244)	72" (183)	84" (213)	96" (244)
Approx. Weight - lb (kg)	135 (61)	145 (66)	240 (109)	267 (121)	280 (127)	376 (171)	402 (183)	422 (192)	461 (209)	497 (226)	534 (243)
Max. Engine HP	25		40		60		80		80		
Hitch Type	Cat. 0 w/ Cat. I Pins		Cat. I		Cat. I		Cat. I, II		Cat. I, II		
Angling	5 Fwd. / 5 Rev. Up to 30° Right or Left		5 Fwd. Up to 30° 7 Rev. Up to 45°		9 Fwd. Up to 45° 5 Rev. Up to 60°		9 Fwd. Up to 45° 5 Rev. Up to 30°		9 Fwd. Up to 45° 5 Rev. Up to 30°		
Tilt	N/A		(RBT15) 5 Positions Up to 30° Left or Right		N/A		5 Positions Up to 30° Right or Left		5 Positions Up to 30° Right or Left		
Offset (cm)	10" Left or Right		12" (30.5) Left or Right		N/A		12" left or right		12" left or right		
Moldboard Height (mm)	13 1/2" (343)		14" (356)		17 1/2" (444)		17 1/2" (444)		17 1/2" (444)		
Moldboard Thickness (mm)	1/4" (6.35)		1/4" (6.35)		5/16" (7.93)		5/16" (7.93)		5/16" (7.93)		
Cutting Edge (mm)	3/8" x 3" (9.52 x 76.5)		1/2" x 6" (12.7 x 152.4)		1/2" x 6" (12.7 x 152.4)		1/2" x 6" (12.7 x 152.4)		1/2" x 6" (12.7 x 152.4)		
	Heat Treated		Reversible & Double Bevel		Reversible & Double Bevel		Reversible & Double Bevel		Reversible & Double Bevel		
	Single Bevel		Heat Treated		Heat Treated		Heat Treated		Heat Treated		
Options	N/A		Skid Shoes Storage Stand		Side Plates, Skid Shoes Gauge Wheel, Storage Stand		Side Plates, Skid Shoes, Gauge Wheel, Hydraulic Offset Cylinder		Side Plates, Skid Shoes, Gauge Wheel, Hydraulic Offset Cylinder		

Model Number	RBT4084	RBT4096	RBT40108	RB4596	RB45108	RBT4596	RBT45108
Blade Width (cm)	84" (213)	96" (244)	108" (274)	96" (244)	108" (274)	96" (244)	108" (274)
Approx. Weight - lb (kg)	889 (400)	904 (406)	924 (415)	1075 (489)	1099 (499)	1200 (540)	1230 (554)
Max. Engine HP	100 HP - 2 Wheel Drive			110		125	
Maximum G.V.W. - lb (kg)	9500 (4318)			9500 (4318)		15,000 (6818)	
Hitch Type	Cat. I or II Quick-Hitch			Cat. II Quick-Hitch		Cat. II & III Quick-Hitch	
Blade Angle	15 Positions (Manual): Forward and Reverse, Up to 45°			7 Fwd. Up to 45° 7 Rev. Up to 45°		15 Positions (Manual): 15°, 30° & 45°	
Angle Cylinder	3-1/2" x 16" x 1-1/4"			N/A		4" x 16"	
Tilt	Up to 15°			Up to 20° Left or Right		Up to 15°	
Tilt Cylinder	3" x 6" x 1-1/4"			3-1/2" x 8" x 1-1/4"		3" x 6" x 1-1/4"	
Swing Offset	Up to 30° Left and Right			Up to 23-1/2" Left and Right		Up to 35" Left and Right	
Offset Cylinder	3-1/2" x 16" x 1-1/4"			4" x 16" x 2"		4" x 16"	
Moldboard Height (mm)	17" (43.2)			19" (48.26)		19" (48.26)	
Moldboard Thickness (mm)	5/16" Reinforced (7.93), 1/4" (6.35) tapered reinforcement channel			1/4" Reinforced (6.35)		5/16" with 1/4" Boxed Reinforcement	
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4) Reversible, Heat Treated			1/2" x 6" (12.5 x 152.4), Reversible & Double Bevel, Heat Treated		1/2" x 6" (12.5 x 152.4) Heat Treated	
Options	Skid Shoes, Side Plates Hydraulic Cushion Valve Double Selector Valve			Skid Shoes		Skid Shoes, End Plates, Hardened Wear Plates, Single or Dual Gauge Wheel Cushion Valve, Double Selector Valve	

Model Number	RB55108	RB55120	RBT5596	RBT55120	RBT55120
Blade Width (cm)	108" (274)	120" (304)	96" (244)	108" (274)	120" (304)
Approx. Weight - lb (kg)	1425 (647)	1475 (670)	1515 (687)	1565 (710)	1600 (725)
Max. Engine HP	180		180		180
Maximum G.V.W. -lb (kg)	15,000 (6818)		15,000 (6818)		15,000 (6818)
Hitch Type	Cat. II & III Quick-Hitch		Cat. II & III Quick-Hitch		15 Positions (Manual): Forward & Rev. Up to 45°
Blade Angle	7 Fwd. Up to 45°, 7 Rev. Up to 45°		Up to 30°		Up to 30°
Tilt	Up to 20° Left or Right		3-1/2" x 8" x 1-1/4"		33"
Tilt Cylinder	3-1/2" x 8" x 1-1/4"		4-1/2" x 16" x 2"		19" (48.26)
Swing Offset	26"		4-1/2" x 16" x 2"		19" (48.26)
Offset Cylinder	4" x 16" x 2"		5/16" Reinforced (7.93)		5/16" Reinforced (7.93)
Moldboard Height (mm)	19" (48.26)		1/2" x 6" (12.5 x 152.4)		1/2" x 6" (12.5 x 152.4)
Moldboard Thickness (mm)	5/16" Reinforced (7.93)		Reversible & Double Bevel, Heat Treated		Reversible & Double Bevel, Heat Treated
Cutting Edge (mm)	1/2" x 6" (12.5 x 152.4)		Skid Shoes, End Plates, Hardened Wear Plates		Skid Shoes, End Plates, Hardened Wear Plates
Options	Reversible & Double Bevel, Heat Treated Skid Shoes, End Plates		Hydraulic Single Gauge Wheel, Hydraulic Dual Gauge Wheel, Double Selector Valve		

Maximum HP Rating based on 2WD specifications.

Models shown may or may not include options.  
Design and specifications subject to change.



# ☀ **The essential tool for landscapers.**

## ☀ **LR & LRP05 SERIES**

15 - 20 HP — 48" 60" 72"

As America's premier supplier of Landscape Rakes, Land Pride offers light-duty through construction-grade models. Designed for raking rocks, dirt and sand, our rakes are the landscaper's perfect tool to clean and prepare a site for seeding as well as general maintenance around farms, parks and beaches.




LRP0548

## ☀ **LR & LRP15 SERIES**

20 - 35 HP — 60", 72", 84", 96" - 3 point  
— 60" & 72" Pull Type

- Cat. 1 hitch or Pull Type
- Angle 5 forward positions
- Angle 7 reverse positions
- High carbon spring steel allows teeth to keep their shape
- Individually replaceable teeth reduces downtime
- Frame can be used with Rear Blade moldboard
- Optional dual gauge wheels for depth control
- Optional flip-down grader blade with endplates turns rake into box scraper functions
- Gauge wheels standard on Pull Type



The LR15 features a 3-1/2" pivot tube providing strength to support weight and drag on the rake element.



LR1572



LR0572

- Cat. 0 with Cat. 1 Pins or Pull Type
- 5 Forward Angles
- 12" Rake Height
- High carbon spring steel teeth
- Optional single gauge wheel on 3 point
- Gauge wheels standard on Pull Type

## **Which Rake is right for you?**


MAXIMUM HORSEPOWER

**05**  
SERIES  
20 HP

**15**  
SERIES  
35 HP

**25**  
SERIES  
50 HP

**35**  
SERIES  
65 HP

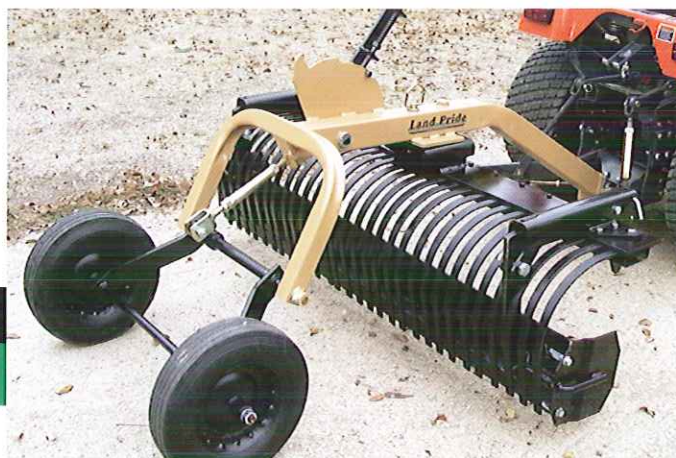

LRP1560



## LR25 SERIES

25 - 50 HP — 72" 84" 96"

- Cat. 1 hitch
- 7 Forward angles, 5 reverse angles
- 16 1/2" Rake height allows for moving lots of material
- High carbon spring steel keeps teeth bouncing back
- Individually replaceable teeth makes replacement easy & quick
- Optional single or dual gauge wheels for depth control
- Rear Blade adaptable



You can change the rake angle on-the-go hydraulically ... optional with the 25 Series.

**Quick Hitch**  
SYSTEM



LR3584




Optional gauge wheels provide better depth control.

## LR35 SERIES

30 - 65 HP — 84" 96"

- Cat. 1 & 2 hitch
- Frame offsets 45 degrees
- 9 forward angles and 5 reverse angles
- 5 Tilt positions
- 16 1/2" Rake height
- High carbon spring steel teeth
- Individually replaceable teeth
- Offset manually or hydraulically 45 degrees left or right
- Retractable Parking Stand keeps the frame off the ground and makes hook-up easier
- Rear Blade adaptable
- Optional single or dual gauge wheels
- Optional flip-down grader blade

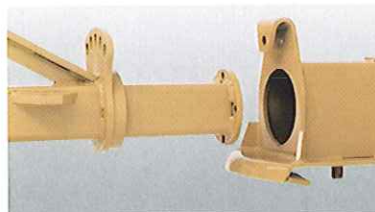

The 35 Series frame features a beefy turntable housing to handle heavy loads.



## SF25 SERIES

25 - 50 HP — 66" 77"

- Cat. 1 hitch
- Four ripping depths
- Heat treated steel shanks
- Replaceable shank tips
- Rear hitch with floating top link for second implement



All Land Pride Scarifiers feature a 5/16" wall thickness on the shank tube for high tensile strength, and a 5/16" x 1" full length reinforcement bar.



The Land Pride Scarifier can work in unison with our 3-point 15 and 25 Series Landscape Rakes and Rear Blades.

## Scarifier Specifications

Model/Number	SF2566	SF2577
Width (cm)	66" (168)	77" (196)
Working Width (cm)	60" (152)	72" (183)
Approximate Weight - lbs. (kg)	222 lbs.(100)	265 lbs.(120)
Horsepower Rating - engine	Up to 50 (25)	
Hitch Type	Cat. I	
No. of Shanks	6	7
Shank Type (mm)	3/4" x 2 1/2" (19 x 63.5) Heat Treated, Spring Steel Dimpled-On Tips	

Maximum HP Rating based on 2WD specifications.

## Landscape Rake Specifications

Model/Series	LR0548	LR0560	LR0572	LR1560	LR1572	LR1584	LR1596	LR2572	LR2584	LR2596	LR3584	LR3596
	LRP0548	LRP0560	LRP0572	LRP1560	LRP1572							
Rake Width (cm)	48" (122)	60" (152)	72" (183)	60" (152)	72" (183)	84" (213)	96" (244)	72" (183)	84" (213)	96" (244)	84" (213)	96" (244)
Maximum HP Rating	25 HP			35 HP				50 HP			65 HP	
Hitch Type	Cat. 0 w/Cat. I Pins or Pull Type			Cat. 1 or Pull Type			Cat. I	Cat. I			Cat. I, II	
Angle/Position	5 Forward Up to 30°			5 Forward Up to 30°, 7 Rev. up to 45°				7 Forward Up to 45°, 5 Rev. up to 45°			9 Forward Up to 60°, 5 Rev. up to 60°	
Offset (cm)	N/A			N/A				N/A			45° Swing 24" (61) Offset Manual or Hydraulic	
No. of Teeth	26	34	40	30	36	42	48	36	42	48	42	48
Teeth Spacing (mm)	1 3/4" (44.45) Centers			2" (50.8) Centers				2" (50.8) Centers			2" (50.8) Centers	
Teeth Material	High Carbon Spring Steel			High Carbon Spring Steel				High Carbon Spring Steel			High Carbon Spring Steel	
Tooth Size (cm)	1/4" x 3/4" (0.64 x 1.91)			5/16" x 1" (0.79 x 2.54)				5/16" x 1" (0.79 x 2.54)			5/16" x 1" (0.79 x 2.54)	
Rake Height (cm)	12" (30.48)			16 1/2" (41.91)				16 1/2" (41.91)			16 1/2" (41.91)	
Appx. Wt.-3 Pt. lb (kg)	101 (46)	113 (51)	125 (57)	245 (111)	275 (125)	305 (138)	325 (147)	322 (146)	343 (155)	362 (164)	441 (200)	476 (216)
Appx. Wt.-Pull Type lb (kg)	170 (77)	182 (83)	194 (88)	280 (127)	310 (141)							
Options	Single Gauge Wheel 8" x 1.75"			Dual Gauge Wheels 13" x 4" x 6" and 13" x 6.5" x 6" *Flip-Down Grader Blade				Single Gauge Wheel 8" x 4" x 4.8" Dual Gauge Wheels 13" x 4" x 6" and 13" x 6.5" x 6", *Flip-Down Grader Blade Hydraulic Angle Cylinder			Single Gauge Wheel 8" x 4" x 4.8" Dual Gauge Wheels 13" x 4" x 6" and 13" x 6.5" x 6" *Flip-Down Grader Blade	
LRP Gauge Wheels	Standard 2 3/4" x 8 1/4"			Standard 4" x 16"								
LRP Option	Flip-Down Grader Blade			Flip-Down Grader Blade								

\*Flip-down grader blade must be used in conjunction with dual gauge wheels. Maximum HP Rating based on 2WD specifications.

Models shown may or may not include options.  
Design and specifications subject to change.



## BB15 SERIES

17 - 25 HP — 42" 48" 54" 60" 72"

Land Pride offers a variety of Box Scrapers for all your leveling and grading needs. Our Fixed Bar models are great for leveling, finish grading and backfilling at building sites, feedlots and outdoor arenas. **Featuring two cutting edges and a curved moldboard design, landscapers and general contractors find our Rollover models just right for multiple job-site projects.** Our Manual or Hydraulic Retractable Box Scrapers are ideal for construction sites, from home building to road maintenance and are available with high or low backs.

- Cat. 1 hitch
- Two welded braces to rear of bucket
- 17" High Roll-formed moldboard
- 3/16" Moldboard thickness
- Heavy 4" x 4" front beam with shank hole reinforcement
- 4 Position Heat treated spring steel shanks
- Heat treated dimpled-on tips
- Replaceable and reversible cutting edges
- 3/8" Side panels
- Optional hinged backfill/leveling blade on 60" and 72"



All Land Pride Fixed Bar Box Scrapers feature a 5/16" wall thickness on the shank tube for high tensile strength, and a 5/16" x 1" full length reinforcement bar.

## Which Box Scraper is right for you?

MAXIMUM HORSEPOWER

Fixed		Rollover	Retractable
<b>15</b>	<b>25</b>	<b>25</b>	<b>35</b>
SERIES	SERIES	SERIES	SERIES
17-25 HP	25-40 HP	30-60 HP	65 HP

## BB25 SERIES

25 - 40 HP — 60" 66" 72" 84" 96"



- Cat. 1 hitch
- 4" x 4" Tubing main frame
- Roll-formed moldboard-17" high keeps material flowing with less drag
- 4 Position heat treated spring steel shanks
- Heat treated dimpled-on tips are replaceable
- Clevis type lower hitches make tractor hook-up easier
- Heat treated, reversible and replaceable cutting edges
- 3/8" Side panels
- Optional hinged backfill blade



## ☀ The Rollover Boxscraper is just right for multiple job-site projects.

### ☀ **RO25 SERIES**

30 - 60 HP — 60" 72" 84"

- Cat. 1 hitch
- Clevis type hitch for easy tractor hook-up
- Hardened bushings in lower lugs
- High back roll-formed moldboard- 19" high
- Heat treated spring steel shanks
- Heat treated dimpled-on tips are replaceable
- Heat treated, reversible and replaceable cutting edges
- Hydraulic rollover kit available



A single lever lowers the moldboard for grading and leveling, reverses it for backfilling, or lowers the scarifier shanks for ripping.

RO2572

**QUICK HITCH**  
SYSTEM

## ☀ Choose from Manual or Hydraulic Retractable Box Scrapers.



HRL3572

Our 35 Series models feature a heavy-duty pivot tube, rolled moldboard, heavy wall shank tube and hinged tail gate for leveling.

### ☀ **HR & HRL35 SERIES**

40 - 65 HP — 66" 72" 78" 84"

- Cat. 1 & 2 hitch
- Manual or hydraulic shank tube
- Available in high or low back
- Knurled bushings in upper and lower hitch
- Roll-formed moldboard- 24" high back, 19" low back
- 3 Position heat treated spring steel shanks
- Heat treated dimpled-on tips are replaceable
- Heat treated, reversible and replaceable cutting edges
- Rear back fill blade: fixed or floating
- 1/2" Thick end panels
- Transport lock on shank tube

### ☀ **MR & MRL35 SERIES**

40 - 65 HP — 66" 72" 78" 84"

The Manually Retractable Box Scraper carries all of the high productivity capabilities of the hydraulic model, with a manual scarifier control.





## Box Scraper Specifications

### Fixed Bar

Model/Series	BB1542	BB1548	BB1554	BB1560	BB1572	BB2560	BB2566	BB2572	BB2584	BB2596
Hitch			Cat. 1					Cat. 1		
Working Width (cm)	42" (107)	48" (122)	54" (137)	60" (152)	72" (183)	60" (152)	66" (167)	72" (182)	84" (213)	96" (244)
Height of Moldboard (cm)			17" (43)					17" (43)		
Side panel material (cm)			3/8" (.95)					3/8" (.95)		
Depth of Bucket (cm)			22" (55)					22" (55)		
Overall Depth (cm)			31-1/2" (80)					31 1/2" (80)		
Overall Height (cm)			35" (88)					35" (88)		
Weight LB (kg)	277 (125)	303 (137)	330(150)	366 (164)	425 (193)	384 (174)	423 (193)	478 (217)	513 (233)	573 (260)
Number of Shanks	3	4	4	4	6	5	5	7	7	8
Maximum H.P. Rating (kw)			25 (18)					40 (29)		
A-Frame Material (mm)			1/2" x 2-1/2" Flat Bar (12.70 x 63.50)					1/2" Plate (12.7)		
Lower Hitch			Bolted Pin					Double Strap		

### Rollover

Model/Series	R02560	R02572	R02584
Hitch Type		Cat. 1	
Working Width (cm)	60" (152)	72" (182)	84" (213)
Height of Moldboard (cm)		19" (48)	
Depth of Bucket (cm)		17" (43)	
Overall Depth - Max (cm)		42" (106)	
Weight LB (kg)	588 (267)	654 (297)	706 (321)
Number of Shanks	5	7	7
Maximum H.P. Rating (kw)		60 (44)	
No. of Cutting Edges		2	

### Retractable - Lowback

Model/Series	3566	3572	3578
Hitch Type		Cat. 1 & 2	
Working Width (cm)	66" (167)	72" (183)	78" (198)
Height of Moldboard (cm)		19" (48)	
Depth of Side Panels (cm)		30" (76)	
Side plate material (cm)		1/2" (1.27)	
Overall Depth (cm)		41" (104)	
Capacity Cu. Ft.* (cd)	20 (0.65)	23 (0.65)	26 (0.74)
Weight LB (kg)	837 (380)	885 (402)	941 (428)
Number of Shanks	6	8	8
Maximum H.P. Rating (kw)		65 (48)	

\*Capacity calculation on material being even with side panels and moldboard. Additional capacity possible if build-up of material above the bucket is added in.

### Retractable - Highback

Model/Series	3572	3578	3584
Hitch Type		Cat. 1 & 2	
Working Width (cm)	72" (182)	78" (198)	84" (213)
Height of Moldboard (cm)		24" (61)	
Depth of Side Panels (cm)		30" (76)	
Side plate material (cm)		1/2" (1.27)	
Overall Depth (cm)		41" (104)	
Capacity Cu. Ft.* (cd)	27 (0.76)	29 (0.82)	31 (0.88)
Weight LB (kg)	970 (441)	1010 (459)	1065 (484)
Number of Shanks	8	8	8
Maximum H.P. Rating (kw)		65 (48)	

Maximum HP Rating based on 2WD specifications.



Ripping shanks with replaceable tips are heat treated spring steel, with four depth settings for the flexibility and long wear operators need.



Models shown may or may not include options. Design and specifications subject to change.



# ☀ The perfect tool for seedbed preparation.

## ☀ SP20 SERIES

25 - 35 HP — 60" 72"

Landscapers, nurseries and general contractors find our 20 and 30 Series Pulverizers ideal for leveling and seedbed preparation.

Land Pride Soil Pulverizers aggressively rip into crusted soils with reversible scarifier shanks. The full width pulverizing roller features 3/8" x 1 1/4" heat treated steel spikes with replaceable wear sleeves. The down pressure spring keeps the roller in constant contact with the soil and the leveling H-beam redistributes freshly loosened soil for an even seedbed.

- Cat. 1 hitch
- Single steel spiked roller with replaceable heat treated sleeves
- Heavy wall round tubing on roller
- Self-aligning cast 1" bearings with double lip seals
- 10" Frame beam
- 1" Diameter shaft in roller



SP2072



3/8" Steel spikes are welded to the roller's surface and feature replaceable wear sleeves.

Two types of shanks to choose from.



### Which Pulverizer is right for you?


MAXIMUM HORSEPOWER

**20**  
Series  
35 HP

**30**  
Series  
50 HP



10 1/2" x 1/2" x 1/2" heat treated shanks for less aggressive ripping, and less side torque during turns.



10 1/2" x 2" x 1/2" Scarifier shanks aggressively rip crusted soils.



## SP30 SERIES

30 - 50 HP — 72" 84"

The 30 Series Pulverizer is available with single or double spiked rollers to break up tough soil conditions. The second roller can also be easily added later with no wasted parts.

- Cat. 1 hitch
- Formed plate A-frame
- Heavy-duty clevis type lower hitch
- Single or double steel spiked roller
- Replaceable heat treated sleeves
- 3/8" steel spikes
- Self-aligning cast 1" bearings with double lip seals
- 12" H-beam frame
- 1" Diameter shaft in roller



SP3072

## Soil Pulverizer Specifications



Model/Series	20 Series		30 Series	
Hitch	Cat. 1		Cat. 1	
H-Beam (mm)	10" (254)		12" (304.8)	
A-Frame (mm)	1 1/2" x 2 1/2" Flat Bar (12.7 x 63.5)		3/8" Plate (9.5)	
Working Width (cm)	60" (152)	72" (182)	72" (182)	84" (213)
Weight - with single roller lb. (kg)	491 (223)	561 (255)	671 (305)	721 (328)
Max. Engine HP	35 HP		50 HP	
Front to Back Length - single roller (cm)	24" (60.9)		27 1/4" (69.2)	
Front to Back Length - double roller (cm)	32" (81.3)		35 1/4" (89.5)	
Height (cm)	36 1/2" (92.7)		36 1/2" (92.7)	
No. of Scarifier Shanks	21	25	25	29
Size of Scarifier Shanks	10 1/2" x 2" x 1/2" Reversible or, 10 1/2" x 1/2" x 1/2" Reversible		10 1/2" x 2" x 1/2" Reversible or, 10 1/2" x 1/2" x 1/2" Reversible	
Shank Spacing (mm)	2 13/16" (71.44)		2 13/16" (71.44)	
No. of Spikes - single roller	86	103	103	116
No. of Spikes - double roller	N/A	N/A	206	232
Spiked Roller Tube Diameter (mm)	5 9/16" O.D. (141.2)		6 5/8" O.D. (168.2) (opt. 2nd roller 5 9/16" (141.2))	
Spike Material (mm)	3/8" x 1-1/4" (9.5 x 28.5) Steel, replaceable heat treated sleeves			
Springs - Front Roller (kg/cm)	32 lbs./inch (14.5/2.54)		32 lbs./inch (14.5/2.54)	
Springs - Rear Roller (kg/cm)	N/A		15 lbs/inch (6.8/2.54)	


Maximum HP Rating based on 2WD specifications.

Models shown may or may not include options.  
Design and specifications subject to change.



☀ **Small farms and food plots ...  
just right for a Land Pride Disc.**

**Quick Hitch**  
SYSTEM

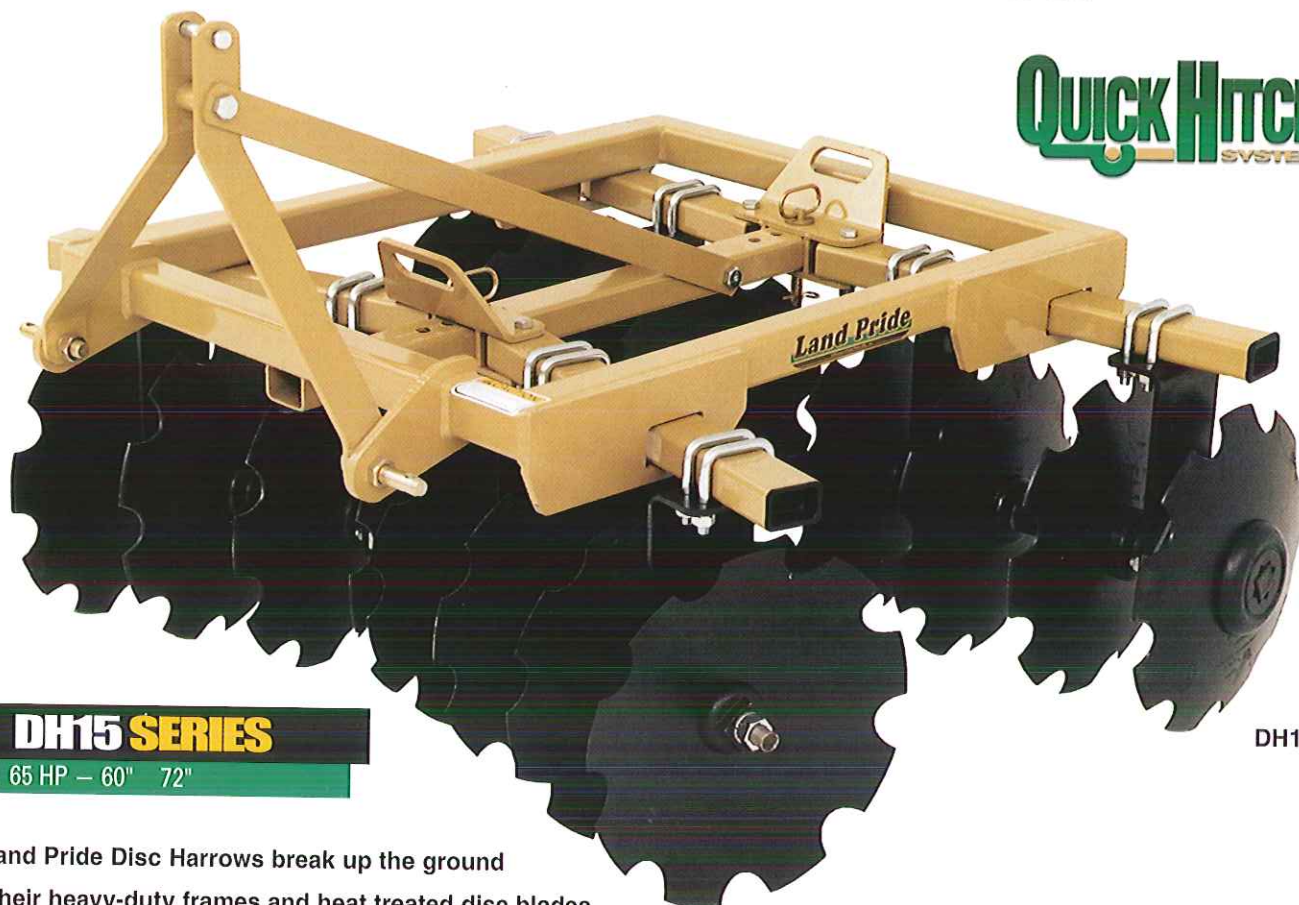

☀ **DH15 SERIES**

65 HP — 60" 72"

DH1572

Land Pride Disc Harrows break up the ground with their heavy-duty frames and heat treated disc blades, making them ideal for landscapers and small acreage farmers.

Our 15 Series Disc Harrow offers smooth disc blades for light tilling or choose the notched disc blades for more aggressive digging and cutting action. Cutting aggressiveness can be obtained by angling the disc gangs, and can be adjusted on the front and rear with the help of an adjustment handle. The 1/2" frame sideplates offer additional strength and reinforcement to the 3" x 2" gang tube. The 25 Series offers the heavier duty harrow with 20" or 22" notched blades. Just right for the smaller acreage areas, the 25 Series fits a variety of users. From produce farms to conservation plots and even roadside work, this harrow is built to give excellent results.

**Which Disc Harrow is right for you?**

**SUGGESTED HORSEPOWER**

**15  
SERIES**

65 HP 60", 72"

**25  
SERIES**

100 HP 60", 72", 96"

- Cat. 1 hitch
- 2-1/2" Square frame tube
- Adjustable gang angles; 4 front, 3 rear
- 3"x 2" Gang tube
- 1" Square, high carbon steel gang axles
- 1/2" Frame sideplates
- 7-1/2" Disc blade spacing
- 18" Notched or smooth disc blades
- Self aligning sealed bearings
- Optional 9" center sweep shank




## **DH25 SERIES**

100 HP — 60" 72" 96"

- Cat. 1 & 2 hitch
- 20" or 22" Notched blades
- 3" Square frame tube
- 7-1/2" Blade spacing
- Angle front and rear gangs up to 21 degrees
- Adjustment handle to aid in angling
- 1/2" Thick bearing hangers with two 5/8" U-bolts
- Self aligning, sealed ball bearings
- 1-1/8" Square, high carbon steel gang axle
- 4" x 3" Gang tube
- Optional disc scrapers are adjustable
- Optional 9" center sweep shank



DH2596

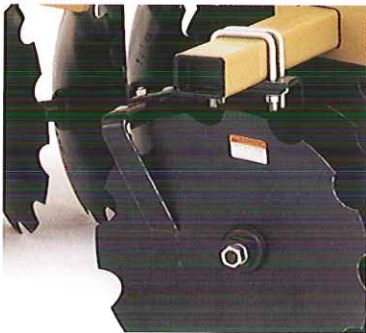

Heavy-duty 1/2" thick bearing hangers resist the high torque from two 5/8" U-bolts.

Disc scrapers are available to reduce build-up on discs.



DH2560

Just right to use between tree rows.

**QUICK HITCH**  
SYSTEM



DH2596



## **Disc Harrow Specifications**

Model Number	DH1560	DH1572	DH2560	DH2572	DH2596
Hitch	Cat. 1			Cat. 1 & 2	
Cutting Width*	60"	72"	60"	72"	96"
Weight (kg)	617 lbs.(280)	690 lbs.(313)	950 lbs.(431)	1300 lbs.(590)	1400 lbs.(635)
Disc Blade Size	18" Diameter - notched or smooth			20" or 22" Diameter	
No. of Disc Blades	16	20	16	20	24
Disc Blade Spacing			7-1/2"		
Disc Scrapers			Optional, Adjustable		
Bearing Hanger	3/8" Plate, 2 each 5/8" U-bolts			1/2" Plate, 2 each 5/8" U-bolts	
Bearing Type - 2 per gang	Self aligning, sealed bearings			Self aligning, sealed ball bearings	
Angling	Front gang: 0, 7, 14, 21 degrees w/angling adjustment handle Rear gang: 7, 14, 21 degrees w/angling adjustment handle				
Frame Tubes	2-1/2" Square			3" Square	
Gang Tubes	3" x 2"			4" x 3"	
Gang Axle	1" Square, high carbon steel			1-1/8" Square, high carbon steel	
Weight per Disc	38 lbs.	34 lbs.	58 lbs.	59 lbs.	66 lbs.
Center Sweep Option	9" Sweep			9" Sweep	



\* Wider cutting may be obtained by adjusting complete gang on gang tube. Adjusting too wide can leave strip in center of unit. Center sweep can help alleviate this.

**DH2596**

## **Core Aerator Specifications**

Model Number	CA2548	CA2560	CA2572
Hitch		Cat. 1	
Working Width	48"	60"	72"
Overall Width	52"	67"	78"
Weight (kg) (w/o added weight)	385 lbs. (175)	455 lbs. (206)	485 lbs. (220)
Height		36-1/2"	
Length (front to back)		26"	
Number of Spoons	64	96	96
Spoons		Replaceable 3/4" closed, case hardened	
Spoon Spacing In Forward Travel		7"	
Gang Spacing	6-1/2"	5-1/2"	6-1/2"
Number of Gangs	8	12	12
Water Tank Capacity			
Gallons per tank	N/A	29	36
Full Water Tank Weight (kg)	N/A	490 lbs. (222)	600 lbs. (272)

Models shown may or may not include options.  
Design and specifications subject to change.





## CA25 SERIES

Cat. 1 — 48" 60" 72"


Land Pride's Core Aerator is built just right for the weekend landscaper, or the fully professional landscape contractor to help reduce compaction in heavy soil conditions. Once cores are pulled, nutrients and air are able to bring life and vitality back to hard stressed turf areas. An annual aeration program is an important part of many landscapers' services, and will play a vital role in keeping premium turf areas maintained to high quality standards.

Available in 4', 5' and 6' units, these Aerators feature case hardened 3/4" spoons to penetrate the ground to a depth of 4-1/2", depending on soil conditions and additional weight needed. A core is pulled every 7" of forward travel from each of the spoon gangs. Each gang is mounted independently, which minimizes torque on the spoons during slight turns.

- Cat. 1 hitch
- Heavy-duty 2-1/2" x 2-1/2" x 3/16" tubular construction
- Expanded metal protection over spoon gangs
- Grease zerks on each spoon gang
- Each Gang is independent to reduce side load on spoons while turning
- Storage stand on each corner for stability



Optional Water Tanks are available on the 60" and 72" Core Aerators for additional weight to aid in spoon penetration. Water drains easily from the tanks through the bottom drain holes, reducing weight to the desired amount.

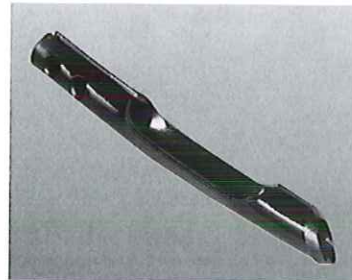

The 3/4" spoon is beveled to easily penetrate the ground and create a nice clean hole.

### Quick Hitch SYSTEM






☀ **Keep soil and seed where you put it.**

## ☀ CR25 SERIES

23 - 40 HP — 72"

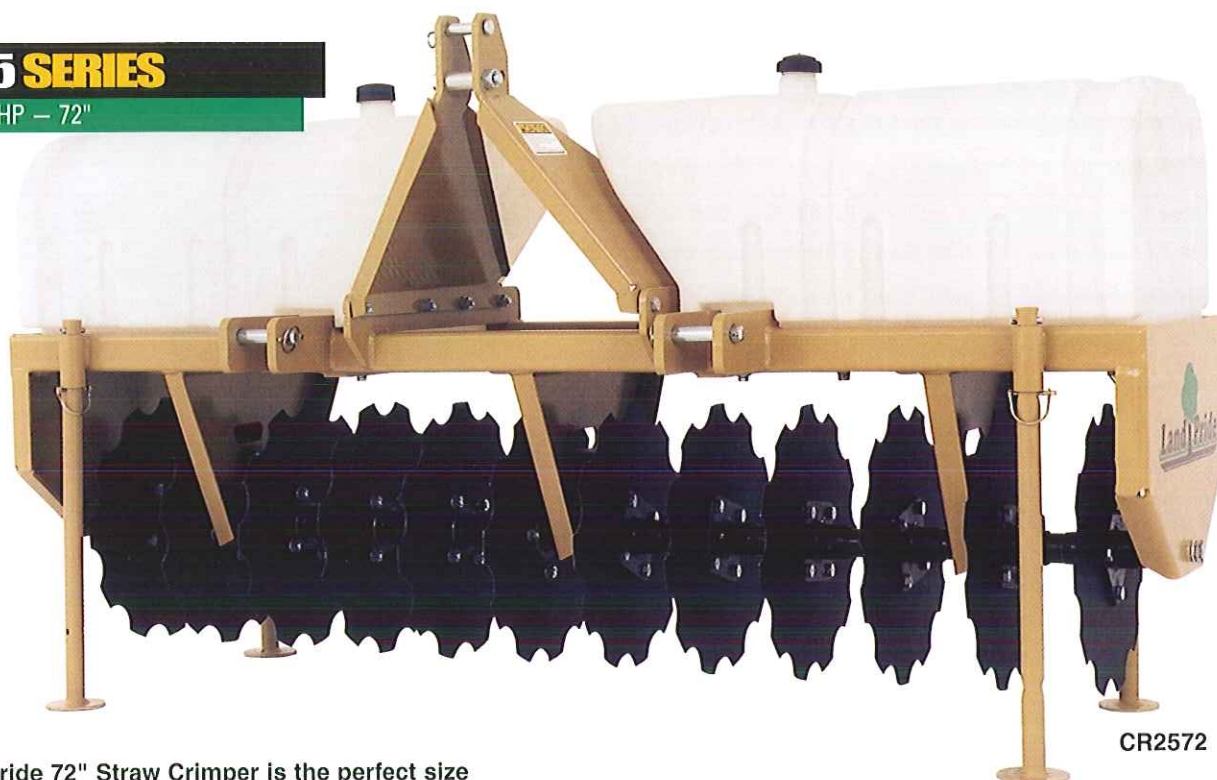

The Land Pride 72" Straw Crimper is the perfect size for landscape jobs or roadside work. Sized to cover most landscaping sized tractors, this Crimper can be used for jobs large or small. If heat, erosion or run-off is a problem, crimping straw into the ground needs to be the final step in grass seeding.

After distributing a layer of hay or straw over newly worked or seeded areas, the Land Pride Straw Crimper is then used to force straw into the ground in 6 1/2" rows. The hairpinned straw holds a tight grip on the soil and keeps erosion to a minimum during high winds and water run-off.

- Cat. 1 hitch
- 4 Bolt Cast Iron Hubs
- 6 1/2" Disc spacing
- Storage stands on each corner for stability and ease of hook-up
- Heat-treated, flat, notched discs
- Greasable disc hubs
- Heavy tubular 2 1/2" x 2 1/2" x 3/16" frame
- Optional water tanks for additional weight

## ☀ Straw Crimper Specifications

Model Number	CR2572
Hitch	Cat. 1
Working Width	69" (175.3 cm)
Overall Width	78" (198 cm)
Weight	475 lbs. (215 kg)
Height	36 1/2" (92.7 cm)
Length (front to back)	26" (66 cm)
Number of Discs	12
Disc Spacing	6 1/2" (16.5 cm)
Water Tank Capacity	
Gallons per tank	36 gal.
Full Water Tank Weight	600 lbs. (272 kg)

Models shown may or may not include options.  
Design and specifications subject to change.






## DT55 SERIES

70 - 200 HP — Powered Ditcher

The DT55 Powered Ditcher is a versatile tool to use in many water control applications. Cleaning water ditches along roadsides or in farm fields to drain standing water away from crops, the DT55 Ditcher makes it simple. The 20" impeller leaves a clean and sculptured trough to keep water flowing freely from unwanted areas. With the Material Control Chute in

place, dirt can be placed just next to the machine, or thrown many feet away to reshape terraces.

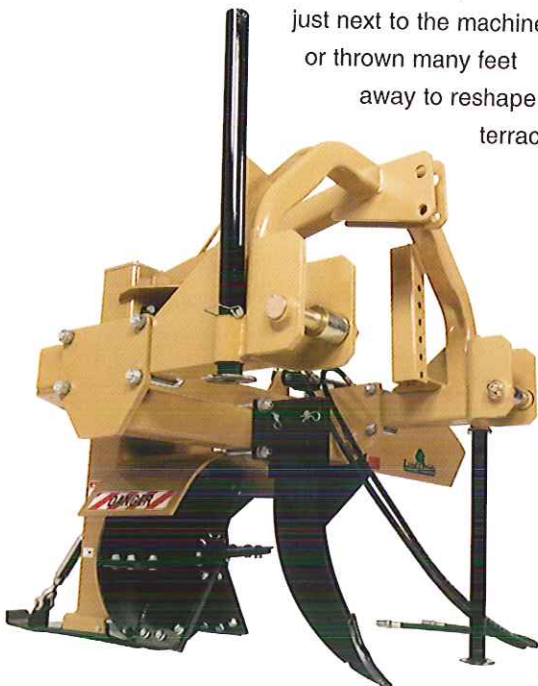

- Lubricated chain drive
- Dual parking stands for storage stability
- Optional rear skid shoe helps control depth
- Optional material chute puts dirt where you want it
- Optional ripper shank tears through hard packed soils moving smaller material into the impeller path
- Optional gauge wheel for depth control



## Powered Ditcher Specifications

### Model Number

Tractor PTO

Hitch\*

HP Range

Weight (kg)

Impeller

Impeller Blades

Chain

Input/Output Shafts

Driveline

Material Control Chute (Optional)

Depth Control Wheel (Optional)

Ripper Shank (Optional)

Skid Shoe (Optional)

### DT55

540 rpm

Cat. 2 & 3, QH adaptable (\*Some early models not QH adaptable)

70 - 200 HP

900 lbs. (408) (without options)

20" Impeller

6 ea, 3/8" Thick steel with replaceable hardened cutting edges

Double 80 chain with spring loaded idler

2-1/4" ID ball type bearings

Cat. 5 with shear-bolt

Manual or with 2" x 8" hydraulic cylinder and hoses

16.5 x 6.50-8 Pneumatic tire

Adjustable from cutting edge height to 10" below

3 Height adjustments

Cutting edge depth to 5" below

3/8" thick, replaceable

### DTM55

1000 rpm

Models shown may or may not include options.  
Design and specifications subject to change.



# The Land Pride Commitment



**Stability.** Since our inception in 1986, Land Pride, A Division of Great Plains Mfg., Inc., has been a leader in grounds maintenance equipment throughout North America. Land Pride is now a leading manufacturer of tractor mounted and skid steer mounted implements including Rotary Tillers, Grooming Mowers, Overseeders, Rotary Cutters, Rear Blades and Landscape Rakes in the United States.

**Reliability.** At Land Pride, we have earned the reputation of standing behind our products. We know how important it is for you to feel confident in purchasing products that are reliable, and to know that our support is available when assistance is needed.

**Pride.** We are proud to be a part of Central Kansas. Our employees come from rural areas and agricultural backgrounds; they know and understand the products they build for you. **Our commitment to our employees and to our customers shows through the quality products we provide.**

**Commitment.** The extra steps we take to deliver our products is another sign of our commitment to you. Packaging provides added protection and efficient shipping procedures to ensure lower freight costs.

**Service.** You can rely on Land Pride's service after the sale. With Genuine Replacement Parts and a national and international network of dealers located in every state, you are assured that parts and service are available when and where you need them.

**Safety.** Our products are all designed and manufactured in compliance with the latest industry and government standards.

**Support.** Up-to-date literature, easy to read Operator's and Parts Manuals, and our informative web site are all available to assist you in making your next Land Pride purchase!

**Great Plains Trucking.** Our in-house trucking company has over 55 trucks and delivers our products throughout the United States and Canada.

**Great Plains Acceptance Corporation.** Land Pride offers financing options through our wholly owned subsidiary.

**Growth.** With four plant locations, 25 product groups and several hundred models, Land Pride continues to expand and grow to meet the challenges of aggressive competition and a fast moving industry.

## Abilene, KS

All-Flex Mowers, Riding Mowers, Rotary Cutters, Rotary Tillers, Grooming Mowers, Disc Mowers, Post Hole Diggers, Flail Mowers, Backhoes and Broadcast Spreaders

## Kipp, KS

Rear Blades, Landscape Rakes, Box Scrapers, Scarifiers, Core Aerators, Disc Harrows, Quick-Hitches and Straw Crimper

## Lucas, KS

Multi-Spindle Rotary Cutters, Parallel Arm Rotary Cutters, Primary Seeders, Overseeders, Pulverizer Seeders, Soil Pulverizers, Powered Rakes, Ditchers and Tree Liminator

## Corporate Office Salina, KS










## Chetek, WI

All Terrain Vehicles



Need more  
information?

See our additional catalogs  
for other product details  
and specifications.



FAIRPLAIN TRACTOR SALES, INC.  
P. O. BOX 787, RT. 33 W 417  
RIPLEY, WV 25271  
PHONE: (304) 372-0375



A Division of Great Plains Mfg., Inc.  
1525 E. North St. • P.O. Box 5060  
Salina, Kansas 67401  
Visit our dealer locator at [landpride.com](http://landpride.com)

Printed in U.S.A  
BAC 24640/6/02





RCF 3672

Pg 12

RC6510

pg 32

# ROTARY CUTTERS







**Fast, clean, dependable  
mowing from Land Pride.**

# ROTARY CUTTERS

Rotary Cutters	Page
RCR12 Series – Single Spindle	3
RCR15 Series – Single Spindle	4
RCR18 Series – Single Spindle	5
RCD18 Series – Offset	6
RCF20 Series – Single Spindle	7
RCR26 Series – Single Spindle	10
RCF27 Series – Single Spindle	11
RCR25 Series – Dual Spindle	9
RCR35 Series – Dual Spindle	12
RCF36 Series – Single Spindle	13
RCP26 Series – Parallel Arm Hydraulic	14
RCP30 Series – Parallel Arm Hydraulic	15
SC26 Series – Skid Steer	8
RC25 Series – 12' Folding	16
RC36 Series – 15' Folding	18
RC40 Series – 15' Folding	20
RC55 Series – 15' Folding	22
RC55 Series – 10' Offset	32
RC50 Series – 20' Folding	21
RC50 Series – 14' Offset	33
RC56 Series – 15' Folding	24
RC56 Series – 10' Offset	32
RCC56 Series – 15' Folding	26
RC66 Series – 15' Folding	28
RC66 Series – 10' Offset	32
RC65 Series – 15' Folding	30
RC65 Series – 10' Offset	32
RCB66 Series – 15' Folding	34
Testing Standards	35

Models may include options.  
Design and specifications subject to change without notice.

Land Pride's line of Single Spindle Rotary Cutters . . . dependable, durable, and versatile. For maintenance around the farm or in the city, Land Pride's expanding line of single spindle cutters can meet your every need.

Land Pride Rotary Cutters offer fast, clean, dependable mowing and have been extensively tested to ensure operating safety. Our cutters feature top quality steel, welding standards second to none, fist-tight quality control, and gearboxes we're so sure about, we offer a 5 year limited warranty.\*

We stand behind our products all the way. And when you need replacement parts, you can't find a better supplying company!

Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. Please understand how your cutter is to be equipped for you, as there are guarding options.

Many products are available in colors to match your tractor. See the legend next to the model throughout this catalog for color availability.



Land Pride Quick-Hitch Systems, available in a Cat. 1 and Cat. 2 Tractor 3-Point Hitch or Cat. 1 or 2 non-PTO Skid Steer Hitch, fit most Land Pride products and are a real time saver when working on multiple projects. Look for the Quick-Hitch System logo to denote applicable products.





**Ideal for clearing grass,  
weeds & light brush.**



**In the City or the Country**

Economically priced rotary cutter for daily use in small lots and countrysides, capable of cutting 1" diameter material.

## RCR12 Series

**48", 60", 72": 20-50 HP**  
RCR1248, RCR1260, RCR1272  
Cat. 1

Working Width (cm)	48" (122), 60" (152), 72" (183)
Overall Width (cm)	53" (134), 64" (162), 76" (193)
Overall Length (cm)	89" (226), 103" (261), 114" (289)
Machine Weight (kg)	400 (181), 478 (217), 564 (256)
Blade Tip Speed	13,256 fpm, 16,536 fpm, 15,033 fpm
Deck Material Thickness (mm)	12 Gauge (2.64)
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing
Cutting Height (mm)	1 1/4" - 10" (31.75 - 254)
Cutting Capacity (mm)	1" diameter (25.4)
Safety Guards	Front and Rear Rubber Guards
Skids (mm)	1/4" x 2" (6.35 x 51) Weld on
Deck Height (mm)	7 1/4" (184)
Blades (mm)	1/2" x 3" (12.7 x 76.2) Heat Treated Alloy Steel Free Swinging Blades
Stump Jumper	Round 10 Ga. x 24" Dia.
Driveline	ASAE Cat. 3
Driveline Safety Protection (mm)	Standard - 1/2" (12.7) Center Shear Bolt Protection Optional - Center Bolt 2 Plate Slip Clutch
Tailwheel	15" Laminated Tire w/Cast Iron Hub

\* See dealer for complete warranty information.

Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck to side skirt
- Dishpan with dual blades
- 360 Degree swiveling tailwheel
- Optional bolt on skid shoes for 60" & 72"




[www.landpride.com](http://www.landpride.com)



# SINGLE SPINDLE

**Efficient handling and dispersing of material.**

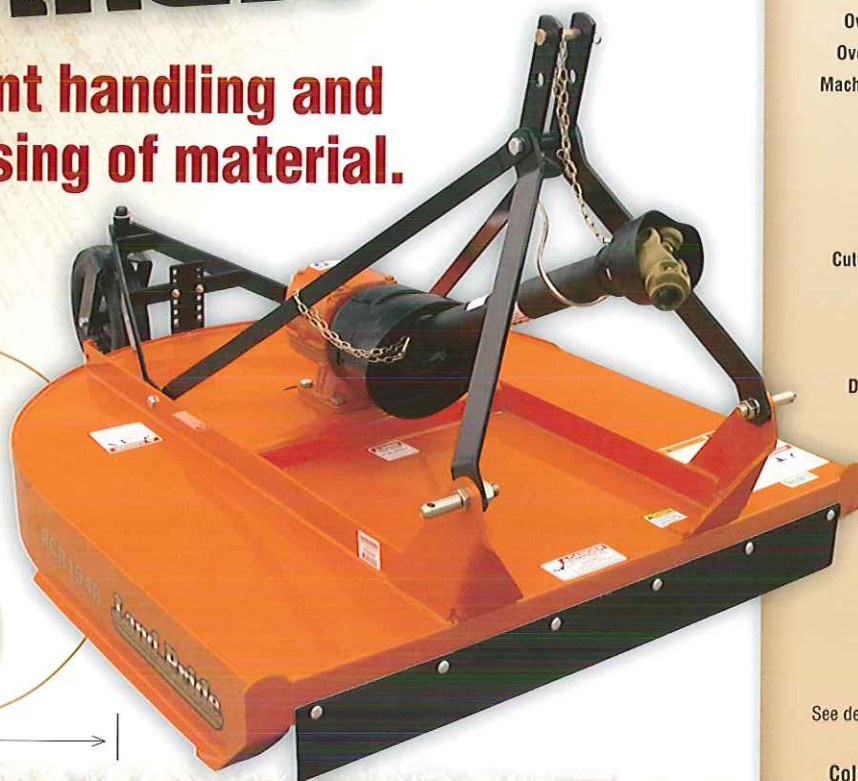

**2"  
CUTTING  
CAPACITY**

2"



## RCR15 Series

20-50 HP

RCR1542, RCR1548

Cat. 1

Working Width (cm)	42" (107), 45 1/2" (116)
Overall Width (cm)	47 1/2" (121), 50" (127)
Overall Length (cm)	86" (218), 90" (229)
Machine Weight* (kg)	402 (182), 424 (192)
Blade Tip Speed	11,459 fpm - 13,090 fpm
Deck Material Thickness (mm)	12 Gauge (2.64)
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing
Cutting Height (mm)	1 3/4" - 11 1/2" (44.45 - 292)
Cutting Capacity	2" diameter
*Safety Guards	Rubber Front and Rear
Skids (mm)	1/4" x 2" (6.35 x 51) Weld on
Deck Height (mm)	7 1/4" (184)
Blades (mm)	1/2" x 3" (12.7 x 76.2) Heat Treated Alloy Steel Free Swinging Blades
Dish Pan	Round 10 Ga. x 24" Dia.
Driveline	ASAE Cat. 3
Driveline Safety Protection (mm)	Standard - 1/2" (12.7) Center Shear Bolt Protection Optional - Center Bolt 2 Plate Slip Clutch
Tailwheel	4" x 16" Molded Rubber Tire

See dealer for complete warranty information.

Color Options:



- Floating 3-point permits deck to hug the terrain
- 2 Position top link for greater lifting leverage on small tractors
- Shearpin or slip-clutch driveline
- High blade tip speed
- Driveline storage hook
- Fully welded deck adds additional strength



[www.landpride.com](http://www.landpride.com)



**Ideal for cleaning around the farm, the pond or empty lots in the city.**



Heavy dishpan with 1" thick blade bar slides over stumps, rocks and debris.



## RCR18 Series

60", 72": 20-65 HP

84": 45-90 HP

RCR1860, RCR1872, RCR1884

Cat. 1

Working Width (cm)	57" (145), 69" (173), 84" (213)
Overall Width (cm)	62" (157), 74" (188), 89" (226)
Overall Length (cm)	96" (244), 108" (274), 135" (343)
Machine Weight* (kg)	609 (276), 749 (340), 851 (386)
Blade Tip Speed	16,363 fpm, 14,853 fpm, 17,113 fpm
Deck Material	10 Gauge (3.42)
Thickness (mm)	
Gearbox	540 RPM PTO Driven Gearbox Cast Iron Housing
Cutting Height (mm)	60: 1 1/2" - 13" (38.1 - 330) 72: 1 1/2" - 11 1/2" (38.1 - 292) 84: 2" - 11" (50 - 279)
Cutting Capacity	2" diameter
*Safety Guards	Rubber or chain, Rear metal band is standard
Skids (mm)	1/4" x 2" (6.35 x 51) Weld on
Deck Height (mm)	60: 7 1/2" (190), 72: 9" (228) 84: 9 1/8" (231)
Blades (mm)	1/2" x 3" (12.7 x 76.2) 1/2" x 4" on 84" (12.7 x 101) Heat Treated Alloy Steel Free Swinging Blades
Dish Pan	Round 10 Ga. x 24" Dia., Oval 10 Ga. on 84"
Driveline	ASAE Cat. 3 on 60 & 72 Cat. 4 on 84
Driveline Safety	Standard - 1/2" (12.7)
Protection (mm)	Center Shear Bolt Protection Optional - Center Bolt 2 Plate Slip Clutch
Tailwheel	4" x 8" x 15" Laminated Tire or Dual laminated optional on 84 Cast Iron Hub 4" x 16" Solid Rubber Tire (60 & 72)

See dealer for complete warranty information.

Color Options:



- Floating 3-point permits deck to hug the terrain
- Fully welded deck adds additional strength
- High blade tip speed ensures clean cut
- Single or dual tailwheel on 84"
- Heavy-duty tailwheel spindle
- Rubber or chain guards protect against flying debris
- All-welded formed channels front to rear add superior strength
- Lower clevises for easy hookup



# 18 SERIES ROTARY CUTTERS

84"



1 1/2"  
CUTTING  
CAPACITY

1 1/2"

The RCD1884 Rotary Cutter offers a smooth deck for easy cleaning, a shorter length than single spindle cutters to help you maneuver tight spaces, as well as being ideal in orchard type applications.

## RCD18 Series

84": 35-60 HP

RCD1884

Cat. 1 QH

Offset	10"
Deck	All Welded
Deck Height	11 5/8"
Deck Thickness	10 gauge
Cutting Capacity	1 1/2'
Cutting Height	2'-12"
Weight (kg)	839 lbs (381)
Gearbox	540 RPM, 60 HP Main, 45 HP Side Beveled Gears Cast Iron Housing
Driveline	Cat. 3 with 2-Plate Slip-Clutch
Blade Holder	Bar with Stump Jumper
Blades	2 ea. (1/2" x 4" Heat Treated) Free Swinging Alloy Steel Suction Blades
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Speed	11,693 fpm
Tailwheels	15" Laminated Tire or 4" x 16" Molded Rubber
Skids	Weld-on
Additional Skids	Bolt-on
Guarding	Front: Rubber or Chain Rear: Metal Band or Chain

Color Options:



- Deep deck design
- All welded deck
- Short coupled for tight spaces
- Clevis style hitches
- Offset to cover your tractor tire and get closer to obstructions



[www.landpride.com](http://www.landpride.com)



# 20 SERIES ROTARY CUTTERS

60" 72" 84"



## RCF20 Series

60", 72": 20-65 HP

Cat. 1 - Floating Top Link

84": 45-90 HP

Cat. 1 & 2 - Floating Top Link

RCF2060, RCF2072, RCF2084

Made in USA

Hitch 60" & 72": Cat. 1 - Floating Top Link

84": Cat. 1 & 2 - Floating Top Link

Clevis Type Lower Links,

Quick Hitch Adaptable

Deck All Welded

Deck Height 60" - 9 11/16"; 72" - 11";

84" - 11 15/16"

Deck Thickness 10 gauge

Cutting Capacity 2'

Cutting Height 1 1/2" - 12"

Gearbox Rating 60", 72": 65 HP; 84" 90 HP

Gearbox 540 RPM, Beveled Gears

Cast Iron Housing

Driveline 60", 72": Cat. 3; Shear Bolt

or 2-Plate Slip-Clutch

84": Cat. 4; 2-Plate Slip-Clutch

Blade Holder Bar with Stump Jumper

Blades 60", 72": 2 ea. (1/2" x 3' Heat Treated)

84": 2 ea. (1/2" x 4' Heat Treated)

Free Swinging High-Lift

Blade Bolt Keyed with Hardened Flat Washer  
& Lock Nut

Blade Speed 60": 16,363 fpm; 72": 14,955 fpm;  
84": 17,113 fpm

Tailwheels 60", 72": 4" x 15" Laminated Tire or  
4" x 16" Molded Rubber -  
360 Degree Swivel  
84": Single or Dual 4" x 15"  
Laminated Tire w/ Cast Iron Hub -  
360 Degree Swivel

Skids Weld-on

Rear Metal Banding Standard

Optional Guarding Front: Rubber or Chain  
Rear: Rubber or Chain

\* See dealer for complete warranty information.

Color Options:



[www.landpride.com](http://www.landpride.com)



# SKID STEER

## Expand the versatility of your skid steer or track loader.

The SC26 Skid Steer Cutter has an eye pleasing smooth top design for easy maintenance and clean running. Attachment is made quick and easy with the standard universal skid steer floating-hitch mounting plate. The float capability makes operation very user friendly over uneven ground.



2"  
CUTTING  
CAPACITY

2"

## SC26 Series

### SC2660, SC2672 Skid Steer Mounting Plate

Cutting Height	1.5' to 18" infinitely variable
Cutting Width	60", 72"
Overall Width	65-1/2", 78"
Overall Length	73", 91"
Cutting Capacity	2" Diameter
Blade Rotation	Clockwise
Blades & Blade Carrier	1/2" x 4" Updraft, Heavy Duty Round Pan Stump Jumper
Double Deck Design Construction	Lower Deck: 10 Gauge; Upper Deck: 14 Gauge
Side Skirt Construction	1/4" Steel
Front Deck Protection	Single Row Chain Guard, Standard Equipment
Rear Deck Protection	Double Row Chain Guard, Standard Equipment
Deck Lift Ht. Protection	Safety Chain Limiter
Deck Wear Protection - Optional	Four Corner Mounted Skid Shoes - Standard or Heavy
Operator Protection	Protective Door Shield
Gauge Wheel Option	Pivoting & Adjustable Front Mounted Gauge Wheel w/Laminated Tire
16 GPM Volume Drive Motor (60" Only)	For hyd. systems with 11-16 GPM flow at 1500-3000 PSI; 88 ft. lbs. torque at 2500 PSI
21 GPM Volume Drive Motor	For hyd. systems with 17-21 GPM flow at 1500-3000 PSI; 117 ft. lbs. torque at 2500 PSI
27 GPM Volume Drive Motor	For hyd. systems with 22-27 GPM flow at 1500-3000 PSI; 152 ft. lbs. at 2500 PSI
16 GPM Volume Motor Max Blade Tip Speed	60": 18,540 FPM
21 GPM Volume Motor Max Blade Tip Speed	60": 18,850 FPM 72": 17,200 FPM
27 GPM Volume Motor Max Blade Tip Speed	60": 19,000 FPM 72": 18,550 FPM

Note: Case drain required.  
See dealer for complete warranty information.

Color Options:

**2 YEAR**  
Limited Gearbox & Motor  
Warranty

- Optional front-mounted pivoting gauge wheel w/laminated tire
- 3 GPM volume motors to choose from
- Operator protection door available for skid steer units without doors
- Mounting plate can be centered or offset to right



# DUAL SPINDLE



## A perfect fit for any size farm.

The RCR25 Series is just perfect for those medium sized chores. Designed for performance in pastures, set aside acres, roadsides and routine farm maintenance.

**Pull-type** — The Pull-type model features two leveling rods that connect the rear axle to the front tongue. This enables the deck to stay level during uneven ground conditions. The height controlling axle cylinder is attached to two deck springs which help cushion the cutter in rough terrain.

**3-Point** — The 3-point unit utilizes two castoring laminated tailwheels for smooth, trouble-free performance. The easy to attach clevis hitch is designed to fit Cat. 1 or 2 tractors on the 96" model, and Cat. 2 or 3 tractors on the 10' model.



Narrow tongue on pull-type allows for tight turns.

Front and rear guarding is highly recommended in any application. Please be sure you understand how your Rotary Cutter is equipped upon purchase. All Land Pride Rotary Cutters are tested and pass rigorous voluntary testing requirements as specified by ANSI, ASAE and SAE.

### RCR25 Series

Pull-Type: 8': 40 - 110 HP, 10': 50 - 110 HP  
 3-Point: 8': 50 - 110 HP, 10': 60 - 110 HP  
 RCR2596, RCR2510  
 3-Point Hitch 8': Cat. 1 & 2  
 10': Cat. 2 & 3

Working Width (cm)	7'10", 9'10"
Overall Width (cm)	8'2", 10'3"
Overall Length (cm)	Lift - 8'11", Pull - 11'3" Lift - 9'2", Pull - 12'1"
Machine Weight (kg)	Lift-Type 8': 1,380 lbs. (625) 10': 1,750 (793) Pull-Type 8': 1,665 lbs. (755) 10': 2,035 (923)
Blade Tip Speed	8': 540 RPM: 14,592 fpm 10': 540 RPM: 17,749 fpm 1000 RPM: 18,035 fpm
Deck Material Thickness (mm)	10 Gauge (3.42)
Gearbox	540 rpm or 1000 rpm, Cast Iron Housing, Beveled Gears
Cutting Height (mm)	8': 2" - 12" (50-304) 10': 2" - 10 1/2" (50-266)
Cutting Capacity	1 1/2"
*Safety Guards (choose)	Front or Rear Chain / Front or Rear Rubber
Skids (mm)	Replaceable
Deck Height (mm)	9-5/8" (245)
Blades (mm)	1/2" x 4" (12.7 x 101.6) Heat Treated, Free-Swinging Suction Blades
Dish Pan	Round pan 3/16"
Driveline	Cat. 4, Equal Angle U-Joint on Pull-type 10': Cat. 4, Equal Angle U-Joint or Constant Velocity U-Joint on Pull-Type
Driveline Safety	540 rpm - 4 Plate Slip-Clutch
Protection (mm)	1000 rpm - 2 Plate Slip-Clutch
Tailwheel	Lift-Type: 2 each, 4" x 8" x 15 1/4" Laminated Pull-Type: 2 each, 6" x 9" x 21" Laminated or 24" Aircraft Tires

See dealer for complete warranty information.

Color Options:    



[www.landpride.com](http://www.landpride.com)



# SINGLE SPINDLE

3"  
CUTTING  
CAPACITY

## Roundback design allows for more efficient handling and dispersing of material.

Land Pride's 26 Series Rotary Cutters are the perfect fit for around the farm clean-up or keeping the horse pasture under control. The 3" cutting capacity also allows it to be the choice of many municipalities from natural parks to various easement control applications.

The floating top link allows the cutter to follow uneven terrain. The beefy lower hitch clevises allow easy hook-up to the tractor, as well as adding another degree of strength to the overall hitch area.

Take a close look at our welding, and the precise fit-up of all the fabricated parts and you'll understand the fine element of perfection we expect out of our manufacturing facilities. Our cast iron gearbox has internal components crafted to a precision fit; teeth and gears that mesh together perfectly for a quiet and efficient performing power source.



### RCR26 Series

40-130 HP - RCR2660, RCR2672

Cat. 1 or 2

60-130 HP - RCR2684

Cat. 2 or 3

Working Width (cm)	60" (154), 72" (183), 84" (213)
Overall Width (cm)	67" (170), 81" (206), 90 3/4" (230)
Overall Length (cm)	114" (290), 126" (320) Single 133" (338), Dual 116" (295)
Machine Weight (kg)	926 (419), 960 (432) 1263 (572) single ga. whl 1388 (629) dual ga. whl
Blade Tip Speed (fpm)	12,384, 14,861, 14,369
Deck Material Thickness (mm)	10 Gauge (3.42)
Gearbox	540 RPM PTO Driven 1 3/8" 6 spline Cast Iron Housing
Cutting Height (mm)	2"-12" (51-304)
Cutting Capacity	3" diameter
*Safety Guards	Front and Rear: Chain
Skids (mm)	Full length weld & replaceable shoes
Deck Height (mm)	9" (228) - 10 1/8" (257)
Blades - (mm)	1/2" x 4" Heat Treated Alloy Steel Free Swinging Blades
Dish Pan	3/16" x 25 1/2" round 3/16" x 32 1/4" round 3/16" x 24" x 38" oval
Driveline	ASAE Cat. 4
Driveline Safety Protection (mm)	4-Plate slip clutch
Tailwheel	4" x 8" x 15" Laminated Tire Cast Iron Hub, 6" x 9" x 21" Laminated Tire or Solid Rubber

See dealer for complete warranty information.

Color Options:



- Clevis hitch for easy hook-up
- Full length skids with replaceable shoes
- Rugged laminated tailwheel
- Fully welded deck
- 3-Point with dual 15" tailwheels on 84"
- See guarding statement on p. 2



3/16" Dish pan with 1" x 4" blade bar provides superior strength for encountering objects in the blade path. Round on 60" & 72"; oval on 84".



# 27 SERIES ROTARY CUTTERS

60" 72" 84"



Our popular medium duty single spindle Rotary Cutters are now available in a smooth top. Floating top link follows the ground contour.



## RCF27 Series

60", 72": 40-130 HP 84": 60-130 HP

RCF2760, RCF2772: Cat. 1 or 2

RCF2784: Cat. 2 & 3, or Pull-Type

Deck	All Welded, Smooth Top
Deck Height	60" & 72": 11 1/4" 84": 10 1/8"
Deck Thickness	10 Gauge
Side Panels	1/4"
Cutting Height	1 1/2" - 12"
Cutting Capacity	3"
Weight (kg)	955 (433), 1072 (486), 1354 (614), Pull-Type 1632 (740)
Gearbox	540 RPM, 130 HP 1 3/8" - 6 Spline
Gearbox Output Shaft	2"
Driveline	Cat. 4 with 4 Plate Slip-Clutch
Stump Jumper	60" - 3/16" x 24" Round 72" - 3/16" x 30 1/2" Round 84" - 3/16" x 24" x 38" Oval
Blades	Free Swinging High Suction 1/2" x 4" - Heat Treated
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 12,384 fpm 72" - 14,861 fpm 84" - 14,369 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings
Skids	Replaceable
Guarding Available	Front: Chain or Rubber Rear: Chain

See dealer for complete warranty information.

Color Options:    



- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model, Standard on Pull-Type



[www.landpride.com](http://www.landpride.com)



## RCR35 Series

3-Point: 8': 30 - 120 HP, 10': 60 - 120 HP  
Semi-Mount and Pull: 8' & 10': 50 - 120 HP  
RCR3596, RCR3510  
3-Point Hitch 8': Cat. 1 & 2  
10': Cat. 2 & 3


Working Width (cm)	8'2" (249), 10' (305)
Overall Width (cm)	8'6-1/2" (260), 10'5" (318)
Overall Length (cm)	Lift: 105", 110" (267, 279) Semi: 110", 118" (279, 300) Pull: 135", 145" (343, 368)
Machine Weight	3-Point - 8': 1,665 (755)
With Front Guard (kg)	3-Point - 10': 2,185 (991)
Blade Tip Speed	540 rpm - 14,223 fpm 1000 rpm - 14,442 fpm 540 rpm - 17,291 fpm 1000 rpm - 17,569 fpm
Deck Material Thickness (mm)	10 Gauge (3.42)
Gearbox	540 rpm or 1000 rpm, Cast Iron Housing
Cutting Height (mm)	2" - 12" (51 - 305)
Cutting Capacity	2" diameter
Safety Guards (choose)	Front & Rear Chain / Front & Rear Rubber
Skid Shoes	Replaceable
Deck Height (mm)	9-5/8" (245)
Blades - (mm)	1/2" x 4" (12.7 x 101.6) Heat Treated Free Swinging Suction Blades
Dish Pan	Round pan 3/16"
Driveline	8': Cat 4, Equal Angle U-Joint on Pull-Type Cat. 4, Choice of Equal Angle U-Joint or Constant Velocity U-Joint on Pull-Type
Driveline Safety Protection (mm)	540 rpm - 4 plate slip-clutch 1000 rpm - 2 plate slip-clutch
Tailwheel	Semi-Mount: 2 ea. 6" x 9" x 21" Laminated Lift: 2 ea. 4" x 8" x 15-1/4" Laminated Pull-Type: 2 or 4 ea. 6" x 9" x 21" Laminated or 24" Used Aircraft tires

\* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.

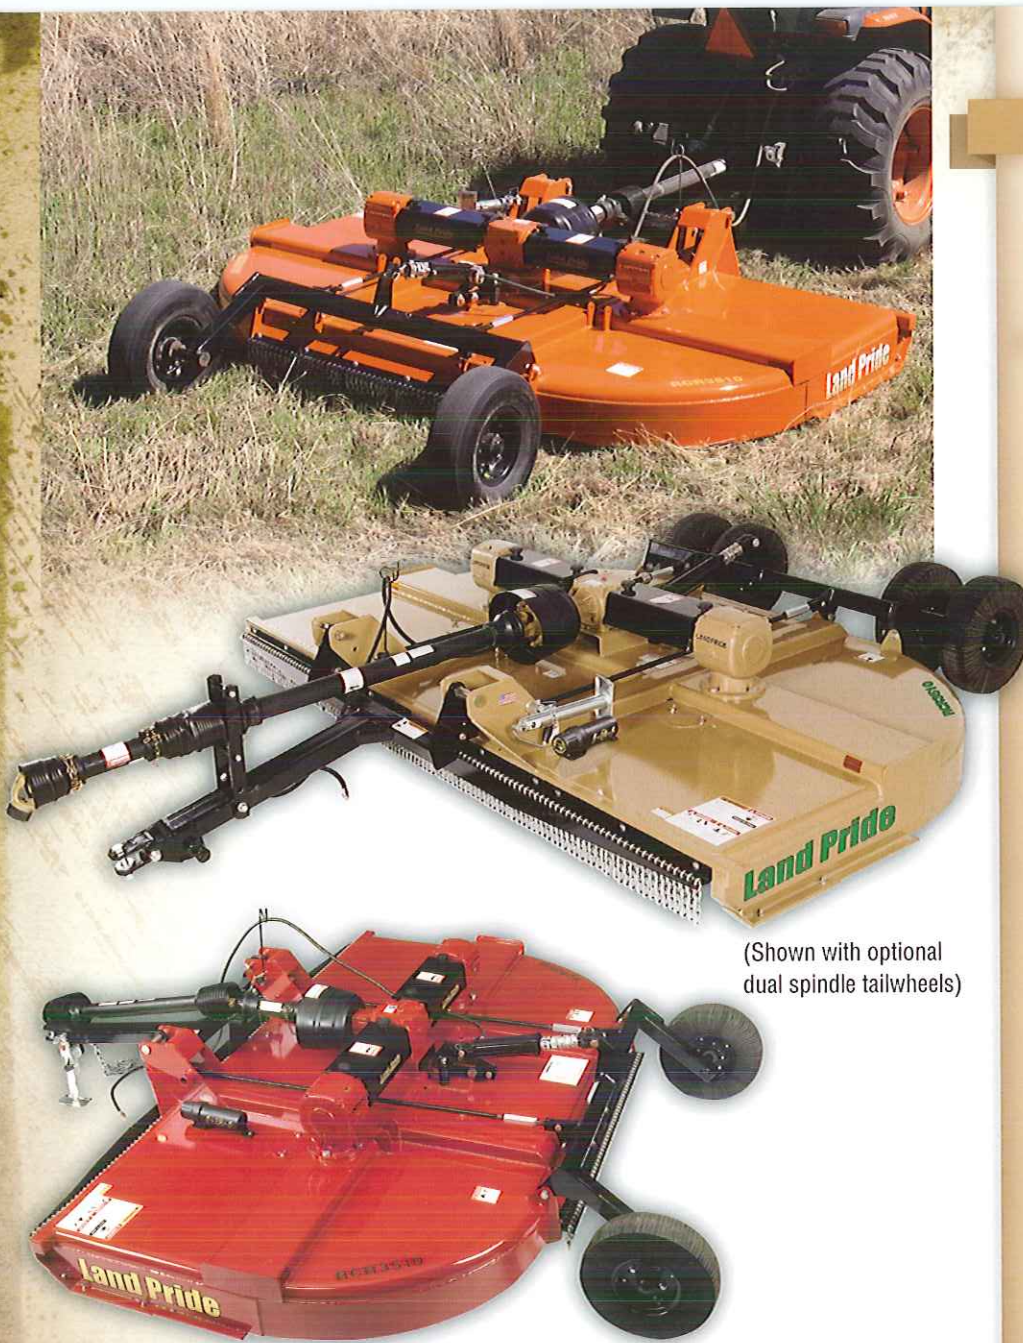

(Shown with optional dual spindle tailwheels)

Pull-Type offers a choice of used aircraft tires or laminated tires.



Laminated tires on 3-Point and Semi-Mount are standard equipment.



The heavy-duty dish pan is a 3/16" steel formed dish with a 1" x 4" blade bar for superior gearbox protection.

- Pull-Type with dual leveling rods keeps cutter level and eliminates deck flex
- Deck height of 9 5/8" is tough to clog
- 1/4" Thick sidewalls help protect against piercing debris
- Slip-clutch protection on main driveline
- Chain or rubber guards reduce flying debris



# 27 SERIES ROTARY CUTTERS

60" 72" 84"



Our popular medium duty single spindle Rotary Cutters are now available in a smooth top. Floating top link follows the ground contour.



## RCF27 Series

60", 72": 40-130 HP 84": 60-130 HP  
RCF2760, RCF2772: Cat. 1 or 2  
RCF2784: Cat. 2 & 3, or Pull-Type

Deck	All Welded, Smooth Top
Deck Height	60" & 72": 11 1/4" 84": 10 1/8"
Deck Thickness	10 Gauge
Side Panels	1/4"
Cutting Height	1 1/2" - 12"
Cutting Capacity	3"
Weight (kg)	955 (433), 1072 (486), 1354 (614), Pull-Type 1632 (740)
Gearbox	540 RPM, 130 HP 1 3/8" - 6 Spline
Gearbox Output Shaft	2"
Driveline	Cat. 4 with 4 Plate Slip-Clutch
Stump Jumper	60" - 3/16" x 24" Round 72" - 3/16" x 30 1/2" Round 84" - 3/16" x 24" x 38" Oval
Blades	Free Swinging High Suction 1/2" x 4" - Heat Treated
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 12,384 fpm 72" - 14,861 fpm 84" - 14,369 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings
Skids	Replaceable
Guarding Available	Front: Chain or Rubber Rear: Chain

See dealer for complete warranty information.

Color Options:



- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model, Standard on Pull-Type



[www.landpride.com](http://www.landpride.com)



## RCR35 Series

3-Point: 8': 30 - 120 HP, 10': 60 - 120 HP  
Semi-Mount and Pull: 8' & 10': 50 - 120 HP  
RCR3596, RCR3510  
3-Point Hitch 8': Cat. 1 & 2  
10': Cat. 2 & 3

Working Width (cm)	8'2" (249), 10' (305)
Overall Width (cm)	8'6-1/2" (260), 10'5" (318)
Overall Length (cm)	Lift: 105", 110" (267, 279) Semi: 110", 118" (279, 300) Pull: 135", 145" (343, 368)
Machine Weight	3-Point - 8': 1,665 (755)
With Front Guard (kg)	3-Point - 10': 2,185 (991)
Blade Tip Speed	540 rpm - 14,223 fpm 1000 rpm - 14,442 fpm 540 rpm - 17,291 fpm 1000 rpm - 17,569 fpm
Deck Material Thickness (mm)	10 Gauge (3.42)
Gearbox	540 rpm or 1000 rpm, Cast Iron Housing
Cutting Height (mm)	2" - 12" (51 -305)
Cutting Capacity	2" diameter
Safety Guards (choose)	Front & Rear Chain / Front & Rear Rubber
Skid Shoes	Replaceable
Deck Height (mm)	9-5/8" (245)
Blades - (mm)	1/2" x 4" (12.7 x 101.6) Heat Treated Free Swinging Suction Blades
Dish Pan	Round pan 3/16"
Driveline	8': Cat 4. Equal Angle U-Joint on Pull-Type Cat. 4. Choice of Equal Angle U-Joint or Constant Velocity U-Joint on Pull-Type
Driveline Safety Protection (mm)	540 rpm - 4 plate slip-clutch 1000 rpm - 2 plate slip-clutch
Tailwheel	Semi-Mount: 2 ea. 6" x 9" x 21" Laminated Lift: 2 ea. 4" x 8" x 15-1/4" Laminated Pull-Type: 2 or 4 ea. 6" x 9" x 21" Laminated or 24" Used Aircraft tires

(Shown with optional  
dual spindle tailwheels)

Pull-Type offers a choice of used  
aircraft tires or laminated tires.



Laminated tires on 3-Point  
and Semi-Mount are standard  
equipment.



The heavy-duty dish pan is a 3/16" steel  
formed dish with a 1" x 4" blade bar for  
superior gearbox protection.

- Pull-Type with dual leveling rods keeps  
cutter level and eliminates deck flex
- Deck height of 9 5/8" is tough to clog
- 1/4" Thick sidewalls help protect against  
piercing debris
- Slip-clutch protection on main driveline
- Chain or rubber guards reduce flying debris

\* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear  
shielding be used with any Rotary Cutter. However,  
they can be purchased with or without shielding. Please  
understand how your cutter is to be equipped for you.



# 27 SERIES ROTARY CUTTERS

60" 72" 84"



Our popular medium duty single spindle Rotary Cutters are now available in a smooth top. Floating top link follows the ground contour.



## RCF27 Series

60", 72": 40-130 HP 84": 60-130 HP  
RCF2760, RCF2772: Cat. 1 or 2  
RCF2784: Cat. 2 & 3, or Pull-Type

Deck	All Welded, Smooth Top
Deck Height	60" & 72": 11 1/4" 84": 10 1/8"
Deck Thickness	10 Gauge
Side Panels	1/4"
Cutting Height	1 1/2" - 12"
Cutting Capacity	3"
Weight (kg)	955 (433), 1072 (486), 1354 (614), Pull-Type 1632 (740)
Gearbox	540 RPM, 130 HP 1 3/8" - 6 Spline
Gearbox Output Shaft	2"
Driveline	Cat. 4 with 4 Plate Slip-Clutch
Stump Jumper	60" - 3/16" x 24" Round 72" - 3/16" x 30 1/2" Round 84" - 3/16" x 24" x 38" Oval
Blades	Free Swinging High Suction 1/2" x 4" - Heat Treated
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 12,384 fpm 72" - 14,861 fpm 84" - 14,369 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings
Skids	Replaceable
Guarding Available	Front: Chain or Rubber Rear: Chain

See dealer for complete warranty information.

Color Options:



- Smooth top design
- All welded deck
- Clevis style lower hitch
- Reinforced rear chain guard
- Floating top hitch
- Pull-type model available in 84" model
- Dual wheels optional on 3-point 84" model, Standard on Pull-Type



[www.landpride.com](http://www.landpride.com)



## RCR35 Series

3-Point: 8': 30 - 120 HP, 10': 60 - 120 HP  
Semi-Mount and Pull: 8' & 10': 50 - 120 HP

RCR3596, RCR3510

3-Point Hitch 8': Cat. 1 & 2

10': Cat. 2 & 3

Working Width (cm)	8'2" (249), 10' (305)
Overall Width (cm)	8'6-1/2" (260), 10'5" (318)
Overall Length (cm)	Lift: 105", 110" (267, 279) Semi: 110", 118" (279, 300) Pull: 135", 145" (343, 368)
Machine Weight	3-Point - 8': 1,665 (755)
With Front Guard (kg)	3-Point - 10': 2,185 (991)
Blade Tip Speed	540 rpm - 14,223 fpm 1000 rpm - 14,442 fpm 540 rpm - 17,291 fpm 1000 rpm - 17,569 fpm
Deck Material Thickness (mm)	10 Gauge (3.42)
Gearbox	540 rpm or 1000 rpm, Cast Iron Housing
Cutting Height (mm)	2" - 12" (51 -305)
Cutting Capacity	2" diameter
Safety Guards (choose)	Front & Rear Chain / Front & Rear Rubber
Skid Shoes	Replaceable
Deck Height (mm)	9-5/8" (245)
Blades - (mm)	1/2" x 4" (12.7 x 101.6) Heat Treated Free Swinging Suction Blades
Dish Pan	Round pan 3/16"
Driveline	8': Cat 4. Equal Angle U-Joint on Pull-Type Cat. 4. Choice of Equal Angle U-Joint or Constant Velocity U-Joint on Pull-Type
Driveline Safety Protection (mm)	540 rpm - 4 plate slip-clutch 1000 rpm - 2 plate slip-clutch
Tailwheel	Semi-Mount: 2 ea. 6" x 9" x 21" Laminated Lift: 2 ea. 4" x 8" x 15-1/4" Laminated Pull-Type: 2 or 4 ea. 6" x 9" x 21" Laminated or 24" Used Aircraft tires

\* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.



(Shown with optional dual spindle tailwheels)

Pull-Type offers a choice of used aircraft tires or laminated tires.



Laminated tires on 3-Point and Semi-Mount are standard equipment.



The heavy-duty dish pan is a 3/16" steel formed dish with a 1" x 4" blade bar for superior gearbox protection.

- Pull-Type with dual leveling rods keeps cutter level and eliminates deck flex
- Deck height of 9 5/8" is tough to clog
- 1/4" Thick sidewalls help protect against piercing debris
- Slip-clutch protection on main driveline
- Chain or rubber guards reduce flying debris



# 36 SERIES ROTARY CUTTERS

60" 72" 84"

4"  
CUTTING  
CAPACITY



## RCF36 Series

50-190 HP

60", 72": Cat. 1 or 2

84": Cat. 2 or 3 - Pull-Type

RCF3660, RCF3672, RCF3684

Working Width (cm)	60" (152), 72" (183), 84" (213)
Deck	All Welded, Smooth Top
Deck Height (cm)	13 3/8" (34)
Deck Thickness (mm)	3/16" (5)
Cutting Height (cm)	2" - 12" (5 - 30)
Cutting Capacity (cm)	4" (10)
Side Panels (mm)	1/4" (6)
Weight (kg)	1233 (559), 1337 (606), 2000 (907), Pull-type 2104 (954)
Gearbox	540 RPM, 190 HP 1 3/4" - 20 Spline
Gearbox Output (cm)	2 3/8" (6)
Shaft	
Driveline	Cat. 5 with 4 Plate Slip-Clutch
Stump Jumper (mm)	3/16" (5)
Blades	Free Swinging High Lift 1/2" x 4", Heat Treated Steel
Blade Bolt	Keyed with Hardened Flat Washer & Lock Nut
Blade Tip Speed	60" - 13,572 fpm 72" - 14,861 fpm 84" - 14,369 fpm
Tailwheel(s)	15" Laminated, w/Cast Iron Hub, Tapered Roller Bearings 21" on Pull-type
Skids	Replaceable
Guarding Available (Choose)	Front: Rubber, Single or Double Chains Rear: Single or Double Chains

Color Options:



- Smooth top design
- All welded deck
- Reinforced rear chain guard
- Heavy-duty tailwheel mount
- Floating top hitch
- Pull-type available in 84" model



www.landpride.com



# PARALLEL ARM ROTARY CUTTERS

## Hydraulic Driven Parallel Arm Rotary Cutter.

Designed to "reach out" and cut along roadsides, over guard rails, down ditchbanks and along side ponds, the Parallel Arm Rotary Cutter has features not found on your typical boom cutter.

First of all, it has a constant attitude! When the two cylinders that operate the two arm sections are activated, the attitude of the deck does not change; thanks to the parallel arm design. Lift the cutter head up, in or out to negotiate an obstacle, and your cutter deck position does not change; set the cutter head down at the same attitude as it was prior to the obstacle. This makes your work efficient!

The hydraulic breakaway feature of the Parallel Arm Rotary Cutter is also not found on your standard boom cutter. The cutter deck is restored to its original position with the help of a hydraulic cylinder. The cutter deck can also swing rearward enabling you to mow into a tight corner, again putting it back to its original setting with the hydraulic cylinder.

The cutter deck is operated by a hydraulic motor, which is run by a pump powered by the PTO of the tractor utilizing the tractor hydraulics, or an optional self contained system. A flow control valve is standard equipment to protect the hydraulic system of the cutter from the high GPM many of the newer tractors now utilize. The 35-gallon oil reservoir keeps the unit running cool, and the in-line filter continually cleans the oil each time it is returned to the reservoir.

The optional electronic package enables each of the arm and deck hydraulic cylinders to be activated by a toggle switch. You get instant response from the cylinder, which can be very difficult with the tractor's hydraulic controls.

Moving this cutter up and around obstacles, in and out next to water or roadsides is what this cutter is all about. Save time and work efficiently with the boom mower that does more!




Optional gauge wheel deck allows the cutter to float over undulations without having to constantly monitor terrain conditions.



### RCP26 Series

75-150 HP  
RCP2660  
Cat. 2 & 3

Cutting Width (cm)	58" (147.32)
Transport Width (cm)	10' (304.8)
Min. Tractor Weight (kg)	8000 lbs (3628.7)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity (liters)	35 Gallons (132.47)
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor provided or self contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Deck Thickness (mm)	10 Gauge (3.42)
Min. Cutting Height (cm)	2' (5.08)
Cutting Capacity (cm)	2' Diameter (5.08)
Dish Pan (cm)	3/16" x 21" (.48 x 53.34) Round, Dish Shaped
Blades (cm)	2 ea. 1/2" x 4" (1.27 x 10.16)
Blade Bolt	Heat Treated; Key-Way; Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Horiz. Cutting Reach (cm)	15'6" Maximum (472)
Vertical Cutting Reach (cm)	11'5" Maximum (348)
Below Ground Level Reach (cm)	9'1" Maximum (277)
Operating Tilt Arc	180 Degrees
Driveline	Cat. 2
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Debris Protection	Front and Rear Chain Guards
Options	Operator Shield Suitcase Weight Bracket Gauge Wheels

Color: 



In-line filter cleans hydraulic fluid before it re-enters reservoir.



## 3 Foot longer reach than the RCP26 Series.



Great for those roadsides that want a manicured look further down the ditch, or being able to stay a little further away from the soggy banks of the pond.

### TOP QUALITY FEATURES ON RCP26 AND RCP30



Hydraulic breakaway feature pivots arm backward to avoid obstacles and protect cutter arm. Hydraulically pivots back into place.



Flow control valve compensates for various hydraulic systems.



Shut-off valve permits maintenance without oil loss.



The built in weight rack can be ordered to fit with various suitcase weight styles.



Grease zerks at all pivot points.



Electronic cylinder controls provide instant response for adjustments on the go.

### RCP30 Series

95-175 HP  
RCP30  
Cat. 2 & 3

Cutting Width (cm)	58" (147.32)
Transport Width (cm)	10' (304.8)
Min. Tractor Weight (kg)	12,000 lbs (5443)
Tractor Hydraulics Req'd	Max 4, Min 1
Hydraulic Pump Input	540 RPM or 1000 RPM
Hyd. Oil Capacity (liters)	35 Gallons (132.47)
Hydraulic Oil Flow	15 GPM
Hydraulic System	Tractor provided or self contained
Overload Protection	Relief Valve
Oil Cleansing	Return Line Filter, Replaceable
Oil Check	Dipstick
Deck Thickness (mm)	10 Gauge (3.42)
Min. Cutting Height (cm)	2" (5.08)
Cutting Capacity (cm)	2" Diameter (5.08)
Dish Pan (cm)	3/16" x 21" (.48 x 53.34) Round, Dish Shaped
Blades (cm)	2 ea. 1/2" x 4" (1.27 x 10.16)
Blade Bolt	Heat Treated; Key-Way; Nut
Blade Tip Speed	15,000 FPM
Blade Rotation	Clockwise
Horiz. Cutting Reach (cm)	18'10" Maximum (574)
Vertical Cutting Reach (cm)	13'5" Maximum (409)
Below Ground Level Reach	11" Maximum (335 cm)
Operating Till Arc	180 Degrees
Driveline	Cat. 2, 1 3/8" 21 Spline
Storage	2 Parking Stands
Unit Protection	Tension Bolt and Hydraulic Breakaway Cylinder
Debris Protection	Front and Rear Chain Guards
Options	Operator Shield Suitcase Wt. Bracket (Required) Gauge Wheels

Color:



- Hydraulic break away and reset
- Case drain deck motor
- Gauge wheel package allows unit to follow ground contour while operating in float position



www.landpride.com

Additional tractor weight (dual tractor wheel, calcium, etc.) may be needed.



25 SERIES  
**ROTARY  
CUTTER** 12' Folding






# Mow Like the Big Boys!

Designed with smaller tractors and smaller areas to cut in mind, our 12' Rotary Cutter has a lot of the features found in our larger folding cutters. The 12' width, sharp turning radius and low tongue weight makes this an ideal rotary cutter for compact tractor owners.



www.landpride.com

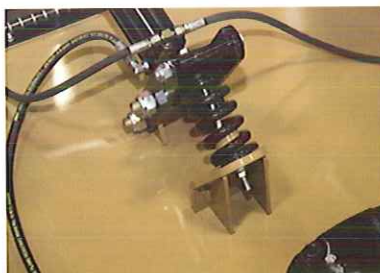

The center spring holds just the right tension to absorb rough terrains, giving you a smoother pull through the field.

## RC25 Series

12' Folding: 50-75 HP

RC2512

Pull-Type, Self Leveling Hitch & Clevis

Working Width (cm)	12' (366)
Transport Width (cm)	7'6" (229)
Overall Width (cm)	12'7" (384)
Overall Length (cm)	13'3" (404)
Cutting Height (cm)	1 1/2" - 12" (4 - 30)
Cutting Capacity (cm)	1 1/2" (4)
Tongue Weight (kg)	793 (359)
Machine Weight (kg)	2,540 (1152)
Deck Height (cm)	11" (28)
Deck Thickness	10 Gauge
Deck Shock Protection	Spring Cushioned Center Axle
Side Skirt Thickness	7 Gauge
Gearbox	540 rpm: 160 HP Divider; 75 HP Center & Wings
Gearbox Input Shaft (cm)	1 3/8" 6 Spline (3.5)
Gearbox Output Shaft (cm)	1 1/2" (4)
Input Driveline	Constant Velocity U-Joint, Cat. 4
Connecting Driveline	Cat. 3 Slip-Clutch
Stump-Jumper	10 Gauge, Round, Dish Shaped
Blades	2 per Section, 1/2" x 3" Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Bolt	Keyed with Hardened Flatwasher & Lock Nut
Blade Overlap	6"
Blade Speed	Center: 16,500 fpm, Wings: 16,000 fpm
Wheels (4)	6" x 9" x 21" Laminated Tires 20.5" x 6.75" Used Aircraft Tires Tapered Roller Bearings & Cast Iron 5-Bolt Hubs with 1 3/4" Shaft
Wing Transport Locks	Standard
Wing Hydraulics	2" x 8" Cylinder, Hoses & Fittings
Height Adjustments	2 1/2" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Skid Shoes	Wings & Center, Replaceable
Standard Shielding	Front and Rear Chain

\* See dealer for complete warranty information.

Color Options:



- Center spring-cushioned axle
- Great size for country estates
- Dual hinge rods for leveling
- Narrow tongue design for tight turns



# 36 SERIES ROTARY CUTTER

15' Folding

**Give your pasture that  
well-groomed look!**

Taking proper care of pasture ground plays an important role in maintaining the agricultural and country side landscape in any area.

If you are maintaining grazing areas for your horses or mowing the wide open spaces close to town, our 36 Series Plainsman leaves a cut you'll be proud of.

With constant compliments that our 36 series cutter cuts like a grooming mower, we too have to remind ourselves that this cutter is still built like a brute. Starting with precision built gearboxes rated up to 160 HP with a 2" output shaft, a Cat. 5 main driveline, and a strategically designed 10 gauge deck, this cutter likes to run with the big boys!

2 1/2"  
CUTTING  
CAPACITY

2 1/2"




[www.landpride.com](http://www.landpride.com)





**Deck Rings  
Now Available!**

With a choice of tires to choose from and chain or rubber guards, you can outfit this cutter to suit your needs. If you transport your cutter from field to field, the airplane tires will give you a smoother ride. If you are cutting over rough material, you should probably choose the chain guards. Whatever the situation, our workmanship and integrity will be in the field with you!

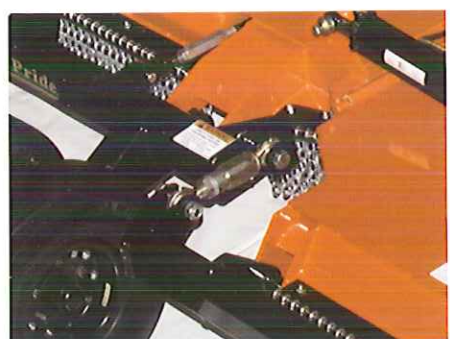

The heavy-duty turnbuckle keeps the center and wing axes at the same cutting height. With grease fittings incorporated in the turnbuckle, free motion is maintained for quality performance.



Choice of used aircraft tires w/wo foam or laminated tires.

# Plainsman SERIES



The 1" thick, 4" wide reinforcement aids the dishpan in withstanding the constant punishment the overall drivetrain must endure.

## Hitches Available on all 36 Series and above Folding Cutters



**Standard Clevis Hitch**  
Pivots up and down for uneven terrain



**Double Swivel Clevis Hitch**  
Swivels up and down and side to side



**Bar-tite™ Clevis Hitch**  
Bolts tight to drawbar which eliminates drawbar wear. Swivels up and down, and rotates on greaseable shaft

# Plainsman

## RC36 Series

### MEDIUM DUTY

50-160 HP

RC3615

Pull-Type

Working Width (cm)	15' (457)
Overall Width (cm)	15' 8" (477.5)
Min. Transport Width (cm)	8' (244)
Overall Length (cm)	15' 1" (460)
Height Adjustment	3" x 8" Cylinder, Hose, Fittings & Stroke Control Spacers
Cutting Height (cm)	2' - 14" (5.08 - 35.56)
Cutting Capacity (cm)	2 1/2" (6.35)
Machine Weight (kg)	3,730 lbs. (1692)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	1,240 lbs. (562)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	9" (22.86)
Deck Material (cm)	10 Gauge (3.4)
Deck Shock Protection	Spring Cushioned Center Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.64)
Skid Shoes	Wings and Center, Replaceable
Tires (cm) - 4 or 6	Laminated, Used Aircraft
Hydraulics	Wings: 2 1/2" x 12" Cylinder, Hoses & Fittings
Gearbox	540 or 1000 RPM: 160 HP Divider, 110 HP Center & Wings
Gearbox Output Shaft	2"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Constant Velocity U-Joint; 540 & 1000 RPM: CAT. 5
Connecting Drivelines	Cat. 4 with slipclutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped
Blades (cm) (2 per section)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 15,268 fpm on center, 15,000 fpm on wings 1000 RPM: 15,578 fpm on center, 14,620 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber

\* See dealer for complete warranty information.

Color Options:    



- 1" Solid and continuous hinge rods provide superior support from section to section
- Smooth top for easy clean off



# 40 SERIES ROTARY CUTTER

15' Folding

3 1/2" CUTTING CAPACITY

3 1/2"

Combine the rugged, heavy-duty gearboxes from our RC5615 and the proven, dependable deck from our RC3615 and you get the new Land Pride RC4015. With a 3.5" cutting capacity and a blade tip speed of 16,300 fpm, the RC4015 is a solid medium-duty cutter in a long line of quality folding cutters from Land Pride.

**NEW!**



## RC40 Series

15' Folding: 50-200 HP  
RC4015, RCM4015

Working Width (cm)	15' (457)
Overall Width (cm)	15'9" (480)
Overall Length (cm)	15'6" (472)
Machine Weight (kg)	3,930 lbs. (1782)
Blade Tip Speed	RC: 16,300 fpm RCM: Center: 16,300 fpm, Wings: 16,000 fpm
Deck Material Thickness	10 Gauge
Side Skirt Thickness	1/4"
Gearbox	540 rpm or 1,000 rpm PTO Driven Gearbox Cast Iron Housing
Cutting Height (cm)	2' - 14" (4 - 30)
Cutting Capacity (cm)	3 1/2" Diameter (8.89)
Shielding	Front: Rubber or Sgl or Dbl Chain Rear: Rubber or Sgl or Dbl Chain
Skids	Bolt-on, Replaceable
Deck Height (cm)	12" (30.48)
Blades	1/2" x 4" Heat Treated Free Swinging Alloy Steel
Stump-Jumper	3/16" Round, Dish Shaped
Driveline	Main: Cat. 5 CV; Wing: Cat. 4
Driveline Protection	Slip-Clutch
Tires	6" x 21" Laminated Tires, 24" x 7.75" x 15" Used Aircraft, 24" x 7.75" x 15" Used Foam Filled Aircraft Tires

\* See dealer for complete warranty information.

Color Options:



**7 YEAR**  
Limited Gearbox  
Warranty



www.landpride.com




# 50 SERIES ROTARY CUTTER

20' Folding



**Put a great deal of work behind you in a hurry.**

Roadsides, pastures, set-aside acres and crop residue are perfect jobs for the 20' Commander. Wing decks float independently, and follow the contour of the land leaving a nicely cut surface.



Outer wing wheels can be single or dual. Duals are ideal when mowing in areas where one wing needs to flex up hill. The outer wheel rides up the embankment and keeps the deck from gouging. Wheel spindles are bolt-in to allow easy change out.



The 20' cutting width, 2" to 14" cutting height and ability to cut weeds and brush up to 3" in diameter make the RC5020 well-suited for varied applications. Various safety guard choices make these an excellent choice for state and municipal mowing applications.



## Shredder and Baffle Kit - optional

The double stacked blade configuration on the Shredder kit is ideal for cutting residue into smaller pieces, while the Baffle kit maintains the cut material in each section of the cutter for a consistent discharge from the rear of each deck.



A stationary blade mounted to the deck completes the shredding process.

# Commander

## RC50 Series

### HEAVY DUTY

70-250 HP

RC5020

Pull-Type

Working Width (cm)	20' (609.6)
Overall Width (cm)	20' 9.5" (632.46)
Min. Transport Width (cm)	8' 9" (266.7)
Overall Length (cm)	19' 3" (589.28) with Laminated Tires
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3" diameter (7.62)
Machine Weight (kg)	6,528 lbs. (2961)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	2,300 lbs. (1043)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	10 1/2" (26.67)
Deck Material (cm)	3/16" (.49)
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635)
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft w/wo foam
Hydraulics	Wings: 3.5" x 12" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: CAT. 5, 1000 RPM: CAT. 5
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Dish Pan (cm)	3/16" (.48) Round, Dish shaped w/ 1" steel plate support
Blades (cm)	1/2" x 4" (1.27 x 10.16) High Lift
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on center, 17,329 fpm on wings 1000 RPM: 18,165 fpm on center, 18,317 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front and Rear: Single or Double Chain or Rubber
Baffle Kit	Optional - Rear

\* See dealer for complete warranty information.

Color Options:



**7 YEAR**  
Limited Gearbox  
Warranty



# 55 SERIES ROTARY CUTTER

15' Folding

**Smooth all the way around.**

Land Pride's 55 series, 15 foot cutter is smooth all the way around. It is smooth on top, which allows debris and moisture to roll off or be easily swept or blown off, and it gives a nice sleek appearance to boot! The underside is just as smooth, which means less chance of dry caking material getting lodged in tight corners, which again, means less time for cleaning.

Add one more smooth, and the best smooth of all, is the smooth clean cut the RC5515 offers. Noted as offering one of the best cuts in the industry, Land Pride cutters have a reputation for leaving behind a superior finish; and we've continued that reputation with this Smooth Top design.



## Commander SERIES





## RC55 Series

### HEAVY DUTY

50-250 HP

RC5515

Pull-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (457)
Overall Width (cm)	15' 8" (477.5)
Min. Transport Width (cm)	8' (244)
Overall Length (cm)	15' 1" (460)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4" (10.15)
Machine Weight (kg)	5,529 lbs. (2507)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	1,860 lbs. (844)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom; 10 Gauge Top
Deck Shock Protection	Spring Cushioned Center Axle
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft, w/wo foam
Hydraulics	Wings: 3" x 12" Cylinder, Hoses and Fittings
Gearbox	540 or 1000 RPM: 250 Center, 210 Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint; Star Profile: Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline slipclutch
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" blade bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings; 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

- Smooth top and bottom design
- Center walking tandem axle available
- Replaceable 1/4" side skirts with replaceable skid shoes
- Front and rear guard options include: rubber, single chain, double chain, double chain w/cable
- Optional deck rings
- Optional shredder kit



**Blade Tip Speed is Not the Complete Story!**  
Our blade tip speed, along with our pre-cut chamber and a longer than average cutting edge on the blade together offer the best cut in the industry!



Our center skid shoes allow the cutter to "glide" over bumps and undulations and can be mounted inboard or outboard to fit your terrain or tractor tire width.

Color Options:



**7 YEAR**  
Limited Gearbox  
Warranty

Heavy-Duty Dishpan is spin balanced for smooth operation.




**Pre-Cut Chamber**

The Dominator and Commander 10' and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut, giving a cleaner, more precise finish.



The RC5515 not only features a smooth top, but our underside is just as smooth. Fewer nooks or crannies for debris to compact in and no frame members to get hung up on obstructions.

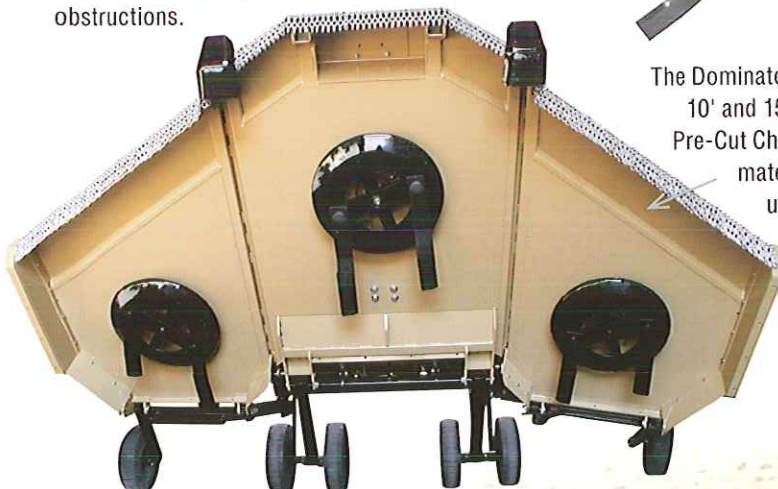



# 56 SERIES ROTARY CUTTER

15' Folding

Smooth top and  
bottom design.

4"  
CUTTING  
CAPACITY



Land Pride's 56 Series, 15-foot cutter is smooth on top, which allows debris and moisture to roll off or be easily swept or blown off. And it's smooth on bottom, which means less chance of dry caking material getting lodged in tight corners, which again, means less time for cleaning.

The 56 Series also features independent spring-cushioned wheel arms for more cushion going through rough terrain, which gives you an easier and more comfortable ride.



**Commander**  
SERIES





## RC56 Series


### HEAVY DUTY

50-250 HP

RC5615

#### Heavy-Duty Dishpan

This is spin balanced for smooth operation.

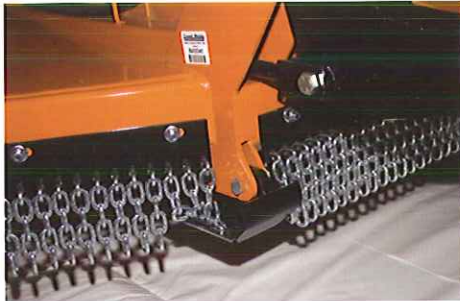

#### Skid Shoes

Our center skid shoes allow the cutter to "glide" over bumps and undulations and protects the turf, as well as various components on the cutter.

#### First Class Cut

Our blade tip speed, along with our pre-cut chamber and a longer than average cutting edge on the blade together offer the best cut in the industry!


#### Deck Rings

Deck rings are available offering additional deck strength and help eliminate damage from obstructions.



#### Pre-Cut Chamber

The Dominator and Commander 10' and 15' Cutters feature a Pre-Cut Chamber. This allows material to spring back up before being cut, giving a cleaner, more precise finish.

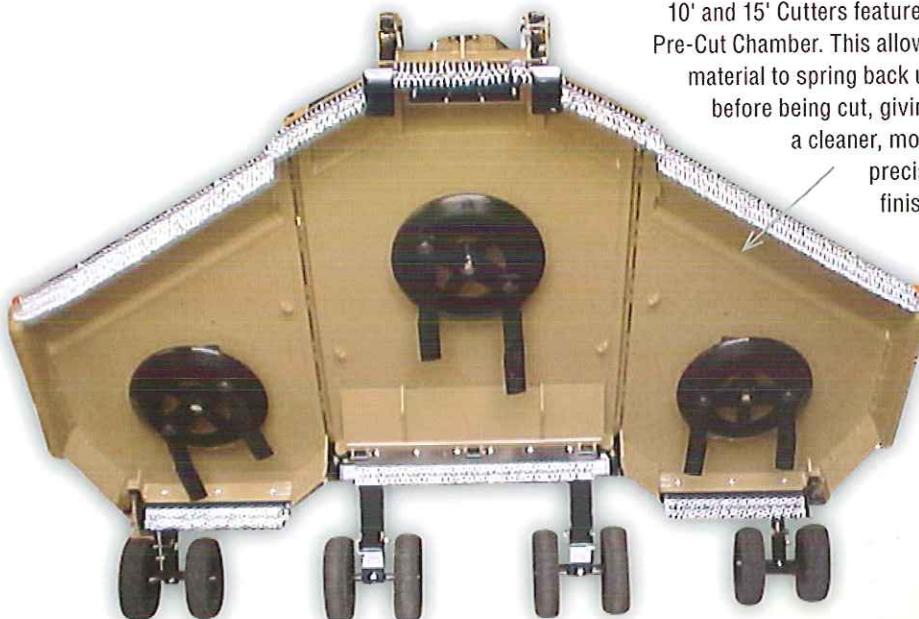

#### Double Your Smooth

The top and bottom sides of the cutter are smooth, with structured membrane in between. This double smooth design allows for easier cleaning of both sides, as well as eliminates bottom structures that cake material.

Working Width (cm)	15' (457)
Overall Width (cm)	15' 8" (477.5)
Min. Transport Width (cm)	8' (244)
Overall Length (cm)	15' 1" (460)
Cutting Height (cm)	2' - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4' (10.15)
Machine Weight (kg)	5,446 lbs. (2470)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	2,080 lbs. (943)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom; 10 Gauge Top
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft, or Recapped Aircraft, w/wo foam
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings
Gearbox	540 or 1000 RPM: 250 Center, 210 Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint; Star Profile: Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline slipclutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" blade bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings; 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:



**7 YEAR**  
Limited Gearbox  
Warranty

- Smooth top and bottom design
- Center walking tandem axle available
- Replaceable 1/4" side skirts with replaceable skid shoes



# 56 SERIES ROTARY CUTTER

15' Folding

## Commander SERIES

### Adjustable wheel spacing for row crop shredding.

The RCC56 Series Rotary Cutter provides excellent shredding performance on row crop fields to manage crop residue. The 15' shredding width, adjustable rear axle, stationary knives, stacked blades, and baffles make them well-suited for this application. The smooth top deck greatly reduces topside accumulation of crop residue.

4"  
CUTTING  
CAPACITY

← 4" →






## RCC56 Series

### HEAVY DUTY

Row Crop Special

50-250 HP

RCC5615

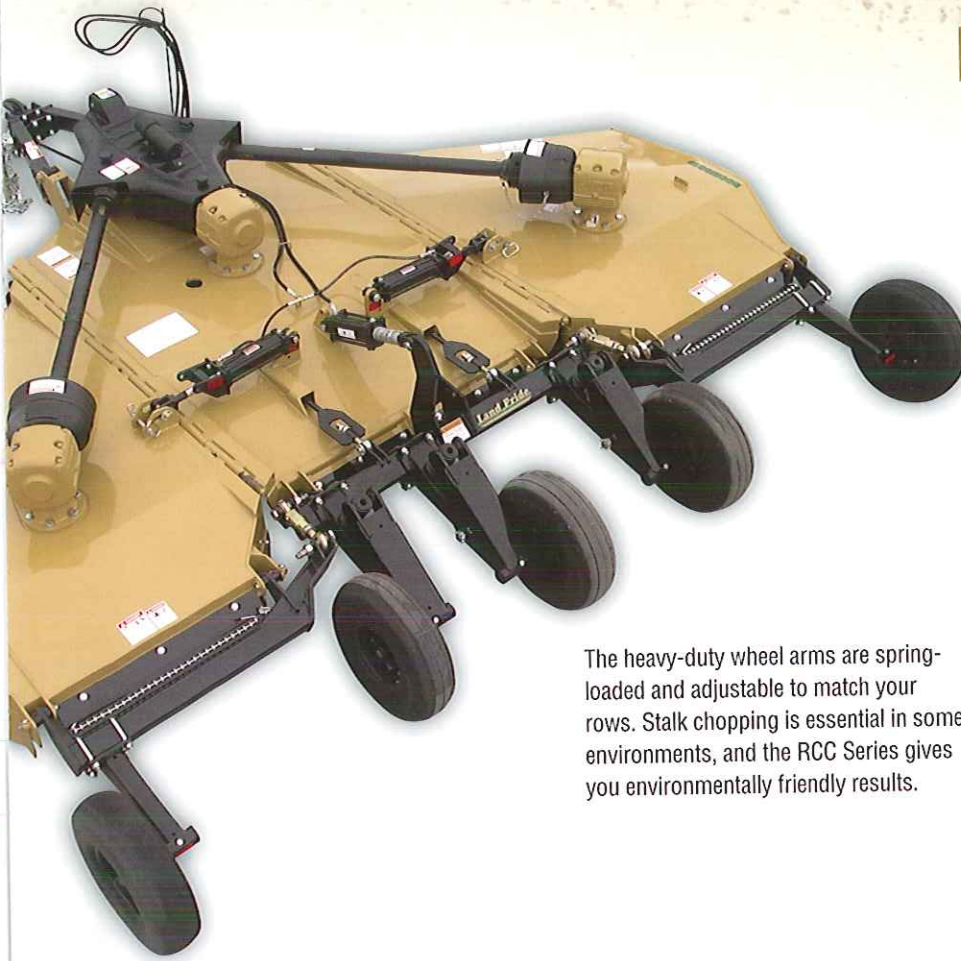

The heavy-duty wheel arms are spring-loaded and adjustable to match your rows. Stalk chopping is essential in some environments, and the RCC Series gives you environmentally friendly results.



Independent  
Spring-cushioned  
Trailing Arms



#### Shredder and Baffle Kit - optional

The double stacked blade configuration on the optional shredder kit is ideal for cutting residue into smaller pieces, while the baffle kit maintains the cut material in each section of the cutter for a consistent discharge from the rear of each deck.

Working Width (cm)	15' (457)
Overall Width (cm)	15' 8" (477.5)
Min. Transport Width (cm)	8' (244)
Overall Length (cm)	15' 1" (460)
Cutting Height (cm)	2' - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4' (10.15)
Machine Weight (kg)	5,506 lbs. (2497)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	1,860 lbs. (844)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.48)
Deck Material (cm)	7 Gauge bottom; 10 Gauge Top
Deck Shock Protection	Independent Wheel Arm Springs
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	Wings and Center, Replaceable
Tires (cm)	Laminated, Used Aircraft, w/w foam
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings
Gearbox	540 or 1000 RPM: 250 Center, 210 Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Constant Velocity U-Joint or Conventional U-Joint; Star Profile; Cat. 5
Connecting Drivelines	Choice of Cat. 4 or Cat. 5 driveline slipclutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" x 5" blade bar
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings; 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front & Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:



- Smooth top and bottom design
- Replaceable 1/4" side skirts with replaceable skid shoes
- Optional deck rings
- Optional shredder kit



# 66 SERIES ROTARY CUTTER

15' Folding

## DOMINATOR SERIES

### Nothing stands in our way!

The extra heavy-duty 66 Series Rotary Cutter has that extra muscle to cut in extreme conditions, and still give you the excellent appearance when completed.

Cutting 4 1/2" material allows you to tackle a great deal of obstacles when cleaning up neglected pastures or fields.

4 1/2"  
CUTTING  
CAPACITY

4 1/2"







The gearbox on our 66 Series cutters tell the 4" story. Our upper and lower bearings are further apart than on our other gearboxes. By spreading these apart, the output shaft and the heavy-duty dishpan can take the rigorous use these cutters will be used for.



#### Extra Heavy-Duty Dishpan

Our 1" thick plate adds superior strength to our dishpan.



The springs located in each wheel arm allows the shock loads to be minimized throughout the entire axle. The independent springs allow for a smooth ride through the field.

Also available in a 10' offset model. See page 32.

# DOMINATOR

## RC66 Series

### EXTRA HEAVY DUTY

50-250 HP

RC6615

Pull-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (457.2)
Overall Width (cm)	15' 8" (478)
Min. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	2' - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4 1/2" (11.43)
Machine Weight (kg)	5,660 lbs. (2567)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	2,080 lbs. (943)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Shock Protection	Independent Wheel Arm Springs
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft w/w/o foam
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:    

Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.



65 SERIES  
**ROTARY  
CUTTER**

**15' Folding**

**DOMINATOR**  
SERIES





# DOMINATOR

## RC65 Series

### EXTRA HEAVY DUTY

50-250 HP

RC6515

Pull-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (457.2)
Overall Width (cm)	15' 8" (478)
Mln. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4 1/2" (11.43)
Machine Weight (kg)	5,559 lbs. (2521)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	1,860 lbs. (844)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Shock Protection	Spring Cushioned Axle
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft, w/wo foam
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.



**7 YEAR**  
Limited Gearbox  
Warranty



Center Walking Tandem axle is available as an option on the 65 Series Cutters. The Walking Tandem axle allows for a smoother pull over rough terrain during cutting and transport.



Choice of recapped aircraft tires, used aircraft tires w/wo foam or laminated tires.

- 4 1/2" Cutting capacity
- Smooth top and bottom
- Replaceable side skirts with replaceable skid shoes
- Extra heavy-duty gearboxes with 2 3/8" output shafts
- Optional deck rings
- Optional center walking tandem axle



**Extra Heavy-Duty Dishpan**  
Our 1" thick plate adds superior strength to our dishpan.

**4 1/2"**  
CUTTING  
CAPACITY

4 1/2"



## Making roadside cutting safe and efficient.



RC5610

- Left hand weight box
- 5 or 6 Wheel option
- Optional hitch configurations
- Optional walking tandem axle on center
- Optional deck rings



RC6510

Land Pride's wheel base offers a smoother pull of the cutter, which holds slopes better and reduces overall operator fatigue.

- Replaceable 1/4" sideskirt with replaceable skid shoe
- Smooth top design
- Heavy-duty dishpans
- 4" Cutting capacity on RC55, RC56
- 4 1/2" Cutting capacity on RC65, RC66

## RC55, RC56, RC65, RC66 Series

50-250 HP

RC5510, RC5610, RC6510, RC6610

Working Width (cm)	10' 6" (320.0)
Overall Width (cm)	11' (335)
Min. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	RC55 & 56: 4" (10.15) RC65 & 66: 4 1/2" (11.43)
Approx. Machine Wt. (kg)	RC55 & 65: 4,977 lbs. (2258) RC56 & 66: 5,292 lbs. (2400)
Tongue Weight (kg)	1,860 lbs. (844)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Shock Protection	RC55 & 65: Spring Cushioned Axle RC56 & 66: Independent Wheel Arm Springs
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 5 or 6	Laminated, Used Aircraft or Recapped Aircraft, w/w/o foam
Hydraulics	RC55 & 65: Wings: 3" x 12" RC56 & 66: Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings, and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Dish Pan (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:






# 14' — Largest offset cutter in the family!



A 14' swath on a roadside can knock out a lot of work in one pass. Equipped with extra heavy-duty gearboxes and drivelines, and a dish pan to help protect it all, this cutter is ready to go to work!



Choice of used aircraft tires w/wo foam or laminated tires.

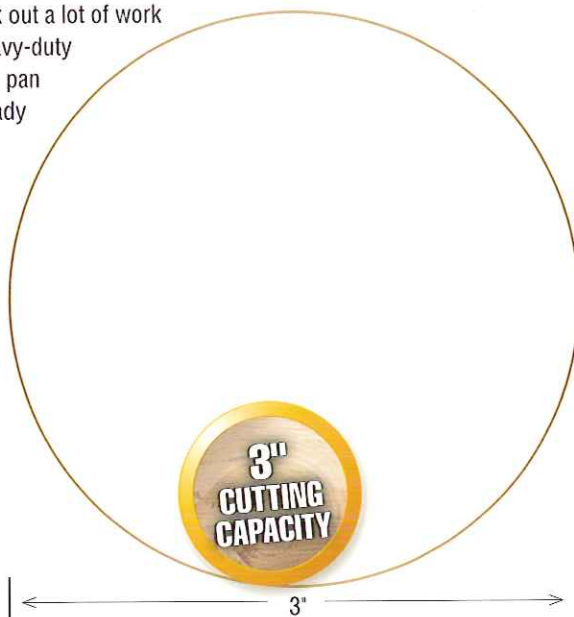

**Standard Clevis Hitch**  
Pivots up and down for uneven terrain



**Double Swivel Clevis Hitch**  
Swivels up and down and side to side



**Bar-tite™ Clevis Hitch**  
Bolts tight to drawbar which eliminates drawbar wear. Swivels up and down, and rotates on greaseable shaft

Working Width (cm)	13' 6" (411)
Overall Width (cm)	14' 7" (445)
Min. Transport Width (cm)	8' 9" (266.7)
Overall Length (cm)	19' 3" (589.28) w/Laminated Tires
Cutting Height (cm)	2' - 14" (5.08 - 35.56)
Cutting Capacity (cm)	3" diameter (7.62)
Machine Weight (kg)	7,282 lbs. (3303)
Tongue Weight (kg)	2,300 lbs. (1043)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	10 1/2" (26.67)
Deck Material (cm)	3/16" (.49)
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635)
Skid Shoes	1 on wing and weight box, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft w/wo foam
Hydraulics	Wings: 3.5" x 8" Cylinder, Hoses and Fittings Axle: 4" x 8" Cylinder, Hoses, Fittings and Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 235 HP Divider, 210 HP Center & Wing
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	4-Plate Slip Clutch; Cat. 5
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped w/1" steel plate support
Blades (cm)	1/2" x 4" (1.27 x 10.16) High Lift
Blade Tip Speed (Feet per minute)	540 RPM: 17,377 fpm on center, 17,329 fpm on wings 1000 RPM: 18,165 fpm on center, 18,317 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Single or Double Chain or Rubber

\* See dealer for complete warranty information.

Color Options:



**7 YEAR**  
Limited Gearbox  
Warranty

- Heavy-duty stump jumper
- Left side weight box
- Optional shredder and baffle kit



# B66 SERIES ROTARY CUTTER

15' Folding



All of the features found on our RC66 Series Rotary Cutter and more!



**Heavy-Duty Dishpan**  
Our 1" thick plate adds superior strength to our dishpan.

**4 1/2" CUTTING CAPACITY**

4 1/2"

Our B66 Series Rotary Cutters offer many of the additional features that counties, states and contract cutters are looking for.

- 4 1/2" Cutting capacity
- 7 Gauge bottom, 10 gauge top
- 12" Deck height
- Extra heavy-duty gearboxes with 2 3/8" output shafts
- Spring cushioned axle
- Optional deck rings
- Rephasing cylinders on wing axles for leveling the wings
- Optional walking tandem axles on center and wings for a smoother pull
- Independent wing hydraulics
- Cable winch (optional) for raising or lowering the wings in a hydraulic failure

## DOMINATOR

### RCB66 Series

#### EXTRA HEAVY DUTY

50-250 HP

RCB6615

Pull-Type, Self-leveling Hitch & Clevis

Working Width (cm)	15' (457.2)
Overall Width (cm)	15' 8" (478)
Min. Transport Width (cm)	8' (243.8)
Overall Length (cm)	15' 1" (459.74)
Cutting Height (cm)	2" - 14" (5.08 - 35.56)
Cutting Capacity (cm)	4 1/2" (11.43)
Machine Weight (kg)	5,738 lbs. (2603)
Hitch	Standard Clevis, Swivel, Pintle or Bar-Tite Hitch
Tongue Weight (kg)	1,842 lbs. (836)
Maximum Turning Angle	80° with Constant Velocity U-Joint
Deck Height (cm)	12" (30.05)
Deck Material (cm)	7 Gauge bottom, 10 Gauge top
Deck Shock Protection	Spring Cushioned Axle
Deck Rings	Optional
Side Thickness (cm)	1/4" (.635) Replaceable
Skid Shoes	1 each wing, 2 on center section, replaceable
Tires (cm) 6 or 8	Laminated, Used Aircraft or Recapped Aircraft
Hydraulics	Wings: 3" x 8" Cylinder, Hoses and Fittings Axle: 3.5" x 8" Cylinder, Hoses, Fittings & Stroke Control Spacers
Gearbox	540 RPM or 1000 RPM: 250 HP Divider, 210 HP Center & Wings
Gearbox Output Shaft	2 3/8"
Gearbox Input Shaft	1 3/4" 20 Spline
Input Driveline	Star Shaped CV U-Joint or Star Shaped Conventional U-Joint 540 RPM: Cat. 5, 1000 RPM: Cat. 5
Connecting Drivelines	Star Shaped Cat. 5 Slip-Clutch
Stump Jumper (cm)	3/16" (.48) Round, Dish shaped with 1" Steel Plate Support
Blades (cm)	1/2" x 4" (1.27 x 10.16) Heat Treated Free Swinging Alloy Steel w/Uplift
Blade Tip Speed (Feet per minute)	540 RPM: 14,886 fpm on center, 14,769 fpm on wings 1000 RPM: 15,604 fpm on center, 15,741 fpm on wings
Blade Overlap (cm)	6" (15.24)
Shielding (must choose)	Front: Single or Double Chain or Rubber Guard Rear: Single or Double Chain or Rubber Guard

\* See dealer for complete warranty information.

Color Options:



Land Pride strongly recommends that front and rear shielding be used with any Rotary Cutter. However, they can be purchased with or without shielding. Please understand how your cutter is to be equipped for you.



# SAFETY STANDARDS




[www.landpride.com](http://www.landpride.com)


## Testing Using Rugged Industry Standards

In our continuing effort to manufacture products in a responsible manner, all Land Pride Rotary Cutters have been designed, tested and found to meet the rigorous voluntary testing requirements of the safety tests as specified in ANSI 871.4, ASAE 5474 and SAE J232. These cutters, however, like any piece of power driven equipment, are only as safe as the care and concern of the operator and the way they are used.


**Blade Unbalance Test:** One blade is removed and cutter run for two minutes to evaluate the structural integrity of the complete cutter and power train.

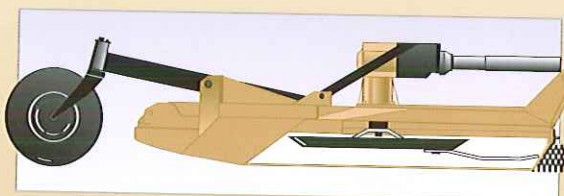


**Thrown Object Test:** 3600 Nails are dropped through multiple holes in the top side of the deck into the rotating blades to evaluate deck design and safety guards.

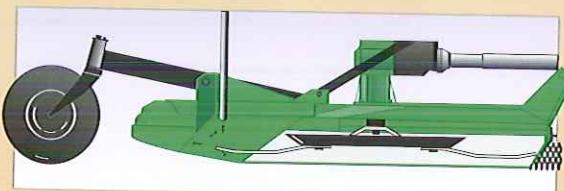

**Blade Impact Test:** Rotary Cutter is lowered onto a vertical 2" steel stake while running at optimum blade tip speed to evaluate the integrity of the complete power train.

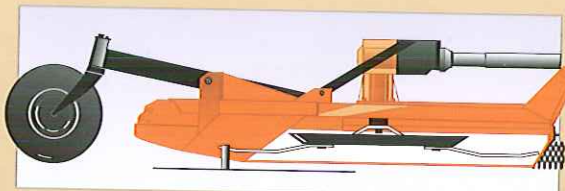

**Structural Integrity Test:** 2" Long steel rods are dropped through multiple holes in the top side of the deck into the rotating blades to evaluate the structural integrity of the deck material.

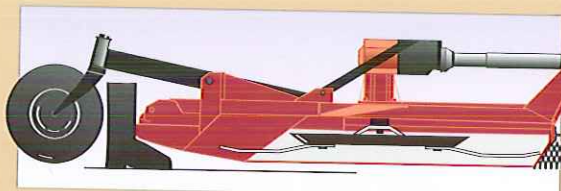

**Foot Probe Test:** 8" Leg to toe with a 4" in-step model foot is inserted under the perimeter of the deck to evaluate its relationship with the rotating blades.

Drawings are for illustration purposes only.





A Division of Great Plains Mfg., Inc.

1525 E. North St. • P.O. Box 5060  
Salina, Kansas 67401

Visit our dealer locator at [landpride.com](http://landpride.com)

**Lp** *Consistently Leading the Way...*

All-Flex Mowers • All-Purpose Seeders • Angle Brooms • Box Scrapers • Core Aerators • Crimpers  
Disc Harrows • Ditchers • Drag Harrows • Drag Scrapers • Fertilizer Spreaders • Flail Mowers  
Food Plot Seeders • Grading Scrapers • Grooming Mowers • Hydraulic Reservoir Kits  
Landscape Rakes • Overseeders • Pallet Forks • Pasture Aerators • Post Hole Diggers  
Powered Rakes • Primary Seeders • Quick-Hitches • Rear Blades • Rotary Cutters  
Rotary Tillers • Scarifiers • Seed Bed Rollers • Soil Pulverizers  
Spike Tooth Harrows • Trip Edge Snow Blades • Zero Turn Mowers


Printed in U.S.A.  
BAC 52767/5/12



# Farm King

## HAY TOOLS

Round Bale Carriers | Square Bale Carrier | Disc Mower | Easy Rakes | Bat Rakes | Tedders

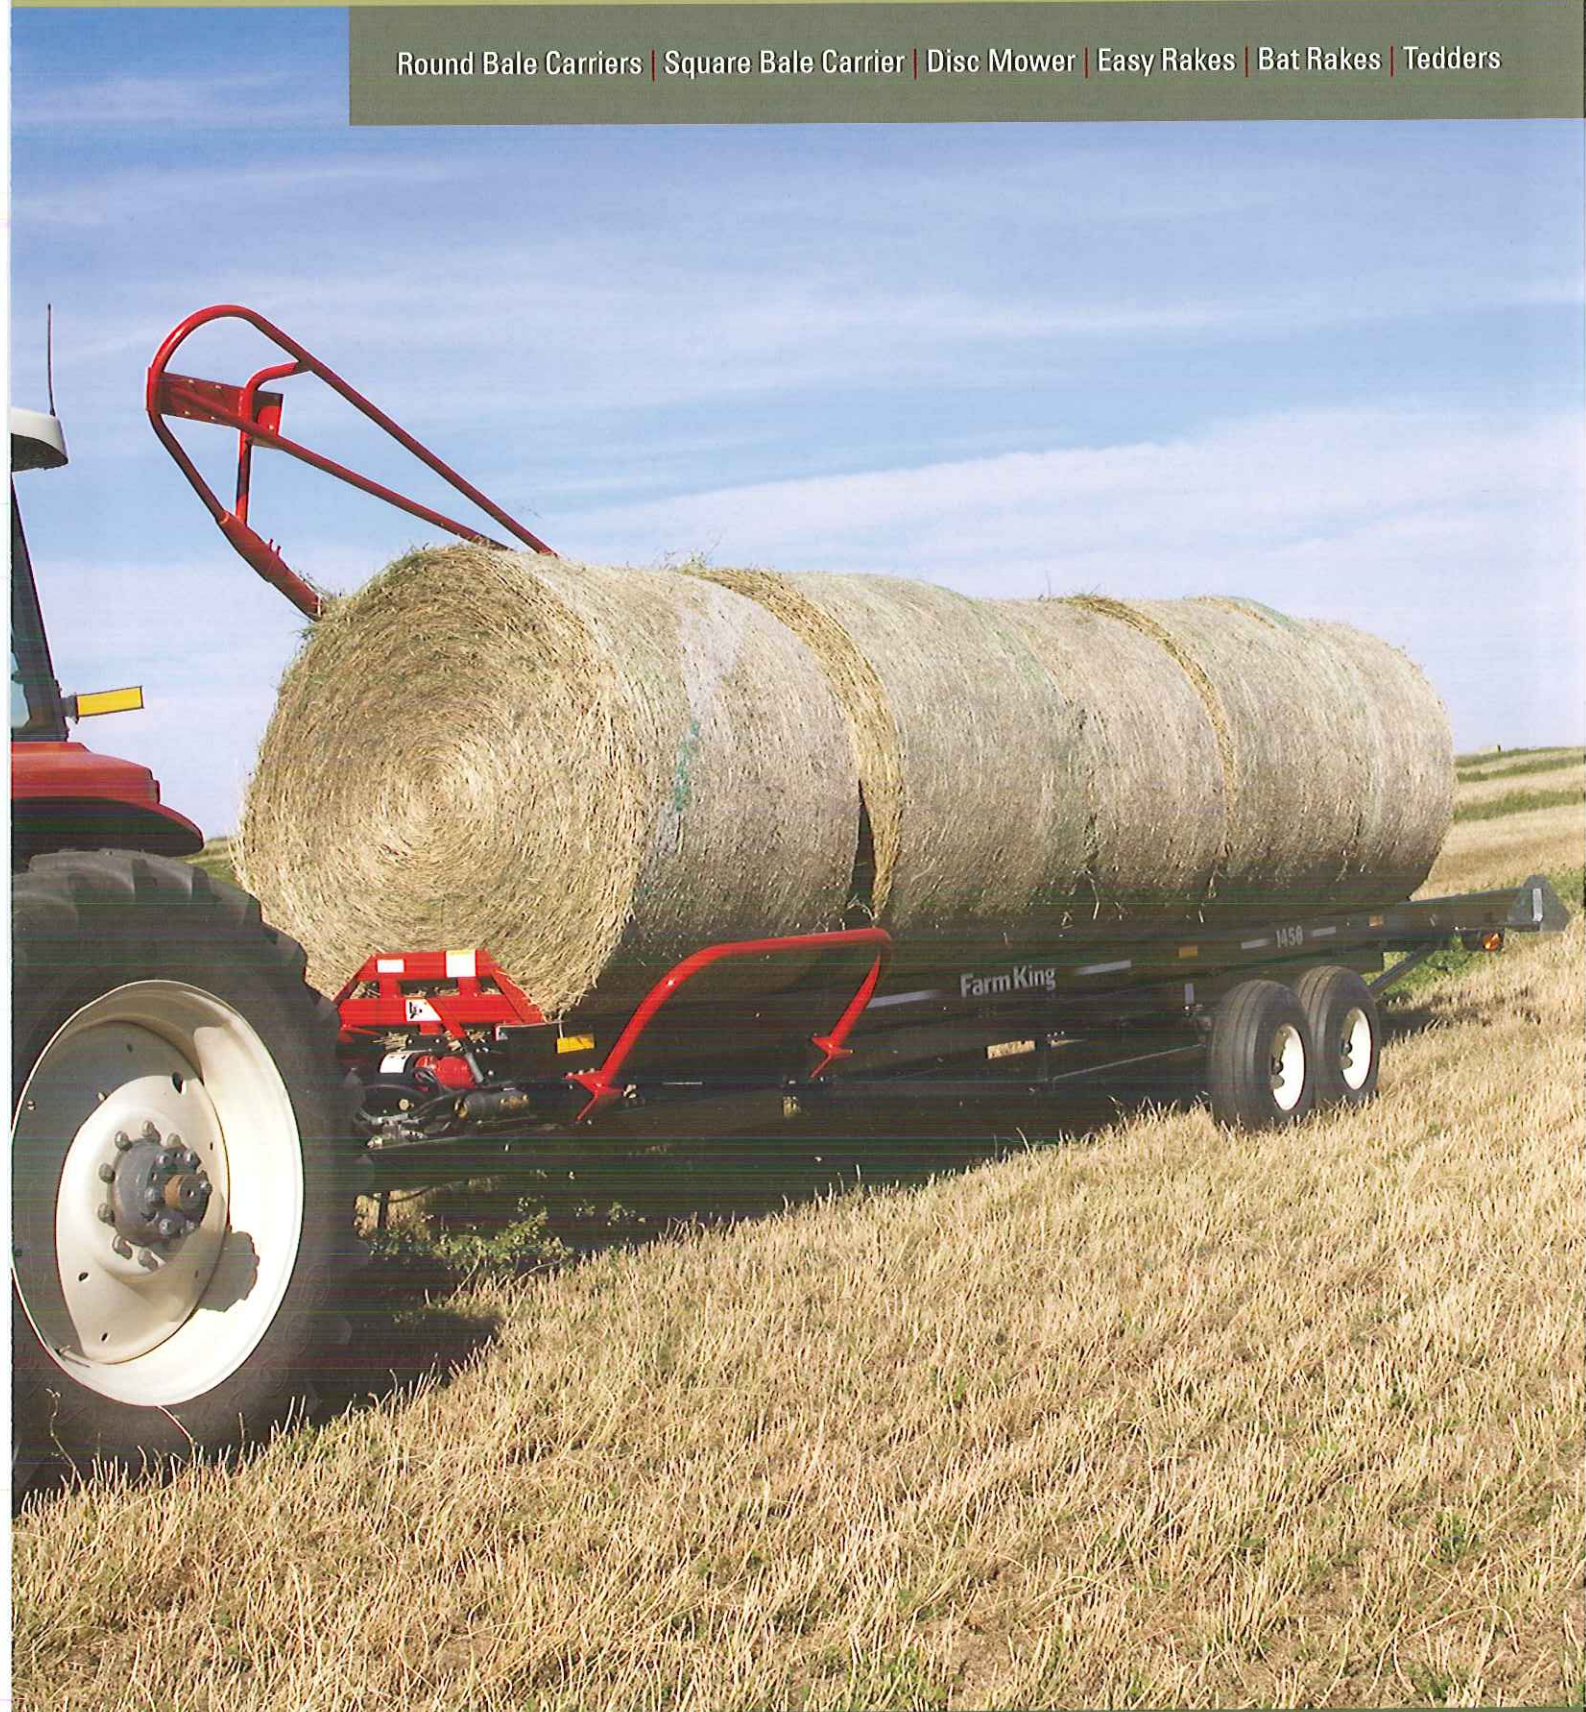





## Farm King Product Line-Up

### **Farm King Product Categories**

Grain Handling

Application Equipment

Hay Tools

Landscaping Equipment

Allied by Farm King

[www.farm-king.com](http://www.farm-king.com)

Farm King hay tools are backed by decades of quality built products for just about every agricultural application. Getting your hay from the field to the barn has never been easier than with the full line of Farm King hay equipment. Known for their simplicity and reliability Farm King implements meet the needs of your operation. Visit your local dealer today and improve your bottom line.





Introduction .....	2
Round Bale Carrier .....	4
Square Bale Carrier .....	8
Disc Mower .....	14
Sickle Bar Mower .....	15
Easy Rakes .....	16
Easy Rake - Superstar .....	18
Bat Rake .....	20
Tedder .....	22







The Farm King 1450 round bale carrier can carry seven 5' by 6' bales weighing up to 900 kg (2,000 lb) each in a single row. The double wide Farm King 2450 round bale carrier has twice the capacity. Heavy duty construction means the bale carriers are robust, yet designed to be affordable with gentle bale handling and easy maintenance. Rugged durability, proven performance and easy unloading minimizes bale damage and reduces handling costs.

#### PRODUCT OVERVIEW

- › The quick and safe way to move round bales
- › 5 x 6 or 6 x 6 bales
- › 60 hp required (1450), 80 hp required (2450)

#### FEATURES

- › Rotating pickup arm
- › Simple hand-held controls

#### OPTIONS

- › Bale deflector





## Features



### Deck

The heavy duty undercarriage and tandem walking beam axles ensure reliable transport to the unloading area. To unload, the operator tilts the carrier deck using the tractor control. Once the rear of the deck is on the ground, the pusher, controlled with the hand-held remote, unloads the bales in tight end-to-end rows.




### Pickup Arms

Gentle yet rugged pickup arms place bales on the deck where a pusher, powered by two hydraulic motors, slides the bales back on graphite coated carrier beams. This means efficient bale handling, less stress and more bales moved each day.



### Pusher

After bales are lifted onto the deck, a pusher, powered by two hydraulic motors, moves the bales rearward. The pusher has two settings that are selected on the hand-held remote. The operator can choose the most efficient speed and torque for varying conditions: 'high' for dry hay and straw; 'low' provides additional torque for wet or high moisture silage bales, and the pusher moves with less speed.

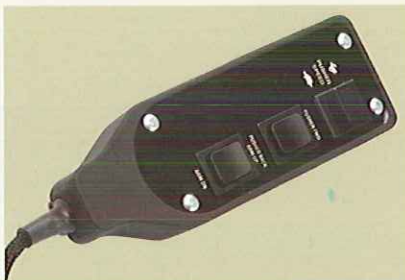

◀ A hand-held control works with the tractor remotes to operate all the functions of the bale carrier. The bale carrier uses two sets of tractor hydraulic outlets.


A transport lighting kit is standard on both ▶ models.








Model 1450

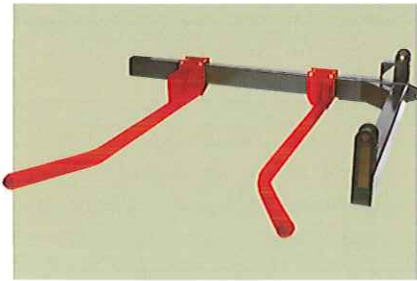

### Standard Arm

Two types of pickup arms are available for each bale carrier model. The 1450S and the 2450S feature standard pickup arms fitted with adjustable forks that cradle and lift bales onto the deck for 'end-on' picking. The 1450R and 2450R have rotating pickup (RPU) arms and forks that hydraulically squeeze, rotate and lift bales onto the deck.

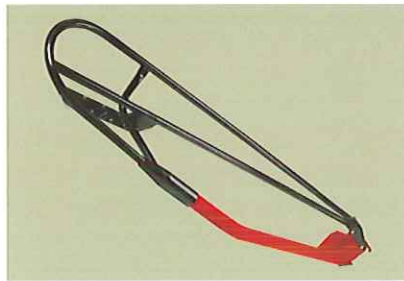

### Bale Deflector

The bale deflector is added to the outer fork of the standard pickup arm which means bales can be picked up from either the 'end-on' or 'side-on' position. The deflector gently lifts and rotates the bale into the pickup arm, allowing the operator to follow the path of the baler without damaging the bale. This eliminates the need to travel over the ruts and ridges left by the baler.



### Rotating Pickup Arm

The 1450R and 2450R are equipped with rotating pickup (RPU) arms with forks that hydraulically squeeze, rotate and lift bales onto the deck for 'side-on' picking. This allows the operator to follow the travel of the baler.



Approach



Pick



Lift



## Specifications

MODEL	1450	2450
Capacity	GVW: 18,720 lb (8,491 kg) Eight - 4' wide bales Seven - 5' wide bales	GVW: 37,440 lb (16,983 kg) Sixteen - 4' wide bales Fourteen - 5' wide bales
Tractor requirements	60 hp (45 kW) at 12,480 lb (5,660 kg) Maximum recommended speed when loaded is 20 mph (32 km/hr)	80 hp (60 kW) at 25,000 lb (11,340 kg) Maximum recommended speed when loaded is 20 mph (32 km/hr)
Hand held remote control	Power: 12v, Fuse: 15 amp	Power: 12v, Fuse: 15 amp
Hydraulics	Two double acting circuits required	Two double acting circuits required
Hydraulics, lift cylinder	One - 3" diameter	Two - 3" diameter
Hydraulics, tilt cylinder	One - 3" diameter	Two - 3" diameter
Hydraulics, motor	Two - 22.0 cu. in	Four - 22.0 cu. in
Tires	(Four) 12.5L x 15FI tires, load range F, intermittent unloaded highway use	(Eight) 12.5L x 15FI tires, load range F, intermittent unloaded highway use
Tires, capacity	4,680 lb (2,130 kg) at 90 PSI inflation	4,680 lb (2,130 kg) at 90 PSI inflation
Tires, hub	6 bolt with twine guard	6 bolt with twine guard
Tires, wheel	Heavy-duty implement style	Heavy-duty implement style
Deck length	37' (11.3 m)	37' (11.3 m)
Overall length	44' (13.4 m)	45' (13.7 m)
Transportation width	8.5' (2.6 m)	12.75' (3.9 m)
Hitch weight	Empty vertical drawbar load 6,071N (1,365lbf)	Empty vertical drawbar load 2,395lbf (10,653N)
Shipping weight (approx.)	5,495 lb (2,498 kg)	9,375 lb (4,252 kg)



Roll



Raise



Unload





With years of on-farm testing and refinements the Farm King 4480 Square Bale Carrier offers simplified operation and an intuitive display. The Farm King 4480 Square Bale Carrier picks, hauls and stacks eight 48" x 48" bales or can double row twenty 32" x 34" x 96" bales, and features a host of new innovations and technology designed to increase efficiency and minimize bale damage. The Farm King 4480 Square Bale Carrier is designed to follow the same path as the baler.

## PRODUCT OVERVIEW

- › Stacks bales in uniform tight rows
- › Simple operation
- › 100 hp required

## FEATURES

- › In cab control for complete manual and automatic operation
- › Hand held remote control
- › Graphite coated beams

## OPTIONS

- › Second row stabilizer kit for intermediate sized bales





## Features



### Bale Pusher

After bales are lifted onto the deck, a pusher powered by two hydraulic motors moves the bales rearward. If the pusher senses resistance from a heavier-than-average bale during regular operation, it automatically shifts to 'low' for five seconds to provide more power to push the bale. If the bale will not move, a sensor sends a message to the monitor to alert the operator. The sensor on the pusher motor counts revolutions to efficiently measure the pushback distance.



### Reduce Stress


The beams on the carrier deck have been covered with a special graphite coating that allows the bales to slide with minimal effort. An optional 2-row stabilizer kit is available for double-stacked bales.

The chain that powers the pusher is recessed beneath the beams so the weight of the bale is never resting fully on the chain, minimizing bale stress and limiting the chance of string breakage. ►



### Carrier Arm

The reinforced carrier arm enhances the structural integrity of the machine. Hydraulic hoses and electronic sensors have been positioned to avoid being pinched or damaged by moving parts.

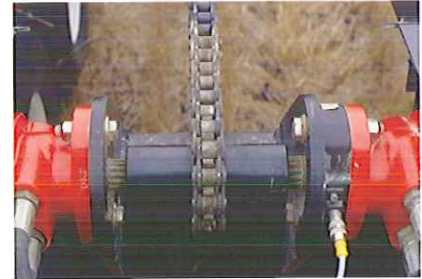

### Hydraulics

The bale carrier automatically adjusts its hydraulic configuration to correspond with the hydraulic system on the tractor, as selected by the operator. The bale carrier is compatible with open-center, closed-center, or load-sensing closed-center hydraulic systems.





A hand-held control and a system monitor are responsible for programming and operating the Farm King 4480 Square Bale Carrier. The hand-held control activates the pickup arm and initializes the pickup sequence and operates the pusher and tilt deck.

## System Monitor



Designed to be intuitive and straightforward, the main menu offers four options, selected by buttons located next to the screen. Shipped from the factory with default settings and preset bale sizes, the bale carrier is ready for operation once the operator indicates the type of hydraulics the operating tractor is using: open center, closed center or closed center with load sensing. The carrier adjusts its hydraulic operation to match that of the tractor.

Shipped from the factory with default settings and preset bale sizes, the bale carrier is ready for operation once the operator indicates the type of hydraulics the operating tractor is using: open center, closed center or closed center with load sensing. The carrier adjusts its hydraulic operation to match that of the tractor.



# RM Series 150 & 200 Gallon

## rear mount units

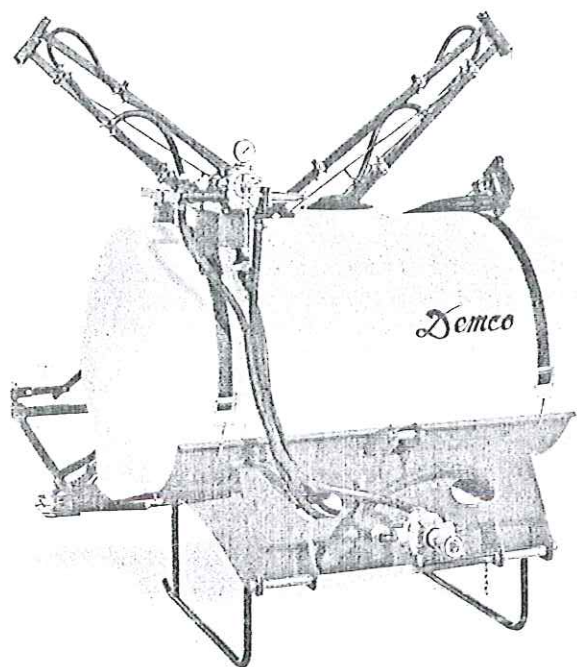


BoomJet® nozzle

See Components section

### Features





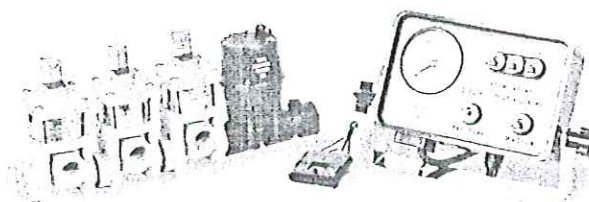

- 150 or 200 gallon tank with jet agitation, molded sight gauge, sump, fillwell with no-splash cover.
- Rear mount brackets are complete with saddles, tank bands and all necessary bolts.
- Rear mount brackets will fit categories "1" and "2".
- Unit may be used with a "Quick Attach" three point hookup.
- Non-retractable built-in ground stand for storage when empty.
- Hypro® 8 roller PTO pump (C7560D) will deliver 22 GPM at 1000 RPM, 12 GPM at 540 RPM and 300 PSI max.
- 21', 28', 30' and 40' Truss-T booms feature vertical and horizontal boom breakaway, no drip diaphragm check nozzles spaced at 20".
- Handgun with 25' of hose (optional)

NOTE: LTL freight shipments require \$60.00 crating charge.



Three section electric solenoid valve and control

**HOW TO ORDER** Choose in this order: 1. Frame 2. Tank 3. Boom 4. Pump and Plumbing 5. Controls 6. Accessories


	<b>Frame</b>			
	Rear Mount Frame for 150 gallon tank	9416006	190 lbs.	\$1,177.00
	Rear Mount Frame for 200 gallon tank	9416007	200 lbs.	\$1,282.00
	<b>Tank</b>			
	150 Gallon Tank with agitation	P150 32A	50 lbs.	\$580.00
	200 Gallon Tank with agitation	P200 32A	64 lbs.	\$680.00
	<b>Boom with Plumbing</b> Note: Order Spray Tips separately (see Components Section)			
	21' Boom (3 section, 13 nozzles)	DB21TDF	85 lbs.	\$998.00
	28' Boom (3 section, 17 nozzles)	DB28TDF	110 lbs.	\$1,172.00
	30' Boom (3 section, 19 nozzles)	DB30TDF	115 lbs.	\$1,249.00
	40' Boom (3 section, 25 nozzles)	DB40TDF	170 lbs.	\$1,671.00
	BoomJet® Nozzle Bracket Kit (1 section, nozzle not included)	9464050	5 lbs.	\$90.00
	<b>Pumps and Plumbing Kit</b> (less controls)			
	NOTE: For Pump Specifications (see Components Section)			
	PTO Mounted 8 Roller Pump and Plumbing Kit (1 section)	9465064	28 lbs.	\$530.00
	PTO Mounted 8 Roller Pump and Plumbing Kit (3 section)	9465066	31 lbs.	\$589.00
	Centrifugal Pump Plumbing Kit (3 section) (Pump not included)	9465068	65 lbs.	\$404.00
	<b>Controls</b>			
	Manual (1 section)	9465054	2 lbs.	\$71.00
	Electric (1 section)	9465055	5 lbs.	\$227.00
	Manual (3 section)	9465056	5 lbs.	\$184.00
	Electric (3 section)	9465057	15 lbs.	\$859.00
	<b>Accessories</b>			
	Handgun (includes 25' of 1/2" hose)	DBHGR	13 lbs.	\$233.00
	Factory setup (Booms may be removed for shipping.)	SURMU	Net	\$261.00




# Spray Tips

## BoomJet® Boomless Nozzles with Extra wide Flat Spray Projection

The 5880 BoomJet® Nozzle combines two off-center tips and three VeeJet nozzles to produce an overall wide swath flat spray. Nozzle assembly provides a good distribution for the wide pattern coverage obtained. Supplied with one additional 1/4" NPT pipe plug and one blank tip for setting BoomJet® to spray to one side only. Type 5880 also has a 1/4" NPT pressure gauge port. 3/4" NPT inlet.



W = Maximum effective coverage with nozzle mounted at 36" height.

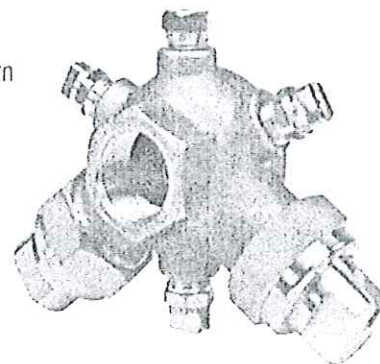

BoomJet® Nozzle No.	OC Tips (Two)	VeeJet Top Nozzles (Two)	VeeJet Bottom Nozzle	Liquid Pressure psi	Total Capacity GPM	"W" in feet	Gallons Per Acre				
							4 mph	5 mph	7.5 mph	10 mph	15 mph
5880 3/4 2TOC06 \$296.84	#6733-OC06	H1/4VV-1506	H1/4VVL-9502 with 50 mesh strainer	20	1.84	33.5	6.8	5.4	3.6	2.7	1.8
				30	2.25	34.0	8.2	6.6	4.4	3.3	2.2
				40	2.60	34.5	9.3	7.5	5.0	3.7	2.5
5880 3/4 2TOC10 \$296.84	OC10	H1/4U-0508HE	H1/4VVL-11004 with 50 mesh strainer	20	2.83	39.5	8.9	7.1	4.7	3.5	2.4
				30	3.46	40.0	10.7	8.6	5.7	4.3	2.9
				40	4.00	40.5	12.2	9.8	6.5	4.9	3.3
5880 3/4 2TOC20 \$332.07	OC20	H1/4U-0520HE	H1/4VVL-9506 with 50 mesh strainer	20	6.08	47.0	16.0	12.8	8.5	6.4	4.3
				30	7.45	50.0	18.4	14.8	9.8	7.4	4.9
				40	8.60	52.0	20.0	16.4	10.9	8.2	5.5
5880 3/4 2TOC40 \$332.07	OC40	H1/4U-0540HE	H1/4U-9510	20	12.0	56.0	27.0	21.0	14.1	10.6	7.1
				30	14.7	60.0	30.0	24.0	16.2	12.1	8.1
				40	17.0	63.0	33.0	27.0	17.8	13.4	8.9

## TeeJet®

### METERING ORIFICES

**Note:** Always insert orifice plate with side marked with number facing the outlet.

**MATERIAL:** Stainless Steel

Chart is based on water with flow regulator on 30" row spacing.

Orifice No.	Pressure in PSI	Capacity in GPM	Gallons Per Acre				
			3 MPH	4 MPH	5 MPH	6 MPH	8 MPH
4916 65 \$3.77	10	.261	17.2	12.8	10.2	8.5	6.4
	20	.369	24.4	17.8	14.5	12.1	9.0
	30	.452	29.7	22.4	17.8	14.5	11.1
	40	.522	34.3	25.6	20.5	17.0	12.8
4916 70 \$3.77	10	.306	19.8	15.2	12.0	10.0	7.5
	20	.432	28.4	21.1	17.2	13.9	10.6
	30	.530	34.3	25.7	20.5	17.2	13.0
	40	.612	39.6	30.4	24.0	19.9	15.0
4916 75 \$3.77	10	.347	22.4	17.2	13.9	11.4	8.5
	20	.491	32.3	23.8	19.1	15.8	12.0
	30	.601	39.6	29.7	23.8	19.8	14.5
	40	.694	44.9	34.3	27.7	22.7	17.0
4916 80 \$3.77	10	.396	25.7	19.1	15.8	12.9	9.7
	20	.561	37.0	27.7	21.8	18.5	13.9
	30	.687	44.9	33.7	27.1	22.4	16.5
	40	.792	51.5	38.3	31.7	25.9	19.4
4916 89 \$3.77	10	.490	26.4	23.8	19.1	15.8	12.0
	20	.693	45.5	33.7	27.1	22.4	17.2
	30	.849	55.4	41.6	33.0	27.7	21.1
	40	.980	64.7	47.5	38.3	31.7	24.0
4916 95 \$3.77	10	.572	37.6	27.7	22.4	18.5	13.9
	20	.808	52.8	39.6	31.7	26.4	19.8
	30	.990	64.7	48.8	38.9	32.3	24.4
	40	1.144	75.2	55.4	44.9	37.0	27.7
4916 107 \$3.77	10	.735	48.2	36.3	29.0	23.8	17.8
	20	1.04	68.0	50.8	40.9	33.7	25.7
	30	1.27	83.2	62.7	50.2	41.6	31.0
	40	1.47	96.4	72.6	58.1	47.5	35.6

4916  
14





## Features



### Free-swinging blade

The MDN 5, 6 and 7 come standard with 15-inch discs and 4-inch long blades. The free-swinging blades create a precise cut when reaching rotation speeds of 3000 rpm. The centrifugal force creates a vacuuming effect on the blades of grass and allow for a nicely manicured look. A 3-inch blade overlap ensures a clean cut every time.



### Suspension Springs

Dual suspension springs on either side of the cutter bar create a smooth motion as the mower glides over the terrain.



### Hydraulics

All three models of easy rake can be conveniently opened and closed using hydraulics.

MODEL	MDN5	MDN6	MDN7
Working width	7' (2.10 m)	8' 1" (2.45 m)	9' 4" (2.85 m)
Number of discs	5	6	7
Number of blades	10	12	14
Blade rotation speed	3000 RPM at 540 G'	3000 RPM at 540 G'	3000 RPM at 540 G'
Vertical lift	Hydraulic	Hydraulic	Hydraulic
Horizontal lift	1 single acting cylinder	1 single acting cylinder	1 single acting cylinder
3-point hitch	Cat. I / II	Cat. I / II	Cat. I / II
Tractor requirements	40 hp	45 hp	50 hp
Weight	992 lb (450 kg)	1,058 lb (480 kg)	1,124 lb (510 kg)



### Sickle Bar Mower

Available in three sizes the Farm King sickle bar mower was designed for simple operation and effective cutting. A dual-action cutter bar ensures a fast, clean and even cut every time. The tilting mower bar allows you to cut on ditches, embankments, and hills.

MODEL	7M	7H	9H
Working width	7' (213 cm)	7' (213 cm)	9' (274 cm)
3-point hitch	Cat. I / II	Cat. I / II	Cat. I / II
Tractor requirements	40 hp	45 hp	50 hp
Weight	441 lb (200 kg)	439 lb (199 kg)	450 lb (204 kg)

