



Purchasing Division
2019 Washington Street East
Post Office Box 80130
Charleston, WV 25308-0130

State of West Virginia
Request for Quotation
09 - Construction

Proc Folder: 615148

Doc Description: Addendum No. 2 Building 86 Parking Lot Repair Project

Proc Type: Central Purchase Order

Date Issued	Solicitation Closes	Solicitation No	Version
2019-08-20	2019-09-16 13:30:00	CRFQ 0211 GSD2000000009	3

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV 25305

US

VENDOR

Vendor Name, Address and Telephone Number:

McClanahan Construction Company LLC

744 Poca River Rd N

Poca, WV 25159

(304) 776-3355

RECEIVED

2019 SEP 16 PM 1:10

WV PURCHASING
DIVISION

FOR INFORMATION CONTACT THE BUYER

Melissa Pettrey

(304) 558-0094

melissa.k.pettrey@wv.gov

Signature X

FEIN # 55-0698258

DATE September 16, 2019

All offers subject to all terms and conditions contained in this solicitation

Addendum No. 2

Addendum No. 2 is issued to publish and distribute the attached information to the vendor community.

REQUEST FOR QUOTATION
CONSTRUCTION

The West Virginia Purchasing Division is soliciting bids on behalf of the General Services Division to establish a One-Time contract for Parking Lot Repairs and Repaving at Building 86 located at 1124 Smith Street, Charleston, West Virginia 25301, per the attached Specifications, Terms & Conditions, and Project Plans.

INVOICE TO		SHIP TO	
DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION 112 CALIFORNIA AVENUE, 5TH FLOOR CHARLESTON WV25305 US		DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION BLDG 86 1124 SMITH ST CHARLESTON WV 25301 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	Building 86 Parking Lot Repair Project	0.00000			95,995.00

Comm Code	Manufacturer	Specification	Model #
72141100			

Extended Description :
Building 86 Parking Lot Repair Project

INVOICE TO		SHIP TO	
DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION 112 CALIFORNIA AVENUE, 5TH FLOOR CHARLESTON WV25305 US		DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION BLDG 86 1124 SMITH ST CHARLESTON WV 25301 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	Building 86 Parking Lot Repair Project	1.00000	CY		200.00

Comm Code	Manufacturer	Specification	Model #
72141100			

Extended Description :
Price per Cubic Yard for removal of existing sub-base, if over excavation is required.

INVOICE TO		BID TO	
DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION 112 CALIFORNIA AVENUE, 5TH FLOOR CHARLESTON WV25305 US		DEPARTMENT OF ADMINISTRATION GENERAL SERVICES DIVISION BLDG 86 1124 SMITH ST CHARLESTON WV 25301 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
3	Building 86 Parking Lot Repair Project	1.00000	TON		75.00

Comm Code	Manufacturer	Specification	Model #
72141100			

Extended Description :

Price per Ton for additional "57" stone backfill, if over excavation is required.

SOLICITATION NUMBER: GSD2000000009

Addendum Number: 1

The purpose of this addendum is to modify the solicitation identified as PSC1800000005 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- ☐ Modify bid opening date and time
- ☐ Modify specifications of product or service being sought
- ☐ Attachment of vendor questions and responses
- ☐ Attachment of pre-bid sign-in sheet
- ☒ Correction of error
- ☐ Other

Description of Modification to Solicitation:

1. To reissue the entire solicitation with pages missed during scanning.

****No other changes****

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

INSTRUCTIONS TO VENDORS SUBMITTING BIDS

1. REVIEW DOCUMENTS THOROUGHLY: The attached documents contain a solicitation for bids. Please read these instructions and all documents attached in their entirety. These instructions provide critical information about requirements that if overlooked could lead to disqualification of a Vendor's bid. All bids must be submitted in accordance with the provisions contained in these instructions and the Solicitation. Failure to do so may result in disqualification of Vendor's bid.

2. MANDATORY TERMS: The Solicitation may contain mandatory provisions identified by the use of the words "must," "will," and "shall." Failure to comply with a mandatory term in the Solicitation will result in bid disqualification.

3. PREBID MEETING: The item identified below shall apply to this Solicitation.

☐ A pre-bid meeting will not be held prior to bid opening

☒ A MANDATORY PRE-BID meeting will be held at the following place and time:

1124 Smith Street (Building 86)- Parking Lot
Charleston, WV 25301

Thursday, September 5, 2019 @ 10:00 A.M.

All Vendors submitting a bid must attend the mandatory pre-bid meeting. Failure to attend the mandatory pre-bid meeting shall result in disqualification of the Vendor's bid. No one person attending the pre-bid meeting may represent more than one Vendor.

An attendance sheet provided at the pre-bid meeting shall serve as the official document verifying attendance. The State will not accept any other form of proof or documentation to verify attendance. Any person attending the pre-bid meeting on behalf of a Vendor must list on the attendance sheet his or her name and the name of the Vendor he or she is representing.

Additionally, the person attending the pre-bid meeting should include the Vendor's E-Mail address, phone number, and Fax number on the attendance sheet. It is the Vendor's responsibility to locate the attendance sheet and provide the required information. Failure to complete the attendance sheet as required may result in disqualification of Vendor's bid.

All Vendors should arrive prior to the starting time for the pre-bid. Vendors who arrive after the starting time but prior to the end of the pre-bid will be permitted to sign in, but are charged with knowing all matters discussed at the pre-bid.

Questions submitted at least five business days prior to a scheduled pre-bid will be discussed at the pre-bid meeting if possible. Any discussions or answers to questions at the pre-bid meeting are preliminary in nature and are non-binding. Official and binding answers to questions will be published in a written addendum to the Solicitation prior to bid opening.

4. VENDOR QUESTION DEADLINE: Vendors may submit questions relating to this Solicitation to the Purchasing Division. Questions must be submitted in writing. All questions must be submitted on or before the date listed below and to the address listed below in order to be considered. A written response will be published in a Solicitation addendum if a response is possible and appropriate. Non-written discussions, conversations, or questions and answers regarding this Solicitation are preliminary in nature and are nonbinding.

Submitted e-mails should have solicitation number in the subject line.

Question Submission Deadline: **September 9, 2019 @ 2:00 P.M.**

Submit Questions to: **Melissa K. Pettrey, Senior Buyer, WV State Purchasing Division**
2019 Washington Street, East
Charleston, WV 25305
Fax: (304) 558-4115 (Vendors should not use this fax number for bid submission)
Email: melissa.k.pettrey@wv.gov

5. VERBAL COMMUNICATION: Any verbal communication between the Vendor and any State personnel is not binding, including verbal communication at the mandatory pre-bid conference. Only information issued in writing and added to the Solicitation by an official written addendum by the Purchasing Division is binding.

6. BID SUBMISSION: All bids must be submitted electronically through wvOASIS or signed and delivered by the Vendor to the Purchasing Division at the address listed below on or before the date and time of the bid opening. Any bid received by the Purchasing Division staff is considered to be in the possession of the Purchasing Division and will not be returned for any reason. The Purchasing Division will not accept bids, modification of bids, or addendum acknowledgment forms via e-mail. Acceptable delivery methods include electronic submission via wvOASIS, hand delivery, delivery by courier, or facsimile.

The bid delivery address is:
Department of Administration, Purchasing Division
2019 Washington Street East
Charleston, WV 25305-0130

A bid that is not submitted electronically through wvOASIS should contain the information listed below on the face of the envelope or the bid may be rejected by the Purchasing Division.:

SEALED BID: Building 86 Parking Lot Repair Project
BUYER: Melissa K. Pettrey, Senior Buyer
SOLICITATION NO.: CRFQ 0211 GSD2000000009
BID OPENING DATE: September 16, 2019
BID OPENING TIME: 1:30pm
FAX NUMBER: 304-558-3970

The Purchasing Division may prohibit the submission of bids electronically through wvOASIS at its sole discretion. Such a prohibition will be contained and communicated in the wvOASIS system resulting in the Vendor's inability to submit bids through wvOASIS. Submission of a response to an Expression or Interest or Request for Proposal is not permitted in wvOASIS.

For Request For Proposal ("RFP") Responses Only: In the event that Vendor is responding to a request for proposal, the Vendor shall submit one original technical and one original cost proposal plus n/a convenience copies of each to the Purchasing Division at the address shown above. Additionally, the Vendor should identify the bid type as either a technical or cost proposal on the face of each bid envelope submitted in response to a request for proposal as follows:

BID TYPE: (This only applies to CRFP)

☐ Technical

☐ Cost

7. BID OPENING: Bids submitted in response to this Solicitation will be opened at the location identified below on the date and time listed below. Delivery of a bid after the bid opening date and time will result in bid disqualification. For purposes of this Solicitation, a bid is considered delivered when confirmation of delivery is provided by wvOASIS (in the case of electronic submission) or when the bid is time stamped by the official Purchasing Division time clock (in the case of hand delivery).

Bid Opening Date and Time: Monday, September 16, 2019 @ 1:30 P.M.

Bid Opening Location: Department of Administration, Purchasing Division
2019 Washington Street East
Charleston, WV 25305-0130

8. ADDENDUM ACKNOWLEDGEMENT: Changes or revisions to this Solicitation will be made by an official written addendum issued by the Purchasing Division. Vendor should acknowledge receipt of all addenda issued with this Solicitation by completing an Addendum Acknowledgment Form, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

9. BID FORMATTING: Vendor should type or electronically enter the information onto its bid to prevent errors in the evaluation. Failure to type or electronically enter the information may result in bid disqualification.

10. ALTERNATE MODEL OR BRAND: Unless the box below is checked, any model, brand, or specification listed in this Solicitation establishes the acceptable level of quality only and is not intended to reflect a preference for, or in any way favor, a particular brand or vendor. Vendors may bid alternates to a listed model or brand provided that the alternate is at least equal to the model or brand and complies with the required specifications. The equality of any alternate being bid shall be determined by the State at its sole discretion. Any Vendor bidding an alternate model or brand should clearly identify the alternate items in its bid and should include manufacturer's specifications, industry literature, and/or any other relevant documentation demonstrating the

equality of the alternate items. Failure to provide information for alternate items may be grounds for rejection of a Vendor's bid.

☐ This Solicitation is based upon a standardized commodity established under W. Va. Code § 5A-3-61. Vendors are expected to bid the standardized commodity identified. Failure to bid the standardized commodity will result in your firm's bid being rejected.

11. EXCEPTIONS AND CLARIFICATIONS: The Solicitation contains the specifications that shall form the basis of a contractual agreement. Vendor shall clearly mark any exceptions, clarifications, or other proposed modifications in its bid. Exceptions to, clarifications of, or modifications of a requirement or term and condition of the Solicitation may result in bid disqualification.

12. COMMUNICATION LIMITATIONS: In accordance with West Virginia Code of State Rules §148-1-6.6, communication with the State of West Virginia or any of its employees regarding this Solicitation during the solicitation, bid, evaluation or award periods, except through the Purchasing Division, is strictly prohibited without prior Purchasing Division approval. Purchasing Division approval for such communication is implied for all agency delegated and exempt purchases.

13. REGISTRATION: Prior to Contract award, the apparent successful Vendor must be properly registered with the West Virginia Purchasing Division and must have paid the \$125 fee, if applicable.

14. UNIT PRICE: Unit prices shall prevail in cases of a discrepancy in the Vendor's bid.

15. PREFERENCE: Vendor Preference may be requested in purchases of motor vehicles or construction and maintenance equipment and machinery used in highway and other infrastructure projects. Any request for preference must be submitted in writing with the bid, must specifically identify the preference requested with reference to the applicable subsection of West Virginia Code § 5A-3-37, and should include with the bid any information necessary to evaluate and confirm the applicability of the requested preference. A request form to help facilitate the request can be found at:

<http://www.state.wv.us/admin/purchase/vrc/Venpref.pdf>.

15A. RECIPROCAL PREFERENCE: The State of West Virginia applies a reciprocal preference to all solicitations for commodities and printing in accordance with W. Va. Code § 5A-3-37(b). In effect, non-resident vendors receiving a preference in their home states, will see that same preference granted to West Virginia resident vendors bidding against them in West Virginia. A request form to help facilitate the request can be found at:

<http://www.state.wv.us/admin/purchase/vrc/Venpref.pdf>.

16. SMALL, WOMEN-OWNED, OR MINORITY-OWNED BUSINESSES: For any solicitations publicly advertised for bid, in accordance with West Virginia Code §5A-3-37(a)(7) and W. Va. CSR § 148-22-9, any non-resident vendor certified as a small, women-owned, or minority-owned business under W. Va. CSR § 148-22-9 shall be provided the same preference made available to any resident vendor. Any non-resident small, women-owned, or minority-owned business must identify itself as such in writing, must submit that writing to the

Purchasing Division with its bid, and must be properly certified under W. Va. CSR § 148-22-9 prior to contract award to receive the preferences made available to resident vendors. Preference for a non-resident small, women-owned, or minority owned business shall be applied in accordance with W. Va. CSR § 148-22-9.

17. WAIVER OF MINOR IRREGULARITIES: The Director reserves the right to waive minor irregularities in bids or specifications in accordance with West Virginia Code of State Rules § 148-1-4.6.

18. ELECTRONIC FILE ACCESS RESTRICTIONS: Vendor must ensure that its submission in wvOASIS can be accessed and viewed by the Purchasing Division staff immediately upon bid opening. The Purchasing Division will consider any file that cannot be immediately accessed and viewed at the time of the bid opening (such as, encrypted files, password protected files, or incompatible files) to be blank or incomplete as context requires, and are therefore unacceptable. A vendor will not be permitted to unencrypt files, remove password protections, or resubmit documents after bid opening to make a file viewable if those documents are required with the bid. A Vendor may be required to provide document passwords or remove access restrictions to allow the Purchasing Division to print or electronically save documents provided that those documents are viewable by the Purchasing Division prior to obtaining the password or removing the access restriction.

19. NON-RESPONSIBLE: The Purchasing Division Director reserves the right to reject the bid of any vendor as Non-Responsible in accordance with W. Va. Code of State Rules § 148-1-5.3, when the Director determines that the vendor submitting the bid does not have the capability to fully perform, or lacks the integrity and reliability to assure good-faith performance.”

20. ACCEPTANCE/REJECTION: The State may accept or reject any bid in whole, or in part in accordance with W. Va. Code of State Rules § 148-1-4.5. and § 148-1-6.4.b.”

21. YOUR SUBMISSION IS A PUBLIC DOCUMENT: Vendor’s entire response to the Solicitation and the resulting Contract are public documents. As public documents, they will be disclosed to the public following the bid/proposal opening or award of the contract, as required by the competitive bidding laws of West Virginia Code §§ 5A-3-1 et seq., 5-22-1 et seq., and 5G-1-1 et seq. and the Freedom of Information Act West Virginia Code §§ 29B-1-1 et seq.

DO NOT SUBMIT MATERIAL YOU CONSIDER TO BE CONFIDENTIAL, A TRADE SECRET, OR OTHERWISE NOT SUBJECT TO PUBLIC DISCLOSURE.

Submission of any bid, proposal, or other document to the Purchasing Division constitutes your explicit consent to the subsequent public disclosure of the bid, proposal, or document. The Purchasing Division will disclose any document labeled “confidential,” “proprietary,” “trade secret,” “private,” or labeled with any other claim against public disclosure of the documents, to include any “trade secrets” as defined by West Virginia Code § 47-22-1 et seq. All submissions are subject to public disclosure without notice.

22. INTERESTED PARTY DISCLOSURE: West Virginia Code § 6D-1-2 requires that the vendor submit to the Purchasing Division a disclosure of interested parties to the contract for all contracts with an actual or estimated value of at least \$1 Million. That disclosure must occur on the form prescribed and approved by the WV Ethics Commission prior to contract award. A copy of that form is included with this solicitation or can be obtained from the WV Ethics Commission. This requirement does not apply to publicly traded companies listed on a national or international stock exchange. A more detailed definition of interested parties can be obtained from the form referenced above.

23. WITH THE BID REQUIREMENTS: In instances where these specifications require documentation or other information with the bid, and a vendor fails to provide it with the bid, the Director of the Purchasing Division reserves the right to request those items after bid opening and prior to contract award pursuant to the authority to waive minor irregularities in bids or specifications under W. Va. CSR § 148-1-4.6. This authority does not apply to instances where state law mandates receipt with the bid.

GENERAL TERMS AND CONDITIONS:

1. CONTRACTUAL AGREEMENT: Issuance of a Award Document signed by the Purchasing Division Director, or his designee, and approved as to form by the Attorney General's office constitutes acceptance of this Contract made by and between the State of West Virginia and the Vendor. Vendor's signature on its bid signifies Vendor's agreement to be bound by and accept the terms and conditions contained in this Contract.

2. DEFINITIONS: As used in this Solicitation/Contract, the following terms shall have the meanings attributed to them below. Additional definitions may be found in the specifications included with this Solicitation/Contract.

2.1. "Agency" or "Agencies" means the agency, board, commission, or other entity of the State of West Virginia that is identified on the first page of the Solicitation or any other public entity seeking to procure goods or services under this Contract.

2.2. "Bid" or "Proposal" means the vendors submitted response to this solicitation.

2.3. "Contract" means the binding agreement that is entered into between the State and the Vendor to provide the goods or services requested in the Solicitation.

2.4. "Director" means the Director of the West Virginia Department of Administration, Purchasing Division.

2.5. "Purchasing Division" means the West Virginia Department of Administration, Purchasing Division.

2.6. "Award Document" means the document signed by the Agency and the Purchasing Division, and approved as to form by the Attorney General, that identifies the Vendor as the contract holder.

2.7. "Solicitation" means the official notice of an opportunity to supply the State with goods or services that is published by the Purchasing Division.

2.8. "State" means the State of West Virginia and/or any of its agencies, commissions, boards, etc. as context requires.

2.9. "Vendor" or "Vendors" means any entity submitting a bid in response to the Solicitation, the entity that has been selected as the lowest responsible bidder, or the entity that has been awarded the Contract as context requires.

3. CONTRACT TERM; RENEWAL; EXTENSION: The term of this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below:

☐ **Term Contract**

Initial Contract Term: This Contract becomes effective on _____ and extends for a period of _____ year(s).

Renewal Term: This Contract may be renewed upon the mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). Any request for renewal should be delivered to the Agency and then submitted to the Purchasing Division thirty (30) days prior to the expiration date of the initial contract term or appropriate renewal term. A Contract renewal shall be in accordance with the terms and conditions of the original contract. Unless otherwise specified below, renewal of this Contract is limited to _____ successive one (1) year periods or multiple renewal periods of less than one year, provided that the multiple renewal periods do not exceed the total number of months available in all renewal years combined. Automatic renewal of this Contract is prohibited. Renewals must be approved by the Vendor, Agency, Purchasing Division and Attorney General's office (Attorney General approval is as to form only)

☐ **Alternate Renewal Term** – This contract may be renewed for _____ successive _____ year periods or shorter periods provided that they do not exceed the total number of months contained in all available renewals. Automatic renewal of this Contract is prohibited. Renewals must be approved by the Vendor, Agency, Purchasing Division and Attorney General's office (Attorney General approval is as to form only)

Delivery Order Limitations: In the event that this contract permits delivery orders, a delivery order may only be issued during the time this Contract is in effect. Any delivery order issued within one year of the expiration of this Contract shall be effective for one year from the date the delivery order is issued. No delivery order may be extended beyond one year after this Contract has expired.

☒ **Fixed Period Contract:** This Contract becomes effective upon Vendor's receipt of the notice to proceed and must be completed within _____ ^{Thirty (30)} days.

☐ **Fixed Period Contract with Renewals:** This Contract becomes effective upon Vendor's receipt of the notice to proceed and part of the Contract more fully described in the attached specifications must be completed within _____ days. Upon completion of the work covered by the preceding sentence, the vendor agrees that maintenance, monitoring, or warranty services will be provided for _____ year(s) thereafter.

☐ **One Time Purchase:** The term of this Contract shall run from the issuance of the Award Document until all of the goods contracted for have been delivered, but in no event will this Contract extend for more than one fiscal year.

☐ **Other:** See attached.

4. NOTICE TO PROCEED: Vendor shall begin performance of this Contract immediately upon receiving notice to proceed unless otherwise instructed by the Agency. Unless otherwise specified, the fully executed Award Document will be considered notice to proceed.

5. QUANTITIES: The quantities required under this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below.

☐ **Open End Contract:** Quantities listed in this Solicitation are approximations only, based on estimates supplied by the Agency. It is understood and agreed that the Contract shall cover the quantities actually ordered for delivery during the term of the Contract, whether more or less than the quantities shown.

☐ **Service:** The scope of the service to be provided will be more clearly defined in the specifications included herewith.

☒ **Combined Service and Goods:** The scope of the service and deliverable goods to be provided will be more clearly defined in the specifications included herewith.

☐ **One Time Purchase:** This Contract is for the purchase of a set quantity of goods that are identified in the specifications included herewith. Once those items have been delivered, no additional goods may be procured under this Contract without an appropriate change order approved by the Vendor, Agency, Purchasing Division, and Attorney General's office.

6. EMERGENCY PURCHASES: The Purchasing Division Director may authorize the Agency to purchase goods or services in the open market that Vendor would otherwise provide under this Contract if those goods or services are for immediate or expedited delivery in an emergency. Emergencies shall include, but are not limited to, delays in transportation or an unanticipated increase in the volume of work. An emergency purchase in the open market, approved by the Purchasing Division Director, shall not constitute a breach of this Contract and shall not entitle the Vendor to any form of compensation or damages. This provision does not excuse the State from fulfilling its obligations under a One Time Purchase contract.

7. REQUIRED DOCUMENTS: All of the items checked below must be provided to the Purchasing Division by the Vendor as specified below.

☒ **BID BOND (Construction Only):** Pursuant to the requirements contained in W. Va. Code § 5-22-1(c), All Vendors submitting a bid on a construction project shall furnish a valid bid bond in the amount of five percent (5%) of the total amount of the bid protecting the State of West Virginia. The bid bond must be submitted with the bid.

☒ **PERFORMANCE BOND:** The apparent successful Vendor shall provide a performance bond in the amount of 100% of the contract. The performance bond must be received by the Purchasing Division prior to Contract award.

☒ **LABOR/MATERIAL PAYMENT BOND:** The apparent successful Vendor shall provide a labor/material payment bond in the amount of 100% of the Contract value. The labor/material payment bond must be delivered to the Purchasing Division prior to Contract award.

In lieu of the Bid Bond, Performance Bond, and Labor/Material Payment Bond, the Vendor may provide certified checks, cashier's checks, or irrevocable letters of credit. Any certified check, cashier's check, or irrevocable letter of credit provided in lieu of a bond must be of the same amount and delivered on the same schedule as the bond it replaces. A letter of credit submitted in lieu of a performance and labor/material payment bond will only be allowed for projects under \$100,000. Personal or business checks are not acceptable. Notwithstanding the foregoing, West Virginia Code § 5-22-1 (d) mandates that a vendor provide a performance and labor/material payment bond for construction projects. Accordingly, substitutions for the performance and labor/material payment bonds for construction projects is not permitted.

☐ **MAINTENANCE BOND:** The apparent successful Vendor shall provide a two (2) year maintenance bond covering the roofing system. The maintenance bond must be issued and delivered to the Purchasing Division prior to Contract award.

☐ **LICENSE(S) / CERTIFICATIONS / PERMITS:** In addition to anything required under the Section of the General Terms and Conditions entitled Licensing, the apparent successful Vendor shall furnish proof of the following licenses, certifications, and/or permits prior to Contract award, in a form acceptable to the Purchasing Division.

☐

☐

☐

☐

The apparent successful Vendor shall also furnish proof of any additional licenses or certifications contained in the specifications prior to Contract award regardless of whether or not that requirement is listed above.

8. INSURANCE: The apparent successful Vendor shall furnish proof of the insurance identified by a checkmark below and must include the State as an additional insured on each policy prior to Contract award. The insurance coverages identified below must be maintained throughout the life of this contract. Thirty (30) days prior to the expiration of the insurance policies, Vendor shall provide the Agency with proof that the insurance mandated herein has been continued. Vendor must also provide Agency with immediate notice of any changes in its insurance policies, including but not limited to, policy cancelation, policy reduction, or change in insurers. The apparent successful Vendor shall also furnish proof of any additional insurance requirements contained in the specifications prior to Contract award regardless of whether or not that insurance requirement is listed in this section.

Vendor must maintain:

☒ **Commercial General Liability Insurance** in at least an amount of: \$1,000,000.00 per occurrence.

☒ **Automobile Liability Insurance** in at least an amount of: \$1,000,000.00 per occurrence.

☐ **Professional/Malpractice/Errors and Omission Insurance** in at least an amount of: _____ per occurrence.

☒ **Commercial Crime and Third Party Fidelity Insurance** in an amount of: \$100,000.00 per occurrence.

☐ **Cyber Liability Insurance** in an amount of: _____ per occurrence.

☐ **Builders Risk Insurance** in an amount equal to 100% of the amount of the Contract.

☐ **Pollution Insurance** in an amount of: _____ per occurrence.

☐ **Aircraft Liability** in an amount of: _____ per occurrence.

☐☐☐☐

Notwithstanding anything contained in this section to the contrary, the Director of the Purchasing Division reserves the right to waive the requirement that the State be named as an additional insured on one or more of the Vendor's insurance policies if the Director finds that doing so is in the State's best interest.

9. WORKERS' COMPENSATION INSURANCE: The apparent successful Vendor shall comply with laws relating to workers compensation, shall maintain workers' compensation insurance when required, and shall furnish proof of workers' compensation insurance upon request.

10. [Reserved]

11. LIQUIDATED DAMAGES: This clause shall in no way be considered exclusive and shall not limit the State or Agency's right to pursue any other available remedy. Vendor shall pay liquidated damages in the amount specified below or as described in the specifications:

☒ Five Hundred Dollars (\$500.00) per day for failure to complete work within 30 day deadline.

☐ Liquidated Damages Contained in the Specifications

12. ACCEPTANCE: Vendor's signature on its bid, or on the certification and signature page, constitutes an offer to the State that cannot be unilaterally withdrawn, signifies that the product or service proposed by vendor meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise indicated, and signifies acceptance of the terms and conditions contained in the Solicitation unless otherwise indicated.

13. PRICING: The pricing set forth herein is firm for the life of the Contract, unless specified elsewhere within this Solicitation/Contract by the State. A Vendor's inclusion of price adjustment provisions in its bid, without an express authorization from the State in the Solicitation to do so, may result in bid disqualification. Notwithstanding the foregoing, Vendor must extend any publicly advertised sale price to the State and invoice at the lower of the contract price or the publicly advertised sale price.

14. PAYMENT IN ARREARS: Payment in advance is prohibited under this Contract. Payment may only be made after the delivery and acceptance of goods or services. The Vendor shall submit invoices, in arrears.

15. PAYMENT METHODS: Vendor must accept payment by electronic funds transfer and P-Card. (The State of West Virginia's Purchasing Card program, administered under contract by a banking institution, processes payment for goods and services through state designated credit cards.)

16. TAXES: The Vendor shall pay any applicable sales, use, personal property or any other taxes arising out of this Contract and the transactions contemplated thereby. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.

17. ADDITIONAL FEES: Vendor is not permitted to charge additional fees or assess additional charges that were not either expressly provided for in the solicitation published by the State of West Virginia or included in the unit price or lump sum bid amount that Vendor is required by the solicitation to provide. Including such fees or charges as notes to the solicitation may result in rejection of vendor's bid. Requesting such fees or charges be paid after the contract has been awarded may result in cancellation of the contract.

18. FUNDING: This Contract shall continue for the term stated herein, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise made available, this Contract becomes void and of no effect beginning on July 1 of the fiscal year for which funding has not been appropriated or otherwise made available.

19. CANCELLATION: The Purchasing Division Director reserves the right to cancel this Contract immediately upon written notice to the vendor if the materials or workmanship supplied do not conform to the specifications contained in the Contract. The Purchasing Division Director may also cancel any purchase or Contract upon 30 days written notice to the Vendor in accordance with West Virginia Code of State Rules § 148-1-5.2.b.

20. TIME: Time is of the essence with regard to all matters of time and performance in this Contract.

21. APPLICABLE LAW: This Contract is governed by and interpreted under West Virginia law without giving effect to its choice of law principles. Any information provided in specification manuals, or any other source, verbal or written, which contradicts or violates the West Virginia Constitution, West Virginia Code or West Virginia Code of State Rules is void and of no effect.

22. COMPLIANCE WITH LAWS: Vendor shall comply with all applicable federal, state, and local laws, regulations and ordinances. By submitting a bid, Vendor acknowledges that it has reviewed, understands, and will comply with all applicable laws, regulations, and ordinances.

SUBCONTRACTOR COMPLIANCE: Vendor shall notify all subcontractors providing commodities or services related to this Contract that as subcontractors, they too are required to comply with all applicable laws, regulations, and ordinances. Notification under this provision must occur prior to the performance of any work under the contract by the subcontractor.

23. ARBITRATION: Any references made to arbitration contained in this Contract, Vendor's bid, or in any American Institute of Architects documents pertaining to this Contract are hereby deleted, void, and of no effect.

24. MODIFICATIONS: This writing is the parties' final expression of intent. Notwithstanding anything contained in this Contract to the contrary no modification of this Contract shall be binding without mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). Any change to existing contracts that adds work or changes contract cost, and were not included in the original contract, must be approved by the Purchasing Division and the Attorney General's Office (as to form) prior to the implementation of the change or commencement of work affected by the change.

25. WAIVER: The failure of either party to insist upon a strict performance of any of the terms or provision of this Contract, or to exercise any option, right, or remedy herein contained, shall not be construed as a waiver or a relinquishment for the future of such term, provision, option, right, or remedy, but the same shall continue in full force and effect. Any waiver must be expressly stated in writing and signed by the waiving party.

26. SUBSEQUENT FORMS: The terms and conditions contained in this Contract shall supersede any and all subsequent terms and conditions which may appear on any form documents submitted by Vendor to the Agency or Purchasing Division such as price lists, order forms, invoices, sales agreements, or maintenance agreements, and includes internet websites or other electronic documents. Acceptance or use of Vendor's forms does not constitute acceptance of the terms and conditions contained thereon.

27. ASSIGNMENT: Neither this Contract nor any monies due, or to become due hereunder, may be assigned by the Vendor without the express written consent of the Agency, the Purchasing Division, the Attorney General's office (as to form only), and any other government agency or office that may be required to approve such assignments.

28. WARRANTY: The Vendor expressly warrants that the goods and/or services covered by this Contract will: (a) conform to the specifications, drawings, samples, or other description furnished or specified by the Agency; (b) be merchantable and fit for the purpose intended; and (c) be free from defect in material and workmanship.

29. STATE EMPLOYEES: State employees are not permitted to utilize this Contract for personal use and the Vendor is prohibited from permitting or facilitating the same.

30. PRIVACY, SECURITY, AND CONFIDENTIALITY: The Vendor agrees that it will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the Agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the Agency's policies, procedures, and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/default.html>.

31. YOUR SUBMISSION IS A PUBLIC DOCUMENT: Vendor's entire response to the Solicitation and the resulting Contract are public documents. As public documents, they will be disclosed to the public following the bid/proposal opening or award of the contract, as required by the competitive bidding laws of West Virginia Code §§ 5A-3-1 et seq., 5-22-1 et seq., and 5G-1-1 et seq. and the Freedom of Information Act West Virginia Code §§ 29B-1-1 et seq.

DO NOT SUBMIT MATERIAL YOU CONSIDER TO BE CONFIDENTIAL, A TRADE SECRET, OR OTHERWISE NOT SUBJECT TO PUBLIC DISCLOSURE.

Submission of any bid, proposal, or other document to the Purchasing Division constitutes your explicit consent to the subsequent public disclosure of the bid, proposal, or document. The Purchasing Division will disclose any document labeled "confidential," "proprietary," "trade secret," "private," or labeled with any other claim against public disclosure of the documents, to include any "trade secrets" as defined by West Virginia Code § 47-22-1 et seq. All submissions are subject to public disclosure without notice.

32. LICENSING: In accordance with West Virginia Code of State Rules § 148-1-6.1.e, Vendor must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agency or political subdivision. Obligations related to political subdivisions may include, but are not limited to, business licensing, business and occupation taxes, inspection compliance, permitting, etc. Upon request, the Vendor must provide all necessary releases to obtain information to enable the Purchasing Division Director or the Agency to verify that the Vendor is licensed and in good standing with the above entities.

SUBCONTRACTOR COMPLIANCE: Vendor shall notify all subcontractors providing commodities or services related to this Contract that as subcontractors, they too are required to be licensed, in good standing, and up-to-date on all state and local obligations as described in this section. Obligations related to political subdivisions may include, but are not limited to, business licensing, business and occupation taxes, inspection compliance, permitting, etc. Notification under this provision must occur prior to the performance of any work under the contract by the subcontractor.

33. ANTITRUST: In submitting a bid to, signing a contract with, or accepting a Award Document from any agency of the State of West Virginia, the Vendor agrees to convey, sell, assign, or transfer to the State of West Virginia all rights, title, and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the State of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to Vendor.

34. VENDOR CERTIFICATIONS: By signing its bid or entering into this Contract, Vendor certifies (1) that its bid or offer was made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership, person or entity submitting a bid or offer for the same material, supplies, equipment or services; (2) that its bid or offer is in all respects fair and without collusion or fraud; (3) that this Contract is accepted or entered into without any prior understanding, agreement, or connection to any other entity that could be considered a violation of law; and (4) that it has reviewed this Solicitation in its entirety; understands the requirements, terms and conditions, and other information contained herein.

Vendor's signature on its bid or offer also affirms that neither it nor its representatives have any interest, nor shall acquire any interest, direct or indirect, which would compromise the performance of its services hereunder. Any such interests shall be promptly presented in detail to the Agency. The individual signing this bid or offer on behalf of Vendor certifies that he or she is authorized by the Vendor to execute this bid or offer or any documents related thereto on Vendor's behalf; that he or she is authorized to bind the Vendor in a contractual relationship; and that, to the best of his or her knowledge, the Vendor has properly registered with any State agency that may require registration.

35. VENDOR RELATIONSHIP: The relationship of the Vendor to the State shall be that of an independent contractor and no principal-agent relationship or employer-employee relationship is contemplated or created by this Contract. The Vendor as an independent contractor is solely liable for the acts and omissions of its employees and agents. Vendor shall be responsible for selecting, supervising, and compensating any and all individuals employed pursuant to the terms of this Solicitation and resulting contract. Neither the Vendor, nor any employees or subcontractors of the Vendor, shall be deemed to be employees of the State for any purpose whatsoever. Vendor shall be exclusively responsible for payment of employees and contractors for all wages and salaries, taxes, withholding payments, penalties, fees, fringe benefits, professional liability insurance premiums, contributions to insurance and pension, or other deferred compensation plans, including but not limited to, Workers' Compensation and Social Security obligations, licensing fees, etc. and the filing of all necessary documents, forms, and returns pertinent to all of the foregoing.

Vendor shall hold harmless the State, and shall provide the State and Agency with a defense against any and all claims including, but not limited to, the foregoing payments, withholdings, contributions, taxes, Social Security taxes, and employer income tax returns.

36. INDEMNIFICATION: The Vendor agrees to indemnify, defend, and hold harmless the State and the Agency, their officers, and employees from and against: (1) Any claims or losses for services rendered by any subcontractor, person, or firm performing or supplying services, materials, or supplies in connection with the performance of the Contract; (2) Any claims or losses resulting to any person or entity injured or damaged by the Vendor, its officers, employees, or subcontractors by the publication, translation, reproduction, delivery, performance, use, or disposition of any data used under the Contract in a manner not authorized by the Contract, or by Federal or State statutes or regulations; and (3) Any failure of the Vendor, its officers, employees, or subcontractors to observe State and Federal laws including, but not limited to, labor and wage and hour laws.

37. PURCHASING AFFIDAVIT: In accordance with West Virginia Code §§ 5A-3-10a and 5-22-1(i), the State is prohibited from awarding a contract to any bidder that owes a debt to the State or a political subdivision of the State. Vendors are required to sign, notarize, and submit the Purchasing Affidavit to the Purchasing Division affirming under oath that it is not in default on any monetary obligation owed to the state or a political subdivision of the state.

38. ADDITIONAL AGENCY AND LOCAL GOVERNMENT USE: This Contract may be utilized by other agencies, spending units, and political subdivisions of the State of West Virginia; county, municipal, and other local government bodies; and school districts ("Other Government Entities"), provided that both the Other Government Entity and the Vendor agree. Any extension of this Contract to the aforementioned Other Government Entities must be on the same prices, terms, and conditions as those offered and agreed to in this Contract, provided that such extension is in compliance with the applicable laws, rules, and ordinances of the Other Government Entity. A refusal to extend this Contract to the Other Government Entities shall not impact or influence the award of this Contract in any manner.

39. CONFLICT OF INTEREST: Vendor, its officers or members or employees, shall not presently have or acquire an interest, direct or indirect, which would conflict with or compromise the performance of its obligations hereunder. Vendor shall periodically inquire of its officers, members and employees to ensure that a conflict of interest does not arise. Any conflict of interest discovered shall be promptly presented in detail to the Agency.

40. REPORTS: Vendor shall provide the Agency and/or the Purchasing Division with the following reports identified by a checked box below:

☒ Such reports as the Agency and/or the Purchasing Division may request. Requested reports may include, but are not limited to, quantities purchased, agencies utilizing the contract, total contract expenditures by agency, etc.

☐ Quarterly reports detailing the total quantity of purchases in units and dollars, along with a listing of purchases by agency. Quarterly reports should be delivered to the Purchasing Division via email at purchasing.requisitions@wv.gov.

41. BACKGROUND CHECK: In accordance with W. Va. Code § 15-2D-3, the Director of the Division of Protective Services shall require any service provider whose employees are regularly employed on the grounds or in the buildings of the Capitol complex or who have access to sensitive or critical information to submit to a fingerprint-based state and federal background inquiry through the state repository. The service provider is responsible for any costs associated with the fingerprint-based state and federal background inquiry.

After the contract for such services has been approved, but before any such employees are permitted to be on the grounds or in the buildings of the Capitol complex or have access to sensitive or critical information, the service provider shall submit a list of all persons who will be physically present and working at the Capitol complex to the Director of the Division of Protective Services for purposes of verifying compliance with this provision. The State reserves the right to prohibit a service provider's employees from accessing sensitive or critical information or to be present at the Capitol complex based upon results addressed from a criminal background check.

Revised 06/05/2019

Service providers should contact the West Virginia Division of Protective Services by phone at (304) 558-9911 for more information.

42. PREFERENCE FOR USE OF DOMESTIC STEEL PRODUCTS: Except when authorized by the Director of the Purchasing Division pursuant to W. Va. Code § 5A-3-56, no contractor may use or supply steel products for a State Contract Project other than those steel products made in the United States. A contractor who uses steel products in violation of this section may be subject to civil penalties pursuant to W. Va. Code § 5A-3-56. As used in this section:

- a. "State Contract Project" means any erection or construction of, or any addition to, alteration of or other improvement to any building or structure, including, but not limited to, roads or highways, or the installation of any heating or cooling or ventilating plants or other equipment, or the supply of and materials for such projects, pursuant to a contract with the State of West Virginia for which bids were solicited on or after June 6, 2001.
- b. "Steel Products" means products rolled, formed, shaped, drawn, extruded, forged, cast, fabricated or otherwise similarly processed, or processed by a combination of two or more or such operations, from steel made by the open hearth, basic oxygen, electric furnace, Bessemer or other steel making process. The Purchasing Division Director may, in writing, authorize the use of foreign steel products if:
- c. The cost for each contract item used does not exceed one tenth of one percent (.1%) of the total contract cost or two thousand five hundred dollars (\$2,500.00), whichever is greater. For the purposes of this section, the cost is the value of the steel product as delivered to the project; or
- d. The Director of the Purchasing Division determines that specified steel materials are not produced in the United States in sufficient quantity or otherwise are not reasonably available to meet contract requirements.

43. PREFERENCE FOR USE OF DOMESTIC ALUMINUM, GLASS, AND STEEL: In Accordance with W. Va. Code § 5-19-1 et seq., and W. Va. CSR § 148-10-1 et seq., for every contract or subcontract, subject to the limitations contained herein, for the construction, reconstruction, alteration, repair, improvement or maintenance of public works or for the purchase of any item of machinery or equipment to be used at sites of public works, only domestic aluminum, glass or steel products shall be supplied unless the spending officer determines, in writing, after the receipt of offers or bids, (1) that the cost of domestic aluminum, glass or steel products is unreasonable or inconsistent with the public interest of the State of West Virginia, (2) that domestic aluminum, glass or steel products are not produced in sufficient quantities to meet the contract requirements, or (3) the available domestic aluminum, glass, or steel do not meet the contract specifications. This provision only applies to public works contracts awarded in an amount more than fifty thousand dollars (\$50,000) or public works contracts that require more than ten thousand pounds of steel products.

The cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than twenty percent (20%) of the bid or offered price for foreign made aluminum, glass, or steel products. If the domestic aluminum, glass or steel products to be supplied or produced in a

“substantial labor surplus area”, as defined by the United States Department of Labor, the cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than thirty percent (30%) of the bid or offered price for foreign made aluminum, glass, or steel products. This preference shall be applied to an item of machinery or equipment, as indicated above, when the item is a single unit of equipment or machinery manufactured primarily of aluminum, glass or steel, is part of a public works contract and has the sole purpose or of being a permanent part of a single public works project. This provision does not apply to equipment or machinery purchased by a spending unit for use by that spending unit and not as part of a single public works project.

All bids and offers including domestic aluminum, glass or steel products that exceed bid or offer prices including foreign aluminum, glass or steel products after application of the preferences provided in this provision may be reduced to a price equal to or lower than the lowest bid or offer price for foreign aluminum, glass or steel products plus the applicable preference. If the reduced bid or offer prices are made in writing and supersede the prior bid or offer prices, all bids or offers, including the reduced bid or offer prices, will be reevaluated in accordance with this rule.

44. INTERESTED PARTY SUPPLEMENTAL DISCLOSURE: W. Va. Code § 6D-1-2 requires that for contracts with an actual or estimated value of at least \$1 million, the vendor must submit to the Agency a supplemental disclosure of interested parties reflecting any new or differing interested parties to the contract, which were not included in the original pre-award interested party disclosure, within 30 days following the completion or termination of the contract. A copy of that form is included with this solicitation or can be obtained from the WV Ethics Commission. This requirement does not apply to publicly traded companies listed on a national or international stock exchange. A more detailed definition of interested parties can be obtained from the form referenced above.

ADDITIONAL TERMS AND CONDITIONS (Construction Contracts Only)

1. CONTRACTOR'S LICENSE: West Virginia Code § 21-11-2 requires that all persons desiring to perform contracting work in this state be licensed. The West Virginia Contractors Licensing Board is empowered to issue the contractor's license. Applications for a contractor's license may be made by contacting the West Virginia Division of Labor. West Virginia Code § 21-11-11 requires any prospective Vendor to include the contractor's license number on its bid. If an apparent low bidder fails to submit a license number in accordance with this section, the Purchasing Division will promptly request by telephone and electronic mail that the low bidder and the second low bidder provide the license number within one business day of the request. Failure of the bidder to provide the license number within one business day of receiving the request shall result in disqualification of the bid. Vendors should include a contractor's license number in the space provided below.

Contractor's Name: McClanahan Construction Company LLC

Contractor's License No.: WV- 004165

The apparent successful Vendor must furnish a copy of its contractor's license prior to the issuance of a contract award document.

2. DRUG-FREE WORKPLACE AFFIDAVIT: W. Va. Code § 21-1D-5 provides that any solicitation for a public improvement contract requires each Vendor that submits a bid for the work to submit an affidavit that the Vendor has a written plan for a drug-free workplace policy. If the affidavit is not submitted with the bid submission, the Purchasing Division shall promptly request by telephone and electronic mail that the low bidder and second low bidder provide the affidavit within one business day of the request. Failure to submit the affidavit within one business day of receiving the request shall result in disqualification of the bid. To comply with this law, Vendor should complete the enclosed drug-free workplace affidavit and submit the same with its bid. Failure to submit the signed and notarized drugfree workplace affidavit or a similar affidavit that fully complies with the requirements of the applicable code, within one business day of being requested to do so shall result in disqualification of Vendor's bid. Pursuant to W. Va. Code 21-1D-2(b) and (k), this provision does not apply to public improvement contracts the value of which is \$100,000 or less or temporary or emergency repairs.

2.1. DRUG-FREE WORKPLACE POLICY: Pursuant to W. Va. Code § 21-1D-4, Vendor and its subcontractors must implement and maintain a written drug-free workplace policy that complies with said article. The awarding public authority shall cancel this contract if: (1) Vendor fails to implement and maintain a written drug-free workplace policy described in the preceding paragraph, (2) Vendor fails to provide information regarding implementation of its drug-free workplace policy at the request of the public authority; or (3) Vendor provides to the public authority false information regarding the contractor's drug-free workplace policy.

Pursuant to W. Va. Code 21-1D-2(b) and (k), this provision does not apply to public improvement contracts the value of which is \$100,000 or less or temporary or emergency repairs.

3. DRUG FREE WORKPLACE REPORT: Pursuant to W. Va. Code § 21-1D-7b, no less than once per year, or upon completion of the project, every contractor shall provide a certified report to the public authority which let the contract. For contracts over \$25,000, the public authority shall be the West Virginia Purchasing Division. For contracts of \$25,000 or less, the public authority shall be the agency issuing the contract. The report shall include:

- (1) Information to show that the education and training service to the requirements of West Virginia Code § 21-1D-5 was provided;
- (2) The name of the laboratory certified by the United States Department of Health and Human Services or its successor that performs the drug tests;
- (3) The average number of employees in connection with the construction on the public improvement;
- (4) Drug test results for the following categories including the number of positive tests and the number of negative tests: (A) Pre-employment and new hires; (B) Reasonable suspicion; (C) Post-accident; and (D) Random.

Vendor should utilize the attached Certified Drug Free Workplace Report Coversheet when submitting the report required hereunder. Pursuant to W. Va. Code 21-1D-2(b) and (k), this provision does not apply to public improvement contracts the value of which is \$100,000 or less or temporary or emergency repairs.

4. AIA DOCUMENTS: All construction contracts that will be completed in conjunction with architectural services procured under Chapter 5G of the West Virginia Code will be governed by the attached AIA documents, as amended by the Supplementary Conditions for the State of West Virginia, in addition to the terms and conditions contained herein.

4A. PROHIBITION AGAINST GENERAL CONDITIONS: Notwithstanding anything contained in the AIA Documents or the Supplementary Conditions, the State of West Virginia will not pay for general conditions, or winter conditions, or any other condition representing a delay in the contracts. The Vendor is expected to mitigate delay costs to the greatest extent possible and any costs associated with Delays must be specifically and concretely identified. The state will not consider an average daily rate multiplied by the number of days extended to be an acceptable charge.

5. GREEN BUILDINGS MINIMUM ENERGY STANDARDS: In accordance with § 22-29-4, all new building construction projects of public agencies that have not entered the schematic design phase prior to July 1, 2012, or any building construction project receiving state grant funds and appropriations, including public schools, that have not entered the schematic design phase prior to July 1, 2012, shall be designed and constructed complying with the ICC International Energy Conservation Code, adopted by the State Fire Commission, and the ANSI/ASHRAE/IESNA Standard 90.1-2007: Provided, That if any construction project has a commitment of federal funds to pay for a portion of such project, this provision shall only apply to the extent such standards are consistent with the federal standards.

6. LOCAL LABOR MARKET HIRING REQUIREMENT: Pursuant to West Virginia Code §21-1C-1 et seq., Employers shall hire at least seventy-five percent of employees for public improvement construction projects from the local labor market, to be rounded off, with at least two employees from outside the local labor market permissible for each employer per project.

Any employer unable to employ the minimum number of employees from the local labor market shall inform the nearest office of Workforce West Virginia of the number of qualified employees needed and provide a job description of the positions to be filled.

If, within three business days following the placing of a job order, Workforce West Virginia is unable to refer any qualified job applicants to the employer or refers less qualified job applicants than the number requested, then Workforce West Virginia shall issue a waiver to the employer stating the unavailability of applicant and shall permit the employer to fill any positions covered by the waiver from outside the local labor market. The waiver shall be in writing and shall be issued within the prescribed three days. A waiver certificate shall be sent to both the employer for its permanent project records and to the public authority.

Any employer who violates this requirement is subject to a civil penalty of \$250 per each employee less than the required threshold of seventy-five percent per day of violation after receipt of a notice of violation.

Any employer that continues to violate any provision of this article more than fourteen calendar days after receipt of a notice of violation is subject to a civil penalty of \$500 per each employee less than the required threshold of seventy-five percent per day of violation.

The following terms used in this section have the meaning shown below.

(1) The term "construction project" means any construction, reconstruction, improvement, enlargement, painting, decorating or repair of any public improvement let to contract in an amount equal to or greater than \$500,000. The term "construction project" does not include temporary or emergency repairs;

(2) The term "employee" means any person hired or permitted to perform hourly work for wages by a person, firm or corporation in the construction industry; The term "employee" does not include: (i) Bona fide employees of a public authority or individuals engaged in making temporary or emergency repairs; (ii) Bona fide independent contractors; or (iii) Salaried supervisory personnel necessary to assure efficient execution of the employee's work;

(3) The term "employer" means any person, firm or corporation employing one or more employees on any public improvement and includes all contractors and subcontractors;

(4) The term "local labor market" means every county in West Virginia and any county outside of West Virginia if any portion of that county is within fifty miles of the border of West Virginia;

(5) The term "public improvement" includes the construction of all buildings, roads, highways, bridges, streets, alleys, sewers, ditches, sewage disposal plants, waterworks, airports and all other structures that may be let to contract by a public authority, excluding improvements funded, in whole or in part, by federal funds.

7. DAVIS-BACON AND RELATED ACT WAGE RATES:

☐ The work performed under this contract is federally funded in whole, or in part. Pursuant to _____, Vendors are required to pay applicable Davis-Bacon wage rates.

☒ The work performed under this contract is not subject to Davis-Bacon wage rates.

8. SUBCONTRACTOR LIST SUBMISSION: In accordance with W. Va. Code § 5-22-1, the apparent low bidder on a contract valued at more than \$250,000.00 for the construction, alteration, decoration, painting or improvement of a new or existing building or structure shall submit a list of all subcontractors who will perform more than \$25,000.00 of work on the project including labor and materials. (This section does not apply to any other construction projects, such as highway, mine reclamation, water or sewer projects.) The subcontractor list shall be provided to the Purchasing Division within one business day of the opening of bids for review. If the apparent low bidder fails to submit the subcontractor list, the Purchasing Division shall promptly request by telephone and electronic mail that the low bidder and second low bidder provide the subcontractor list within one business day of the request. Failure to submit the subcontractor list within one business day of receiving the request shall result in disqualification of the bid.

If no subcontractors who will perform more than \$25,000.00 of work are to be used to complete the project, the apparent low bidder must make this clear on the subcontractor list, in the bid itself, or in response to the Purchasing Division's request for the subcontractor list.

a. Required Information. The subcontractor list must contain the following information:

i. Bidder's name

ii. Name of each subcontractor performing more than \$25,000 of work on the project.

iii. The license number of each subcontractor, as required by W. Va. Code § 21-11-1 et. seq.

iv. If applicable, a notation that no subcontractor will be used to perform more than \$25,000.00 of work. (This item iv. is not required if the vendor makes this clear in the bid itself or in documentation following the request for the subcontractor list.)

b. Subcontractor List Submission Form: The subcontractor list may be submitted in any form, including the attached form, as long as the required information noted above is included. If any information is missing from the bidder's subcontractor list submission, it may be obtained from other documents such as bids, emails, letters, etc. that accompany the subcontractor list submission.

c. Substitution of Subcontractor. Written approval must be obtained from the State Spending Unit before any subcontractor substitution is permitted. Substitutions are not permitted unless:

- i. The subcontractor listed in the original bid has filed for bankruptcy;
- ii. The subcontractor in the original bid has been debarred or suspended; or
- iii. The contractor certifies in writing that the subcontractor listed in the original bid fails, is unable, or refuses to perform his subcontract.

Subcontractor List Submission (Construction Contracts Only)


Bidder's Name: McClanahan Construction Company LLC

☒ Check this box if no subcontractors will perform more than \$25,000.00 of work to complete the project.

Subcontractor Name	License Number if Required by W. Va. Code § 21-11-1 et. seq.

Attach additional pages if necessary

DESIGNATED CONTACT: Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

 Managing Member
(Name, Title)
Bruce D. McClanahan, Managing Member
(Printed Name and Title)
744 Poca River Rd N, Poca, WV 25159
(Address)
(304) 776-3355 (304) 776-6121
(Phone Number) / (Fax Number)
bruce@mcclanahanconstruction.com
(email address)

CERTIFICATION AND SIGNATURE: By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

McClanahan Construction Company LLC
(Company)

 Managing Member
(Authorized Signature) (Representative Name, Title)

Bruce D. McClanahan, Managing Member
(Printed Name and Title of Authorized Representative)

September 16, 2019
(Date)

(304) 776-3355 (304) 776-6121
(Phone Number) (Fax Number)

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

GENERAL CONSTRUCTION SPECIFICATIONS (No AIA Documents)

1. **PURPOSE AND SCOPE:** The West Virginia Purchasing Division is soliciting bids on behalf of General Services Division to establish a contract for Parking Lot Repairs and Repaving at Building 86 located at 1124 Smith Street, Charleston, West Virginia 25301 as specified herein (Aerial Photo of work area included as Exhibit C).

The contractor is responsible for verifying all existing conditions to include dimensions, materials and locations. No existing topographical drawings are available; therefore, complete verification of existing drainage conditions, as well as sublayers and soils, were not possible prior to this solicitation

The Vendor shall furnish all materials, labor, and equipment necessary to complete all Construction Services. The Vendor shall furnish any incidental work, materials, labor, and equipment that are necessary to complete the Construction Services, even if such incidental work is not explicitly included in the Project Plans.

2. **DEFINITIONS:** The terms listed below shall have the meanings assigned to them below. Additional definitions can be found in section 2 of the General Terms and Conditions and in the Project Plans as defined below.

2.1 **"Construction Services"** means repair, resurfacing and restriping of the Building 86 Parking Lot, as more fully described in the Project Plans.

2.2 **"Pricing Page"** means the pages contained in wvOASIS, attached hereto as Exhibit A, or included in the Project Plans upon which Vendor should list its proposed price for the Construction Services.

2.3 **"Project Plans"** means documents developed by an architect, an engineer, the Agency, or another design professional, which are attached hereto as Exhibit B, that provide detailed instructions on how the Construction Services are to be performed. In the event that Project Plans contain drawings or other documents too large to attach in Exhibit B-H, Vendors can obtain copies in accordance with Section 9 of these Specifications.

2.4 **"Solicitation"** means the official notice of an opportunity to supply the State with Construction Services that is published by the Purchasing Division.

3. **ORDER OF PRECEDENCE:** This General Construction Specifications document will have priority over, and supersede, anything contained in the Project Plans.

REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project

4. **QUALIFICATIONS:** Vendor, or Vendor's staff if requirements are inherently limited to individuals rather than corporate entities, shall have the following minimum qualifications:
 - 4.1. **Experience:** Vendor, or Vendor's supervisory staff assigned to this project, must have successfully completed at least three (3) projects that involved work similar to that described in these specifications or the Project Plans. Compliance with this experience requirement will be determined prior to contract award by the State through references provided by the Vendor upon request, through knowledge or documentation of the Vendor's past projects, through confirmation of experience requirements from the architect assisting the State in this project, or some other method that the State determines to be acceptable. Vendor must provide any documentation requested by the State to assist in confirmation of compliance with this provision. References, documentation, or other information to confirm compliance with this experience requirement may be requested after bid opening and prior to contract award.
5. **CONTRACT AWARD:** The Contract is intended to provide Agency with a purchase price for the Construction Services. The Contract will be awarded to the lowest qualified responsible bidder meeting the required specifications. If the Pricing Pages contain alternates/add-ons, the Contract will be awarded based on the grand total of the base bid and any alternates/add-ons selected.
6. **SELECTION OF ALTERNATES:** Pursuant to W. Va. Code § 5-22-1(f), any solicitation of bids shall include no more than five alternates. Alternates, if accepted, shall be accepted in the order in which they are listed on the bid form. Any unaccepted alternate contained within a bid shall expire 90 days after the date of the opening of bids for review. Determination of the lowest qualified responsible bidder shall be based on the sum of the base bid and any alternates accepted.
7. **PERFORMANCE:** Vendor shall perform the Construction Services in accordance with this document and the Project Plans.
8. **SUBSTITUTIONS:** Any substitution requests must be submitted in accordance with the official question and answer period described in the INSTRUCTIONS TO VENDORS SUBMITTING BIDS, Paragraph 4. Vendor Question Deadline. Vendors submitting substitution requests should submit product brochures and product specifications during the official question and answer period.

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

9. PROJECT PLANS: The checked box will apply to Project Plans for this solicitation.

- ☒ **No Additional Project Plan Documents:** There are no additional Project Plans other than those attached hereto as Exhibit B or any subsequent addenda modifying Exhibit B.
- ☐ **Additional Project Plan Documents:** There are additional Project Plan documents other than those attached as Exhibit B. Copies of the additional Project Plan documents not attached as Exhibit B can be obtained by contacting the entity identified below.

10. CONDITIONS OF THE WORK

10.1. Permits: The Vendor shall procure all necessary permits and licenses to comply with all applicable Federal, State, or Local laws, regulations and ordinances of any regulating body.

10.2. Existing Conditions: If discrepancies are discovered between the existing conditions and those noted in the specifications, Vendor must immediately notify the Agency's representative. Vendor must also immediately notify the Agency if suspected hazardous materials are encountered.

10.3. Standard Work Hours: The standard hours of work for this Contract will be from 7:00am to 5:00pm, Monday through Friday, excluding holidays recognized by the State of West Virginia. Any work outside of the standard hours of work must be approved in advance at the Agency's sole discretion. Authorization of work outside of the standard hours of work will not entitle Vendor to additional compensation.

10.4. Project Closeout: Project Closeout shall include the following:

10.4.1. Final Cleanup: Vendor shall perform the final cleanup activities listed below, along with any other final cleanup activities normally associated with the work performed under this Contract, prior to final inspection:

10.4.1.1. No additional Final Cleanup activities other than those included in Exhibits B-G.

10.4.2. Final Inspection: Vendor shall participate in a final inspection with the Agency's project manager. The purpose of the final inspection will be to identify deficiencies that need to be remedied prior to Agency's final acceptance of the work. Vendor shall at all times be obligated to perform in accordance with the Contract and must take all actions necessary to ensure that work complies with requirements of Contract prior to final acceptance. Final acceptance does not waive or release Vendor from its obligation to ensure that

REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project

work complies with the Contract requirements. Vendor shall submit any warranty documents to the Agency project manager at final inspection.

10.5. Payment:

10.5.1. Agency shall pay flat fee as shown on the Pricing Pages, for all Contract Services performed and accepted under this Contract. Vendor shall accept payment in accordance with the payment procedures of the State of West Virginia.

10.5.2. Invoices shall be submitted for payment (in arrears) and must include the following information:

10.5.2.1. Invoice must include, at a minimum, invoice date, FEIN number, complete address of vendor and Contract number.

10.5.2.2. Invoices shall be mailed to the following address:

General Services Division
112 California Avenue
Building 4, Fifth Floor
Attn: Business Manager
Charleston, WV 25305

or, emailed to GSDInvoices@wv.gov

11. FACILITIES ACCESS: Performance of Contract Services may require access cards and/or keys to gain entrance to Agency's facilities. In the event that access cards and/or keys are required:

11.1. Vendor must identify principal service personnel which will be issued access cards and/or keys to perform service.

11.2. Vendor will be responsible for controlling cards and keys and will pay replacement fee, if the cards or keys become lost or stolen.

11.3. Vendor shall notify Agency immediately of any lost, stolen, or missing card or key.

11.4. Anyone performing under this Contract will be subject to Agency's security protocol and procedures.

11.5. Vendor shall inform all staff of Agency's security protocol and procedures.

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

12. MISCELLANEOUS:

12.1. Contract Manager: During its performance of this Contract, Vendor must designate and maintain a primary contract manager responsible for overseeing Vendor's responsibilities under this Contract. The Contract manager must be available during normal business hours to address any customer service or other issues related to this Contract. Vendor should list its Contract Manager and his or her contact information below.

Contract Manager:	<u>Bruce D. McClanahan</u>
Telephone Number:	<u>(304) 776-3355</u>
Fax Number:	<u>(304) 776-6121</u>
Email Address:	<u>bruce@mcclanahanconstruction.com</u>

REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project

EXHIBIT A - Pricing Page

Base Bid: Repair Building 86 parking lot with all associated work as specified herein:

Ninety Five Thousand Nine Hundred Ninety Five Dollars and no cents Lump Sum \$ 95,995.00

(Show amount in both words and numbers: In the event of a difference between the written amount and the number amount, the written amount shall govern.)

Unit Price (wvOASIS commodity line 2): Price per cubic yard for removal of existing sub-base if over excavation is required (this unit price will be the basis for change orders if work beyond the original scope).

Two Hundred Dollars and no cents Cubic Yard \$ 200.00

(Show amount in both words and numbers: In the event of a difference between the written amount and the number amount, the written amount shall govern.)

Unit Price (wvOASIS commodity line 3): Price per ton for additional "57" stone backfill if over excavation is required due to unsuitable subbase (this unit price will be the basis for change orders if work beyond the original scope).

Seventy Five Dollars and no cents Ton \$ 75.00

(Show amount in both words and numbers: In the event of a difference between the written amount and the number amount, the written amount shall govern.)

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

EXHIBIT B – PROJECT PLANS

1. GENERAL REQUIREMENTS:

1.1. Mandatory Construction Services Requirements: Construction Services must meet or exceed the mandatory requirements listed below. All work to be performed per the specifications included in attached Exhibits:

1.1.1. Demolition Work:

Sawcut and remove existing asphalt located at the Southeast corner of the parking lot under the highway overpass (approx. 3500 S.F. polygon; see attached Exhibit C "Aerial View" for location; vendor awarded this project shall verify dimensions). Excavate area to suitable substrate before fill and compaction as specified. Thoroughly remove all demolition debris. Prior to commencing work, contractor shall submit a plan shop drawing (for approval) depicting sloped layout for proper drainage throughout. The contractor is responsible for proper drainage with no ponding areas.

1.1.2. Finish Work

At the Southeast corner of the parking lot under the highway overpass (approx. 3500 S.F. polygon; vendor awarded this project shall verify dimensions): Clean and prepare sawcut edges prior to installing finish surface. Modify existing manhole and/or utility covers as required to make flush with the new finished concrete elevations. Repave with 6" thick 3000psi air-entrained concrete with a 2000psi high early strength within (12) hours. Prior to pouring concrete, add 6" X 6" welded wire fabric (WWF) reinforcement throughout on 2" WWF chairs placed on compacted subgrade. At the present refuse dumpster located adjacent to the neighboring building, add (2) 6" diameter X 96" steel bollards buried to a depth of 40". Bollards shall be placed 36" away from building wall in 18" diameter X 40" deep concrete foundations and filled with concrete as a monolithic pour with paving installation. Bollards shall be painted OSHA yellow or capped with a smooth sleeve of like yellow color.

1.1.3. Parking Lot Repair and Replacement

All Construction Services must comply with the specifications included in Exhibits D-G, as follows:

Exhibit D - 017419 - Construction Waste Management and Disposal

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

Exhibit E - 033000 - Cast-In-Place Concrete
Exhibit F - 312000 - Earth Moving
Exhibit G - 321373 - Concrete Paving Joint Sealants

2. **PERFORMANCE:** Vendor and Agency shall agree upon a schedule for performance of Contract Services and Contract Services Deliverables, unless such a schedule is already included herein by Agency. In the event that this Contract is designated as an open-end contract, Vendor shall perform in accordance with the release orders that may be issued against this Contract.
 - 2.1. The successful Vendor, as a condition of the Contract, agrees that all work is to be Substantially Complete fifteen (15) days prior to the Final Completion Date established by the Centralized Request for Quotation and the issuance of the Notice to Proceed. See General Conditions, Item 3.
 - 2.2. The Vendor shall provide the Agency Project Manager with an overall draft project schedule within seventy-two (72) hours of Award of the Contract. The proposed project schedule shall indicate (at a minimum) shop drawing submission and approval, construction sequence, areas to be worked, building entrance closures, etc. Vendor shall be expected to attend a pre-construction meeting, within seven (7) calendar days of Award of the Contract; during this meeting the final project schedule will be coordinated. Where coordination or disruption of office workspaces or occupants may be required, provide at least one week's advance notice prior to conducting work in those areas. Vendor shall adhere to schedule provided and coordinate through the Agency Project Manager.
 - 2.3. Work shall be conducted as a single project. The work schedule shall be reviewed and approved by the Agency Project Manager prior to commencement of the work. The Vendor shall coordinate the schedule around the Agency's work requirements.
3. **TRAVEL:** Vendor shall be responsible for all mileage and travel costs, including travel time, associated with performance of this Contract. Any anticipated mileage or travel costs may be included in the Vendor's bid, but such costs will not be paid by the Agency separately.
4. **PROJECT SPECIFIC CONDITIONS OF THE WORK**
 - 4.1. **Limits of Work**
 - 4.1.1. Work areas will be limited to those spaces required for access to the jobsite.

**REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project**

4.1.2. Some interior space may be utilized for temporary (overnight) storage of equipment and tools. Coordinate storage needs with the Agency Project Manager.

4.1.3. Agency facilities shall remain in use during this contract. Contractor shall work with the Building Manager to coordinate the temporary access to work areas and otherwise provide for the Contractor needs to complete work. Contractor shall minimize disruption to building work areas and loading dock access.

Contractor shall be permitted reasonable use of building utilities including power, water and sanitary sewage disposal as required for conducting the work. Contractor shall coordinate the location of service connections or use of receptacles with the Building Manager to avoid overloading existing circuits.

4.2. Contractor Visitor Badges

Contractor shall provide a list of all personnel working on this project within the Building parameters. This list shall include a copy of a valid driver's license or other legal identification and include date of birth and cell phone number. Workers shall carry valid Contractor Photo ID Badges to be worn when working on the building and/or grounds. Under no circumstances shall a worker be assigned to this project without the validation first being submitted to the General Services Division and approval given.

4.3. Work Restrictions

Access to the building shall be coordinated with the Owner. Contractor shall not leave open doors unattended and shall close doors when not in use.

This is a non-smoking building. Smoking is not permitted within the building or near entrances, operable windows or outdoor air intakes.

4.4. Parking

Some parking is available on the project site. Parking in non-designated areas is not permitted. Parking is the responsibility of the contractor. With prior approval, contractor's vehicles may be brought on-site for loading & unloading or to provide equipment necessary for conducting the work.

Use of loading dock areas or sidewalk areas for parking is strictly prohibited.

REQUEST FOR QUOTATION
Bldg. 86 Parking Lot Repair Project

4.5. Codes

All work is to be performed in compliance with applicable Federal and State codes including but not limited to the International Building Code, International Mechanical Code, Life Safety Code, NEC, OSHA, UL, ANSI, ASME and related standards.

4.6. Safety

All applicable local safety and OSHA rules and guidelines shall be met by the Contractor. Work shall be subject to verification and inspection by GSD Safety representatives. Such verification shall not relieve the Contractor from meeting all applicable safety regulations and inspection by other agencies.

4.7. Hot Work Permit

Contractor shall obtain Owner's permission prior to performing any work that requires an open flame, creates sparks, use's equipment that creates combustible temperatures, or performs any work that could result in a fire hazard. Owner will review work area and issue a 'Hot Work Permit' prior to Contractor commencing work. Note that the Contractor must take proper precautions and may be required to provide a Fire Watch as a condition of the permit.


4.8. Workmanship

Contractor shall complete all work in a neat and workmanlike manner. All work shall be done using new materials in a manner that meets commercial quality standards. Work shall be neat, true, plumb and square, as applicable. Contractor shall verify all dimensions.

4.9. General Services Division Jobsite Safety Handbook


Prior to beginning any work covered by the Contract, Vendor shall have read, reviewed and acknowledged in writing the attached Jobsite Safety Handbook (Exhibit H).

EXHIBIT C
BUILDING 86 PARKING LOT REPAIR PROJECT

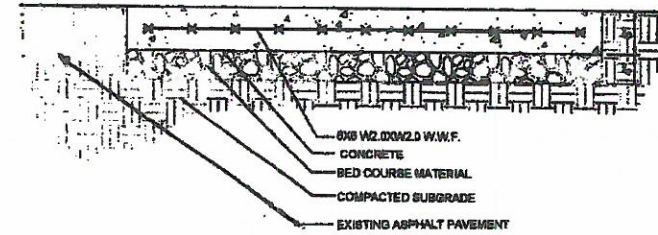

CONCRETE PAVEMENT DETAIL - TYPICAL

NOT TO SCALE

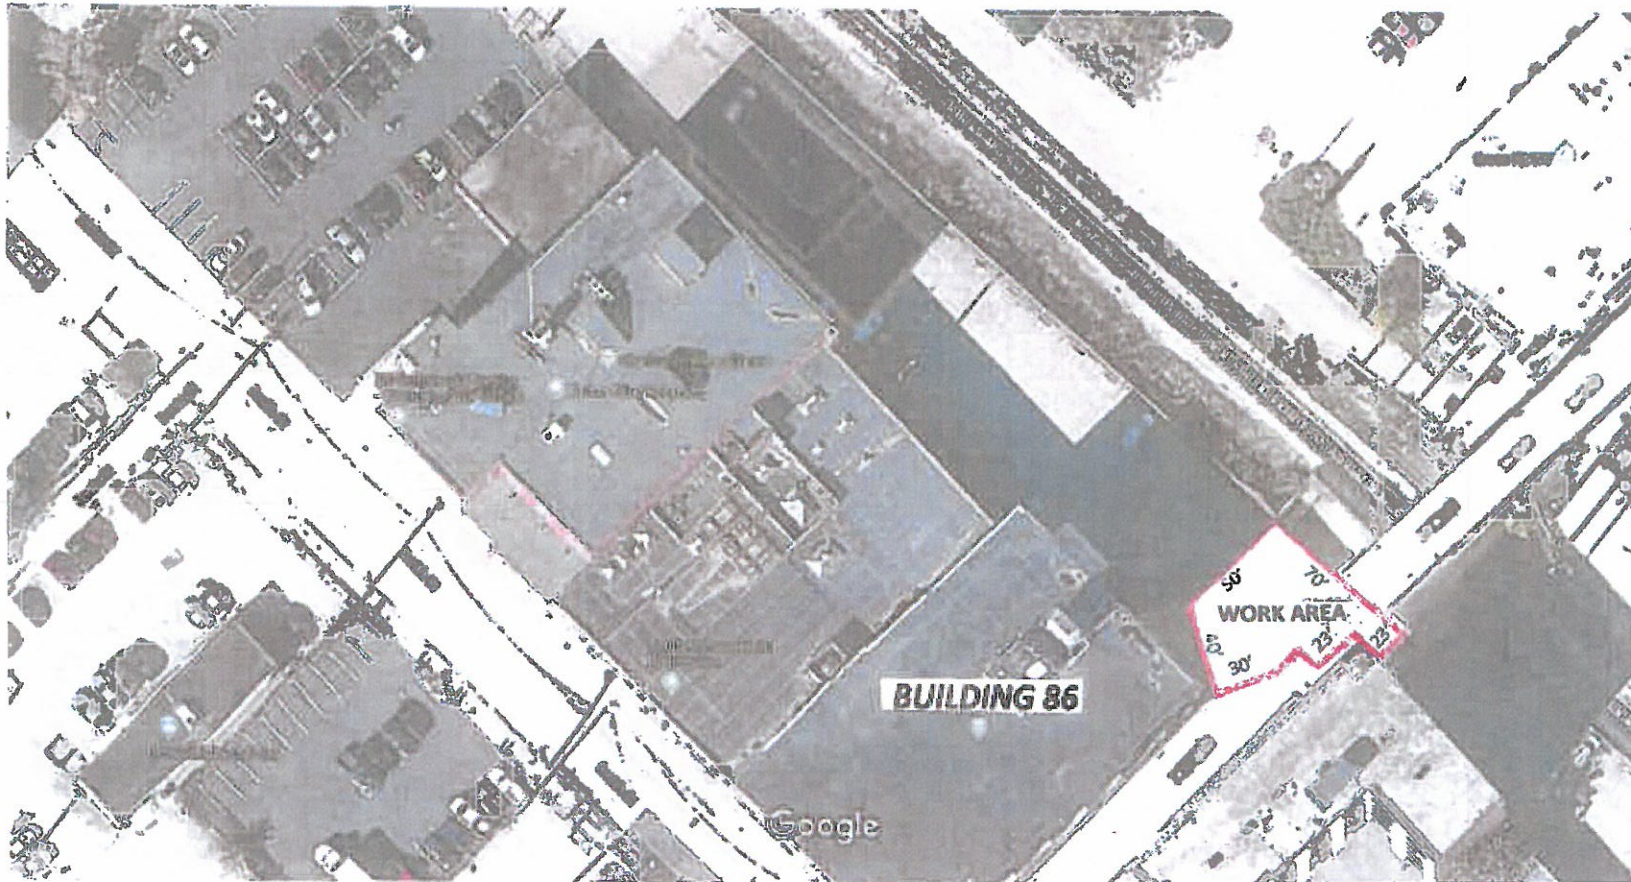

AERIAL VIEW

NOT TO SCALE

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT E**

SECTION 017419 - CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.1 SUMMARY

A. Section includes administrative and procedural requirements for the following:

- 1. Recycling nonhazardous demolition waste.**
- 2. Disposing of nonhazardous demolition and construction waste.**

1.2 DEFINITIONS

- A. Demolition Waste:** Site improvement materials resulting from demolition or selective demolition operations.
- B. Disposal:** Removal off-site of demolition and construction waste and subsequent recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.
- C. Recycle:** Recovery of demolition or construction waste for subsequent processing in preparation for reuse.

1.3 QUALITY ASSURANCE

- A. Waste Management Plan Conference:** Conduct conference at Project site with owner representative.

PART 2 - EXECUTION

2.1 PLAN IMPLEMENTATION

- A. Site Access and Temporary Controls:** Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.

2.2 RECYCLING DEMOLITION WASTE

- A. Asphalt Paving:** Break up and transport paving to asphalt-recycling facility.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT E**

2.3 DISPOSAL OF WASTE

- A. General:** Except for items or materials to be recycled, or otherwise reused, remove waste materials from Project site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.
 - 1.** Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on-site.
 - 2.** Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Disposal:** Remove waste materials from Owner's property and legally dispose of them.

END OF SECTION 017419

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

PART 3 - EXECUTION

3.1 FORMWORK

- A. Design, erect, shore, brace, and maintain formwork, according to ACI 301, to support vertical, lateral, static, and dynamic loads, and construction loads that might be applied, until structure can support such loads.
- B. Construct formwork so concrete members and structures are of size, shape, alignment, elevation, and position indicated, within tolerance limits of ACI 117.
- C. Chamfer exterior corners and edges of permanently exposed concrete.

3.2 EMBEDDED ITEMS

- A. Place and secure anchorage devices and other embedded items required for adjoining work that is attached to or supported by cast-in-place concrete. Use setting drawings, templates, diagrams, instructions, and directions furnished with items to be embedded.

3.3 STEEL REINFORCEMENT

- A. General: Comply with CRSI's "Manual of Standard Practice" for placing reinforcement.

3.4 JOINTS

- A. General: Construct joints true to line with faces perpendicular to surface plane of concrete.
- B. Construction Joints: Install so strength and appearance of concrete are not impaired, at locations indicated or as approved by Architect.
- C. Contraction Joints in Slabs-on-Grade: Form weakened-plane contraction joints, sectioning concrete into areas as indicated. Construct contraction joints for a depth equal to at least one-fourth of concrete thickness as follows:
 - 1. Grooved Joints: Form contraction joints after initial floating by grooving and finishing each edge of joint to a radius of 1/8 inch. Repeat grooving of contraction joints after applying surface finishes. Eliminate groover tool marks on concrete surfaces.
 - 2. Sawed Joints: Form contraction joints with power saws equipped with shatterproof abrasive or diamond-rimmed blades. Cut 1/8-inch wide joints into concrete when cutting action will not tear, abrade, or otherwise damage surface and before concrete develops random contraction cracks.
- D. Isolation Joints in Slabs-on-Grade: After removing formwork, install joint-filler strips at slab junctions with vertical surfaces, such as column pedestals, foundation walls, grade beams, and other locations.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

3.5 CONCRETE PLACEMENT

- A. Before placing concrete, verify that installation of formwork, reinforcement, and embedded items is complete and that required inspections have been performed.
- B. Deposit concrete continuously in one layer or in horizontal layers of such thickness that no new concrete will be placed on concrete that has hardened enough to cause seams or planes of weakness. If a section cannot be placed continuously, provide construction joints. Deposit concrete to avoid segregation.
 - 1. Consolidate placed concrete according to ACI 301.
- C. Cold-Weather Placement: Comply with ACI 306.1.
- D. Hot-Weather Placement: Comply with ACI 301.

3.6 FINISHING FORMED SURFACES

- A. Rough-Formed Finish: As-cast concrete texture imparted by form-facing material with tie holes and defects repaired and patched. Remove fins and other projections that exceed specified limits on formed-surface irregularities.
- B. Related Unformed Surfaces: At horizontal offsets, and similar unformed surfaces adjacent to formed surfaces, strike off smooth and finish with a texture matching adjacent formed surfaces. Continue final surface treatment of formed surfaces uniformly across adjacent unformed surfaces unless otherwise indicated.

3.7 FINISHING SLABS

- A. General: Comply with ACI 302.1R recommendations for screeding, restraighening, and finishing operations for concrete surfaces. Do not wet concrete surfaces.
- B. Scratch Finish: While still plastic, texture concrete surface that has been screeded and bull-floated or darbied. Use stiff brushes, brooms, or rakes to produce a profile amplitude of 1/4 inch in one direction.

3.8 CONCRETE PROTECTING AND CURING

- A. General: Protect freshly placed concrete from premature drying and excessive cold or hot temperatures. Comply with ACI 306.1 for cold-weather protection and ACI 301 for hot-weather protection during curing.
- B. Evaporation Retarder: Apply evaporation retarder to unformed concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 lb./sq. ft. x h before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- C. Cure concrete according to ACI 308.1, by the following method:

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

1. **Curing and Sealing Compound:** Apply uniformly to slab indicated in a continuous operation by power spray or roller according to manufacturer's written instructions. Recoat areas subjected to heavy rainfall within three hours after initial application. Repeat process 24 hours later and apply a second coat. Maintain continuity of coating and repair damage during curing period.

3.9 CONCRETE SURFACE REPAIRS

- A. **Defective Concrete:** Repair and patch defective areas when approved by Architect. Remove and replace concrete that cannot be repaired and patched to Architect's approval.

3.10 FIELD QUALITY CONTROL

- A. **Testing and Inspecting:** Contractor shall engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports.

END OF SECTION 033000

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

SECTION 033000 - CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes cast-in-place concrete, including formwork, reinforcement, concrete materials, mixture design, placement procedures, and finishes.
- B. Related Sections:
 - 1. Section 312000 "Earth Moving" for drainage fill under slabs-on-grade.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Design Mixtures: For each concrete mixture.

1.3 INFORMATIONAL SUBMITTALS

- A. Material certificates.
- B. Material test reports.

1.4 QUALITY ASSURANCE

- A. Manufacturer Qualifications: A firm experienced in manufacturing ready-mixed concrete products and that complies with ASTM C 94/C 94M requirements for production facilities and equipment.
 - 1. Manufacturer certified according to NRMCA's "Certification of Ready Mixed Concrete Production Facilities."
- B. Testing Agency Qualifications: An independent agency, qualified according to ASTM C 1077 and ASTM E 329 for testing indicated.
- C. ACI Publications: Comply with the following unless modified by requirements in the Contract Documents:
- D. Concrete Testing Service: Engage a qualified independent testing agency to perform material evaluation tests and to design concrete mixtures.
- E. Preinstallation Conference: Conduct conference at State of West Virginia Building 86 located at 1124 Smith Street, Charleston, West Virginia 25301.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

PART 2 - PRODUCTS

2.1 FORM-FACING MATERIALS

- A. **Rough-Formed Finished Concrete:** Plywood, lumber, metal, or another approved material. Provide lumber dressed on at least two edges and one side for tight fit.

2.2 STEEL REINFORCEMENT

- A. **Plain-Steel Welded Wire Reinforcement:** ASTM A 185/A 185M, plain, fabricated from as-drawn steel wire into flat sheets.
- B. **Supports:** Chairs, spacers, and other devices for spacing, supporting, and fastening reinforcing welded wire reinforcement in place. Manufacture supports from steel wire, according to CRSI's "Manual of Standard Practice.

2.3 CONCRETE MATERIALS

- A. **Cementitious Material:** Use the following cementitious materials, of the same type, brand, and source, throughout Project:
 - 1. **Portland Cement:** ASTM C 150, Type I/III gray. Supplement with the following:
 - a. **Fly Ash:** ASTM C 618
- B. **Normal-Weight Aggregates:** ASTM C 33, graded.
 - 1. **Maximum Coarse-Aggregate Size:** 1-inch (25 mm) nominal.
 - 2. **Fine Aggregate:** Free of materials with deleterious reactivity to alkali in cement.
- C. **Water:** ASTM C 94/C 94M and potable.

2.4 ADMIXTURES

- A. **Air-Entraining Admixture:** ASTM C 260.
- B. **Chemical Admixtures:** Provide admixtures certified by manufacturer to be compatible with other admixtures and that will not contribute water-soluble chloride ions exceeding those permitted in hardened concrete. Do not use calcium chloride or admixtures containing calcium chloride.
 - 1. **Water-Reducing Admixture:** ASTM C 494/C 494M, Type A.
 - 2. **Retarding Admixture:** ASTM C 494/C 494M, Type B.
 - 3. **Water-Reducing and Retarding Admixture:** ASTM C 494/C 494M, Type D.
 - 4. **High-Range, Water-Reducing Admixture:** ASTM C 494/C 494M, Type F.
 - 5. **High-Range, Water-Reducing and Retarding Admixture:** ASTM C 494/C 494M, Type G.
 - 6. **Plasticizing and Retarding Admixture:** ASTM C 1017/C 1017M, Type II.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT F**

2.5 CURING MATERIAL

- A. Clear, Waterborne, Membrane-Forming Curing and Sealing Compound: ASTM C 1315, Type 1, Class A.

2.6 RELATED MATERIALS

- A. Expansion- and Isolation-Joint-Filler Strips: ASTM D 1751, asphalt-saturated cellulosic fiber.

2.7 CONCRETE MIXTURES

- A. Prepare design mixtures for each type and strength of concrete, proportioned based on laboratory trial mixture or field test data, or both, according to ACI 301.
- B. Cementitious Materials: Use fly ash, pozzolan, ground granulated blast-furnace slag, and silica fume as needed to reduce the total amount of portland cement, which would otherwise be used, by not less than 25 percent.
- C. Admixtures: Use admixtures according to manufacturer's written instructions.
 - 1. Use water-reducing, high-range water-reducing or plasticizing admixture in concrete, as required, for placement and workability.
 - 2. Use water-reducing and retarding admixture when required by high temperatures, low humidity, or other adverse placement conditions.
 - 3. Use water-reducing admixture in pumped concrete, concrete for heavy-use industrial slabs and parking structure slabs, concrete required to be watertight, and concrete with a water-cementitious materials ratio below 0.50.

2.8 FABRICATING REINFORCEMENT

- A. Fabricate steel reinforcement according to CRSI's "Manual of Standard Practice."

2.9 CONCRETE MIXING

- A. Ready-Mixed Concrete: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M and ASTM C 1116/C 1116M and furnish batch ticket information.
 - 1. When air temperature is between 85 and 90 deg F, reduce mixing and delivery time from 1-1/2 hours to 75 minutes; when air temperature is above 90 deg F, reduce mixing and delivery time to 60 minutes.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT G**

SECTION 312000 - EARTH MOVING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Preparing subgrades for asphalt paving.
2. Excavating and backfilling for asphalt paving.
3. Sub-base course and base course for asphalt paving.

1.2 DEFINITIONS

- A. Backfill: Soil material used to fill an excavation.
- B. Base Course: Aggregate layer placed between the sub-base course and hot-mix asphalt paving.
- C. Borrow Soil: Satisfactory soil imported from off-site for use as fill or backfill.
- D. Drainage Course: Aggregate layer supporting the slab-on-grade that also minimizes upward capillary flow of pore water.
- E. Excavation: Removal of material encountered above subgrade elevations and to lines and dimensions indicated.
 1. Unauthorized Excavation: Excavation below subgrade elevations or beyond indicated lines and dimensions without direction by Architect. Unauthorized excavation, as well as remedial work directed by Architect, shall be without additional compensation.
- F. Fill: Soil materials used to raise existing grades.
- G. Sub-base Course: Aggregate layer placed between the subgrade and base course for hot-mix asphalt pavement.
- H. Subgrade: Uppermost surface of an excavation or the top surface of a fill or backfill immediately below sub-base, drainage fill, drainage course, or topsoil materials.
- I. Utilities: On-site underground pipes, conduits, ducts, and cables, as well as underground services within buildings.

1.3 QUALITY ASSURANCE

- A. Pre-excavation Conference: Conduct conference at State of West Virginia Building 86 located at 1124 Smith Street, Charleston, West Virginia 25301.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT G**

1.4 PROJECT CONDITIONS

- A. Utility Locator Service: Notify utility locator service for area where Project is located before beginning earth moving operations.

PART 2 - PRODUCTS

2.1 SOIL MATERIALS

- A. General: Provide borrow soil materials when enough satisfactory soil materials are not available from excavations.
 - 1. Unsatisfactory soils include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction.
- B. Sub-base Material: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 12 percent passing a No. 200 (0.075-mm) sieve.
- C. Base Course: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 95 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 8 percent passing a No. 200 (0.075-mm) sieve.
- D. Engineered Fill: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; with at least 90 percent passing a 1-1/2-inch (37.5-mm) sieve and not more than 12 percent passing a No. 200 (0.075-mm) sieve.
- E. Bedding Course: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D 2940; except with 100 percent passing a 1-inch (25-mm) sieve and not more than 8 percent passing a No. 200 (0.075-mm) sieve.
- F. Drainage Course: Narrowly graded mixture of [washed] crushed stone, or crushed or uncrushed gravel; ASTM D 448; coarse-aggregate grading Size 57; with 100 percent passing a 1-1/2-inch (37.5-mm) sieve and 0 to 5 percent passing a No. 8 (2.36-mm) sieve.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Protect structures, utilities, sidewalks, pavements, and other facilities from damage caused by settlement, lateral movement, undermining, washout, and other hazards created by earth moving operations.
- B. Protect and maintain erosion and sedimentation controls during earth moving operations.
- C. Protect subgrades and foundation soils from freezing temperatures and frost. Remove temporary protection before placing subsequent materials.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT G**

3.2 EXCAVATION, GENERAL

- A. **Unclassified Excavation:** Excavate to subgrade elevations regardless of the character of surface and subsurface conditions encountered. Unclassified excavated materials may include rock, soil materials, and obstructions. No changes in the Contract Sum or the Contract Time will be authorized for rock excavation or removal of obstructions.
 - 1. If excavated materials intended for fill and backfill include unsatisfactory soil materials and rock, replace with satisfactory soil materials.

3.3 SUBGRADE INSPECTION

- A. **Proof-roll or tamp subgrade.** Do not proof-roll or tamp wet or saturated subgrades.
- B. **Reconstruct subgrades damaged by freezing temperatures, frost, rain, accumulated water, or construction activities, as directed by Architect, without additional compensation.**

3.4 STORAGE OF SOIL MATERIALS

- A. **Stockpile borrow soil materials and excavated satisfactory soil materials without intermixing.** Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
 - 1. **Stockpile soil materials away from edge of excavations.**

3.5 SOIL FILL

- A. **Place and compact fill material in layers to required elevations as follows:**
 - 1. **Under walks and pavements, use satisfactory soil material.**
- B. **Other soil materials, such as a drainage course or subbase or base courses, may still be required over fill.**

3.6 SOIL MOISTURE CONTROL

- A. **Uniformly moisten or aerate subgrade and each subsequent fill or backfill soil layer before compaction to within 2 percent of optimum moisture content.**
 - 1. **Do not place backfill or fill soil material on surfaces that are muddy, frozen, or contain frost or ice.**
 - 2. **Remove and replace, or scarify and air dry, otherwise satisfactory soil material that exceeds optimum moisture content by 2 percent and is too wet to compact to specified dry unit weight.**

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT G**

3.7 COMPACTION OF SOIL BACKFILLS AND FILLS

- A. Place backfill and fill soil materials in layers not more than 8 inches (200 mm) in loose depth for material compacted by heavy compaction equipment, and not more than 4 inches (100 mm) in loose depth for material compacted by hand-operated tampers.
- B. Place backfill and fill soil materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure.
- C. Compact soil materials to not less than the following percentages of maximum dry unit weight according to ASTM D 698:
 - 1. Under structures, building slabs, steps, and pavements, scarify and re-compact top 12 inches (300 mm) of existing subgrade and each layer of backfill or fill soil material at 95 percent.

3.8 GRADING

- A. General: Uniformly grade areas to a smooth surface, free of irregular surface changes. Comply with compaction requirements.
- B. Site Rough Grading: Slope grades to direct water away from buildings and to prevent ponding. Finish subgrades to required elevations within the following tolerances:
 - 1. Pavements: Plus or minus 1/2 inch (13 mm).

3.9 SUBBASE AND BASE COURSES UNDER PAVEMENTS AND WALKS

- A. Place sub-base course and base course on subgrades free of mud, frost, snow, or ice.
- B. On prepared subgrade, place sub-base course and base course under pavements and walks as follows:
 - 1. Shape sub-base course and base course to required crown elevations and cross-slope grades.
 - 2. Place sub-base course and base course that exceeds 6 inches (150 mm) in compacted thickness in layers of equal thickness, with no compacted layer more than 6 inches (150 mm) thick or less than 3 inches (75 mm) thick.
 - 3. Compact sub-base course and base course at optimum moisture content to required grades, lines, cross sections, and thickness to not less than 95 percent of maximum dry unit weight according to ASTM D 698.

3.10 FIELD QUALITY CONTROL

- A. Testing Agency: Contractor shall engage a qualified geotechnical engineering testing agency to perform tests and inspections.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT G**

- B. Allow testing agency to inspect and test subgrades and each fill or backfill layer. Proceed with subsequent earth moving only after test results for previously completed work comply with requirements.
- C. When testing agency reports that subgrades, fills, or backfills have not achieved degree of compaction specified, scarify and moisten or aerate, or remove and replace soil materials to depth required; re-compact and retest until specified compaction is obtained.

3.11 PROTECTION

- A. Protecting Graded Areas: Protect newly graded areas from traffic, freezing, and erosion. Keep free of trash and debris.
- B. Repair and reestablish grades to specified tolerances where completed or partially completed surfaces become eroded, rutted, settled, or where they lose compaction due to subsequent construction operations or weather conditions.
- C. Where settling occurs before Project correction period elapses, remove finished surfacing, backfill with additional soil material, compact, and reconstruct surfacing.
 - 1. Restore appearance, quality, and condition of finished surfacing to match adjacent work, and eliminate evidence of restoration to greatest extent possible.

3.12 DISPOSAL OF SURPLUS AND WASTE MATERIALS

- A. Remove surplus satisfactory soil and waste materials, including unsatisfactory soil, trash, and debris, and legally dispose of them off Owner's property.

END OF SECTION 312000

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT H**

SECTION 321373 - CONCRETE PAVING JOINT SEALANTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

- 1. Cold-applied joint sealants.**
- 2. Hot-applied joint sealants**

1.2 ACTION SUBMITTALS

A. Product Data: For each joint-sealant product indicated.

B. Pavement-Joint-Sealant Schedule: Include the following information:

- 1. Joint-sealant application, joint location, and designation.**
- 2. Joint-sealant manufacturer and product name.**
- 3. Joint-sealant formulation.**
- 4. Joint-sealant color.**

1.3 INFORMATIONAL SUBMITTALS

A. Product certificates.

B. Product test reports.

C. Preconstruction compatibility and adhesion test reports.

1.4 QUALITY ASSURANCE

A. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C 1021.

B. Pre-installation Conference: Conduct conference at State of West Virginia Building 86 located 1124 Smith Street, Charleston, West Virginia 25301.

1.5 MATERIALS

A. Compatibility: Provide joint sealants, backing materials, and other related materials that are compatible with one another and with joint substrates under conditions of service and

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT H**

application, as demonstrated by joint-sealant manufacturer based on testing and field experience.

- B. Colors of Exposed Joint Sealants: Black

1.6 COLD-APPLIED JOINT SEALANTS

- A. Single-Component, Non-sag, Silicone Joint Sealant for Concrete: ASTM D 5893, Type NS.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following]:

- a. Crafco Inc., an ERGON company; RoadSaver Silicone or equal.
- b. Dow Corning Corporation; 888 or equal.
- c. Pecora Corporation; 301 NS or equal.

- B. Single-Component, Self-Leveling, Silicone Joint Sealant for Concrete: ASTM D 5893, Type SL.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Crafco Inc., an ERGON company; RoadSaver Silicone SL or equal.
- b. Dow Corning Corporation; 890-SL or equal.
- c. Pecora Corporation; 300 SL or equal.

- C. Multicomponent, Pourable, Traffic-Grade, Urethane Joint Sealant for Concrete: ASTM C 920, Type M, Grade P, Class 25, for Use T.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Pecora Corporation; Urexpan NR-200 or equal.

- D. Hot-Applied, Single-Component Joint Sealant for Concrete and Asphalt: ASTM D 6690, Types I, II, and III.

1. Products: Subject to compliance with requirements, available products that may be incorporated into the Work include, but are not limited to, the following:

- a. Meadows, W. R., Inc.; Sealtight Hi-Spec, Sealtight 3405 or equal.
- b. Right Pointe; D-3405 Hot Applied Sealant.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT H**

1.7 JOINT-SEALANT BACKER MATERIALS

- A. Round Backer Rods for Cold- and Hot-Applied Joint Sealants: ASTM D 5249, Type 1, of diameter and density required to control sealant depth and prevent bottom-side adhesion of sealant.
- B. Round Backer Rods for Cold-Applied Joint Sealants: ASTM D 5249, Type 3, of diameter and density required to control joint-sealant depth and prevent bottom-side adhesion of sealant.
- C. Backer Strips for Cold- and Hot-Applied Joint Sealants: ASTM D 5249; Type 2; of thickness and width required to control joint-sealant depth, prevent bottom-side adhesion of sealant, and fill remainder of joint opening under sealant.

1.8 PRIMERS

- A. Primers: Product recommended by joint-sealant manufacturer where required for adhesion of sealant to joint substrates indicated, as determined from preconstruction joint-sealant-substrate tests and field tests.

PART 2 - EXECUTION

2.1 INSTALLATION

- A. General: Comply with joint-sealant manufacturer's written installation instructions for products and applications indicated unless more stringent requirements apply.
- B. Cleaning of Joints: Clean out joints immediately before installing joint sealants.
- C. Joint-Sealant Installation Standard: Comply with recommendations in ASTM C 1193 for use of joint sealants as applicable to materials, applications, and conditions indicated.
- D. Install joint-sealant backings of kind indicated to support joint sealants during application and at position required to produce cross-sectional shapes and depths of installed sealants relative to joint widths that allow optimum sealant movement capability.
 - 1. Do not leave gaps between ends of joint-sealant backings.
 - 2. Do not stretch, twist, puncture, or tear joint-sealant backings.
 - 3. Remove absorbent joint-sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Install joint sealants using proven techniques that comply with the following and at the same time backings are installed:
 - 1. Place joint sealants so they directly contact and fully wet joint substrates.
 - 2. Completely fill recesses in each joint configuration.
 - 3. Produce uniform, cross-sectional shapes and depths relative to joint widths that allow optimum sealant movement capability.

**BUILDING 86 – PARKING LOT REPAIR PROJECT
EXHIBIT H**

- F. Tooling of Non-sag Joint Sealants: Immediately after joint-sealant application and before skinning or curing begins, tool sealants according to the following requirements to form smooth, uniform beads of configuration indicated; to eliminate air pockets; and to ensure contact and adhesion of sealant with sides of joint:
 - 1. Remove excess joint sealant from surfaces adjacent to joints.
 - 2. Use tooling agents that are approved in writing by joint-sealant manufacturer and that do not discolor sealants or adjacent surfaces.
- G. Provide joint configuration to comply with joint-sealant manufacturer's written instructions unless otherwise indicated.
- H. Clean off excess joint sealant or sealant smears adjacent to joints as the work progresses, by methods and with cleaning materials approved in writing by manufacturers of joint sealants and of products in which joints occur.

END OF SECTION 321373

EXHIBIT H

Jobsite Safety Handbook

For Contractors

Department of Administration (DOA)

General Services Division (GSD)

**112 California Avenue
Building Four, 5th Floor
Charleston, WV**

**THIS HANDBOOK IS TO BE POSTED IN A VISIBLE AREA AT ALL CONSTRUCTION
PROJECTS AND/OR CONTRACTOR WORKSITES**

Contractor Contact: Bruce D. McClanahan **Phone #:** (304) 776-3355

EMERGENCY CONTACTS:

Project Manager:

Name: Bruce D. McClanahan **Phone #:** (304) 776-3355

Emergency Services #: 911

GSD Safety Section:

112 California Ave, Bldg.4 5th Floor. Charleston, WV 25305

Jonathan Trout: Work# 304 957-7153 Cell# 304-205-2721

Marsha Bowling Work# 304-957-7154 Cell# 304-951-1410

Revision 2/6/19

TABLE OF CONTENTS

Jobsite Safety Handbook

1. Building Alarms	2
2. Personal Protective Equipment	2
3. Housekeeping and Access Around Site	2
4. Stairs and Ladders	2
5. Scaffolds and Other Work Platforms	3
6. Fall Protection	3
7. Excavation and Trenching	4
8. Tools and Equipment	5
9. Vehicles and Mobile Equipment.....	5
10. Electrical	5
11. Fire Prevention	5
12. Chemical Hazards	6
13. Confined Spaces	6
14. Lock-Out/Tag-Out	6
15. Contractor Acknowledgement	7

JOBSITE SAFETY HANDBOOK

The following is a summary of applicable jobsite safety requirements. This handbook is intended to be used as a guide and in no way reflects all applicable safety requirements. All employees are responsible for ensuring a safe working environment. All hazards must be addressed regardless if they have been addressed in this handbook. All contractors working on GSD projects are required to follow OSHA regulations.

GSD safety and health procedures are available for review 24/7 in the Main Capitol Building basement, MB-69.

1. BUILDING ALARMS

In the event of a fire, sound the alarm and/or notify other building occupants immediately. Contractor personnel shall respond appropriately to all alarms by exiting the building immediately and remaining at least 50 feet from the building to allow for emergency response access.

2. PERSONAL PROTECTIVE EQUIPMENT (PPE)

Workers must use personal protective equipment, such as:

- Hard hats when overhead, falling or flying hazards exist;
- Safety glasses or face shields for welding, cutting, nailing (including pneumatic), or when working with concrete and/or harmful chemicals;
- Proper shoes or boots to lessen slipping hazards and prevent toe crushing and nail punctures;
- Safety belts and/or harness systems for fall protection.

3. HOUSEKEEPING AND ACCESS AROUND SITE

- Keep all walkways and stairways clear of trash/debris and other materials such as tools and supplies to prevent tripping.
- Keep boxes, scrap lumber and other materials picked up and put in a dumpster or trash/debris area to prevent fire and tripping hazards.
- Provide enough light to allow workers to see and to prevent accidents.

4. STAIRS AND LADDERS

- All stairs are to be equipped with standard handrails.
- Keep ladders in good condition and free of defects – Do not use job made ladders.
- Inspect ladders before use for broken rungs or other defects so falls don't happen. Discard defective ladders.
- Secure ladders at the top and brace or tie off at the bottom to prevent them from slipping and causing falls.

5. SCAFFOLDS AND OTHER WORK PLATFORMS

Scaffolding is to be assembled and used according to OSHA regulations.

General scaffolding guidance:

- Provide ladders or stairs to access scaffold and work platforms safely.
- Keep scaffolds and work platforms free of debris. Keep tools and materials as neat as possible on scaffolds and platforms. This will help prevent materials from falling and workers from tripping.
- Erect scaffolds on firm and level foundations.
- Scaffold legs must be placed on firm footing and secured from movement or tipping, especially on dirt or similar surfaces (a good foundation is a must).
- Erecting and dismantling scaffolds must be under the supervision of a Competent Person.
- The competent person must inspect scaffolds before each use.
- Don't use blocks, bricks, or pieces of lumber to level or stabilize the footings. Manufactured base plates or "mud sills" made of hardwood or equivalent can be used.

Planking:

- Fully plank or use manufactured decking to provide a full work platform on scaffolds. The platform decking and/or scaffold planks must be scaffold grade and not have any visible defects.
- Extend planks or decking material at least 6' over the edge or cleat them to prevent movement. The work platform or planks must not extend more than 12" beyond the end supports to prevent tipping when stepping or working.
- Be sure that manufactured scaffolds are the proper size and that the end hooks are attached to the scaffold frame.

Guardrails:

- Guard scaffold platforms that are more than 10 feet above the ground or floor surface must have a standard guardrail. If guardrails are not practical, use other fall protection devices such as safety belts/harnesses and lanyards.
- Place the top rail approximately 42" above the work platform or planking, with a mid-rail about half that high at 21".
- Install toe boards when other workers are below the scaffold.

6. FALL PROTECTION

OSHA has specific and detailed requirements for fall protection – refer to 29 CFR 1926 Subpart M, 29 CFR 1910, 29 CFR Subpart I. A few of those requirements are listed below:

Guarding:

- Install guardrails around open floors and walls when the fall distance is 4' or more. The top rail must withstand a 200 lb load.
- Construct guardrails with a top rail approximately 42" high with a midrail about half that high at 21".
- Install toe boards when other workers are below the work area.
- Cover floor openings larger than 2x2 (inches) with material to safely support the working load.
- Use other fall protection systems like personal fall arrest systems (harness & lanyard), slide guards, roof anchors or alternative safe work practices when a guardrail system cannot be used. Only wear proper shoes or footwear to lessen slipping hazards.
- Train workers on safe work practices before performing work on foundation walls, roofs, trusses, or where performing exterior wall erections and floor installations.
- Flagging systems can be used, where appropriate. Flagging systems must comply with OSHA guidance.

7. EXCAVATION AND TRENCHING

Refer to OSHA regulations for excavation and trenching requirements, along with regulations for walking and working surfaces: 29 CFR 1926 Subpart P, 29 CFR 1910 Subpart D

Some of the Excavation and Trenching requirements are listed below:

- Find the location of all underground utilities by contacting West Virginia 811 before digging. Dial 811 or 800-245-4848.
- Keep workers away from digging equipment and never allow workers in an excavation when equipment is in use.
- Keep workers from getting between equipment in use and other obstacles and machinery that can cause crushing hazards.
- Keep equipment and the excavated dirt back 2 feet from the edge of the excavation.
- Have a competent person conduct daily inspections and correct any hazards before workers enter a trench or excavation.
- Provide workers a way to get into and out of a trench or excavation. Ladders and ramps can be used and must be within 25' of the worker.
- For excavations and utility trenches over 5 feet deep, use shoring (trench boxes), benching, or slope back the sides. Unless soil analysis has been completed, the earth's slope must be at least 1-1/2 horizontal to 1 vertical.
- Keep water out of trenches with a pump or drainage system, and inspect the area for soil movement and potential cave-ins.
- Open ditches more than 24 hours or overnight must have fence protection.
- Keep drivers in the cab and workers away when dirt and other debris are being loaded into dump trucks. Workers must never be allowed under any load and must stay clear of the back of vehicles.

8. TOOLS AND EQUIPMENT

- Maintain all hand tools and equipment in safe condition and check regularly for defects. Broken or damaged tools and equipment must be removed from the jobsite.
- Use double insulated tools, or ensure the tools are grounded (check for ground plug).
- Equip all power saws (circular, skill, table, etc) with blade guards. Saws must be turned off when unattended. Unplug all power tools when not in use.
- Make sure cords are not damaged. The outer insulation must not be cut or damaged.
- Pneumatic and powder-actuated tools must only be used by trained and experienced personnel. Require proper eye protection for workers.
- Never leave cartridges for pneumatic or powder-actuated tools unattended. Keep equipment in a safe place, according to manufacturer's instructions.

9. VEHICLES AND MOBILE EQUIPMENT

- Inform workers verbally and provide training to stay clear of backing and turning vehicles and equipment with rotating cabs.
- Maintain back-up alarms for equipment with limited rear view or use someone to help guide them back.
- Verify experience or provide training to crane and heavy equipment operators.
- Maintain at least 10 foot clearance from overhead power lines when operating equipment.
- Block up the raised bed when inspecting or repairing dump trucks.
- Use a tag line to control materials moved by a crane.

10. ELECTRICAL

- Prohibit work on new and existing energized (hot) electrical circuits until all power is shut off and a positive "Lockout/Tagout System" is in place.
- Maintain all electrical tools and equipment in safe condition and check regularly for defects.
- Broken or damaged tools and equipment must be removed from the jobsite.
- Protect all temporary power (including extension cords) with Ground Fault Circuit Interrupters (GFCI's). Plug into a GFCI protected temporary power pole, a GFCI protected generator, or use a GFCI extension cord to protect against shocks.
- Locate and identify overhead electrical power lines. Make sure that ladders, scaffolds, equipment or materials never come within 10 feet of electrical power lines.
- Exterior electrical must be approved (UL, NEMA, etc) for exterior use (no internal junction boxes).

11. FIRE PREVENTION

- Provide fire extinguishers near all welding, soldering or other ignition sources.
- Avoid spraying of paint, solvents or other types of flammable materials in rooms with poor ventilation. Build up of fumes and vapors can cause explosions or fires.

- Store gasoline and other flammable materials in a safety can outdoors or in an approved storage facility. (Metal cans with self-sealing lids).

12. CHEMICAL HAZARDS

All hazardous chemicals present in the workplace must have an up-to-date Material Safety Data Sheet (MSDS). All contractors shall maintain MSDS for chemicals used or stored at GSD facilities. All warnings and directions for use must be followed.

13. CONFINED SPACES

By definition, a confined space:

- Is large enough for an employee to enter fully and perform assigned work;
- Is not designed for continuous occupancy by the employee; and
- Has a limited or restricted means of entry or exit.

These spaces may include underground vaults, tanks, storage bins, pits and diked areas, vessels, silos and other similar areas.

By definition, a permit-required confined space has one or more of these characteristics:

- Contains or has the potential to contain a hazardous atmosphere;
- Contains a material with the potential to engulf someone who enters the space;
- Has an internal configuration that might cause an entrant to be trapped or asphyxiated by inwardly converging walls or by a floor that slopes downward and tapers to a smaller cross section; and/or
- Contains any other recognized serious safety or health hazards.

Entry into confined spaces without an evaluation is forbidden. Entry into permit-required confined spaces requires compliance with all OSHA requirements. Entry into non-permit spaces will require an evaluation by GSD Safety to confirm that conditions remain non-permit required.

Contractors that perform confined space entry activities are required to comply with OSHA regulations. GSD will not provide confined space rescue equipment.

14. LOCK-OUT/TAG-OUT

Before working on, repairing, adjusting or replacing equipment and machinery, all appropriate safety procedures, including lockout/tagout, must be utilized to place the machinery or equipment in a neutral or zero mechanical state.

Outside contractors are expected to have knowledge of lock-out/tag-out requirements.

Contractor Acknowledgement:

I, the undersigned, have read, reviewed and acknowledge my understanding of the General Services Division safety requirements, as set forth in this handbook. I am also aware that all applicable rules and regulations are to be followed, regardless of whether they are specifically mentioned in this handbook.

Contractor Representative (Print Name): Bruce D. McClanahan

Contractor Representative Signature:  Date: September 16, 2019

This signed acknowledgement must be signed and returned to the GSD Safety Section prior to start of project work.

STATE OF WEST VIRGINIA
Purchasing Division
PURCHASING AFFIDAVIT

CONSTRUCTION CONTRACTS: Under W. Va. Code § 5-22-1(f), the contracting public entity shall not award a construction contract to any bidder that is known to be in default on any monetary obligation owed to the state or a political subdivision of the state, including, but not limited to, obligations related to payroll taxes, property taxes, sales and use taxes, fire service fees, or other fines or fees.

ALL CONTRACTS: Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

EXCEPTION: The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

AFFIRMATION: By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that: (1) for construction contracts, the vendor is not in default on any monetary obligation owed to the state or a political subdivision of the state, and (2) for all other contracts, that neither vendor nor any related party owes a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

WITNESS THE FOLLOWING SIGNATURE:

Vendor's Name: McClanahan Construction Company LLC

Authorized Signature: *David D. McClanahan* Date: September 16, 2019


State of West Virginia

County of Kanawha, to-wit:

Taken, subscribed, and sworn to before me this 16th day of September, 2019.

My Commission expires 05/02, 2023

AFFIX SEAL HERE



Purchasing Affidavit (Revised 01/19/2018)

State of West Virginia
Purchasing Division

CERTIFIED DRUG-FREE WORKPLACE REPORT COVERSHEET

In accordance with *West Virginia Code* § 21-1D-7b, no less than once per year, or upon completion of the project, every contractor shall provide a certified report to the public authority which let the contract. That report must include each of the items identified below in the Required Report Content section.

Instructions: Vendor should complete this coversheet, attach it to the required report, and submit it to the appropriate location as follows: For contracts more than \$25,000, the report should be mailed to the West Virginia Purchasing Division at 2019 Washington Street East, Charleston, WV 25305. For contracts of \$25,000 or less, the vendor should mail the report to the public authority issuing the contract.

Contract Identification:

Contract Number: CRFQ 0211 GSD2000000009

Contract Purpose: Building 86 Parking Lot Repair

Agency Requesting Work: WV Department of Administration General Services Division

Required Report Content: The attached report must include each of the items listed below. The vendor should check each box as an indication that the required information has been included in the attached report.

- ☐ Information indicating the education and training service to the requirements of *West Virginia Code* § 21-1D-5 was provided;
- ☐ Name of the laboratory certified by the United States Department of Health and Human Services or its successor that performs the drug tests;
- ☐ Average number of employees in connection with the construction on the public improvement;
- ☐ Drug test results for the following categories including the number of positive tests and the number of negative tests: (A) Pre-employment and new hires; (B) Reasonable suspicion; (C) Post-accident; and (D) Random.

Vendor Contact Information:

Vendor Name: McClanahan Construction Company LLC

Vendor Telephone: (304) 776-3355

Vendor Address: 744 Poca River Rd N

Vendor Fax: (304) 776-6121

Poca, WV 25159

Vendor E-Mail: bruce@mcclanahanconstruction.com



State of West Virginia
DRUG FREE WORKPLACE CONFORMANCE AFFIDAVIT
West Virginia Code §21-1D-5

STATE OF WEST VIRGINIA,

COUNTY OF Putnam, TO-WIT:

I, Bruce D. McClanahan, after being first duly sworn, depose and state as follows:

1. I am an employee of McClanahan Construction Company LLC; and,
(Company Name)
2. I do hereby attest that McClanahan Construction Company LLC
(Company Name)

maintains a written plan for a drug-free workplace policy and that such plan and policy are in compliance with **West Virginia Code §21-1D**.

The above statements are sworn to under the penalty of perjury.

Printed Name: Bruce D. McClanahan

Signature: 

Title: Managing Member


Company Name: McClanahan Construction Company LLC

Date: September 16, 2019

Taken, subscribed and sworn to before me this 16th day of September, 2019.

By Commission expires 05/02/23

(Seal)




(Notary Public)

BID BOND

KNOW ALL MEN BY THESE PRESENTS, That we, the undersigned, McClanahan Construction Company, LLC
of Poca, WV, as Principal, and Fidelity and Deposit Company of Maryland
of Schaumburg, IL, a corporation organized and existing under the laws of the State of
IL with its principal office in the City of Schaumburg, as Surety, are held and firmly bound unto the State
of West Virginia, as Obligee, in the penal sum of Five Percent of Amount Bid (\$ 5%) for the payment of which,
well and truly to be made, we jointly and severally bind ourselves, our heirs, administrators, executors, successors and assigns.

The Condition of the above obligation is such that whereas the Principal has submitted to the Purchasing Section of the
Department of Administration a certain bid or proposal, attached hereto and made a part hereof, to enter into a contract in writing for
Building 86 Parking Lot Repair Project - CRFQ 0211 GSD2000000009 - According to Plans & Specifications

NOW THEREFORE,

(a) If said bid shall be rejected, or
(b) If said bid shall be accepted and the Principal shall enter into a contract in accordance with the bid or proposal
attached hereto and shall furnish any other bonds and insurance required by the bid or proposal, and shall in all other respects perform
the agreement created by the acceptance of said bid, then this obligation shall be null and void, otherwise this obligation shall remain in
full force and effect. It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no
event, exceed the penal amount of this obligation as herein stated.

The Surety, for the value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no
way impaired or affected by any extension of the time within which the Obligee may accept such bid, and said Surety does hereby
waive notice of any such extension.

WITNESS, the following signatures and seals of Principal and Surety, executed and sealed by a proper officer of Principal and
Surety, or by Principal individually if Principal is an individual, this 16th day of September, 2019.

Principal Seal

McClanahan Construction Company, LLC

(Name of Principal)

By: Bruce D. McClanahan

(Must be President, Vice President, or
Duly Authorized Agent)

Bruce D. McClanahan Managing Member

(Title)

Surety Seal

Fidelity and Deposit Company of Maryland

(Name of Surety)

By: Patricia A. Moye

Patricia A. Moye, WV Resident Agent Attorney-in-Fact

IMPORTANT – Surety executing bonds must be licensed in West Virginia to transact surety insurance, must affix its seal, and must attach a power of attorney with its seal affixed.

**ZURICH AMERICAN INSURANCE COMPANY
COLONIAL AMERICAN CASUALTY AND SURETY COMPANY
FIDELITY AND DEPOSIT COMPANY OF MARYLAND
POWER OF ATTORNEY**

KNOW ALL MEN BY THESE PRESENTS: That the ZURICH AMERICAN INSURANCE COMPANY, a corporation of the State of New York, the COLONIAL AMERICAN CASUALTY AND SURETY COMPANY, a corporation of the State of Illinois, and the FIDELITY AND DEPOSIT COMPANY OF MARYLAND a corporation of the State of Illinois (herein collectively called the "Companies"), by **ROBERT D. MURRAY, Vice President**, in pursuance of authority granted by Article V, Section 8, of the By-Laws of said Companies, which are set forth on the reverse side hereof and are hereby certified to be in full force and effect on the date hereof, do hereby nominate, constitute, and appoint **Gregory T. GORDON, Patricia A. MOYE and Kimberly J. WILKINSON, all of Charleston, West Virginia**, **EACH** its true and lawful agent and Attorney-in-Fact, to make, execute, seal and deliver, for, and on its behalf as surety, and as its act and deed: **any and all bonds and undertakings**, and the execution of such bonds or undertakings in pursuance of these presents, shall be as binding upon said Companies, as fully and amply, to all intents and purposes, as if they had been duly executed and acknowledged by the regularly elected officers of the ZURICH AMERICAN INSURANCE COMPANY at its office in New York, New York., the regularly elected officers of the COLONIAL AMERICAN CASUALTY AND SURETY COMPANY at its office in Owings Mills, Maryland., and the regularly elected officers of the FIDELITY AND DEPOSIT COMPANY OF MARYLAND at its office in Owings Mills, Maryland., in their own proper persons.

The said Vice President does hereby certify that the extract set forth on the reverse side hereof is a true copy of Article V, Section 8, of the By-Laws of said Companies, and is now in force.

IN WITNESS WHEREOF, the said Vice-President has hereunto subscribed his/her names and affixed the Corporate Seals of the said **ZURICH AMERICAN INSURANCE COMPANY, COLONIAL AMERICAN CASUALTY AND SURETY COMPANY, and FIDELITY AND DEPOSIT COMPANY OF MARYLAND**, this 2nd day of July, A.D. 2019.

ATTEST:

**ZURICH AMERICAN INSURANCE COMPANY
COLONIAL AMERICAN CASUALTY AND SURETY COMPANY
FIDELITY AND DEPOSIT COMPANY OF MARYLAND**



By: _____

Dawn E. Brown
Assistant Secretary
Dawn E. Brown

Vice President
Robert D. Murray

State of Maryland
County of Baltimore

On this 2nd day of July, A.D. 2019, before the subscriber, a Notary Public of the State of Maryland, duly commissioned and qualified, **ROBERT D. MURRAY, Vice President, and DAWN E. BROWN, Assistant Secretary**, of the Companies, to me personally known to be the individuals and officers described in and who executed the preceding instrument, and acknowledged the execution of same, and being by me duly sworn, depose and saith, that he/she is the said officer of the Company aforesaid, and that the seals affixed to the preceding instrument are the Corporate Seals of said Companies, and that the said Corporate Seals and the signature as such officer were duly affixed and subscribed to the said instrument by the authority and direction of the said Corporations.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed my Official Seal the day and year first above written.

Constance A. Dunn

Constance A. Dunn, Notary Public
My Commission Expires: July 9, 2023



SOLICITATION NUMBER: GSD2000000009

Addendum Number: 2

The purpose of this addendum is to modify the solicitation identified as GSD2000000009 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- ☐ Modify bid opening date and time
- ☐ Modify specifications of product or service being sought
- ☒ Attachment of vendor questions and responses
- ☒ Attachment of pre-bid sign-in sheet
- ☐ Correction of error
- ☐ Other

Description of Modification to Solicitation:

1. To publish the Mandatory Pre-bid Sign-in sheet.
2. To publish the Vendor questions and responses.
3. The Bid opening remains 09/19/2019 @ 1:30 P.M.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

SIGN IN SHEET

Page 1 of 1

Date: Sept. 5, 2019

Request for Proposal No. CRFQ GSD2000000009 PLEASE PRINT

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME		MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company:	<u>ACS W Asphalt Contractors & Site Work Inc.</u>	<u>20 Dickson Dam Road</u>	PHONE <u>304-697-2510</u>
Rep:	<u>Dale McKinnley</u>	<u>Lovalette, WV 25536</u>	TOLL FREE <u>866-697-2590</u>
Email Address:	<u>D.mckinnley@asphalt.sitework.com</u>		FAX <u>304-697-2590</u>
Company:	<u>Benchmark Const. Co. Inc.</u>		PHONE <u>304-881-1735</u>
Rep:	<u>Eddie Layne</u>	<u>P.O. Box 1018</u>	TOLL FREE
Email Address:	<u>e.layne@bmcwv.com</u>	<u>Hurricane WV 25560</u>	FAX
Company:	<u>McClanahan Construction Co.</u>	<u>744 N Pace River Rd</u>	PHONE <u>304 776 3355</u>
Rep:	<u>Tiffany Burgess</u>	<u>Poca, WV 25159</u>	TOLL FREE
Email Address:	<u>bruce@mcclanahanconstruction.com</u>		FAX
Company:			PHONE
Rep:			TOLL
Email Address:			FREE
			FAX
Company:			PHONE
Rep:			TOLL
Email Address:			FREE
			FAX

Aphalt Contractors & Site Work Inc.

Dale McKinley
Sales

20 Dickson Dam Road
Lavalette, WV 25535
(304) 697-2510 Office
(304) 380-9846 Cell

1-866-697-2590
Fax (304) 697-2590
www.asphaltsitework.com
d.mckinley@asphaltsitework.com



Tiffany Burgess
Field Office Manager
WVPL #004126

McCLANAHAN CONSTRUCTION COMPANY

744 Poca River Road N
Poca, WV 25159

Cell: 681-207-6368

Fax: 304-776-6121

CRFQ GSD2000000009
Building 86 Parking Lot Repair

- Q1. Instructions to Vendor's submitting bids, Item 41: Are employee background checks required for this project since it is not on the Capitol Complex Grounds?**
- A1. As the work will not be on the Capitol complex, vendors will not be required to submit to fingerprint based state and federal background checks.**

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: GSD2000000009

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

- | | |
|---|--|
| <input checked="" type="checkbox"/> Addendum No. 1
Dated 8/20/2019 | <input type="checkbox"/> Addendum No. 6 |
| <input checked="" type="checkbox"/> Addendum No. 2
Dated 9/9/2019 | <input type="checkbox"/> Addendum No. 7 |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8 |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9 |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

McClanahan Construction Company LLC

Company




Authorized Signature

September 16, 2019

Date

NOTE: This addendum acknowledgement should be submitted with the bid to expedite document processing.

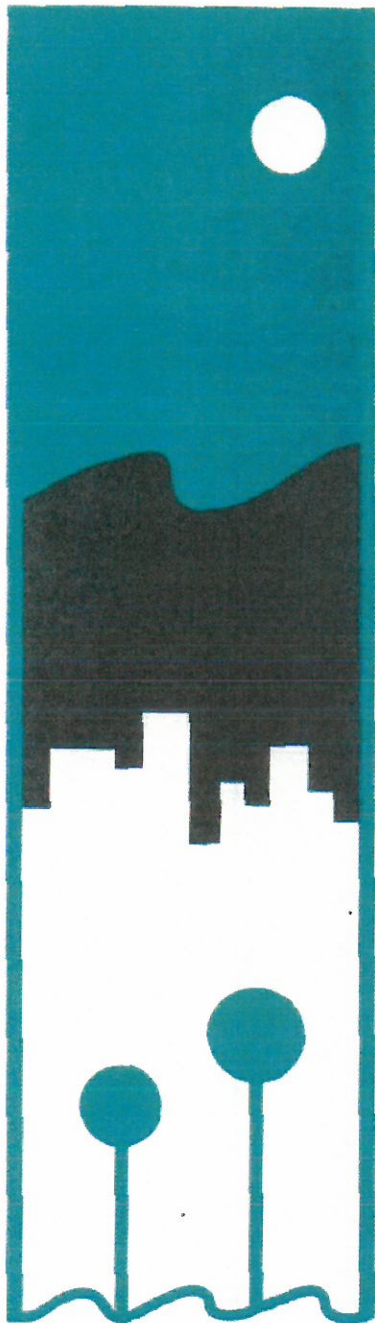

**WEST VIRGINIA
CONTRACTOR
LICENSING
BOARD**

CONTRACTOR LICENSE

Authorized by the

West Virginia Contractor Licensing Board

Number: WV004165

Classification:

**GENERAL BUILDING
RESIDENTIAL
SPECIALTY**

**MCCLANAHAN CONSTRUCTION COMPANY LLC
DBA MCCLANAHAN CONSTRUCTION COMPANY LLC
744 POCA RIVER RD N
POCA, WV 25159-9042**

Date Issued

SEPTEMBER 11, 2019

Expiration Date

SEPTEMBER 11, 2020



Authorized Company Signature



Chair, West Virginia Contractor
Licensing Board

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.