



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

Header 1

General Information

[Contact](#)
[Default Values](#)
[Discount](#)
[Document Information](#)

Procurement Folder: 308239

Procurement Type: Central Purchase Order

Vendor ID: 000000170817


Legal Name: LEMONS FARM EQUIPMENT & TRAILER SALES LIMITED
PARTNERSHIP

Alias/DBA:

Total Bid: \$37,995.00

Response Date: 03/16/2017



Response Time: 12:17

SO Doc Code: CRFQ

SO Dept: 0211

SO Doc ID: GSD1700000018

Published Date: 3/2/17

Close Date: 3/16/17

Close Time: 13:30

Status: Closed

Solicitation Description: Compact Utility Tractor,
Attachments and Accessories

Total of Header Attachments: 1

Total of All Attachments: 1



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Solicitation Response

Proc Folder : 308239

Solicitation Description : Compact Utility Tractor, Attachments and Accessories

Proc Type : Central Purchase Order

Date issued	Solicitation Closes	Solicitation Response	Version
	2017-03-16 13:30:00	SR 0211 ESR03161700000004422	1

VENDOR

000000170817

LEMONS FARM EQUIPMENT & TRAILER SALES LIMITED PATNERSHIP

Solicitation Number: CRFQ 0211 GSD17000000018

Total Bid : \$37,995.00

Response Date: 2017-03-16

Response Time: 12:17:05

Comments: WILL ALSO GIVE ALL FILTERS AND OIL-NOT HYD FOR FIRST OIL CHANGE. WE LOAD REAR TIRES WITH METHONAL, FILL TRACTOR FULL OF DIESEL

FOR INFORMATION CONTACT THE BUYER

Linda B Harper
(304) 558-0468
linda.b.harper@wv.gov

Signature on File

FEIN #

DATE

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	John Deere 3039R (or equal) Compact Tractor with Attachments	1.00000	LS	\$37,995.000000	\$37,995.00

Comm Code	Manufacturer	Specification	Model #
25101901			

Extended Description :	John Deere 3039R (or equal) Compact Utility Tractor

MF 1749



(F.O.B. Port of Entry)

MASSEY FERGUSON®

TRACTOR FEATURES

POWER TRAIN

- Engine:
 - 48.3 Rated HP Mitsubishi 3-Cylinder liquid cooled Diesel, 1.7L (101 cu in) Direct Injection, Turbocharged and Intercooled, Electronic Engine Control
 - 39 PTO HP @ 2500 RPM - Shuttle
 - 37.8 PTO HP @ 2500 RPM - Hydrostatic
 - Emission Standard Category: Tier 4
- Dual Element Dry Type Air Cleaner
- Transmission:
 - 12F/12R Power Shuttle with 4 Synchronized Gears and 3 Ranges.
- Servo-HST Electronic Hydrostatic Transmission with 3 Ranges, Cruise Control, Stall Guard, Max Speed Control and Response Control
- Sealed Wet Disc Brakes
- Pedal Operated Rear Differential Lock
- PTO:
 - Rear - 540 RPM Independent Electro Hydraulic
 - Mid - Optional 2000 RPM Independent

HYDRAULIC SYSTEM

- 3-Point Hitch Cat I with Position Control Standard, Draft Control Optional
- Lift Capacity @ 24 inches - 3,086 lb (1400 kg)
- Telescopic Stabilizers
- Telescopic Draft Link Ends
- Dual Engine Driven Gear Pump
- Flow at Remotes 11.6 GPM (43.8 LPM)
- Hydrostatic Power Steering
- One Rear Remote Valve Standard on Cab Models, up to 3 Possible. Loader Joystick Standard

INSTRUMENTS

- Combination Digital and Analog Front Dash Display
- Tachometer and Hour Meter
- Temperature and Fuel Gauges
- Warning Lights: High Beam Indicator, Engine Oil Pressure, PTO Engagement, Battery Charge (alt) Indicator, Glow Plug Indicator and Flasher Indicators
- Key Operated Electronic Fuel Shutoff and Glow Plug Control

OTHER STANDARD FEATURES

- ISO Mounted Flat Platform w/ Molded Rubber Floor Mat
- One Piece Tilt-up Hood
- 3 Position Tilt Steering
- Deluxe Adjustable Suspension Seat with Arm Rest
- 2 Post Folding ROPS and Retractable Seat Belt
- Turn Signals, Flashers, Tail Lights and SMV Emblem
- 4 Headlights

CAB FEATURES

- Heating and Air Conditioning
- Wired for Radio and Speakers
- Front and Rear Wiper / Washer
- 2 Front Work Lights
- 2 Rear Work Lights
- Rear and Side opening Windows
- Right and Left Entry Doors
- Right and Left External Mirrors
- Deluxe Digital Display with Ground Speed, Engine Coolant, Temperature, Fuel Level & Diagnostic Readout
- ROPS Certified
- Recirculation Filter

• **Note: 3-Point Backhoe Installation Voids Warranty**

IMPLEMENT FEATURES

MF DL135 LOADER

- One Piece Main Frame with Tapered Arms and Single Cross Member
- Quick Attach Loader Frame Mount with Pin Lock
- Built-in Parking Stands
- (2) 2.75 inch Double Acting Lift Cylinders
- (2) 2.75 inch Double Acting Bucket Cylinders
- Hydraulic Lines Routed Inside Main Frame for Protection and Visibility
- 3rd Function Capable, Soft-Drive Capable
- Galvanized Steel Bushings with Recessed Grease Points
- Universal Skid Steer Implement Attachment
- Grille Guard Standard
- Fits MF1749, 1754, 1758, 1759 Compact Tractor Models with R1 AG, R3 Turf, or R4 Industrial Tires
- Maximum Lift Height: 110.2 inches at Pivot
- Lift Capacity to Full Height @ 19.6 inches Forward of Pivot Pin: 1760 lbs
- Breakout Force: 2870 lbs
- Rated Hydraulic Pressure: 2277 PSI

MF DL135 COMPACT LOADER

QUICK ATTACH MOUNT LOADER

(F.O.B. TELFORD, TN)



MASSEY FERGUSON*

FEATURES

- One Piece Main Frame with Tapered Arms and Single Cross Member
- Quick Attach Loader Frame Mount with Pin Lock
- Built-in Parking Stands
- Bucket Level Indicator
- (2) 2.75 inch Double Acting Lift Cylinders
- (2) 2.75 inch Double Acting Bucket Cylinders
- Hydraulic Lines Routed Inside Main Frame for Protection and Visibility
- 3rd Function Capable, Soft-Drive Capable
- Galvanized Steel Pins with Bushings at Key Points
- Recessed Grease Zerk Points
- Universal Skid Steer or Exclusive Compact Quick Attach Implement Attachment Designs
- Grille Guard Standard
- Fits MF1749, 1754, 1758, 1759 Compact Tractor Models with R1 AG, R3 Turf, or R4 Industrial Tires
- Maximum Lift Height: 110.2 Inches at Pivot
- Lift Capacity to Full Height @ 19.6 inches Forward of Pivot Pin: 1760 lbs
- Breakout Force: 2870 lbs
- Rated Hydraulic Pressure: 2277 PSI

Note: Tractors must be properly ballasted for loader operation. See Operator's Manual for information.

Note: Specifications may vary between tractor models, tires and hydraulic options

Order Code	Catalog Number	Description	Factory Code	Approx. Weight (lb.)	List Price
------------	----------------	-------------	--------------	----------------------	------------

For a Complete Loader, Select One Order Code from Group 01 through Group 03

For Additional Hydraulics, Buckets and Accessories Order as Required From Groups 04 through 07

BASE MACHINE

					<u>Group 01</u>
ZL18N1E 1W000M	72533632	MF DL135 Base Loader - Skid Steer Style	55C2807	670	3,303.00
ZL18N1E 2W000M	72533633	MF DL135 Base Loader - Compact Quick Attach Style	15C2668	655	3,139.00

SUBFRAME MOUNTING KITS

					<u>Group 02</u>
72533854M		Subframe Kit for MF1749 Tractors	65C636	295	749.00
72533851M		Subframe Kit for MF1754 and 1758 with Shuttle Transmission	65C636	295	749.00
72533852M		Subframe Kit for MF1754 and 1758 with Hydro Transmission	65C636	295	749.00
72533853M		Subframe Kit for MF1759.	65C636	295	749.00

HYDRAULICS

					<u>Group 03</u>
72533663M		Mid-Mount Hose Kit for MF1700 Series Tractors. (Required to connect loader steel lines to factory installed tractor mid-valves)	95C192	10	227.00

ADDITIONAL HYDRAULIC OPTIONS

					<u>Group 04</u>
72533665M		Soft Drive Ride Control System	15C492	20	579.00
72533934M		Third Function Valve with Deutsch Connector (Requires Wiring Harness)	65C653	20	769.00
72533667M		Wiring Harness for Third Function (with Knob).	65C160	2	189.00

MF 1535 ROTARY BROOM



MASSEY FERGUSON®

(F.O.B. Port of Entry)

FEATURES

- Patented Quick Hitch, Cat C
- Overall Width 72"
- Overall Height 31"
- Rotation Counterclockwise
- Brush Diameter 22"
- Sweeping Width - 66-1/2"
- Drive System Gearbox in oil
- Polypropylene Brush
- 1 Front Mounted, 12x3 support wheel
- Lifting Mechanism: Hydraulic
- Hydraulic Angling
- Front Mount To Fit: MF1547, 1552, 1643, 1648, 1652, 1742, 1749, 1754, 1758 and 1759
- **NOTE:**
To Operate MF 1535 Rotary Broom, Tractor Must Be Equipped with Two Spool Valve or Auxiliary Valve.

To Mount to the tractor, the Mid PTO Driveline must be ordered and tractor must be equipped with MID PTO.

Order Code	Catalog Number	Description	Factory Code	Approx. Weight (lb.)	List Price
------------	----------------	-------------	--------------	----------------------	------------

For a Complete Rotary Broom, Select One Order Code from Group 01 and Catalog Number(s) Group 02 and 03

BASE MACHINE

MF1535	7584002	MF1535 72" Rotary Broom	15C3603	537	4,239.00
		(Requires Subframe and PTO Driveline)			

Group 01

SUBFRAME

72530368M	Subframe for MF1742, 1749, 1754, 1758 and 1759	65C2115		2,489.00
7581101M	Subframe for MF1547, 1552, 1643, 1648, and 1652	15C1818	427	2,139.00

Group 02

MID PTO DRIVELINE

7581102M	Mid PTO Driveline for MF1547, 1552, 1643, 1648, 1652, 1742, 1749, 1754, and 1758	65C687	37	809.00
----------	--	--------	----	--------

Group 03

ACCESSORIES:

4252102M	6" X 2" Side Caster Wheel	65C381	48	449.00
7584902M	50/50 Wire / Poly Broom	15C560	65	659.00
7584901	French Manual			No Charge
7092904M	French Manual (Subframe).			No Charge

* See Compact Tractor Section for Hydraulic Valves

ALITEC

Pallet Forks


Choose from a wide variety of styles to match your application. PF4000 & PF6000 series forks utilize certified forged steel tines for long life and the integral center load point allows for safe lifting and machine tie-down.

Specifications	PF2042S	PF4036SLG
Operating Weight	280 lbs	347 lbs
Fork Length	42"	36"
Fork Capacity at 24 From Fork Frame Face	2,000	
Fork Tine Dimensions	1.4" x 3.9"	
Fork Spread Range	8"-40"	
Fork Type	free pivoting rail	
Back Guard	full height, high visibility	reduced height, high visibility

PF4048S

Manure Forks

Specifications	MF6000	MF6600	MF7200
Width	60"	66"	72"
Length	34.3"		
Height	20.8"		
Operating Weight	300 lbs	330 lbs	375 lbs
Number of Tines	8	9	10
Number of Additional Tines Available	7	8	9
Tooth Spacing	8.25"		
Working Length of Tine	25.5"		
Diameter of Tine	1.25"		

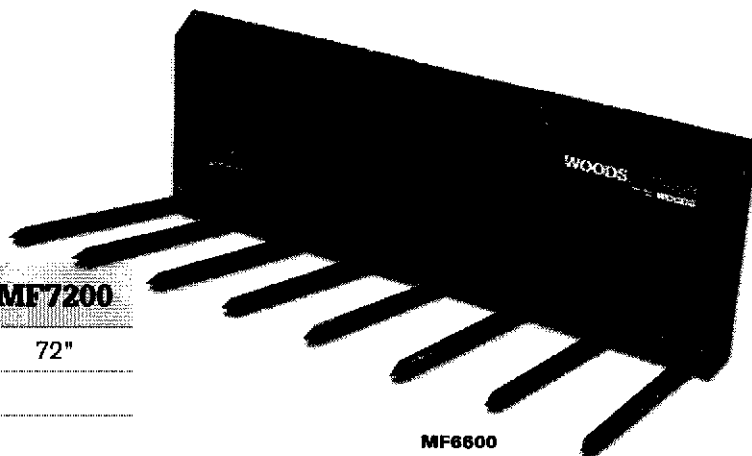

MF6600

Sturdy reinforced design ensures extra strength, and replaceable, heat-treated round tines provide a working length of 25.5-inches. For applications requiring tighter spacing, these forks will accept up to nine additional tines.