


2019 Washington Street, East Charleston, WV 25305 Telephone: 304-558-2306 General Fax: 304-558-6026

Bid Fax: 304-558-3970

The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at *wvOASIS.gov*. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at *WVPurchasing.gov* with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.



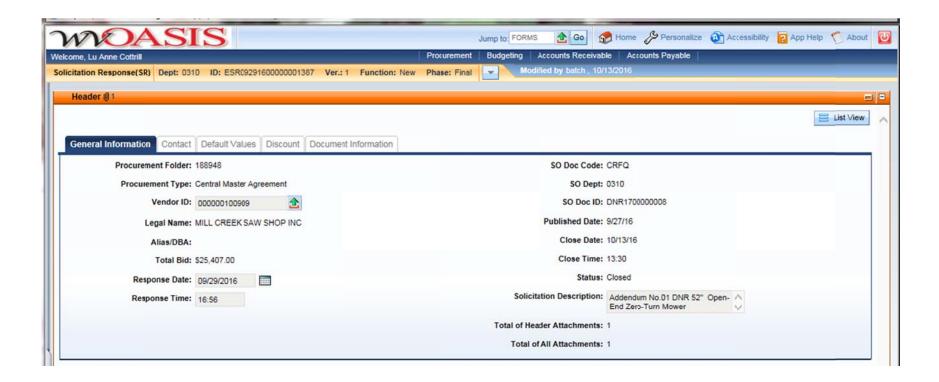

## State of West Virginia Solicitation Response

Proc Folder: 188948

Solicitation Description: Addendum No.01 DNR 52" Open-End Zero-Turn Mower

Proc Type: Central Master Agreement

Date issued	Solicitation Closes	Solicitation Response	Version
	2016-10-13 13:30:00	SR 0310 ESR09291600000001387	1

VENDOR

000000100909

MILL CREEK SAW SHOP INC

Solicitation Number: CRFQ 0310 DNR1700000008

**Total Bid :** \$25,407.00 **Response Date**: 2016-09-29 **Response Time**: 16:56:39

Comments:

FOR INFORMATION CONTACT THE BUYER

Guy Nisbet (304) 558-2596 guy.l.nisbet@wv.gov

Signature on File FEIN # DATE

All offers subject to all terms and conditions contained in this solicitation

Page: 1 FORM ID: WV-PRC-SR-001

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	Zero Turn Riding Lawn Mower	3.00000	EA	\$8,469.000000	\$25,407.00

Comm Code	Manufacturer	Specification	Model #	
27112014				
<b>Extended Descrip</b>	otion: Gravely Model 992	2277 or Equal		

Comments: Please view attached document for unit specs. Thank you!

## Specifications for model # LZS740AKC524A2

Equipment

Blade Spindles No maintenance, sealed and non-greasable spindles; 7.75"-diameter cutter housing with 30mm (1.18")diameter spindle shaft and splined blade driver.

Drive Tires 23 x 9.5-12, 4 ply Turf Master®

Cup Holder Standard

Tractor Frame Unibody, welded, heavy-duty 1.5" x 3" tubular steel.

Steering Control Hydraulically dampened twin levers, adjust fore and aft. Adjustable dampeners (3 positions) to customize drive responsiveness. Also adjustable to 2 height positions.

Front Caster Tires 13 x 5.0-6, smooth-tread, semi-pneumatic.

Parking Brake Lever-actuated disc brake.

Seat Deluxe, two-tone, bolstered suspension seat with Elastomeric Vibration Control material. Mounted on innovative Seat Isolation System that provides operator isolation in all three planes of motion as well as fore-aft slide and seat flip-up.

Electrical 12-volt battery with 20-amp alternator.

**Power Components** 

Engine Brand Kohler®

Engine Model ECV740

Engine Displacement 747

Engine Series Command™ EFI

Engine Type Electronic Fuel Injected

Engine Speed 3,750 rpm

Air Filter Heavy-duty canister air filtration system

Fuel Type Gas EFI

Fuel Capacity 12-gallon (45.4-L), single fuel tank with single fill location.

Fuel Indicator Yes - electronic Sender

Drive Hydro-Drive

Drive Description Two Exmark exclusive Parker unitized pump and wheel motor systems with no hoses, integrated cooling fans, 1.7-quart integrated reservoir, spin-on filter and heavy-duty components. 12 cc pumps and 14. 5 cubic inch motors.

Speed Infinitely variable speed selection from 0–10.0 mph (16 kmph) forward, 0–6.0 mph (9.7 kmph) reverse.

Carb Compliant Yes

Deck Lift Standard; foot-controlled deck lift changes cutting height and lifts the deck to maneuver around obstacles, or place in transport position.

Safety Package Operator Presence Controls (OPC) and drive system interlock, with safety interlock system indicators.

ROPS 2-post foldable ROPS standard with seat belt and latch.

PTO Engagement MagStop electromagnetic 200-ft-lb clutch with spot brake

Drive Wheel Release Allows unit movement without engine running.

Casters .50" thick caster yoke arms.

Decks

Width / Cutting Deck 52"

Deck Style Floating Deck

Deck Style Description Full-floating UltraCut Series 4. Side discharge standard, with molded discharge chute and option to bag or mulch.

Deck Construction 10-gauge top that is formed and continuously seam welded, 7-gauge side skirt and 7-gauge reinforced spindle mounting locations for improved strength and reduced weight.

Blade Tip Speed Approximately 18,500 fpm.

Cutting Heights 1.0" (2.5 cm) to 5.5" (11.8 cm) in 0.25" (0.64 cm) increments adjustable from operator's seat.

Blades 3 Blades at 18.00" Length

**Dimensions** 

Width 64.8 in. (164.6 cm)

Length 79.2 in. (201.2 cm)

Height 70 in. (177.8 cm)

Curb Weight 1165