


GENERAL NOTES:

1. REMOVE EXISTING ROOF TO METAL DECK. PROVIDE NEW 60 MIL. ADHERED ROOF MEMBRANE PER SPECIFICATIONS OVER NEW INSULATION. SLOPE TO DRAIN AS INDICATED.
2. PROVIDE NEW METAL COPING PER SPECIFICATIONS.
3. REMOVE EXISTING ROOF HATCH. PROVIDE NEW METAL DECKING OVER OPENING.
4. INSTALL NEW ROOF HATCH PER SPECS AND DETAILS. WORK INCLUDES INTERIOR FINISH WORK AND NEW METAL LADDER BELOW.
5. EXISTING SCAFFERS TO REMAIN. REMOVE ROOFING AND FLASHING FOR NEW ROOF ELEVATION AND MATERIALS.
6. EXISTING SCAFFERS FROM HIGH TO LOWER ROOF TO REMAIN.
7. REMOVE EXISTING METAL ANTENNAS AND HVAC EQUIPMENT SUPPORTS TO METAL DECK. RE-ROOF OVER AREA.
8. EXISTING HVAC EQUIPMENT TO REMAIN. REMOVE FLASHINGS AND PITCH ROCKETS AS REQUIRED.
9. VENT THRU ROOF. REMOVE FLASHINGS.
10. EXISTING EXTERIOR STAIR TO REMAIN. DO NOT USE FOR ROOF ACCESS OR DELIVERY OF MATERIALS TO ROOF. PROTECT FROM DAMAGE.
11. 30" x 30" ROOF WALKWAY PADS. ADHERE TO ROOF AROUND HATCH, AROUND MECHANICAL EQUIPMENT AND AT WALKWAYS INDICATED.



INTERIOR
STAIRWELL PLAN

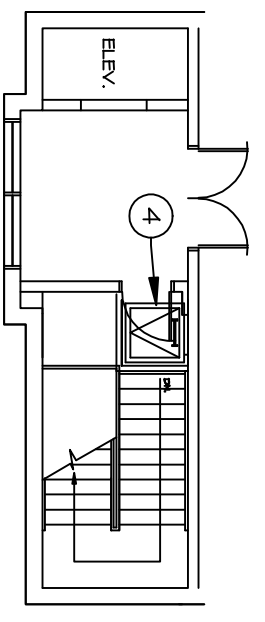

BUILDING 15
ROOF PLAN

