



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at [wvOASIS.gov](http://wvOASIS.gov). As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at [WVPurchasing.gov](http://WVPurchasing.gov) with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

## Header 9

List View

### General Information

Contact

Default Values

Discount

Document Information

Procurement Folder: 453854

SO Doc Code: CRFQ

Procurement Type: Central Purchase Order

SO Dept: 0403

Vendor ID:  

SO Doc ID: DBS1800000009

Legal Name: CUNNINGHAM ASSOCIATES INC

Published Date: 6/14/18

Alias/DBA:

Close Date: 6/19/18

Total Bid: \$159,340.19

Close Time: 13:30

Response Date:  

Status: Closed

Apply Default Values to Commodity Lines

View Procurement Folder



Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

**State of West Virginia  
 Solicitation Response**

**Proc Folder :** 453854  
**Solicitation Description :** Addendum No. 2 - WVSDA ADA Playground  
**Proc Type :** Central Purchase Order

Date issued	Solicitation Closes	Solicitation Response	Version
	2018-06-19 13:30:00	SR 0403 ESR06191800000005960	1

<b>VENDOR</b>
000000197651 CUNNINGHAM ASSOCIATES INC

**Solicitation Number:** CRFQ 0403 DBS1800000009

**Total Bid :** \$159,340.19      **Response Date:** 2018-06-19      **Response Time:** 11:25:46

**Comments:**

**FOR INFORMATION CONTACT THE BUYER**  
 Michelle L Childers  
 (304) 558-2063  
 michelle.l.childers@wv.gov

<b>Signature on File</b>	<b>FEIN #</b>	<b>DATE</b>
--------------------------	---------------	-------------

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	Playground System				\$159,340.19

Comm Code	Manufacturer	Specification	Model #
49221532			

**Extended Description :** Lump sum price to furnish all labor, material, equipment, supplies and transportation and to perform all work as specified in the bidding documents.

Agency \_\_\_\_\_  
REQ.P.O# \_\_\_\_\_

**BID BOND**

KNOW ALL MEN BY THESE PRESENTS, That we, the undersigned, PlayCore Wisconsin, Inc. DBA GameTime  
of 150 PlayCore Dr., Fort Payne, AL 35967, as Principal, and Berkley Insurance Company  
of 475 Steamboat Rd., Greenwich, CT 06830, a corporation organized and existing under the laws of the State of Delaware  
with its principal office in the City of Greenwich, CT, as Surety, are held and firmly bound unto the State  
of West Virginia, as Obligee, in the penal sum of Five Percent (5%) of Bid Amount (\$ \_\_\_\_\_) for the payment of which,  
well and truly to be made, we jointly and severally bind ourselves, our heirs, administrators, executors, successors and assigns.

The Condition of the above obligation is such that whereas the Principal has submitted to the Purchasing Section of the  
Department of Administration a certain bid or proposal, attached hereto and made a part hereof, to enter into a contract in writing for  
WVSDA ADA Playground  
Solicitation No. CRFQ 0403 DBS1800000009

NOW THEREFORE,

- (a) If said bid shall be rejected, or
- (b) If said bid shall be accepted and the Principal shall enter into a contract in accordance with the bid or proposal attached hereto and shall furnish any other bonds and insurance required by the bid or proposal, and shall in all other respects perform the agreement created by the acceptance of said bid, then this obligation shall be null and void, otherwise this obligation shall remain in full force and effect. It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated.

The Surety, for the value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no way impaired or affected by any extension of the time within which the Obligee may accept such bid, and said Surety does hereby waive notice of any such extension.

WITNESS, the following signatures and seals of Principal and Surety, executed and sealed by a proper officer of Principal and Surety, or by Principal individually if Principal is an individual, this 14th day of June, 2018.

Principal Seal



PlayCore Wisconsin, Inc. DBA GameTime

(Name of Principal)

By

(Must be President, Vice President, or Duly Authorized Agent)

MIKE McWILLIAMS, VP CUST. SATISFACTION

(Title)

Surety Seal



Berkley Insurance Company

(Name of Surety)

Attorney-in-Fact Sylvia M. Ogle

**IMPORTANT – Surety executing bonds must be licensed in West Virginia to transact surety insurance, must affix its seal, and must attach a power of attorney with its seal affixed.**

POWER OF ATTORNEY  
BERKLEY INSURANCE COMPANY  
WILMINGTON, DELAWARE

NOTICE: The warning found elsewhere in this Power of Attorney affects the validity thereof. Please review carefully.

KNOW ALL MEN BY THESE PRESENTS, that BERKLEY INSURANCE COMPANY (the "Company"), a corporation duly organized and existing under the laws of the State of Delaware, having its principal office in Greenwich, CT, has made, constituted and appointed, and does by these presents make, constitute and appoint: *Gary D. Eklund; D-Ann Kleidosty; Sylvia M. Ogle; Sharon J. Potts; or Karina Plis of Marsh USA, Inc. of Atlanta, GA* its true and lawful Attorney-in-Fact, to sign its name as surety only as delineated below and to execute, seal, acknowledge and deliver any and all bonds and undertakings, with the exception of Financial Guaranty Insurance, providing that no single obligation shall exceed **Fifty Million and 00/100 U.S. Dollars (U.S.\$50,000,000.00)**, to the same extent as if such bonds had been duly executed and acknowledged by the regularly elected officers of the Company at its principal office in their own proper persons.

This Power of Attorney shall be construed and enforced in accordance with, and governed by, the laws of the State of Delaware, without giving effect to the principles of conflicts of laws thereof. This Power of Attorney is granted pursuant to the following resolutions which were duly and validly adopted at a meeting of the Board of Directors of the Company held on January 25, 2010:

**RESOLVED**, that, with respect to the Surety business written by Berkley Surety, the Chairman of the Board, Chief Executive Officer, President or any Vice President of the Company, in conjunction with the Secretary or any Assistant Secretary are hereby authorized to execute powers of attorney authorizing and qualifying the attorney-in-fact named therein to execute bonds, undertakings, recognizances, or other suretyship obligations on behalf of the Company, and to affix the corporate seal of the Company to powers of attorney executed pursuant hereto; and said officers may remove any such attorney-in-fact and revoke any power of attorney previously granted; and further

**RESOLVED**, that such power of attorney limits the acts of those named therein to the bonds, undertakings, recognizances, or other suretyship obligations specifically named therein, and they have no authority to bind the Company except in the manner and to the extent therein stated; and further

**RESOLVED**, that such power of attorney revokes all previous powers issued on behalf of the attorney-in-fact named; and further

**RESOLVED**, that the signature of any authorized officer and the seal of the Company may be affixed by facsimile to any power of attorney or certification thereof authorizing the execution and delivery of any bond, undertaking, recognizance, or other suretyship obligation of the Company; and such signature and seal when so used shall have the same force and effect as though manually affixed. The Company may continue to use for the purposes herein stated the facsimile signature of any person or persons who shall have been such officer or officers of the Company, notwithstanding the fact that they may have ceased to be such at the time when such instruments shall be issued.

IN WITNESS WHEREOF, the Company has caused these presents to be signed and attested by its appropriate officers and its corporate seal hereunto affixed this 31<sup>st</sup> day of January, 2018.

Attest:

Berkley Insurance Company

(Seal)

By Ira S. Lederman  
Executive Vice President & Secretary

By Jeffrey M. Hafter  
Senior Vice President

**WARNING: THIS POWER INVALID IF NOT PRINTED ON BLUE "BERKLEY" SECURITY PAPER.**

STATE OF CONNECTICUT )

) ss:

COUNTY OF FAIRFIELD )

Sworn to before me, a Notary Public in the State of Connecticut, this 31<sup>st</sup> day of January, 2018, by Ira S. Lederman and Jeffrey M. Hafter who are sworn to me to be the Executive Vice President and Secretary, and the Senior Vice President, respectively, of Berkley Insurance Company.

MARIA C. RUNDBAKEN  
NOTARY PUBLIC  
MY COMMISSION EXPIRES  
APRIL 30, 2019

Maria C. Rundbaken  
Notary Public, State of Connecticut

**CERTIFICATE**

I, the undersigned, Assistant Secretary of BERKLEY INSURANCE COMPANY, DO HEREBY CERTIFY that the foregoing is a true, correct and complete copy of the original Power of Attorney; that said Power of Attorney has not been revoked or rescinded and that the authority of the Attorney-in-Fact set forth therein, who executed the bond or undertaking to which this Power of Attorney is attached, is in full force and effect as of this date.

Given under my hand and seal of the Company, this 14<sup>th</sup> day of June, 2018.  
Vincent P. Forte  
Vincent P. Forte

(Seal)

WARNING - Any unauthorized reproduction or alteration of this document is prohibited. This power of attorney is void unless seals are readable and the certification seal at the bottom is embossed. The background imprint, warning and verification instructions (on reverse) must be in blue ink.

Please **verify the authenticity** of the instrument attached to this Power by:

Toll-Free Telephone: (800) 456-5486; or

Electronic Mail: [BSGInquiry@berkleysurety.com](mailto:BSGInquiry@berkleysurety.com)

---

Any written notices, inquiries, claims or demands to the Surety on the bond attached to this Power should be directed to:

Berkley Surety  
412 Mount Kemble Ave.  
Suite 310N  
Morristown, NJ 07960  
Attention: Surety Claims Department

**Or**

Email: [BSGClaim@berkleysurety.com](mailto:BSGClaim@berkleysurety.com)

---

Please include with all communications the bond number and the name of the principal on the bond. Where a claim is being asserted, please set forth generally the basis of the claim. In the case of a payment or performance bond, please also identify the project to which the bond pertains.

Berkley Surety is a member company of W. R. Berkley Corporation that underwrites surety business on behalf of Berkley Insurance Company, Berkley Regional Insurance Company and Carolina Casualty Insurance Company.

ADDENDUM ACKNOWLEDGEMENT FORM  
SOLICITATION NO.:

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

*(Check the box next to each addendum received)*

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6  |
| <input checked="" type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7  |
| <input type="checkbox"/> Addendum No. 3            | <input type="checkbox"/> Addendum No. 8  |
| <input type="checkbox"/> Addendum No. 4            | <input type="checkbox"/> Addendum No. 9  |
| <input type="checkbox"/> Addendum No. 5            | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Playcore Wisconsin Inc. DBA GameTime c/o Cunningham Recreation  
Company



Authorized Signature

06/19/18  
Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.



**ADDENDUM ACKNOWLEDGEMENT FORM**  
**SOLICITATION NO.:01**

**Instructions:** Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

**Acknowledgment:** I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

**Addendum Numbers Received:**

(Check the box next to each addendum received)

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6  |
| <input type="checkbox"/> Addendum No. 2            | <input type="checkbox"/> Addendum No. 7  |
| <input type="checkbox"/> Addendum No. 3            | <input type="checkbox"/> Addendum No. 8  |
| <input type="checkbox"/> Addendum No. 4            | <input type="checkbox"/> Addendum No. 9  |
| <input type="checkbox"/> Addendum No. 5            | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Playcore Wisconsin Inc, DBA GameTime

Company



Authorized Signature

06/14/18

Date

**NOTE:** This addendum acknowledgement should be submitted with the bid to expedite document processing.  
Revised 6/8/2012

**ADDENDUM ACKNOWLEDGEMENT FORM**  
**SOLICITATION NO.: 02**

**Instructions:** Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

**Acknowledgment:** I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

**Addendum Numbers Received:**

(Check the box next to each addendum received)

- |  |  |
|--|--|
| <input type="checkbox"/> Addendum No. 1            | <input type="checkbox"/> Addendum No. 6  |
| <input checked="" type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7  |
| <input type="checkbox"/> Addendum No. 3            | <input type="checkbox"/> Addendum No. 8  |
| <input type="checkbox"/> Addendum No. 4            | <input type="checkbox"/> Addendum No. 9  |
| <input type="checkbox"/> Addendum No. 5            | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Playcore Wisconsin Inc. DBA GameTime

Company



Authorized Signature

06/14/18

Date

**NOTE:** This addendum acknowledgment should be submitted with the bid to expedite document processing.  
Revised 6/8/2012

## ADDITIONAL TERMS AND CONDITIONS (Construction Contracts Only)

**1. CONTRACTOR'S LICENSE:** West Virginia Code § 21-11-2 requires that all persons desiring to perform contracting work in this state be licensed. The West Virginia Contractors Licensing Board is empowered to issue the contractor's license. Applications for a contractor's license may be made by contacting the West Virginia Division of Labor. West Virginia Code § 21-11-11 requires any prospective Vendor to include the contractor's license number on its bid. If an apparent low bidder fails to submit a license number in accordance with this section, the Purchasing Division will promptly request by telephone and electronic mail that the low bidder and the second low bidder provide the license number within one business day of the request. Failure of the bidder to provide the license number within one business day of receiving the request shall result in disqualification of the bid. Vendors should include a contractor's license number in the space provided below.

Contractor's Name: Playcore Wisconsin Inc, GT Grandstands Inc, DBA GameTime  
Contractor's License No.: WV- WV046434

The apparent successful Vendor must furnish a copy of its contractor's license prior to the issuance of a contract award document.

**2. DRUG-FREE WORKPLACE AFFIDAVIT:** W. Va. Code § 21-1D-5 provides that any solicitation for a public improvement contract requires each Vendor that submits a bid for the work to submit an affidavit that the Vendor has a written plan for a drug-free workplace policy. If the affidavit is not submitted with the bid submission, the Purchasing Division shall promptly request by telephone and electronic mail that the low bidder and second low bidder provide the affidavit within one business day of the request. Failure to submit the affidavit within one business day of receiving the request shall result in disqualification of the bid. To comply with this law, Vendor should complete the enclosed drug-free workplace affidavit and submit the same with its bid. Failure to submit the signed and notarized drugfree workplace affidavit or a similar affidavit that fully complies with the requirements of the applicable code, within one business day of being requested to do so shall result in disqualification of Vendor's bid. Pursuant to W. Va. Code 21-1D-2(b) and (k), this provision does not apply to public improvement contracts the value of which is \$100,000 or less or temporary or emergency repairs.

**2.1. DRUG-FREE WORKPLACE POLICY:** Pursuant to W. Va. Code § 21-1D-4, Vendor and its subcontractors must implement and maintain a written drug-free workplace policy that complies with said article. The awarding public authority shall cancel this contract if: (1) Vendor fails to implement and maintain a written drug-free workplace policy described in the preceding paragraph, (2) Vendor fails to provide information regarding implementation of its drug-free workplace policy at the request of the public authority; or (3) Vendor provides to the public authority false information regarding the contractor's drug-free workplace policy.

Pursuant to W. Va. Code 21-1D-2(b) and (k), this provision does not apply to public improvement contracts the value of which is \$100,000 or less or temporary or emergency repairs.

# CONTRACTOR LICENSE

Authorized by the

**West Virginia Contractor Licensing Board**

**Number:** WV046434

**Classification:**

GENERAL BUILDING  
FOUNDATION SUPPORT SYSTEMS

GT GRANDSTANDS INC  
DBA GT GRANSTANDS OF WEST VIRGINIA INC  
2810 SYDNEY ROAD  
PLANT CITY, FL 33566

**Date Issued**

**Expiration Date**

JULY 26, 2017

JULY 26, 2018

Authorized Company Signature

*Gene Traynor*  
Chair, West Virginia Contractor  
Licensing Board

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



**WEST VIRGINIA  
CONTRACTOR  
LICENSING  
BOARD**



REQUEST FOR QUOTATION  
Playground Equipment and Poured In-Place Safety Surfacing

---

- 11.1. Vendor must identify principal service personnel which will be issued access cards and/or keys to perform service.
- 11.2. Vendor will be responsible for controlling cards and keys and will pay replacement fee, if the cards or keys become lost or stolen.
- 11.3. Vendor shall notify Agency immediately of any lost, stolen, or missing card or key.
- 11.4. Anyone performing under this Contract will be subject to Agency's security protocol and procedures.
- 11.5. Vendor shall inform all staff of Agency's security protocol and procedures.

**12. MISCELLANEOUS:**

**12.1. Contract Manager:** During its performance of this Contract, Vendor must designate and maintain a primary contract manager responsible for overseeing Vendor's responsibilities under this Contract. The Contract manager must be available during normal business hours to address any customer service or other issues related to this Contract. Vendor should list its Contract manager and his or her contact information below.

Contract Manager:  Mitch Reno

Telephone Number:  540-798-4031

Fax Number:  704-525-5174

Email Address:  mitch@cunninghamrec.com

EXHIBIT A – Pricing Page

**CRFQ DBS180000009**  
**WVSDB Playground Equipment and Poured In-Place Surface**  
**EXHIBIT A – Pricing Page**

Please use this for vendors who do not submit via wvOasis.

DATE: \_\_\_\_\_

NAME OF VENDOR: \_\_\_\_\_

The aforementioned, hereinafter called Vendor, being familiar with and understanding the Bidding Documents and also having examined the site and being familiar with all local conditions affecting the project hereby proposes to furnish all labor, material, equipment, supplies and transportation and to perform all Work in accordance with the Bidding Documents within the time set forth for the sum of:

INSERT JOB NAME HERE For the sum of: \_\_\_\_\_

(\$ \_\_\_\_\_ )

(Show amount in both words and numbers)

**DESIGNATED CONTACT:** Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

Mitch Reno, Sales Representative  
(Name, Title)  
Mitch Reno, Sales Representative  
(Printed Name and Title)  
5932 Old Pineville Rd. Charlotte, NC 28217  
(Address)  
540-798-4031 / 704-525-5174  
(Phone Number) / (Fax Number)  
mitch@cunninghamrec.com  
(email address)

**CERTIFICATION AND SIGNATURE:** By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

Playcore Wisconsin Inc. DBA GameTime c/o Cunningham Recreation  
(Company)

Scott Cunningham President  
(Authorized Signature) (Representative Name, Title)

Scott Cunningham - President  
(Printed Name and Title of Authorized Representative)

06/19/18  
(Date)

800-438-2780 / 704-525-5174  
(Phone Number) (Fax Number)



West Virginia Ethics Commission  
**Disclosure of Interested Parties to Contracts**

(Required by *W. Va. Code* § 6D-1-2)

Contracting Business Entity: \_\_\_\_\_ Address: \_\_\_\_\_

Authorized Agent: \_\_\_\_\_ Address: \_\_\_\_\_

Contract Number: \_\_\_\_\_ Contract Description: \_\_\_\_\_

Governmental agency awarding contract: \_\_\_\_\_

Check here if this is a Supplemental Disclosure

List the Names of Interested Parties to the contract which are known or reasonably anticipated by the contracting business entity for each category below (*attach additional pages if necessary*):

**1. Subcontractors or other entities performing work or service under the Contract**

Check here if none, otherwise list entity/individual names below.

**2. Any person or entity who owns 25% or more of contracting entity (not applicable to publicly traded entities)**

Check here if none, otherwise list entity/individual names below.

**3. Any person or entity that facilitated, or negotiated the terms of, the applicable contract (excluding legal services related to the negotiation or drafting of the applicable contract)**

Check here if none, otherwise list entity/individual names below.

Signature: \_\_\_\_\_ Date Signed: \_\_\_\_\_

***Notary Verification***

State of \_\_\_\_\_, County of \_\_\_\_\_:

I, \_\_\_\_\_, the authorized agent of the contracting business entity listed above, being duly sworn, acknowledge that the Disclosure herein is being made under oath and under the penalty of perjury.

Taken, sworn to and subscribed before me this \_\_\_\_\_ day of \_\_\_\_\_, \_\_\_\_\_.

\_\_\_\_\_  
Notary Public's Signature

**To be completed by State Agency:**

Date Received by State Agency: \_\_\_\_\_

Date submitted to Ethics Commission: \_\_\_\_\_

Governmental agency submitting Disclosure: \_\_\_\_\_

*Revised October 7, 2017*

**\* Furnished Upon Reward \***

State of West Virginia  
Purchasing Division

---

## CERTIFIED DRUG-FREE WORKPLACE REPORT COVERSHEET

---

In accordance with *West Virginia Code* § 21-1D-7b, no less than once per year, or upon completion of the project, every contractor shall provide a certified report to the public authority which let the contract. That report must include each of the items identified below in the Required Report Content section.

**Instructions:** Vendor should complete this coversheet, attach it to the required report, and submit it to the appropriate location as follows: For contracts more than \$25,000, the report should be mailed to the West Virginia Purchasing Division at 2019 Washington Street East, Charleston, WV 25305. For contracts of \$25,000 or less, the vendor should mail the report to the public authority issuing the contract.

**Contract Identification:**

Contract Number: \_\_\_\_\_

Contract Purpose: \_\_\_\_\_

Agency Requesting Work: \_\_\_\_\_

**Required Report Content:** The attached report must include each of the items listed below. The vendor should check each box as an indication that the required information has been included in the attached report.

- Information indicating the education and training service to the requirements of *West Virginia Code* § 21-1D-5 was provided;
- Name of the laboratory certified by the United States Department of Health and Human Services or its successor that performs the drug tests;
- Average number of employees in connection with the construction on the public improvement;
- Drug test results for the following categories including the number of positive tests and the number of negative tests: (A) Pre-employment and new hires; (B) Reasonable suspicion; (C) Post-accident; and (D) Random.

**Vendor Contact Information:**

Vendor Name: \_\_\_\_\_

Vendor Telephone: \_\_\_\_\_

Vendor Address: \_\_\_\_\_

Vendor Fax: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_

Vendor E-Mail: \_\_\_\_\_



State of West Virginia  
DRUG FREE WORKPLACE CONFORMANCE AFFIDAVIT  
West Virginia Code §21-1D-5

North Carolina  
~~STATE OF WEST VIRGINIA,~~

COUNTY OF Mecklenburg, TO-WIT:

I, Scott Cunningham, after being first duly sworn, depose and state as follows:

1. I am an employee of Cunningham Recreation; and,  
(Company Name)  
Playcore Wisconsin Inc.
2. I do hereby attest that DBA GameTime c/o Cunningham Recreation  
(Company Name)

maintains a written plan for a drug-free workplace policy and that such plan and policy are in compliance with **West Virginia Code** §21-1D.

The above statements are sworn to under the penalty of perjury.

Printed Name: Scott Cunningham

Signature: *Scott Cunningham*

Title: President

Playcore Wisconsin Inc.  
Company Name: DBA GameTime c/o Cunningham Recreation


Date: 06/19/18

Taken, subscribed and sworn to before me this 19 day of June, 2018.

By Commission expires March 5, 2019

(Seal)

*Cynthia A. Pasquelli*  
(Notary Public)



**THIS AFFIDAVIT MUST BE SUBMITTED WITH THE BID IN ORDER TO COMPLY WITH WV CODE PROVISIONS. FAILURE TO INCLUDE THE AFFIDAVIT WITH THE BID SHALL RESULT IN DISQUALIFICATION OF THE BID.**

STATE OF WEST VIRGINIA  
Purchasing Division

# PURCHASING AFFIDAVIT

**CONSTRUCTION CONTRACTS:** Under W. Va. Code § 5-22-1(i), the contracting public entity shall not award a construction contract to any bidder that is known to be in default on any monetary obligation owed to the state or a political subdivision of the state, including, but not limited to, obligations related to payroll taxes, property taxes, sales and use taxes, fire service fees, or other fines or fees.

**ALL CONTRACTS:** Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

**EXCEPTION:** The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**DEFINITIONS:**

**"Debt"** means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.


**"Employer default"** means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

**"Related party"** means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

**AFFIRMATION:** By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that: (1) for construction contracts, the vendor is not in default on any monetary obligation owed to the state or a political subdivision of the state, and (2) for all other contracts, that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

**WITNESS THE FOLLOWING SIGNATURE:**

Vendor's Name: Playcore Wisconsin Inc. DBA GameTime c/o Cunningham Recreation

Authorized Signature:  Date: 06/19/18

State of North Carolina


County of Mecklenburg, to-wit:

Taken, subscribed, and sworn to before me this 19 day of June, 2018.

My Commission expires March 5, 2019.

**AFFIX SEAL HERE**

**NOTARY PUBLIC**

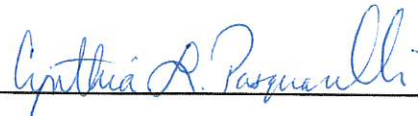

*Purchasing Affidavit (Revised 01/19/2018)*





Playcore Wisconsin Inc. dba  
 GameTime c/o Cunningham Recreation  
 PO Box 240981  
 Charlotte, NC 28224  
 800.438.2780  
 704.525.7356 FAX

QUOTE  
 #132915

06/19/2018

**WVSDB ADA Playground Bid - CRFQ DBS 1800000009**

West Virginia School for the Deaf and Blind  
 Attn: Mark Gandolf  
 301 East Main Street  
 Romney, WV 26757  
 Phone: 304-822-4810  
 mgandolfi@k12.wv.us

Project #: P92216  
 Ship To Zip: 26757

Quantity	Part #	Description	Unit Price	Amount
1	RDU	GameTime - PowerScope 5-12 Modular Unit (as per drawing)	\$63,673.91	\$63,673.91
		(1) 3900 -- Spin Chimes 20" 2S		
		(1) 3940 -- Giggler 12" 2S		
		(1) 3945 -- Rain 12" 2S		
		(1) 3951 -- Roller Balls 20" 2S		
		(1) 3952 -- Twist Bearing 20" 2S		
		(1) 4669 -- Up & On Silver Sensor Package		
		(1) 4842 -- Echo Chamber Ass'Y		
		(1) 4847 -- Hypno Wheel Ass'Y		
		(2) 16465 -- Slide Transfer (Ada)		
		(3) 16700 -- Ada49"Sq Punch Steel Deck		
		(1) 32022 -- Hex Pod Step (1')		
		(2) 80687 -- Handhold/Kick Plate Pkg		
		(1) 80688 -- 2' Tri Transfer Platform		
		(2) 80835 -- Zoo Panel Encl		
		(1) 90021 -- 2'-0" Transfer System W/ Barrier		
		(1) 90176 -- Ada Crow'S Nest W/ Gizmo		
		(1) 90182 -- Ada Crow'S Nest W/ Thunderring		
		(1) 90251 -- 3' Leaning Wall Climber		
		(4) 90265 -- 7' Upright, Alum		
		(7) 90266 -- 8' Upright, Alum		
		(2) 90267 -- 9' Upright, Alum		
		(2) 90268 -- 10' Upright, Alum		
		(4) 90269 -- 11' Upright, Alum		
		(1) 90306 -- Climber Archway W/Socket & Barrier		
		(1) 90366 -- Sloped Funnel Climber W/Barrier		
		(1) 90425 -- Letters Maze Above Deck		
		(1) 90507 -- 2'-6"/3' Rumble & Roll Zip Slide		
		(1) 90530 -- 2'/2'-6" Little Foot Slide W/Encl		
		(1) 90579 -- Double Swerve Slide		
		(1) 90669 -- Spiral Step Climber (5'-0) & 5'-6")		



Playcore Wisconsin Inc. dba  
 GameTime c/o Cunningham Recreation  
 PO Box 240981  
 Charlotte, NC 28224  
 800.438.2780  
 704.525.7356 FAX

QUOTE  
 #132915

06/19/2018

**WVSDB ADA Playground Bid - CRFQ DBS 1800000009**

Quantity	Stock ID	Description	Unit Price	Amount
		(1) 90674 -- Std Access Ramp Link 3 Dk Gr		
		(1) 90816 -- 1' Ada Hex Dk W/Shadow Play Flower		
		(1) 90817 -- 2' Ada Hex Dk W/Shadow Play Flower		
		(1) 91208 -- Climber Entryway - Guardrail		
		(1) 91209 -- Climber Entryway - Barrier		
		(1) 91365 -- Sensory Wave Panel w/ stained glass		
		(1) 91374 -- PS Sensory Wave Up & On (3' & 3'6")		
		(1) 91457 -- Sensory Wave Entryway		
		(1) 91459 -- Sensory Wave Rock N Raft		
		(1) 91471 -- 1' Sensory Wave Ramp Att. II		
		(4) G90262 -- 4' Upright, Galv		
		(1) G90265 -- 7' Upright, Galv		
		(3) G90266 -- 8' Upright, Galv		
		(2) G90267 -- 9' Upright, Galv		
1	3259	GameTime - Concert Trio	\$3,774.00	\$3,774.00
1	5055	GameTime - Merry-Go-All	\$5,296.00	\$5,296.00
1	3249	GameTime - Harmonic Chimes (set of 7)	\$6,325.00	\$6,325.00
1	4677	GameTime - Melody Chimes	\$4,973.00	\$4,973.00
1	178749	GameTime - Owner's Kit	\$53.00	\$53.00
1	INSTALL	MISC - Installation	\$19,940.00	\$19,940.00
2500	PIP	GT-Impax - Poured-in-Place Safety Surfacing; per sq. ft. - <b>Includes:</b> - Materials: 2,500 sq. ft. PIP surfacing 50% standard color - 50% black 2" thick for 5' CFH - 4" stone sub base - Security - Dumpster - Freight - Installation	\$15.05	\$37,625.00

**Standard Warranty for PIP is 5 Years**



Playcore Wisconsin Inc. dba  
 GameTime c/o Cunningham Recreation  
 PO Box 240981  
 Charlotte, NC 28224  
 800.438.2780  
 704.525.7356 FAX

QUOTE  
 #132915

06/19/2018

**WVSDB ADA Playground Bid - CRFQ DBS 180000009**

Quantity	Part #	Description	Unit Price	Amount
1	INSTALL	MISC - Concrete Curbing (per LF) - <i>Approximately 200 lf</i>  - Supply and pour curbing; 6" wide x 10" tall, to be recessed in the ground as much or as little as required. Will try to make everything as flush as possible. - 4000 PSI fiber reinforced concrete. No rebar included in pricing. - Gravel sub base as-needed. - Top edges to be rounded as directed by Cunningham/Customer.	\$5,715.00	\$5,715.00
1	INSTALL	MISC - Drainage to Daylight - <i>3 runs of perforated, corrugated 4" (inch) drain pipe; approximately 70' each. Wrapped in fabric and surrounded by gravel. Daylighted on lower side of play area.</i>	\$360.00	\$360.00
1	INSTALL	MISC - Site Prep - - Site prep to include excavation for surfacing, grading the site, building a slight grassy berm on the top of the side of the area, and trimming/lifting canopy on Bradford Pear Tree adjacent to the area. - Includes moving excavated dirt to the dump site on campus as-needed. - Does not include supplying any fill dirt (if needed).	\$625.00	\$625.00
1	BONDS	MISC - Performance & Payment Bond	\$4,480.00	\$4,480.00
1	14908	GameTime - Nds 7 Principles Sign Package		

\* Site must be clear, level, free of obstructions, and accessible.

SubTotal: \$152,839.91  
 Freight: \$6,500.28  
**Total Amount: \$159,340.19**

\* Taxes, if applicable, to be applied at the time of invoice. Please provide a copy of your tax exempt certificate.



Playcore Wisconsin Inc. dba  
GameTime c/o Cunningham Recreation  
PO Box 240981  
Charlotte, NC 28224  
800.438.2780  
704.525.7356 FAX

QUOTE  
#132915

06/19/2018

## WVSDB ADA Playground Bid - CRFQ DBS 180000009

### GAMETIME - TERMS & CONDITIONS:

- **PRICING:** Pricing is subject to change. Request updated pricing when purchasing from quotes more than 30 days old.
- **TERMS OF SALE:** For equipment & material purchases, Net 30 days from date of invoice for governmental agencies and those with approved credit. All others, full payment for equipment, taxes and freight up front. Balance for services & materials due upon completion or as otherwise negotiated upon credit application review. Pre-payment may be required for equipment orders totaling less than \$5,000. Payment by VISA, MasterCard, or AMEX is accepted. Checks should be made payable to Playcore Wisconsin, Inc. d/b/a GameTime unless otherwise directed.
- **CREDIT APPLICATION:** Required for all non-governmental agencies and those entities who have not purchased from GameTime within the previous twelve calendar months.
- **FINANCE CHARGE:** A 1.5% monthly finance charge (or maximum permitted by law) will be added to all invoices over 30 days past due.
- **CASH WITH ORDER DISCOUNT:** Orders for GameTime equipment paid in full at time of order via check or electronic funds transfer (EFT) are eligible for a 3% cash-with-order (CWO) discount.
- **ORDERS:** All orders shall be in writing by purchase order, signed quotation or similar documentation. Purchase orders must be made out to Playcore Wisconsin, Inc. d/b/a GameTime.
- **FREIGHT CHARGES:** Shipments shall be F.O.B. destination. Freight charges prepaid and added separately.
- **SHIPMENT:** Standard Lead time is 4-6 weeks after receipt and acceptance of purchase order, credit application, color selections and approved drawings or submittals.
- **PACKAGING:** All goods shall be packaged in accordance with acceptable commercial practices and marked to preclude confusion during unloading and handling.
- **RECEIPT OF GOODS:** Customer shall coordinate, receive, unload, inspect and provide written acceptance of shipment. Any damage to packaging or equipment must be noted when signing delivery ticket. If damages are noted, receiver must submit a claim to Cunningham Recreation within 15 Days. Receiver is also responsible for taking inventory of the shipment and reporting any concealed damage or discrepancy in quantities received within 60 days of receipt.
- **RETURNS:** Returns are only available on shipments delivered within the last 60 days. A 25% (min.) restocking fee will be deducted from any credit due. Customer is responsible for all packaging & shipping charges. Credit is based on condition of items upon return. All returns must be in unused and merchantable condition. GameTime reserves the right to deduct costs associated with restoring returned goods to merchantable condition. Uprights & custom products cannot be returned.
- **TAXES:** Sales tax is shown as a separate line item when included. A copy of your tax exemption certificate must be submitted at time of order or taxes will be added to your invoice.

### INSTALLATION CONDITIONS:

- **ACCESS:** Site should be clear, level and allow for unrestricted access of trucks and machinery.
- **STORAGE:** Customer is responsible for providing a secure location to off-load and store the equipment during the installation process. Once equipment has delivered to the site, the owner is responsible should theft or vandalism occur unless other arrangements are made and noted on the quotation.
- **FOOTER EXCAVATION:** Installation pricing is based on footer excavation through earth/soil only. Customer shall be responsible for unknown conditions such as buried utilities (public & private), tree stumps, rock, or any concealed materials or conditions that may result in additional labor or materials cost.
- **UTILITIES:** Installer will contact Miss Utility to locate all public utilities prior to layout and excavation of any footer holes. Owner is responsible for locating any private utilities.
- **ADDITIONAL COSTS:** Pricing is based on a single mobilization for installation unless otherwise noted. Price includes ONLY what is stated in this quotation. If additional site work or specialized equipment is required, pricing is subject to change.





Playcore Wisconsin Inc. dba  
 GameTime c/o Cunningham Recreation  
 PO Box 240981  
 Charlotte, NC 28224  
 800.438.2780  
 704.525.7356 FAX

QUOTE  
 #132915

06/19/2018

**WVSDB ADA Playground Bid - CRFQ DBS 1800000009**

**ACCEPTANCE OF QUOTATION:**

*Acceptance of this proposal indicates your agreement to the terms and conditions stated herein.*

Accepted By (printed): \_\_\_\_\_ Title: \_\_\_\_\_

Telephone: \_\_\_\_\_ Fax: \_\_\_\_\_

P.O. Number: \_\_\_\_\_ Date: \_\_\_\_\_

Purchase Amount: **\$159,340.19**

SALES TAX EXEMPTION CERTIFICATE #: \_\_\_\_\_

(PLEASE PROVIDE A COPY OF CERTIFICATE)

*Mitch Reno*

\_\_\_\_\_  
 Salesperson's Signature

\_\_\_\_\_  
 Customer Signature

**Wish to pay by credit card? Please complete the following information:**

Card Type: \_\_\_\_\_ Mastercard \_\_\_\_\_ Visa \_\_\_\_\_ AMEX

Credit Card Number: \_\_\_\_\_ Exp Date: \_\_\_\_\_

Card Security Code (CSC): \_\_\_\_\_

Name as it appears on card: \_\_\_\_\_

Amount to be charged to card: **\$159,340.19**

Email or Fax credit card receipt to: \_\_\_\_\_



Playcore Wisconsin Inc. dba  
GameTime c/o Cunningham Recreation  
PO Box 240981  
Charlotte, NC 28224  
800.438.2780  
704.525.7356 FAX

QUOTE  
#132915

06/19/2018

**WVSDB ADA Playground Bid - CRFQ DBS 1800000009**

**BILLING INFORMATION:**

Bill to: \_\_\_\_\_

Contact: \_\_\_\_\_

Address: \_\_\_\_\_

Address: \_\_\_\_\_

City, State: \_\_\_\_\_ Zip: \_\_\_\_\_

Tel: \_\_\_\_\_ Fax: \_\_\_\_\_

E-mail: \_\_\_\_\_

**SHIPPING INFORMATION (IF DIFFERENT FROM ABOVE):**

Ship to: \_\_\_\_\_

Contact: \_\_\_\_\_


Address: \_\_\_\_\_

Address: \_\_\_\_\_

City, State: \_\_\_\_\_ Zip: \_\_\_\_\_

Tel: \_\_\_\_\_ Fax: \_\_\_\_\_

E-mail: \_\_\_\_\_

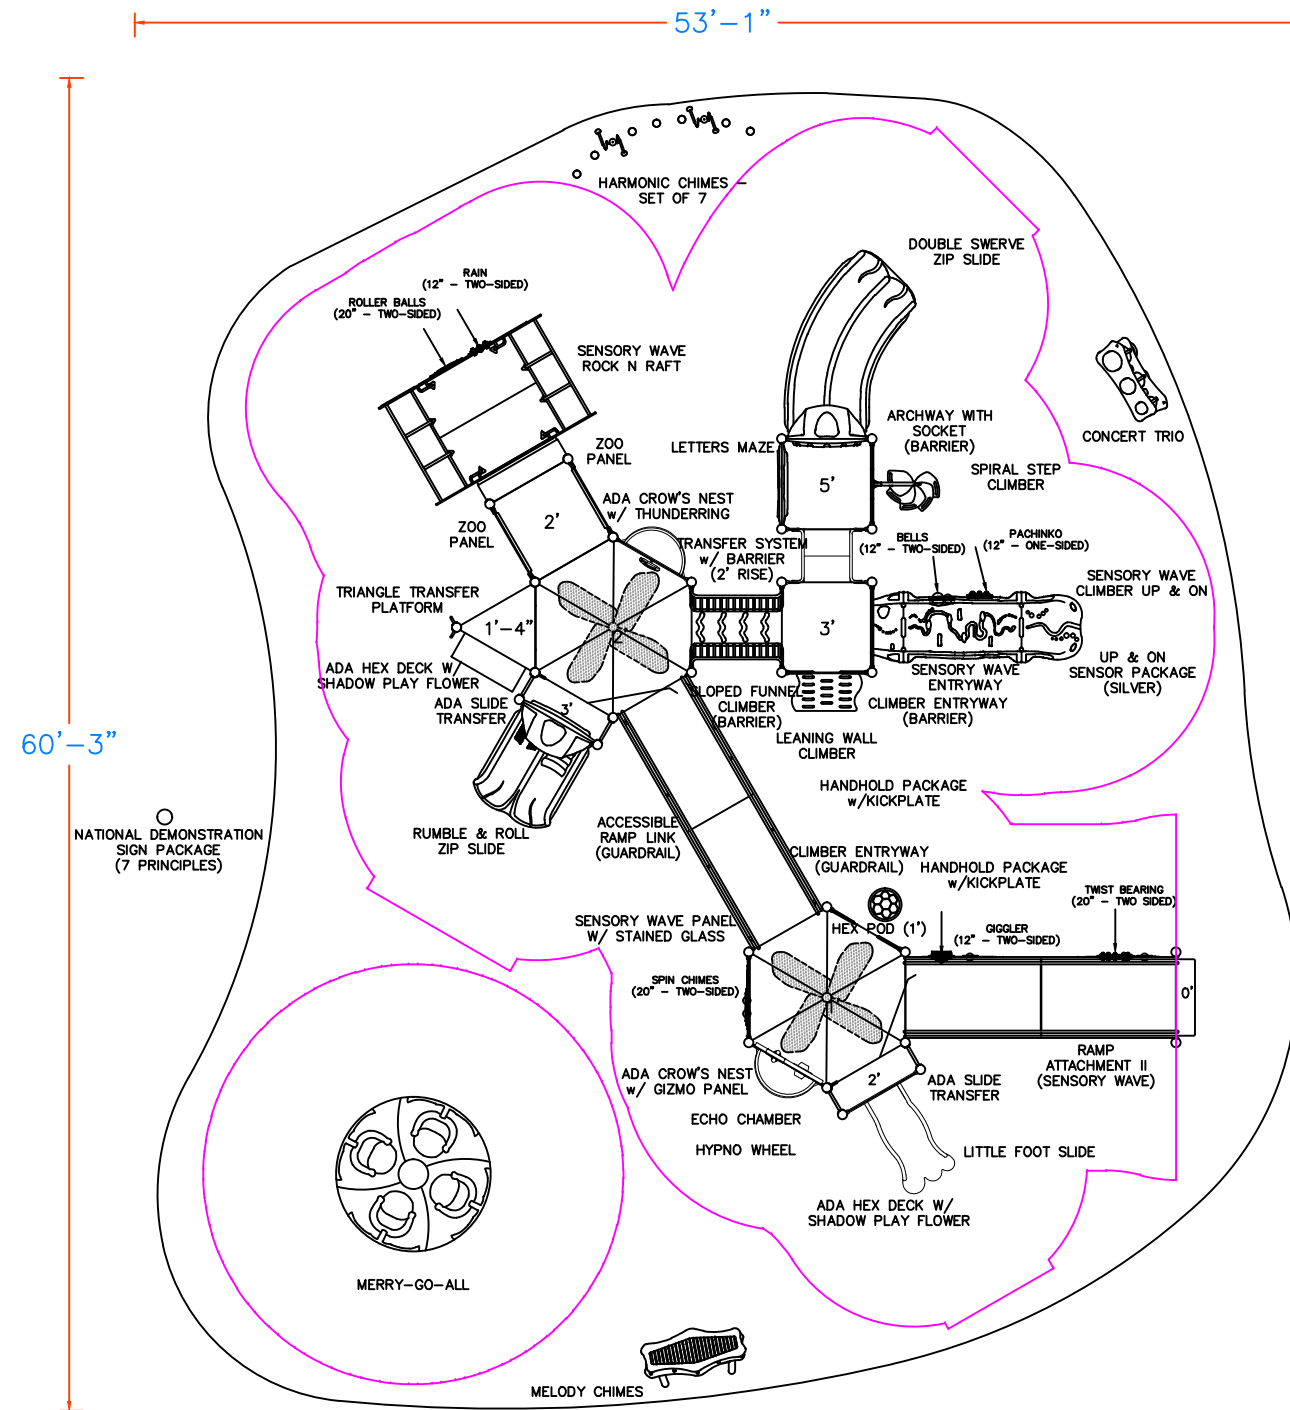

A PLAYCORE Company

150 PlayCore Drive SE  
Fort Payne, AL 35967

www.gametime.com



WVSDB ADA Playground  
CRFQ DBS100000009  
Romney, WV

Representative  
Cunningham Recreation

This play equipment is recommended for children ages 5-12

Minimum Area Required:

Scale: NTS

This drawing can be scaled only when in an 11" x 17" format

**IMPORTANT:** Soft resilient surfacing should be placed in the use zones of all equipment, as specified for each type of equipment, and at depths to meet the critical fall heights as specified by the U.S. consumer Product Safety Commission, ASTM standard F 1487 and Canadian Standard CAN/CSA-Z-614

Drawn By:  
LS

Date:  
03/13/18

Drawing Name:  
92216-02 Bid Update

# WVSDB ADA Playground CRFQ DBS1800000009



## GT Events Specifications

---

### General System Specifications:

The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. GT Events are direct bolt products NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable.

Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON POWERLOCK AND HARDWARE

Manufacturer shall be ISO 9001/2008 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-07ae1.

### Motion

MERRY GO ALL  
5055 - Merry-Go-All

**PLATFORM ASSEMBLY:** Shall be formed of one piece 11 gauge H.R. steel with a turned under flange. Braces shall be fabricated of 1-5/16" O.D. galvanized pipe. Platform shall be an all welded construction.

**HUB:** Shall be fabricated of 3-1/2" O.D. pipe with 1/4" H.R. flat plate.

**BASE ASSEMBLY:** Legs shall be fabricated of 2-7/8" O.D. galvanized pipe. Axle shall be fabricated of 1-5/8" O.D. cold-rolled steel. Collar shall be fabricated of 2-3/4" O.D. tube. Base assembly shall be an all welded construction.

**BRAKE DRUM:** Shall be fabricated of 8-1/2" O.D. pipe with 1/4" H.R. flat plate welded in place to receive hub and platform plates.

**SPRING MOUNTING PLATE ASSEMBLY:** Shall be fabricated of 3/16" H.R. flat steel to form weld assembly.

**SPRING:** Shall be heavy duty die spring of rectangular wire construction.

**HOLDING BRACKET:** Shall be an all welded assembly fabricated from 3/16" H.R. flat steel with 5/8" diameter C.R. threaded rod.

**WHEEL:** Shall have die cast aluminum core with sealed roller bearings. Cast polyurethane tread is chemically bonded to core.

**SHIELD HALVES:** Shall be color-impregnated, molded polyethylene with 3/16" nominal thickness.

**SHIELD MOUNTING BRACKET:** Shall be fabricated of 3/16" H.R. flat steel, drilled and tapped to receive 3/8" bolts. Bracket shall have a powder coat finish.

**WHIRL N SPIN ASSEMBLY:** Shall be an all welded assembly fabricated from 14 gauge galvanized steel, 1 1/4" galvanized pipe, 1/8" steel plate, 3" schedule 40 pipe, and



3/16" flat hot rolled steel.

**WHIRL N SPIN SEAT:** The Whirl N Spin Seat shall be rotational molded from polyethylene. The polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. All rotational molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D-155); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

**FINISH:** Platform and Whirl N Spin assembly shall have a powder coat finish. Handrails and base shall be painted aluminum.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all playequipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zincplating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

**NOTE:** All weights are based on average comparisons of each part.

**SPECIFICATIONS:** GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

## Sensory Wave Sensors

### TWIST BEARING

**Twist Bearing:** The Twist Bearing shall be fabricated from 1/2" high density polyethylene and 3/16" thick UV inhibitive acrylic with 4.5mm stainless steel balls.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

**SPECIFICATIONS:** GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

### SPIN CHIMES

**Spin Chime:** The Spin Chime shall be fabricated from 11 Ga/ steel tab, purchased stainless steel shaft, purchased encapsulated stainless steel bearings, and 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing which shall be coated in TGIC polyester powder coating as specified herein.

**Spin Chime Panel:** The Spin Chime Panel shall be fabricated from 3/4" high density polyethylene.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel,



yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

**POWDER COAT FINISH:** Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a six stage bath system with an iron phosphate wash, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68),

**SPECIFICATIONS:** GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

### GIGGLER

**Giggler:** The Giggle shall be fabricated from 1/2" high density polyethylene with electronic components housed in water tight low density polyethylene housing.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

**SPECIFICATIONS:** GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

### RAIN

**Rain:** The Rain shall be fabricated from 1/2" high density polyethylene, 14 ga. Stainless steel, and 3/16" thick UV inhibitive acrylic with 4.5mm stainless steel balls.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

**SPECIFICATIONS:** GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

### ROLLER BALL

**Roller Ball:** The Roller Ball shall be fabricated from 1/2" high density polyethylene which encapsulates colored acrylic spheres.

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.



SPECIFICATIONS: GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

## Symphony

### HARMONIC CHIMES

#### HARMONIC CHIMES :

Each chime is made with heavy duty, anodized aluminum. Each instrument is supplied with four durable mallets with coated steel cables.

SPECIFICATIONS: GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

### MELODY CHIMES

MELODY CHIMES FRONT HDPE PANEL AND MELODY CHIMES BACK HDPE PANEL: The HDPE pieces shall be made from 3/4" thick (solid) high density, UV-stabilized and color impregnated polyethylene.

MELODY CHIMES INSTRUMENT INSERT: Shall be constructed of anodized aluminum chimes, plastic slats, and 3/8" thick pvc sheet.

MELODY CHIMES SUPPORT ASSEMBLY: Shall be an all welded construction fabricated from 2-3/8" O.D. x .095" (13 gauge) wall galvanized steel tubing, 1/4" thick laser cut plate, and 3-1/2" O.D. X .095" (13 gauge) wall galvanized steel tubing. The Melody Chimes Support Assembly shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with specifications outlined herein.

MELODY CHIMES SPACER: Shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and threaded insert. The Melody Chimes Spacer shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with specifications outlined herein.

MALLET PACKAGE: Shall be an all plastic construction with stainless steel hardware.

POWDER COAT FINISH: Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent / zirconium based bath system (free of iron phosphate), as a rust inhibitor, and a zirconium conversion coating to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: Two coat process to achieve 3.0 - 5.0 mil thickness and oven cured between 350 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 350 degrees Fahrenheit for 10 minutes.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. NOTE: All weights are based on average comparisons of each part.

SPECIFICATIONS: GAMETIME® has a policy of continuous improvement and reserves the right to discontinue or change specifications without notice.

## CONCERT TRIO





CONCERT TRIO FRONT HDPE PANEL AND CONCERT TRIO BACK HDPE PANEL: Shall be 3/4" thick high-density polyethylene.

CONCERT TRIO 6, CONCERT TRIO 8, AND CONCERT TRIO 10: Shall be constructed of 6" plastic pipe, 8", and 10" plastic pipe, and molded plastic lid.

CONCERT TRIO RING ASSEMBLY: Shall be an all welded construction fabricated from 3-1/2" O.D. X .095" (13 gauge) wall galvanized steel tubing and 1/4" thick laser cut steel. The Concert Trio Ring Assembly shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with specifications outlined herein.

CONCERT TRIO UPRIGHT SUPPORT: Shall be an all welded construction fabricated from 3-1/2" O.D. X .095" (13 gauge) wall galvanized steel tubing and 1/4" thick laser cut steel. The Concert Trio Upright Support shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with specifications outlined herein.

SPACER WITH INSERTS: Shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 1.120" threaded insert. The Spacer shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with specifications outlined herein.

POWDER COAT FINISH: Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent / zirconium based bath system (free of iron phosphate), as a rust inhibitor, and a zirconium conversion coating to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: Two coat process to achieve 3.0 - 5.0 mil thickness and oven cured between 350 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 350 degrees Fahrenheit for 10 minutes.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. NOTE: All weights are based on average comparisons of each part.

## IONiX Specifications

---

### General System Specifications:

IONiX® features 3 1/2" O.D. uprights with a positive bolt-through fastening system utilizing stainless steel tabs. Field drilling and measuring are not required. IONiX is a direct bolt system NOT a clamp system. All uprights shall receive factory installed labels indicating proper surfacing level.

Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PIPES, RUNGS, RAILS AND LOOPS
- 15 YEAR LIMITED WARRANTY ON ROTATIONALLY MOLDED PRODUCTS
- LIFETIME LIMITED WARRANTY ON HARDWARE

Manufacturer shall be ISO 9001:2008 certified



Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-11.

## General Specifications of Materials

### POWDER COAT FINISH

Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent / zirconium based bath system (free of iron phosphate), as a rust inhibitor, and a zirconium conversion coating to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: Two coat process to achieve 3.0 - 5.0 mil thickness and oven cured between 350 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 350 degrees Fahrenheit for 10 minutes.

### HARDWARE

All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. PowerScape Plus stainless steel fasteners shall be button pin-in head, hex socket cap screws with a two-part epoxy locking patch added to the threads. The two-part locking patch shall consist of one part resin and one part catalyst which are activated during installation. After curing, the material shall require a minimum of five times the installation torque to remove the fastener. Manufacturer shall provide special installation tools for pinned fasteners.

### ROTATIONALLY MOLDED PRODUCTS

All polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790);Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

## Freestanding

### HEX POD STEP

#### HEX POD

The Hex Pod Pipe Support shall be fabricated from 3.5" outside diameter, 13 gauge (.095") galvanized round tubing with a mounting plate made from 3/16" thick hot rolled steel. The Hex Pod Pipe Support shall be a welded assembly and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication. The rotomolded step shall be color impregnated linear low-density polyethylene and shall conform to the rotationally molded specifications outlined herein with double wall construction molded to a minimum .25" wall thickness. The Hex Pod surface shall be 3/4" thick (solid) high density, UV-stabilized, laminated and color impregnated polyethylene.

## PowerScape Specifications

### General System Specifications:



PowerScape® features 5" O.D. uprights with a positive bolt-through TRU-LOC fastening system. The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. PowerScape® is a direct bolt system NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable. All climbing attachments shall include a 15" wide deck entryway or archway to control deck access to one child at a time and help prevent inadvertent falls.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable. All climbing attachments shall include a 15" wide deck entry archway to control deck access to one child at a time and help prevent inadvertent falls.

Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON TRU-LOCKS AND HARDWARE

Manufacturer shall be ISO 9001/2008 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-11.

## General Specifications of Materials

### HARDWARE

All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. PowerScape Plus stainless steel fasteners shall be button pin-in head, hex socket cap screws with a two-part epoxy locking patch added to the threads. The two-part locking patch shall consist of one part resin and one part catalyst which are activated during installation. After curing, the material shall require a minimum of five times the installation torque to remove the fastener. Manufacturer shall provide special installation tools for pinned fasteners.

### POWDER COAT FINISH

Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent / zirconium based bath system (free of iron phosphate), as a rust inhibitor, and a zirconium conversion coating to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: Two coat process to achieve 3.0 - 5.0 mil thickness and oven cured between 350 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 350 degrees Fahrenheit for 10 minutes.

### ROTATIONALLY MOLDED PRODUCTS

All polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification 7



LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

#### THUNDERRING

The ThunderRing is molded from a color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. The ThunderRing bracket shall be an all welded steel structure and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

#### METAL GUARDRAIL ENTRYWAY

The Guardrail Entryway shall be fabricated of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and a 3/16" Hot Rolled Mounting Tab. The Guardrail Entryway shall be an all welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

#### METAL BARRIER ENTRYWAY

The Barrier Entryway shall be fabricated of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and a 3/16" Hot Rolled Mounting Tab. The vertical rungs shall be fabricated of 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. The Barrier Entryway shall be an all welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

#### METAL BARRIER ARCHWAY W/ SOCKET

The Barrier Archway w/Socket shall be fabricated of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing, 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing, 1/8" Hot Rolled Steel Gussets, and 3/16" Hot Rolled Mounting Tabs. The vertical rungs shall be fabricated of 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. The Barrier Archway W/Socket shall be an all welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

#### SENSORY WAVE ENTRYWAY FOR 2' DECK

The sensory wave entryway weld assembly shall be fabricated from from 1-5/16" x 14 gauge (.083") wall and 1-1/16" x 15 gauge (.075") wall galvanized steel tubing, 1-1/16" O.D. x .072" (15 gauge) wall galvanized steel tubing, and 1/4" thick H.R. steel purchased plate. The enclosure weld assembly shall be powder coated after fabrication with a custom formula of TGIC polyester in conformance with the specifications outlined herein. The enclosure HDPE panels shall be made from 1/2" thick (solid) high density, UV-stabilized and color impregnated polyethylene.

### Uprights & Upright Accessories:

#### TRU-LOC CONNECTION

The Tru-Loc shall incorporate an aluminum casting in a distinctive purpose mounting system that allows a rung panel to mount to the upright. The Tru-Loc connector will have a matching counterpart for flat panel connections. Each is bolted directly into the upright post through a factory located and installed connection and designed to eliminate protrusions. Each shall be die cast of 380 aluminum alloy, to resist corrosion. Minimum tensile strength shall be 45,000 psi, minimum yield strength shall be 22,000 psi. All connectors shall be coated with a custom formula of TGIC polyester powder coating, in conformance with the specifications outlined herein.

#### UPRIGHTS, ALUMINUM



Shall be 5" outside diameter tubing, 1/8" wall thickness, extruded from 6005-T5 aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

#### UPRIGHTS, STEEL

Shall be 5" outside diameter, 11 gauge (.120") galvanized round tubing, manufactured to ASTM A-500 Grade B tolerances from cold-formed steel conforming to ASTM A-569 Sheet Spec for steel coil. Minimum yield strength shall be 50,000 psi and minimum tensile strength shall be 55,000 psi.

The exterior surface is hot dip galvanized, chromate conversion coated, and a clear high performance organic polymer is applied. The inside diameter has 81% minimum zinc rich primer capable of providing excellent rust protection and fabrication characteristics. All coatings are applied inside and out after welding for superior corrosion protection throughout. Exterior surface galvanizing zinc purity is 99% as per ASTM B-6 high grade and special high grade. Galvanizing coverage shall demonstrate the ability to exceed 1000 hours salt spray corrosion exposure in accordance with ASTM B-117. Internal surface zinc rich 81% minimum zinc dust content in organic resin, as per ASTM F-1234, Section 5.2.4, Type D. All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

#### UPRIGHT CAPS

The standard upright cap shall be an aluminum cap, cast from a 383 alloy, powder coated to match the upright. Every upright cap shall receive a primer coat for maximum protection. All upright caps are permanently installed at the factory using aluminum self-sealing rivets.

### **Punched Steel & Coated Deck Components:**

#### PUNCHED STEEL DECKS AND PVC COATED COMPONENTS

All punched steel products shall be fabricated from 11 gauge punched steel with a protective p&o finish. Coated products shall consist of a welded assembly with an oven cured matte finish polyvinyl chloride (PVC) coating with a minimum coating thickness of .080". All decks shall be exclusively dipped utilizing the DuraWear process with an extra thick coating on the top of the deck. The PVC coating shall have a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. The PVC coating shall contain phthalate levels in concentrations of 1/10 of 1% or lower. For ADA Ramp Accessible decks and ramps, the hole shall measure 1/4" diameter after coating. For standard decks and ramps, the hole size shall measure 1 1/4" diameter after coating.

#### CROW'S NEST

Shall have a minimum surface area of 501 square inches. The deck shall be fabricated in conformance with the punched steel specifications outlined herein. The deck frame shall be fabricated from 3/16" x 3-1/2" hot rolled steel with the intermediate supports fabricated from 1/8" x 2-1/2" hot rolled steel. The deck shall be a one-piece welded assembly.

#### DECKS, SQUARE

Shall have a minimum surface area of 2,381 square inches, maintaining a full 49" center to center spacing on the upright posts. The 49" square deck shall be fabricated in conformance with the punched steel specifications outlined herein. The deck frame shall be fabricated from 3/16" x 3-1/2" hot rolled steel with corner supports fabricated from 1/4" x 3-1/2" hot rolled steel. Intermediate supports, fabricated from 1/8" x 2-1/2" hot rolled steel, shall be notched and welded at the intersections forming a rigid 12" support grid underneath the entire deck surface. The deck shall be a one-piece welded assembly, coated after fabrication with an oven cured matte finish polyvinyl chloride (PVC) coating in accordance with the specifications herein. The square deck shall be directly bolted to the upright posts with eight 3/8" diameter button-pin-in-head, hex socket cap screws in accordance with the hardware specifications herein.

#### TRANSFER SYSTEM

The transfer system shall be made from 11 gauge punched steel with a protective P&O finish in conformance with the specifications outlined herein. The transfer system shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handrails and attachment rails shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing, with supports fabricated from 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing and 2" square x 3/16" wall steel tubing. Handholds, and attachment rails shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

#### WITH GIZMO PANEL

The Gizmo panel shall be 2-1/2" thick, color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. Gizmo's shall conform to the Gizmo specifications outlined herein. The mounting frame shall be an all welded structure fabricated from 1-5/16" O.D. x .083" (14 gauge) and 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing and shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication.

#### TRIANGLE TRANSFER PLATFORM

The Triangle Transfer Platform shall consist of triangle deck and modular deck that shall both be fabricated of 12 Ga. (.109") P.&O. Hot Rolled Flat Galvannealed Steel and finished with the matte PVC coating per the specifications herein. The kickplates shall be fabricated of 11Ga. (.1233") Hot Rolled Flat Galvannealed Steel and finished with the matte PVC coating per the specifications herein.

The Handrail shall be all welded assembly. The formed tab for the handrail shall be fabricated from 3/16" x 1/12" Hot Rolled Steel. The pipe for the handrail shall be fabricated from 1.315" O.D. x .083" wall galvanized steel pipe. The handrail shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

The support pipe shall be all welded assembly. The support pipe shall be fabricated from 1.315" O.D. x .083" wall galvanized steel pipe. The end cap shall be fabricated from 14 Ga. galvanneal steel. The support pipe shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

#### HEX DECK W SHADOW PLAY FLOWER DECK

Shall have a minimum surface area of 1,039 square inches, maintaining a full 49" center to center spacing on the upright posts. The triangular platform shall be fabricated in conformance with the punched steel specifications outlined herein. The deck frame shall be fabricated from 3/16" x 3-1/2" hot rolled steel with corner supports fabricated from 1/4" x 3-1/2" hot rolled steel. Intermediate supports, fabricated from 1/8" x 2-1/2" hot rolled steel, shall be welded at the intersections forming a rigid support grid underneath the deck surface. The deck shall be a one-piece welded assembly, coated after fabrication with an oven cured matte finish polyvinyl chloride (PVC) coating in accordance with the specifications herein. Each triangular deck shall be directly bolted to the upright posts with six 3/8" diameter button-pin-in-head, hex socket cap screws in accordance with the hardware specifications herein.

#### SHADOW PLAY FLOWER

The bearing system shall be fabricated from 5.500" o.d. x .500" wall D.O.M. MEC. tube and 3/16" H.R. steel plate. Two bearings shall be press fit into the weld assembly. Hub Bearing shall be an all welded assembly and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication.

The top weld assembly shall be constructed 5" O.D. L.W. galvanized pipe, formed 1 1/4" L.W. galvanized pipe (1.66 O.D.), The Overhead Assembly shall be welded constructions and coated with a custom formula of TGIC polyester powder coating after fabrication.

The transparent acrylic panels shall be Transparent Acrylic Panels shall be manufactured from 1/4" thick "ACRYCAST CELL CAST



ACRYLIC SHEET" produced to precise specifications.

#### SLIDE TRANSFER

The Platform shall each be made from 11 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Platform and Steps shall each be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handrails shall be all-welded assemblies, fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing, and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

#### Climbers:

##### LEANING WALL CLIMBER

Shall be fabricated from 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing frame. The climber frame assembly shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication. The Leaning wall panel shall be made from 3/4" thick (solid) high density, UV-stabilized, laminated and color impregnated polyethylene. PowerScape Leaning Wall climber shall include an entry archway or entryway in accordance with the specifications herein.

##### SLOPED FUNNEL CLIMBER

The climber sections shall be fabricated from punched steel in conformance with the specifications outlined herein. Each climber section shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The climber frame shall be fabricated from 11 gauge x 3-1/2" hot rolled steel with the intermediate supports fabricated from 1/8" x 1" hot rolled steel. Sloped Funnel Climber protective barriers shall be an all welded construction of a formed 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing and 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing vertical rungs. The protective barrier assembly shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein. The HDPE Steps shall be made from 3/4" thick (solid) high density, UV-stabilized, laminated and color impregnated polyethylene.

##### SPIRAL STEP CLIMBER

Spiral Step climber shall be a one-piece weld assembly with a center rail fabricated from 1 21/32" O.D. x .083" wall galvanized steel tubing. The handrail shall be fabricated from 1 1/32" O.D. x .072" wall galvanized steel tubing. The step plates shall be fabricated from 10 Gauge hot rolled steel. the support pipe for the step shall be fabricated from 1 21/32" O.D. x .083" wall galvanized steel tubing. A custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

The step shall be fabricated from 3/4" HDPE.

##### SENSORY WAVE

**SENSORY WAVE ROTOMOLDED PARTS:** The sensory wave rotomolded components shall be one piece construction manufactured from linear low-density polyethylene material and shall conform to the rotationally molded specifications outlined herein. Polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. Rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790);Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

**SENSORY WAVE FOOTBUCKS:** The Sensory Wave footbucks shall be all weld assemblies fabricated from 3 1/2" O.D. X .095" (13 gauge) wall galvanized steel tubing and 1/4" Hot Rolled flat steel coated with TGIC powder coat outlined herein.

**POWDER COAT FINISH:** Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a six stage bath system with an iron phosphate wash, as a



rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68).

**HARDWARE:** All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

## **Panels:**

### **ZOO PANEL**

Frame shall be 1-7/8" thick, color-impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. Rungs shall be made of 3/8" galvanized pipe. The zoo bar assembly shall be an all welded assembly and shall be powder coated after fabrication with a custom formula of TGIC polyester in conformance with the specifications outlined herein

### **ALPHA MAZE**

ALPHA MAZE - Panel shall be color-impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. HDPE in 30" diameter opening of the panel shall be made from 1/2" thick (solid) high density, UV-stabilized and color impregnated polyethylene.

### **SENSORY WAVE PANEL W/ WINDOW**

The enclosure weld assembly shall be fabricated from 14 gauge (.083") galvanized punched steel and the panel frame shall be fabricated from 1-5/16" x 14 gauge (.083") wall and 1-1/16" x 15 gauge (.075") wall galvanized steel tubing. The enclosure weld assembly shall be powder coated after fabrication with a custom formula of TGIC polyester in conformance with the specifications outlined herein. The enclosure HDPE panels shall be made from 1/2" thick (solid) high density, UV-stabilized and color impregnated polyethylene.

**COLORED WINDOW:** The colored window shall be fabricated from 1/4" thick polycarbonate.

## **Ramps/Connecting Walks:**

### **RAMPS/CONNECTING WALKS WITH 6" AND 12" INCLINE**

The ramp shall be fabricated from punched steel in conformance with the specifications outlined herein. The ramp frame shall be fabricated from 3/8" x 3-1/2" hot rolled steel. The ramp section shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handrails shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 2" square x 3/16" wall tubing outer frame, with vertical members fabricated of 1- 1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. The handrails shall be an all welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

### **SENSORY RAMP ATTACHMENT**

The ramp shall be fabricated from punched steel in conformance with the specifications outlined herein. The ramp sections shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The Ramp Weld Assembly shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with vertical members fabricated of 1- 1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing and 14 gauge punched still with protective p&o finish. The handrails shall be an all welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the





specifications outlined herein. The Hand Hold shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 1- 1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing with 3/16" x 2" hot rolled steel tabs. The ramp support shall be fabricated from 3/16" x 3" hot rolled steel with 3/16" x 2 1/2" x 4 1/2" stainless steel formed mounting tabs. The Support pipe shall be fabricated from 2 3/8" O.D. x .095 light wall galvanized steel pipe. The ramp trim shall be made from 3/4" thick (solid) high density, UV-stabilized and color impregnated polyethylene.

Spin Chime: The Spin Chime shall be fabricated from 11 Ga/ steel tab, purchased stainless steel shaft, purchased encapsulated stainless steel bearings, and 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing which shall be coated in TGIC polyester powder coating as specified herein.

Spin Chime Panel: The Spin Chime Panel shall be fabricated from 3/4" high density polyethylene.

Window: The colored window shall be fabricated from 1/4" thick polycarbonate.

#### SENSORY WAVE ROCK N RAFT

HDPE Panels & Chime Cover: shall be made from 3/4" thick and 1/2" thick (solid) high density, UV-stabilized, laminated and color impregnated polyethylene.

Handrail Weld Ass'y Right & Left: shall be an all welded assembly constructed out of 1.029" x .072 Wall GALV. Pipe. The assemblies shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication.

Seat Hand Hold: shall be an all welded assembly constructed out of 1.029" x .072 Wall GALV. Pipe. The assemblies shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication.

Base Assembly: The Base Assembly shall be an all weld assembly constructed out of 11 Gauge H.R. Steel. The Base Assembly also contains machined parts: Collars, Spacers, Shock Absorbers, Bronze Thrust Washers, Swing Arms, Mounting Plates, and a Frame Assembly constructed out of 11 Gauge H.R. Steel.

Chime Assembly: shall be fabricated from 11 Ga/ steel tab, purchased stainless steel shaft, purchased encapsulated stainless steel bearings, and 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing which shall be coated in TGIC polyester powder coating as specified herein.

#### Slides:

##### LITTLE FOOT SLIDE

The slide shall be constructed from 1/4" thick (nominal) material conforming to the rotationally molded products specification outlined herein. The slide shall be of one-piece double wall construction. The bedway width shall be 18-1/2", with a maximum width of 21-1/2" and an overall length of 62-3/4" (nominals). The exit region is sculptured to resemble a little foot with three toes and incorporates a molded-in pedestal for support. The Little Foot shall bolt to the deck and entrance panel with threaded inserts that are molded into the slide.

##### ZIP SLIDES (SINGLE & DOUBLE BEDWAY, AND RUMBLE & ROLL)

Zip Slides and hoods shall be color impregnated linear low-density polyethylene and shall conform to the rotationally molded specifications outlined herein with double wall construction molded to a minimum .25" wall thickness. Single bedway Zip Slides shall have a minimum inside bed width of 17.5" while double bedway Zip Slides shall have a minimum inside bed width of 16.5" on each bedway. Outside rails are at least 7" high when measured from the centerline of the bedway surface. The angle of descent shall be no greater than 50°. Each Zip Slide works in conjunction with a rotationally molded hood that has an integrated cross bar which force users to a seated position. The exit section of the bedway shall have a minimum 40" radius for a smooth transition from the slide chute to the run-out area. The run-out shall be angled at a maximum of 4° with an integrated drain at 5° to reduce pooling of water. Zip Slides bolt directly to the deck and to the slide hood.

##### SWERVE SLIDES (SINGLE & DOUBLE)

Swerve Slides and hoods shall be color impregnated linear low-density polyethylene and shall conform to the rotationally molded specifications outlined herein with double wall construction molded to a minimum .25" wall thickness. Single bedway



Swerve Slides shall have a minimum inside bed width of 17.5" while double bedway Swerve Slides shall have a minimum inside bed width of 16.5" on each bedway. Outside rails are at least 7" high when measured from the centerline of the bedway surface. The angle of descent shall be no greater than 50°. Each Swerve Slide works in conjunction with a rotationally molded hood that has an integrated cross bar which force users to a seated position. The exit section of the bedway shall have a minimum 40" radius for a smooth transition from the slide chute to the run-out area. The run-out shall be angled at a maximum of 4° with an integrated drain at 5° to reduce pooling of water. Swerve Slides bolt directly to the deck and to the slide hood.



**IPEMA ASTM F1487-17 CERTIFICATE OF COMPLIANCE**

**ISSUE DATE:** June 19, 2018

**Requested By:** Kelli Anderson

**Project:** WVSDA ADA Playground

In the interest of public playground safety, IPEMA provides a third-party certification service whereby TÜV SÜD America validates a manufacturer's certification of conformance to the ASTM F1487-17 (excluding sections 7.1.1, 10, 13.1.1, 13.1.2, 13.2, and 13.3) Standard Consumer Safety Performance Specification for Playground Equipment for Public Use.

The manufacturer listed below has received written validation from TÜV SÜD America that the product(s) listed conform with the requirements of ASTM F1487-17 (excluding sections 7.1.1, 10, 13.1.1, 13.1.2, 13.2, and 13.3).

This certificate is invalid if any component or part is replaced, unless purchased from the original manufacturer and assembled in accordance with the original equipment manufacturer's instructions. Check with the manufacturer to determine the validity of the certification of the product(s) listed prior to using this certificate for proof of certification.

PRODUCT	PRODUCT LINE	MANUFACTURER	DESCRIPTION
16700	Powerscape	GameTime	PLATFORM, SQUARE, ACCESSIBLE
80835	Powerscape	GameTime	PANEL, ZOO
4842	Gt event	GameTime	Echo Chamber, Gizmo
80687	Powerscape	GameTime	Handhold Kick Plate Package
80688	Powerscape	GameTime	Transfer Platform
5055	Gt event	GameTime	MERRY-GO-ALL
90251	Powerscape	GameTime	Leaning Wall Climber 3'
G90262	Powerscape	GameTime	Upright Galvanized 4'
G90265	Powerscape	GameTime	Upright Galvanized 7'
G90267	Powerscape	GameTime	Upright Galvanized 9'
G90266	Powerscape	GameTime	Upright Galvanized, 8'
90306	Powerscape	GameTime	Climber Archway Barrier
90366	Powerscape	GameTime	Sloped Funnel Climber (Barrier)
90176	Powerscape	GameTime	ADA Crow's Nest W/ Gizmo Panel
90182	Powerscape	GameTime	ADA Crow's Nest W/ Thunder Ring
90507	Powerscape	GameTime	Rumble & Roll Zip Slide, 2'6" – 3'-0"
90669	Powerscape	GameTime	Spiral Step Climber 5' & 5'6"
90579	Powerscape	GameTime	Zip Swerve Slide (Double)
91208	Powerscape	GameTime	Climber Entryway (Guardrail)
91209	Powerscape	GameTime	Climber Entryway (Barrier)
90425	Powerscape	GameTime	Alpha Maze Panel
32022	Gt event	GameTime	1' Hex Pod
90817	Powerscape	GameTime	ADA Hex Deck W/Shadow Play Flower 2'
16465	Powerscape	GameTime	ADA Slide Transfer Platform
91374	Powerscape	GameTime	Sensory Wave Climber Up & On
91365	Powerscape	GameTime	Sensory Wave Panel
91457	Powerscape	GameTime	Sensory Wave Climber Entryway
91471	Powerscape	GameTime	Ramp Attachment 11 Sensory Wave 1'



**IPEMA** INTERNATIONAL  
PLAY EQUIPMENT  
MANUFACTURERS  
ASSOCIATION



**IPEMA ASTM F1487-17 CERTIFICATE OF COMPLIANCE**

**ISSUE DATE:** June 19, 2018

**Requested By:** Kelli Anderson

**Project:** WVSDA ADA Playground

**PRODUCT PRODUCT LINE MANUFACTURER**

200114669	Kid Builder	Playpower LT Farmington, Inc.-formerly Little Tikes
		Commercial
3259	Gt event	GameTime

**DESCRIPTION**

360° W/CIRCLE/SQUARE  
OVERHEAD  
Concert Trio





## IPEMA CAN/CSA Z-614-14 CERTIFICATE OF COMPLIANCE

**ISSUE DATE:** June 19, 2018

**Requested By:** Kelli Anderson

**Project:** WVSDA ADA Playground

In the interest of public playground safety, IPEMA provides a third-party certification service whereby TÜV SÜD America validates a manufacturer's certification of conformance to CAN/CSA-Z614-14 (excluding clauses 10 and 11) Children's Playspaces and Equipment.

The manufacturer listed below has received written validation from TÜV SÜD America that the product(s) listed conform with the requirements of CAN/CSA-Z614-14 (excluding clauses 10 and 11).

This certificate is invalid if any component or part is replaced, unless purchased from the original manufacturer and assembled in accordance with the original equipment manufacturer's instructions. Check with the manufacturer to determine the validity of the certification of the product(s) listed prior to using this certificate for proof of certification.

PRODUCT	PRODUCT LINE	MANUFACTURER	DESCRIPTION
16700	Powerscape	GameTime	PLATFORM, SQUARE, ACCESSIBLE
80835	Powerscape	GameTime	PANEL, ZOO
4842	Gt event	GameTime	Echo Chamber, Gizmo
80687	Powerscape	GameTime	Handhold Kick Plate Package
80688	Powerscape	GameTime	Transfer Platform
5055	Gt event	GameTime	MERRY-GO-ALL
90251	Powerscape	GameTime	Leaning Wall Climber 3'
G90262	Powerscape	GameTime	Upright Galvanized 4'
G90265	Powerscape	GameTime	Upright Galvanized 7'
G90267	Powerscape	GameTime	Upright Galvanized 9'
G90266	Powerscape	GameTime	Upright Galvanized, 8'
90306	Powerscape	GameTime	Climber Archway Barrier
90366	Powerscape	GameTime	Sloped Funnel Climber (Barrier)
90176	Powerscape	GameTime	ADA Crow's Nest W/ Gizmo Panel
90182	Powerscape	GameTime	ADA Crow's Nest W/ Thunder Ring
90507	Powerscape	GameTime	Rumble & Roll Zip Slide, 2'6" – 3'-0"
90669	Powerscape	GameTime	Spiral Step Climber 5' & 5'6"
90579	Powerscape	GameTime	Zip Swerve Slide (Double)
91208	Powerscape	GameTime	Climber Entryway (Guardrail)
91209	Powerscape	GameTime	Climber Entryway (Barrier)
90425	Powerscape	GameTime	Alpha Maze Panel
32022	Gt event	GameTime	1' Hex Pod
90817	Powerscape	GameTime	ADA Hex Deck W/Shadow Play Flower 2'
16465	Powerscape	GameTime	ADA Slide Transfer Platform
91374	Powerscape	GameTime	Sensory Wave Climber Up & On
91365	Powerscape	GameTime	Sensory Wave Panel
91457	Powerscape	GameTime	Sensory Wave Climber Entryway
91471	Powerscape	GameTime	Ramp Attachment 11 Sensory Wave 1'



**IPEMA** INTERNATIONAL  
PLAY EQUIPMENT  
MANUFACTURERS  
ASSOCIATION



**IPEMA CAN/CSA Z-614-14 CERTIFICATE OF COMPLIANCE**

**ISSUE DATE:** June 19, 2018

**Requested By:** Kelli Anderson

**Project:** WVSDB ADA Playground

**PRODUCT PRODUCT LINE MANUFACTURER**

200114669 Kid Builder

Playpower LT Farmington, Inc.-formerly Little Tikes  
Commercial

**DESCRIPTION**

360° W/CIRCLE/SQUARE  
OVERHEAD

IPEMA

IPEMA

II

WA

IPEMA

IPEMA

IPEMA

IPEMA

II

WA

IPEMA

IPEMA

IPEMA

IPEMA

II



## IPEMA CAN/CSA Z-614-14 CERTIFICAT DE CONFORMITÉ

**Date de Délivrance Initiale: juin 19, 2018**

**Demandé par: Kelli Anderson**

**Nom du parc: WVSDA ADA Playground**

Dans l'intérêt de la sécurité au terrain de jeu, IPEMA offre une certification par une tierce partie et TÜV SÜD America valide une certification par le fabricant de la conformité à la norme CAN/CSA-Z614-14 (excluant les articles 10, 11) les enfants les espaces de jeu et du matériel.

Le fabricant ci-dessous a reçu la validation de la part de TÜV SÜD America que les produits énumérés ci-dessous sont conformes aux exigences de la norme CAN/CSA-Z614-14 (excluant les articles 10, 11).

Ce certificat n'est pas valide si un composant ou une pièce est remplacé, à moins que le composant soit acheté du fabricant d'origine et assemblé conformément aux instructions du fabricant de l'équipement. Vérifiez auprès du fabricant pour déterminer la validité de la certification du (des) produit(s) indiqué(s) avant d'utiliser ce certificat pour la preuve de la certification.

MODÈLE	LIGNE DE PRODUIT	MANUFACTURIER	DESCRIPTION
16700	Powerscape	GameTime	
80835	Powerscape	GameTime	
4842	Gt event	GameTime	
80687	Powerscape	GameTime	
80688	Powerscape	GameTime	
5055	Gt event	GameTime	
90251	Powerscape	GameTime	
G90262	Powerscape	GameTime	
G90265	Powerscape	GameTime	
G90267	Powerscape	GameTime	
G90266	Powerscape	GameTime	
90306	Powerscape	GameTime	
90366	Powerscape	GameTime	
90176	Powerscape	GameTime	
90182	Powerscape	GameTime	
90507	Powerscape	GameTime	
90669	Powerscape	GameTime	
90579	Powerscape	GameTime	
91208	Powerscape	GameTime	
91209	Powerscape	GameTime	
90425	Powerscape	GameTime	
32022	Gt event	GameTime	
90817	Powerscape	GameTime	
16465	Powerscape	GameTime	
91374	Powerscape	GameTime	
91365	Powerscape	GameTime	
91457	Powerscape	GameTime	
91471	Powerscape	GameTime	
200114669	Kid Builder	Playpower LT Farmington, Inc.-formerly Little Tikes Commercial	

## **COMPANY PROFILE**

Since 1929, GameTime has been a pioneer in the commercial playground equipment industry. GameTime has continued to bring meaningful research around the importance of play to the design, engineering, manufacture and delivery of play equipment. GameTime play equipment's work has elevated industry standards on safety, physical and mental development, inclusion and intergenerational interaction.

GameTime play systems, site furnishings and amenities are constructed from the highest quality materials and are backed by the industry's best warranty and customer service. Equipment is manufactured to meet current ASTM, CPSC and ADA guidelines for playground safety and accessibility.

Since 1966, Cunningham Recreation has been providing commercial park and playground equipment from design to construction. We are proud to serve as GameTime Play Equipment's exclusive representative in North Carolina, South Carolina, Virginia, West Virginia, Arkansas, Kansas, Missouri, Illinois, Oklahoma, western Tennessee, Iowa, Nebraska, North Dakota, South Dakota, Delaware, Maryland and DC.

Cunningham Recreation has adequate coverage in each territory to insure our customers receive professional assistance and excellent customer service.

## **RANGE OF INSTALLATION**

GameTime holds an ISO 9001 certification, which validates our high quality manufacturing standards and our commitment to excellence in the design, production, installation, inspection and testing of our products. Our ISO 14001 certification supports our dedication to environmental sustainability, and our commitment to eliminating waste, implementing recycling practices in our manufacturing facility and offering recycled and recyclable products to our customers.

Cunningham Recreation specializes in complete park and playground solutions from design to construction. We offer a full range of commercial park and play equipment for children of all ages and all abilities, and have completed thousands of installations.

Cunningham Recreation can offer a variety of resources and design approaches for those planning and maintaining parks and playgrounds.

Both Cunningham Recreation and GameTime are considered leaders in the playground industry. Why not partner with a leader. Our research, design principles, innovative products and available resources are at your disposal.



## KEY PERSONNEL



Mitch Reno of Monroe, VA, the local representative for West Virginia and western Virginia, joined Cunningham Recreation in 2015. Mitch has sales experience in sporting goods and recreation equipment. He is available to meet on-site for any design and compliance questions concerning playgrounds, and can be reached at 800.438.2780 ext. 151.



Scott Cunningham of Charlotte, NC, President of Cunningham Recreation and Playground Guardian, is a NPSI certified playground safety inspector and has been designing playgrounds and managing community build projects since 1993. He is available to meet on-site for any design and compliance questions concerning playgrounds, or Playground Guardian services and products. Scott can be reached at 800.438.2780 ext. 127.

Kelli Anderson, Project Manager, joined Cunningham Recreation in 2017 and works closely with sales associates in preparing proposals to meet the needs of our customers. She is available for questions concerning general customer service, orders, shipments, replacement parts and warranty issues at 800.438.2780 ext. 140.

Park and Playground Builders, LLC is excited to install your playground equipment, safety surfacing, shelters, and/or site amenities! Caleb Knighten, the owner of PPB, is a Gametime Certified Installer and a Certified Playground Safety Inspector. He has his Class A contractor's license in Virginia and is also a licensed contractor in West Virginia. Caleb has years of construction experience and is also the founder of Knighten's Outdoor Services - a lawn care and landscaping company based in Martinsville, VA. Between the two companies and with Caleb's experience, the scope of work they can cover is broad. They are delighted to have the opportunity to serve you! Caleb can be contacted for on-site installation questions at (276) 734-8249.

**References:**

Charlottesville Parks and Recreation  
Cynthia Lewis-Brown  
1300 Pen Park Road  
Charlottesville, VA  
434-962-7915  
[browncy@charlottesville.org](mailto:browncy@charlottesville.org)

Putnam County Parks and Recreation  
Jarrod Dean  
1 Valley Park Drive  
Hurricane, WV 25526  
304-562-0518  
[jarrod@putnamcountyparks.com](mailto:jarrod@putnamcountyparks.com)

Board of Park and Recreation Commissioners (BOPARC)  
Roger Moss  
1235 Parkview Drive  
Morgantown, WV 26505  
304-296-8356  
[rmoss@boparc.org](mailto:rmoss@boparc.org)

Lynchburg City School District  
Don Floyd  
3525 John Capron Road  
Lynchburg, VA 24506  
434-515-5111  
[floydfd@lcsedu.net](mailto:floydfd@lcsedu.net)



# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
08/01/2017

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

**IMPORTANT:** If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

<b>PRODUCER</b> Marsh USA, Inc. Two Alliance Center 3560 Lenox Road, Suite 2400 Atlanta, GA 30326 Attn: Atlanta.CertRequest@marsh.com / Fax: 212-948-4321 457102-CAS-GAUWX-17-18	<b>CONTACT NAME:</b> 	<b>PHONE (A/C, No, Ext):</b>	<b>FAX (A/C, No):</b>
	<b>E-MAIL ADDRESS:</b>		
<b>INSURED</b> GameTime A Division of PlayCore WI, Inc. 150 PlayCore Drive SE Fort Payne, AL 35967	<b>INSURER(S) AFFORDING COVERAGE</b>		<b>NAIC #</b>
	<b>INSURER A :</b> Westchester Surplus Lines Insurance Co		10172
	<b>INSURER B :</b> Charter Oak Fire Insurance Company		25615
	<b>INSURER C :</b> National Union Fire Insurance Co. of Pittsburgh, PA		19445
	<b>INSURER D :</b> Phoenix Insurance Company		25623
	<b>INSURER E :</b> Liberty Surplus Insurance Corp		10725
<b>INSURER F :</b> Travelers Property Casualty Company Of America		25674	

**COVERAGES**                      **CERTIFICATE NUMBER:** ATL-004720415-26                      **REVISION NUMBER:** 12

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> <b>COMMERCIAL GENERAL LIABILITY</b> <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> SIR \$250,000 Per Occ.  GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER:			G2821800A 001	02/01/2017	08/01/2018	EACH OCCURRENCE \$ 2,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000 MED EXP (Any one person) \$ EXCLUDED PERSONAL & ADV INJURY \$ 2,000,000 GENERAL AGGREGATE \$ 4,000,000 PRODUCTS - COMP/OP AGG \$ 4,000,000 POLICY AGGREGATE \$ 10,000,000
F	<input checked="" type="checkbox"/> <b>AUTOMOBILE LIABILITY</b> <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> NON-OWNED AUTOS ONLY <input type="checkbox"/> AUTOS ONLY			TJ-CAP-9D897065TIL-17	08/01/2017	08/01/2018	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ Comp./Coll. Ded.: \$1,000 \$
C	<input checked="" type="checkbox"/> <b>UMBRELLA LIAB</b> <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED <input checked="" type="checkbox"/> RETENTION \$ 10,000			BE 027711064	08/01/2017	08/01/2018	EACH OCCURRENCE \$ 25,000,000 AGGREGATE \$ 25,000,000
D	<input checked="" type="checkbox"/> <b>WORKERS COMPENSATION AND EMPLOYERS' LIABILITY</b> <input type="checkbox"/> ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below			TC2NUB-9D900314-17 (AOS) TRC-UB-9D90032-6-17 (AZ,FL,OR,WI) 7J602089-17 (AL)	08/01/2017 08/01/2017 08/01/2017	08/01/2018 08/01/2018 08/01/2018	<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000
E	Excess Umbrella			1000054456-07	08/01/2017	08/01/2018	Each Occurrence 25,000,000 Aggregate 25,000,000

**DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)**  
For Information Only

<b>CERTIFICATE HOLDER</b> GameTime A Division of PlayCore Wisconsin, Inc. 150 PlayCore Drive SE Fort Payne, AL 35967	<b>CANCELLATION</b> SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.  <b>AUTHORIZED REPRESENTATIVE</b> of Marsh USA Inc. Manashi Mukherjee <i>Manashi Mukherjee</i>
--	--



**ADDITIONAL REMARKS SCHEDULE**

<b>AGENCY</b> Marsh USA, Inc.		<b>NAMED INSURED</b> PCH Holdings, Inc. 150 PlayCore Drive SE Fort Payne, AL 35967	
<b>POLICY NUMBER</b>		<b>EFFECTIVE DATE:</b>	
<b>CARRIER</b>	<b>NAIC CODE</b>		

**ADDITIONAL REMARKS**

THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,  
 FORM NUMBER: 25 FORM TITLE: Certificate of Liability Insurance

INSURERS AFFORDING COVERAGE/NAIC #

INSURER G: The Insurance Company of the State of PA (19429)



## American Society for Testing and Materials (ASTM)

We don't just follow the rules; we help create them. Several key people at GameTime, including our Manager of Compliance and Standards, serve on the ASTM committee that sets the standards for the entire playground industry. GameTime products conform to that standard, F1487-07a<sup>E1</sup>, the Standard Consumer Safety Performance Specification for Playground Equipment for Public Use.



CPSC

The Consumer Product Safety Commission is an independent agency within the United States Federal Government with the authority to inform the public of current product safety performance information and recommended practices. The CPSC first published their guidelines for public playgrounds in 1981 and have updated their publication since then. The current CPSC Handbook for Public Playground Safety, publication #325, is an excellent guide for owners and operators of public play environments.



## ISO 14001 Certified

ISO 14001 also known as green certification specifies the requirements of an environmental management system. An EMS is a systematic approach to handling environmental issues within an organization.



## IPEMA Equipment Certification

GameTime is one of the founding members of IPEMA, and several of our people serve as board members, committee members and chairpersons of the association. In the interest of public playground safety, IPEMA provides a 3rd party certification, to validate conformance to established standards. Our use of the IPEMA seal is your assurance that GameTime has received written validation from an independent lab that the products associated with the seal conform with the ASTM standard, as well as the Canadian CSA standard CAN Z-614. A list of our validated products may be found on the IPEMA website, [www.ipema.org](http://www.ipema.org).



## IPEMA Surfacing Certification

GameTime's GT Impax product provides you with the assurance that our surfacing has been certified as compliant to the appropriate ASTM standard. In the interest of public playground safety, IPEMA provides a third party certification to validate a manufacturer's conformance to the ASTM F-1292-99 Standard Specification for Impact Attenuation of Surface Systems Under And Around Playground Equipment.

The use of the IPEMA Certification Seal displayed above signifies that the manufacturer has received written validation from the independent laboratory that the product associated with the use of the seal conforms with the requirements of ASTM F1292-99. A complete list of our validated products may be found on the IPEMA website at [www.ipema.com](http://www.ipema.com).



ADA

GameTime is the only manufacturer to meet accessibility guidelines on all of its pre-designed PowerScope Plus and PrimeTime playground plans. We also recommend accessible surfacing options. Access Board (The United States Architectural and Transportation Barriers Compliance Board) has completed Accessibility Guidelines for Play Facilities as set forth in the Americans with Disabilities Act of 1990. For more information, log on to [www.access-board.gov](http://www.access-board.gov)



ISO 9001:2008

GameTime was the first playground manufacturer to obtain the ISO9001:2000 standard. In order to obtain this certification, the company's manuals, policies, objectives and quality procedures are closely examined during a surveillance audit by ISO representatives. Strict attention is paid to policies and procedures in manufacturing, communication channels, system monitoring, customer relations and order processing, which are reviewed for consistency and standards. Companies who meet the standard are awarded the ISO designation.



TUV

An international organization that is a European Union Notified and Competent Body, providing testing and certification. Use of the TUV seal demonstrates that products have passed a comprehensive testing procedure based upon the European Harmonized Standard for Commercial Playground Equipment, and that the GameTime plant is regularly monitored by TUV. Contact your international GameTime distributor for complete EN 1176 compliance details.



# The Industry's BEST Warranty

GameTime offers you peace of mind with the best, most all encompassing warranties in the industry.

We want to assure you that we are part of your community playground long after the sale is made. Our quality is legendary, and we stand behind our products with one of the best warranties in the business and a level of customer service that assures you that your needs will be met. For complete Warranty information, consult your GameTime sales representative.

- Lifetime limited warranty on PowerScape®, PrimeTime®, and Xscape® uprights.
- Lifetime limited warranty on all hardware.
- Lifetime limited warranty on PowerScape PowerLocks®.
- 15 Year limited warranty on pipes, rungs, rails, metal decks and loops.
- 15 Year warranty on rotationally molded KidTime and GameTime products.
- 10 Year limited warranty on PrimeTime bolt-through connection.
- 10 Year limited warranty on Parcourse® fitness equipment.
- 5 Year limited warranty on SuperSeats™.
- 3 Year limited warranty on rubber or C type springs used on SaddleMates®.
- 1 Year limited warranty on all other GameTime products.



150 PlayCore Drive, SE  
Fort Payne, Alabama 35967  
Telephone: 256/845-5610  
Facsimile: 256/845-9361  
Email: service@gametime.com

**A PLAYCORE COMPANY**  
**GameTime**  
Enriching Childhood Through Play.

## GAMETIME® WARRANTIES

GameTime provides warranties on all materials and workmanship for one year, excluding vandalism.

In addition, GameTime offers:


- ✓ Lifetime limited warranty on PowerScape® Plus, PrimeTime® and Xscape® uprights.
- ✓ Lifetime limited warranty on all hardware.
- ✓ Lifetime limited warranty on GameTime PowerScape Plus PowerLocks®.
- ✓ Ten-Year limited warranty on PrimeTime and Xscape bolt-through connections.
- ✓ Fifteen-Year limited warranty on metal decks, pipes, rungs, rails and loops.
- ✓ Fifteen-Year limited warranty on rotationally molded products.
- ✓ Twenty-Year limited warranty on Timber Décor™ recycled plastic lumber products.
- ✓ Five-Year limited warranty on nylon-covered cable net climbers and components.
- ✓ Ten-Year limited warranty on pressure-treated pine and redwood products.
- ✓ Ten-Year limited warranty on Parcourse® fitness equipment.
- ✓ Ten-Year limited warranty on site furnishings.
- ✓ Ten-Year limited warranty on integrated GTShade® products.
- ✓ Ten-Year limited warranty on fiberglass signage.
- ✓ Five-Year limited warranty on Super Seats™.
- ✓ Three-Year limited warranty on SaddleMates® rubber and "C"-springs.
- ✓ One-Year limited warranty on all other GameTime products.

*All warranties specifically exclude damage caused by vandalism; negligence, improper installation or improper use; changes in appearance resulting from weathering; scratches, dents or marring as a result of use.*

*Warranties are valid only if products are installed and maintained in accordance with GameTime instructions and use approved parts.*

GTW0100125 Page 1

# CERTIFICATE OF REGISTRATION

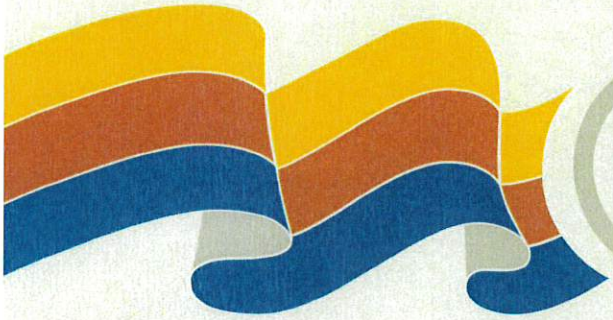

**Quality  
System  
Registrar**



Having been audited in accordance with requirements of

**ISO 14001:2015**

SRI Quality System Registrar, 300 Northpointe Circle, Seven Fields, Pennsylvania, 16046, USA, hereby grants to:

## **GameTime Division of Playcore**

Registration of the management system at its location:

**150 PlayCore Drive SE  
Fort Payne, Alabama, 35967, USA**


The conditions for maintaining this certificate of registration are set forth in the SRI registration agreements R20.3 and R20.4.

**Scope of ISO 14001:2015 registration:** "Environmental activities related to the production of playground equipment."

**Initial SRI registration date:** July 23, 2008

**Current registration period:** July 21, 2017 through July 20, 2020


Signed for SRI:

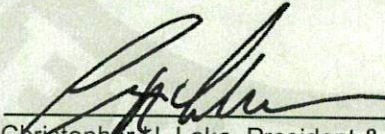  
\_\_\_\_\_  
Christopher H. Lake, President & COO

Release Date: July 21, 2017  
Certificate Number: 017410  
Registration Number: 0689-01



# CERTIFICATE OF REGISTRATION

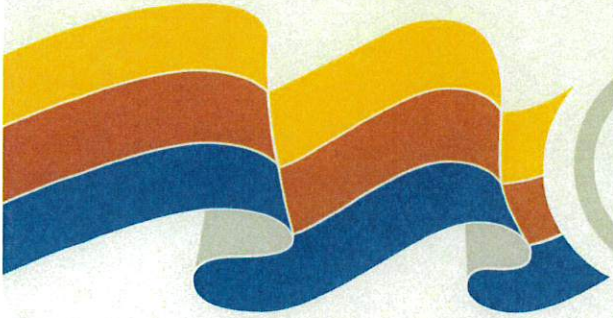

**Quality  
System  
Registrar**



Having been audited in accordance with requirements of

## **ISO 9001:2015 – ANSI/ISO/ASQ Q9001-2015**

SRI Quality System Registrar, 300 Northpointe Circle, Seven Fields, Pennsylvania, 16046, USA, hereby grants to:

### **GameTime Division of Playcore**

Registration of the management system at its location:

**150 PlayCore Drive SE  
Fort Payne, Alabama, 35967, USA**


The conditions for maintaining this certificate of registration are set forth in the SRI registration agreements R20.3 and R20.4. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2015 requirements may be obtained by consulting the organization.

**Scope of ISO 9001:2015 registration:** "Design, manufacture and supply of park and playground equipment, site furnishings and rotational molded plastics."

**Initial SRI Registration date:** September 18, 1996

**Current registration period:** February 23, 2017 through February 22, 2020

Signed for SRI:

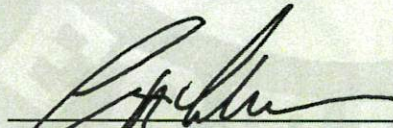  
\_\_\_\_\_  
Christopher H. Lake, President & COO

Release Date: February 23, 2017  
Certificate Number: 017050  
Registration Number: 0689-01





## Submarine

Uprights Champagne	Plastic Dark Blue	HDPE Sky Blue
Metal Burgundy	Decks Blue	2 Color HDPE Sky Blue/White



## Jovial

Uprights Burgundy	Plastic Spring Green	HDPE Gray
Metal Butterscotch	Decks Blue	2 Color HDPE Gray/Black

## Shine

Uprights Sky Blue	Plastic Orange	HDPE Orange
Metal Spring Green	Decks Gray	2 Color HDPE Spring Green/White



## Patriotic

Uprights Burgundy	Plastic Champagne	HDPE Blue
Metal White	Decks Blue	2 Color HDPE Blue/Beige

## Jellybean

Uprights Burgundy	Plastic Blue	HDPE Blue
Metal Butterscotch	Decks Blue	2 Color HDPE Red/White





## Carnival

Uprights <b>Spring Green</b>	Plastic <b>Sky Blue</b>	HDPE <b>Blue</b>
Metal <b>Butterscotch</b>	Decks <b>Red</b>	2 Color HDPE <b>Sky Blue/White</b>

## Papaya

Uprights <b>Orange</b>	Plastic <b>Yellow</b>	HDPE <b>Sky Blue</b>
Metal <b>Spring Green</b>	Decks <b>Brown</b>	2 Color HDPE <b>Sky Blue/White</b>



## Wisteria

Uprights <b>Spring Green</b>	Plastic <b>Periwinkle</b>	HDPE <b>Blue</b>
Metal <b>Champagne</b>	Decks <b>Gray</b>	2 Color HDPE <b>Spring Green/White</b>

## Deep Space

Uprights <b>Starlight Black</b>	Plastic <b>Sky Blue</b>	HDPE <b>Red</b>
Metal <b>Yellow</b>	Decks <b>Blue</b>	2 Color HDPE <b>Red/White</b>




## Emerald

Uprights <b>Metallic</b>	Plastic <b>Spring Green</b>	HDPE <b>Yellow</b>
Metal <b>White</b>	Decks <b>Blue</b>	2 Color HDPE <b>Red/White</b>

## Bayou

Uprights <b>Spring Green</b>	Plastic <b>Champagne</b>	HDPE <b>Green</b>
Metal <b>Bronze</b>	Decks <b>Brown</b>	2 Color HDPE <b>Green/Beige</b>

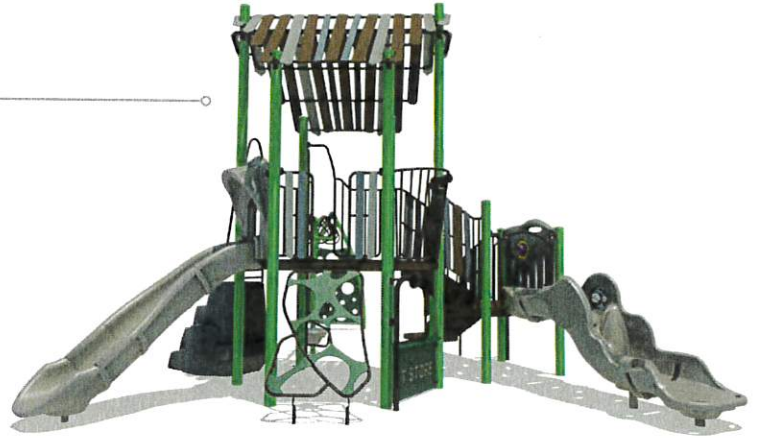

## Riverbank

Uprights <b>Champagne</b>	Plastic <b>Green</b>	HDPE <b>Blue</b>
Metal <b>Sky Blue</b>	Decks <b>Blue</b>	2 Color HDPE <b>Sky Blue/White</b>

## Malibu

Uprights <b>Bronze</b>	Plastic <b>Spring Green</b>	HDPE <b>Spring Green</b>
Metal <b>Beige</b>	Decks <b>Brown</b>	2 Color HDPE <b>Spring Green/White</b>



## Rainforest


Uprights <b>Bronze</b>	Plastic <b>Light Green</b>	HDPE <b>Gray</b>
Metal <b>Butterscotch</b>	Decks <b>Brown</b>	2 Color HDPE <b>Gray/Black</b>

## Atlantic


Uprights <b>Metallic</b>	Plastic <b>Sky Blue</b>	HDPE <b>Sky Blue</b>
Metal <b>Spring Green</b>	Decks <b>Blue</b>	2 Color HDPE <b>Sky Blue/White</b>




METAL

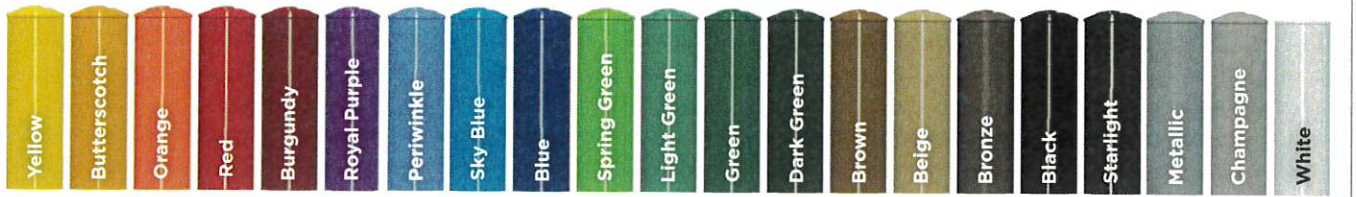


PLASTIC

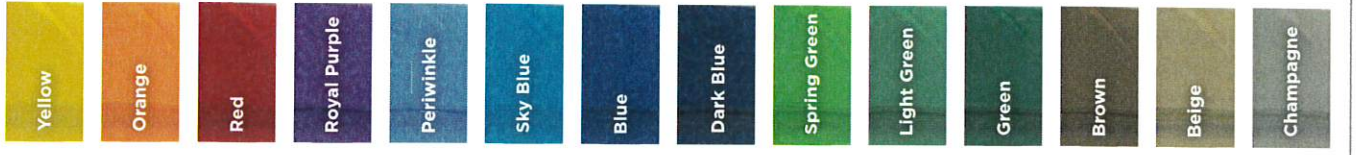


POLYETHYLENE (HDPE)

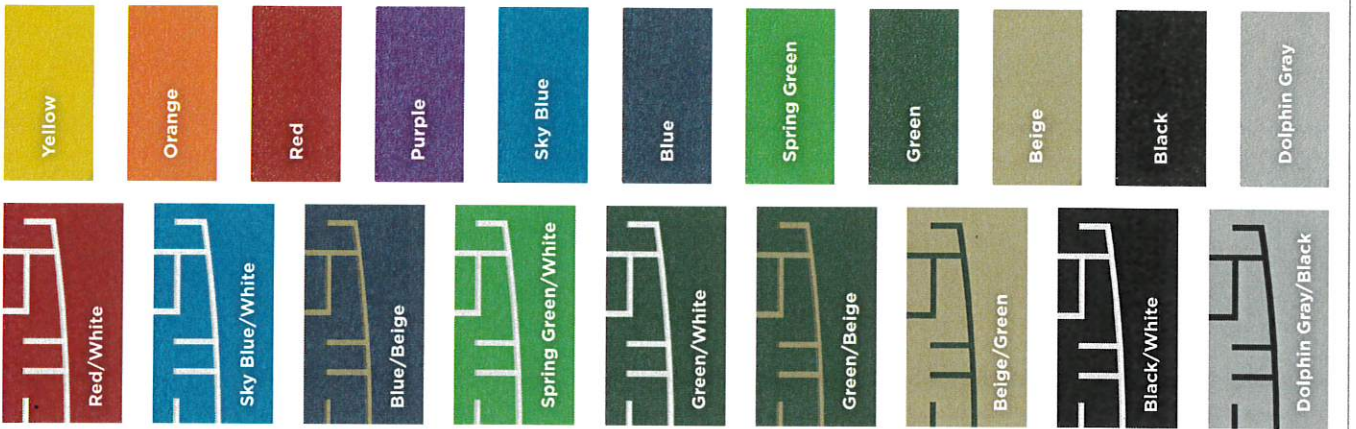

NEW! CANOPY & SHADE

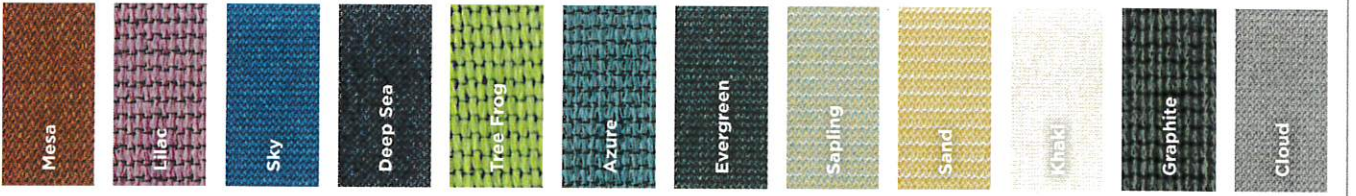

DECKS



SPECIAL ROCK



WALLCANO® HANDHOLDS



TIMBER DÉCOR



NETS

