



**PRECAST PANEL DETAIL**  
SCALE: 3/4"=1'-0"



**DRILLED SHAFT SCHEDULE**

PIER NO.	TOP OF PIER EST. ROCK ELEV.	ROCK SOCKET DEPTH (FT)	PIER LENGTH (FT)	BOTTOM OF LAGGING ELEV.	BEAM SIZE
1	1267.61	15	33.55	1258.61	W18x106
2	1267.61	15	33.55	1258.61	W18x106
3	1268.07	15	34.03	1259.07	W18x106
4	1268.68	15	34.65	1259.68	W18x106
5	1269.28	15	35.26	1260.28	W18x106
6	1269.96	15	35.95	1260.96	W18x106
7	1270.76	15	36.33	1261.76	W18x106
8	1271.57	15	35.86	1262.57	W18x106
9	1272.44	15	35.35	1263.44	W18x106
10	1273.25	15	34.88	1264.25	W18x106
11	1274.10	15	34.45	1265.10	W18x106
12	1275.01	15	34.08	1266.01	W18x106
13	1275.92	15	33.71	1266.92	W18x106
14	1276.83	15	33.34	1267.83	W18x106
15	1277.74	15	32.97	1268.74	W18x106
16	1278.78	15	32.73	1269.78	W18x106
17	1280.00	15	33.20	1271.00	W18x106
18	1281.23	15	34.43	1272.23	W18x106
19	1282.46	15	35.66	1273.46	W18x106
20	1283.99	15	37.19	1274.99	W21x111
21	1284.40	15	37.60	1275.40	W21x111
22	1284.40	15	37.60	1275.40	W21x111
23	1284.40	15	37.60	1275.40	W21x111
24	1284.40	15	37.60	1275.40	W21x111

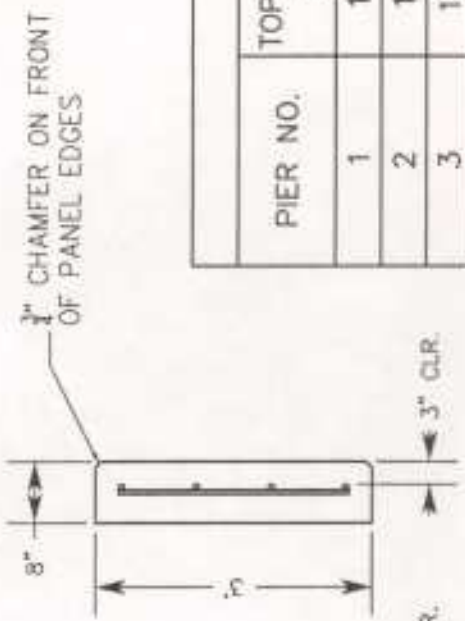

	<b>WEST VIRGINIA ARMY NATIONAL GUARD</b>	<b>SOUTH GATE ROAD SLOPE REPAIR</b>	DATE: 12/20/08 PROJECT NO: 1-7728-0000
	PREPARED BY: <b>AMEC Earth &amp; Environmental</b> 690 Commonwealth Center 11003 Burggrass Parkway Louisville, Ky 40299 (502) 267-0700	PROJECT: SCALE: AS SHOWN	TITLE: REV: NO:

DETAILS, CONT'D