



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

Header 2

 List View

General Information [Contact](#) [Default Values](#) [Discount](#) [Document Information](#) [Clarification Request](#)

Procurement Folder: 1813976

Procurement Type: Central Purchase Order

Vendor ID: 

Legal Name: Solis Electric Supply

Alias/DBA: Solis Electric Supply

Total Bid: \$9,281.26

Response Date: 

Response Time:

Responded By User ID: 

First Name:

Last Name:

Email:

Phone:

SO Doc Code: CRFQ

SO Dept: 0403

SO Doc ID: DBS2600000003

Published Date: 10/31/25

Close Date: 11/13/25

Close Time: 13:30

Status: Closed

Solicitation Description:

Total of Header Attachments: 2

Total of All Attachments: 2



Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Solicitation Response

Proc Folder: 1813976
Solicitation Description: LIGHT FIXTURES
Proc Type: Central Purchase Order

Solicitation Closes	Solicitation Response	Version
2025-11-13 13:30	SR 0403 ESR11122500000003103	1

VENDOR
VS0000045970
Solis Electric Supply

Solicitation Number: CRFQ 0403 DBS2600000003
Total Bid: 9281.260000000000218278728425 **Response Date:** 2025-11-13 **Response Time:** 00:00:15
Comments: We are quoting equals. Spec Sheets attached

FOR INFORMATION CONTACT THE BUYER
James W Atkins
(304) 558-0094
james.w.atkins@wv.gov

Vendor
Signature X **FEIN#** **DATE**

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	2X4 STANDARD PANEL	160.00000	EA	38.220000	6115.20

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: Quoting Honya # HYA-PB2-2X4-50W H-TWCCT

Extended Description:

2X4 STANDARD PANEL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	2X4 PANEL WITH EMERGENCY	8.00000	EA	106.800000	854.40

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: Quoting Honya #HYA-PB2-2X4-50W H-TWCCT(EM)

Extended Description:

2X4 PANEL WITH EMERGENCY

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
3	2X2 STANDARD PANEL	8.00000	EA	26.220000	209.76

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: Quoting Honya # HYA-PB2-2X2-40W-H TWCCT

Extended Description:

2X2 STANDARD PANEL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
4	2X2 PANEL WITH EMERGENCY	4.00000	EA	94.800000	379.20

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: Quoting Honya #HYA-PB2-2X2-40W H-TWCCT (EM)

Extended Description:

2X2 PANEL WITH EMERGENCY

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
5	6X4 PANEL	35.00000	EA	49.220000	1722.70

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: Quoting Honya #HY-4FT-LW102-40W-3CCT

Extended Description:

6X4 PANEL



HONYA Lighting

Project Name: _____

Date: _____ Note: _____



LED BACK-LIT PANEL LIGHT (PB2 SERIES)



Slide switch for color selection



Slide switch for power selection



Optional Accessories



Emergency Back-Up



Sensor



Application: Offices, Schools, Showrooms, Airports, Retail and Healthcare Facilities...

Features

- UL&DLC Listed. Suitable for damp locations.
- More than 50% energy savings compared to traditional fluorescent fixtures.
- Reduce SKUs with Power Select and Color Select switches, allowing quick selection of 5 lumen outputs and 5 color temperatures on one model.
- Easy installation for new construction and retrofits. Fits standard T-grid ceilings for recessed installation and supports surface or suspended mounting with optional accessories.
- Optional plug-and-play motion and daylight harvesting sensors for enhanced energy savings.

Specifications

Model No.	HYA-PB2-1X4-40W-H-TWCCT	HYA-PB2-2X2-40W-H-TWCCT	HYA-PB2-2X4-50W-H-TWCCT	HYA-PB2-2X4-72W-H-TWCCT	HYA-PB2-2X2-40W-H-TWCCT(XX)	HYA-PB2-2X4-50W-H-TWCCT(XX)	HYA-PB2-2X4-72W-H-TWCCT(XX)	HYA-PB2-2X2-40W-H-TWCCT(EM)	HYA-PB2-2X4-50W-H-TWCCT(EM)	HYA-PB2-2X4-72W-H-TWCCT(EM)
Size	1'x4'	2'x2'	2'x4'	2'x4'	2'x2'	2'x4'	2'x4'	2'x2'	2'x4'	2'x4'
Feature	LED Panel Backlit				LED Panel Backlit With Sensor Base			LED Panel Backlit With Emergency Back-up Battery		
Wattage	20W/25W/30W/35W/40W		30W/35W/40W/45W/50W	30W/40W/50W/60W/72W	20W/25W/30W/35W/40W	30W/35W/40W/45W/50W	30W/40W/50W/60W/72W	20W/25W/30W/35W/40W	30W/35W/40W/45W/50W	30W/40W/50W/60W/72W
Lumens	5200 LM @40W		6469 LM @50W	9360 LM @72W	5200 LM @40W	6469 LM @50W	9360 LM @72W	5200 LM @40W	6469 LM @50W	9360 LM @72W
Rated Input Voltage(V)	120-277V									
Dimming	0-10V Dimmable									
CCT	30K/35K/40K/50K/65K Selectable									
CRI	≥80									
Power Factor	>0.9									
Beam Angle (°)	110°									
Lumen Efficiency	130 Lm/W									
Working Temperature	-13 ° F ~ +113 ° F / -25°C ~ +45°C									
Environment Location	IP 20 – Indoor Only									
Lifespan	Lumen Maintenance over 70% @ 50,000+ Hours									
Lampshell	White									
PC/ Master Pack	2									



LED BACK-LIT PANEL LIGHT (PB2 SERIES)


Ordering Code Definition

Example: HYA-PB2-1X4-40W-H-TWCCT


Company Code	Product	Size	Power:	H	TW	CCT	Suffix
HYA	PB2-LED Backlit Panel	1'x4'	20W/25W/30W/35W/40W	120-277V	Tunable Wattage	30K/35K/40K/50K/65K	XX: With Sensor Base MS: With motion Sensor EM: with Emergency Back-up Battery
		2'x2'					
		2'x4'	30W/40W/50W/60W/72W; 30W/35W/40W/45W/50W				

Product Dimensions


2x4 Front View

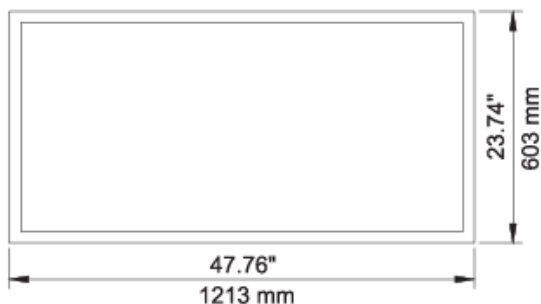

1x4 Front View

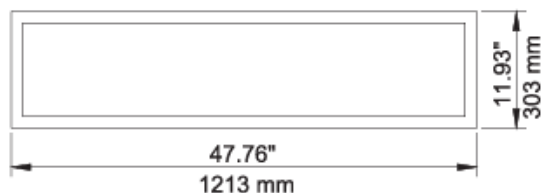


2x2 Front View



Side View



Side View



Package Information

Model NO	HYA-PB2-1X4-40W-H-TWCCT	HYA-PB2-2X2-40W-H-TWCCT	HYA-PB2-2X4-50W-H-TWCCT	HYA-PB2-2X4-72W-H-TWCCT	HYA-PB2-2X2-40W-H-TWCCT (XX)	HYA-PB2-2X4-50W-H-TWCCT (XX)	HYA-PB2-2X4-72W-H-TWCCT (XX)	HYA-PB2-2X2-40W-H-TWCCT (EM)	HYA-PB2-2X4-50W-H-TWCCT (EM)	HYA-PB2-2X4-72W-H-TWCCT (EM)
Package Size	1265X95X360mm 49.8"x3.74"x14.17"	655X95X660mm 25.79"x3.74"x25.98"	1265X95X660mm 49.8"x3.74"x25.98"	655X95X660mm 25.79"x3.74"x25.98"	1265X95X660mm 49.8"x3.74"x25.98"	655X95X660mm 25.79"x3.74"x25.98"	1265X95X660mm 49.8"x3.74"x25.98"	655X95X660mm 25.79"x3.74"x25.98"	1265X95X660mm 49.8"x3.74"x25.98"	1265X95X660mm 49.8"x3.74"x25.98"
Package Weight	4.45kg / 9.81LBS	4.71kg / 10.38LBS	9.22kg / 22.33LBS	4.71kg / 10.38LBS	9.22kg / 20.33LBS	5.5kg / 12.13LBS	10.4kg / 22.93LBS			
Package CBM	0.043263	0.041069	0.079316	0.041069	0.079316	0.041069	0.079316			
40GP Capacity (PCS)	~2680	~2820	~1460	~2820	~1460	~2820	~1460			
40HQ Capacity (PCS)	~3140	~3310	~1710	~3310	~1710	~3310	~1710			
40HQ Capacity (PCS)	~3600	~3790	~1960	~3790	~1960	~3790	~1960			




LED BACK-LIT PANEL LIGHT (PB2 SERIES)

Photometric Report

2X4 50W LED BACKLIT PANEL

VERTICAL EQUILUMINOUS CURVE


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

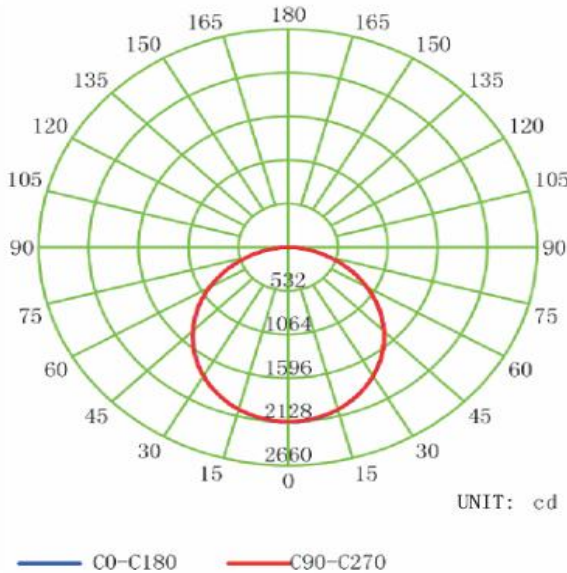




LED BACK-LIT PANEL LIGHT (PB2 SERIES)


Wiring Guide

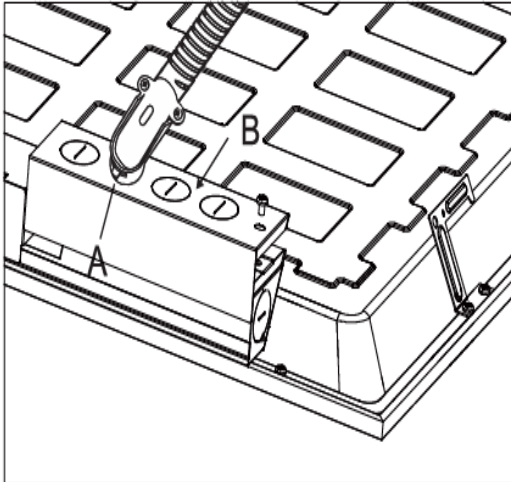

(1) Remove the knock-down hole on box by screwdriver (Part A), Remove screw and take out the driver cover (Part B)

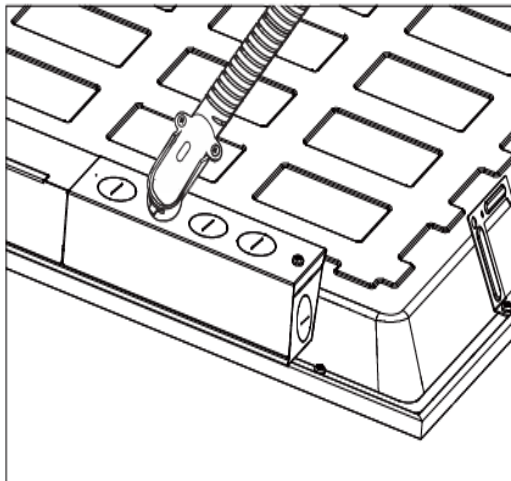




(3) Cover the driver box and tighten it with a screwdriver, finish connection.

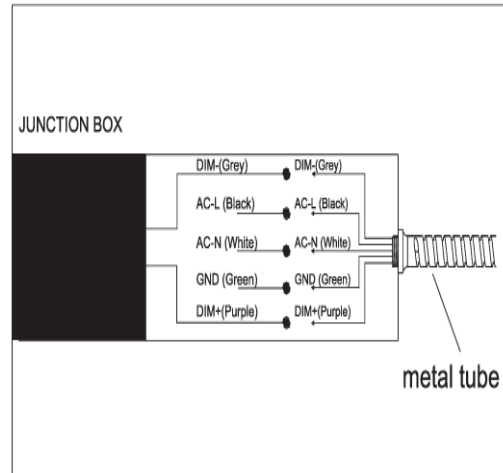

(2) Connect the wire as the picture showing.

※ This knock-out at side surface is not permitted for branch circuit entry into the luminaire.


For the product with Slide Switch of CCT or power selection, please select the CCT or power needed before installation. (Ignore these steps if without the function)

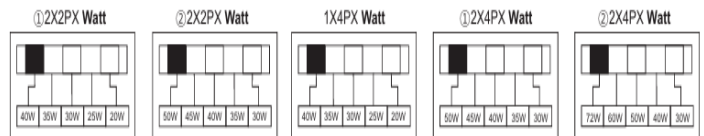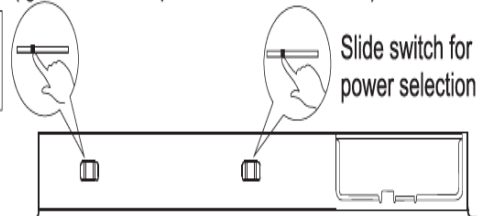

Lamp inspection before installation:
please adjust the lamp with below steps before installation:

1. Press the opposite angles at the same time;
2. Press another two opposite angles at the same time, make sure the four angles are flat, then start the installation.


Take out the lamp from the box and put it in a flat table, if the lamp upwarps,

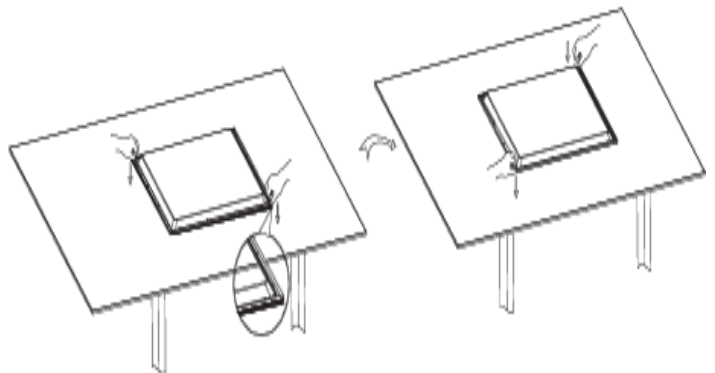



LED BACK-LIT PANEL LIGHT (PB2 SERIES)

Recessed Mounted


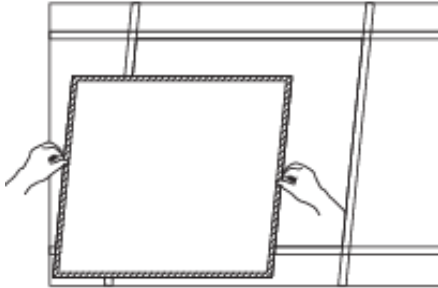


① Remove the ceiling plaster slab.


② Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.

③ Fix the panel light into plaster ceiling.

④ Make sure the led panel light is firmly fixed, turn on the power.

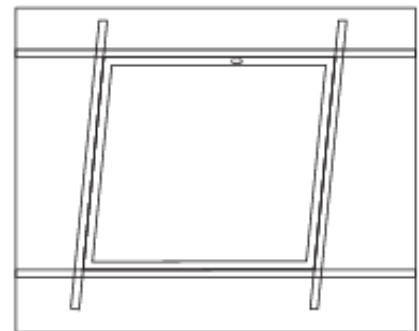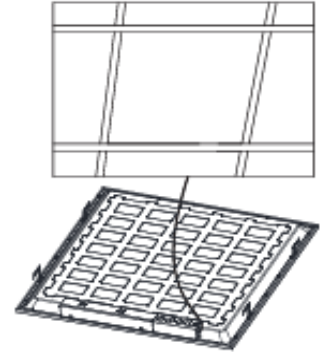

Suspended Mounted



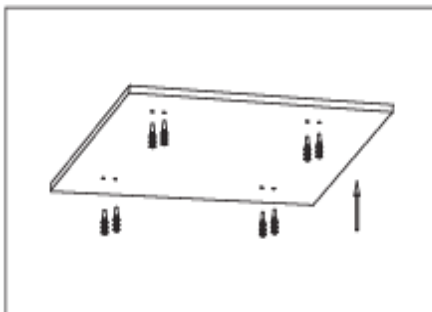


① Fix the anchor into target place on the ceiling.

② Fix the installation mount on the ceiling with plastic anchor.

③ Hang the panel to ceiling with suspended installation kits, adjust the length of steel wires.


④ Feed the main AC wire in driver terminal block respectively, turn on the power.

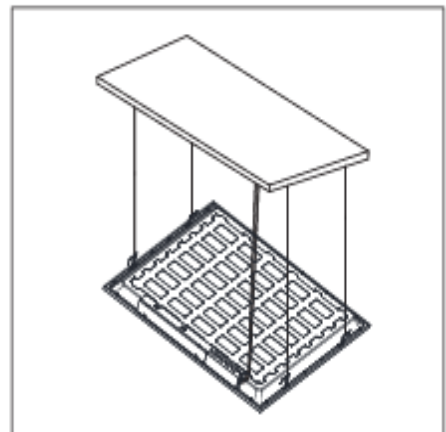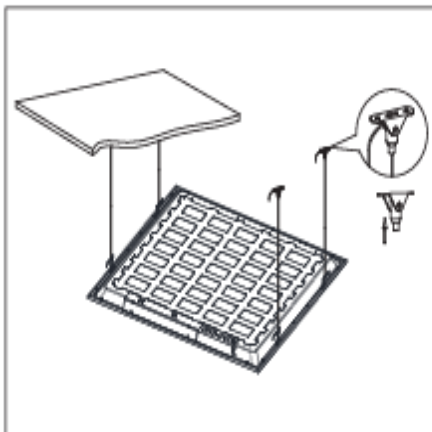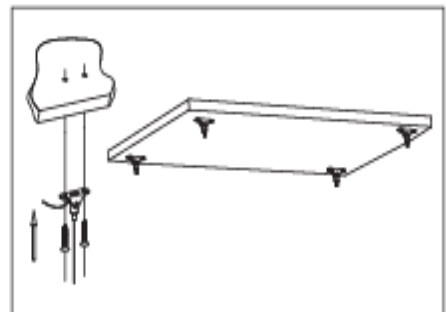




LED BACK-LIT PANEL LIGHT (PB2 SERIES)

Surface Mounted


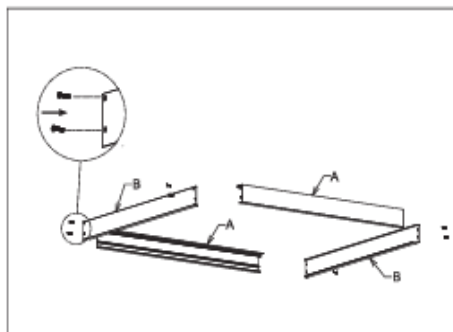


① Assemble the surface mounted frame and fix by screws.


② knock the plastic anchor into ceiling, fix the surface mounted frame on the ceiling by screws.

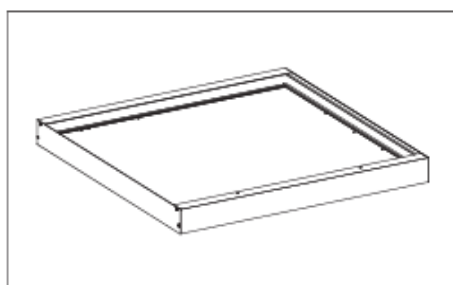

④ Fix the side frame back by screw.

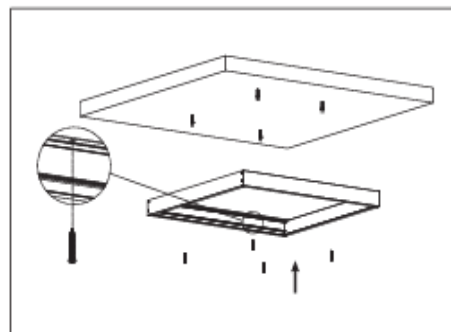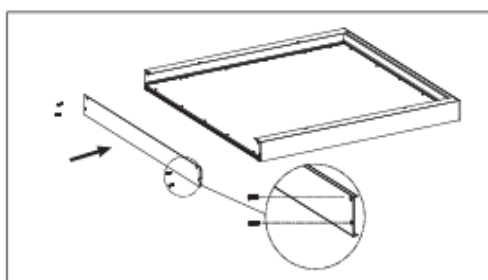


③ Unscrew the side frame then take out, connect the panel light to power supply, insert the panel light into the frame.

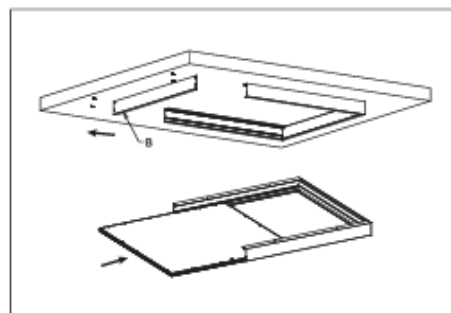

⑤ Make sure the frame and panel light are firmly fixed, turn on the power.

Recessed Mounting(Clips)

①

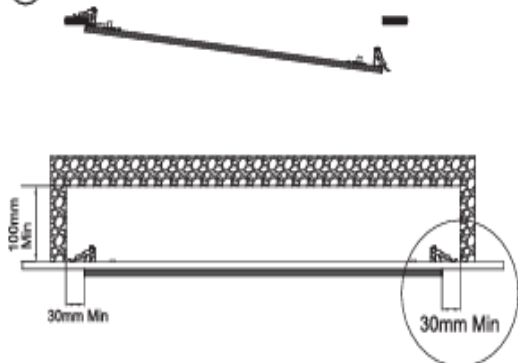

②



Cut Out Sizes		
Type	A(mm)	B(mm)
PL2X2	578	578
PL1X4	1188	278
PL2X4	1188	578

Clips should be purchased separately as an accessory

Warning:

Input wire diameter $\geq 0.75\text{mm}^2$;


Product modification and improper installation are not valid for warranty!



LED BACK-LIT PANEL LIGHT (PB2 SERIES)

Sensor Light Instruction

SENSOR BASE

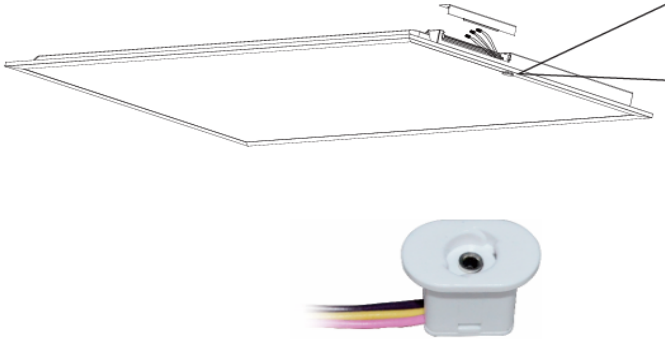

SENSOR

PIR Occupancy Bi-level
&
Daylight Harvesting Sensor



Bluetooth Fixture Sensor



⚠ WARNING

NOTE: Warm up time is 40seconds. After the sensor connects input power first time, the light will keep on 40seconds, then go to dimming to work normally.

NOTE: Factory Default Setting: Task light level: 100%, Occupied timeout: 5min, Timeout light level: 20%, Prolonged: 30minutues.


NOTE: Any setting changed by remote control, the led light that sensor connect will on/off as confirm.

Dimming Function


This function inside the motion sensor to achieve tri-level control, for some areas which require a light change notice before switch-off. The sensor offers 3 levels of light: 100%-->dimmed light (natural light is insufficient) -->off; and 2 periods of selectable waiting time: motion hold-time and stand-by period; Selectable daylight threshold and freedom of detection area.



With sufficient natural light, the light does not switch on when presence is detected.



With insufficient natural light, the sensor switches on the light automatically when presence is detected.



After hold-time, the light dims to stand-by level if the surrounding natural light is below the daylight threshold.



Light switches off automatically after the stand-by period elapses.



LED BACK-LIT PANEL LIGHT (PB2 SERIES)


Emergency LED Driver Installation

CAUTION:

- ① The Emergency LED driver must connect to 0-10V dimming wires(DIM+,DIM-) of the luminaire if the LED
- ② When dimming to minimum,the LED luminaire power must be less than emergency driver's power.
- ③ In emergency mode, double click test switch to turn off emergency state during storage and transportation .



17.7"X1.26"X0.83" (450X32X21mm)

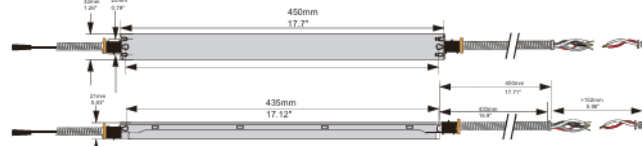

Input Voltage: 100-347Vac, 50/60Hz

Input Current: $\leq 100\text{mA}$

Input Power: 6W Max.

Output Voltage: 170Vdc

Output Power: 8W


Ambient Temperature: 5°C ~ 50°C (41°F ~ 122°F)

Application: (1) $\leq 60\text{W}$ (0-10V dimming luminaire)

(2) $\leq 8\text{W}$ (non-dimming luminaire)

Wiring Diagram:

1. For luminaire with 0-10V LED driver and using 0-10V dimmer (* LED DRIVER INPUT POWER NOT GREATER THAN 60W) Emergency Inverter Dim+ (Blue) , Driver Dim- (Yellow) has to connect with LED driver DIM+ and DIM

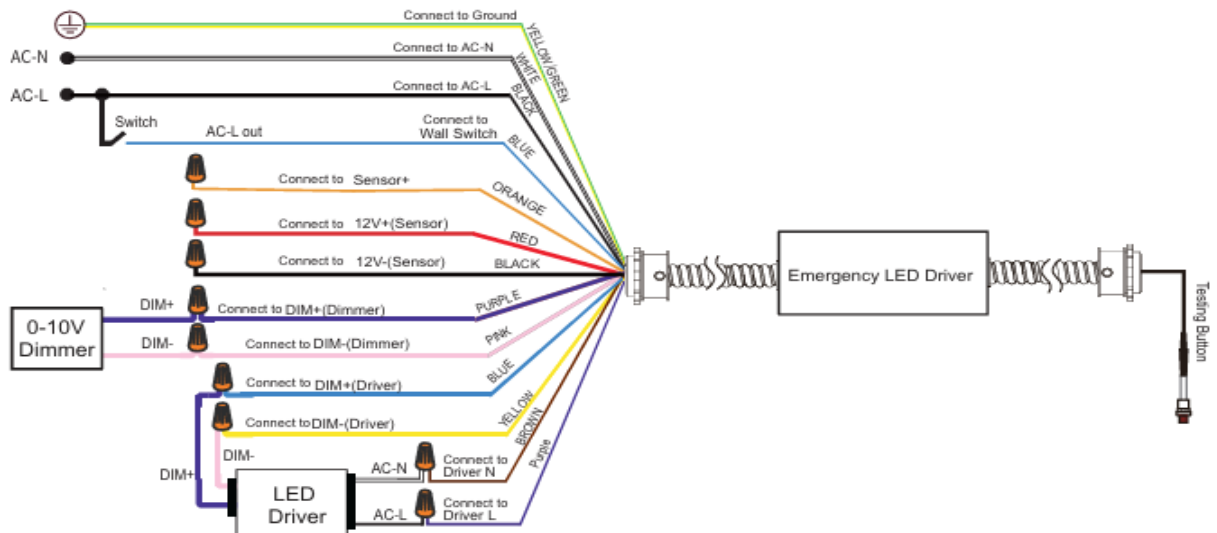




HONYA Lighting

Project Name: _____

Date: _____ Note: _____

LED Wraparound - LW102 Series

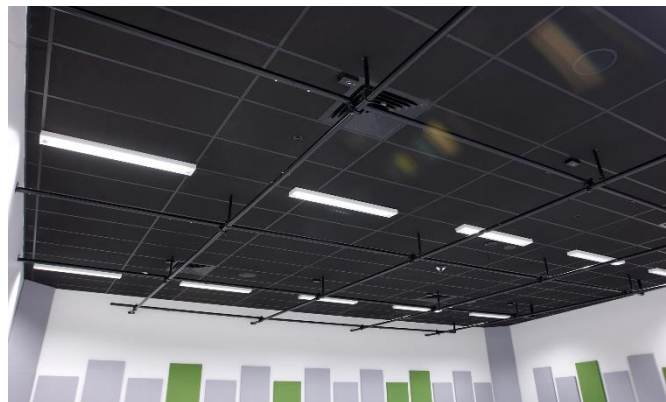

Application: Commercial; Industrial; Warehouse; Retails; Residential garage; school/institution; supermarket....



FEATURE

- Acrylic lens available in 4 FT and 8FT length
- High energy efficiency: 32W replace 2x32W T8
- Suitable for damp location
- Steel housing
- Equipped with heat resistant prismatic lens
- 0-10V Dimmable
- Chain or surface mount installation
- Option: available with emergency backup kit/ motion sensor

OPTION

- Emergency Driver
- Motion Sensor

Specifications

Model No.	HY-4FT-LW102-40W-3CCT	HY-8FT-LW102-80W-3CCT
Power:	40W	80W
Input Voltage:	AC110-277V	
Luminous Flux:	5,200	10,400
Efficacy:	130 lm/W	
Power Factor:	>0.9	
THD:	<10%	
CCT:	3000K-4000K-5000K Adjustable	
CRI:	>80	
Working Life:	>50,000 hours	
Working Temperature:	-10°F to 105°F	
DLC Listing	S-4FIDSR	S-YNM289
Product Size:	46.85"x6.89"x2.76"	93.70"x6.89"x2.76"
Qty/Master Pack	5	3
Master Pack Size:	48.7"x13.6"x25.5"	94.9"x11.0"x9.3"
Master Pack Weight	38.58 lbs	46.74 lbs

ORDERING CODE DEFINITION

EXAMPLE: HY-4FT-LW102-40W-3CCT

Company Code	Length	Product	Wattage	CCT
HYA	4FT	LW102: LED Wraparound	40W: 4FT 40W	CCT: 3000K-4000K-5000K
	8FT		80W: 8FT 80W	



HONYA Lighting


Project Name: _____

Date: _____ Note: _____


LED Wraparound - LW102 Series

DIMENSION


8ft Front View

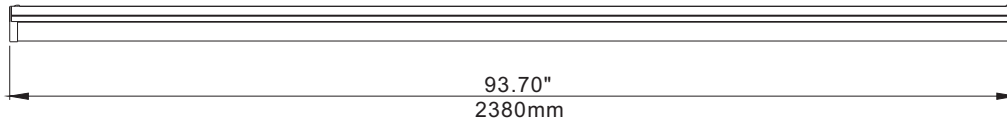


Side View



4ft Front View

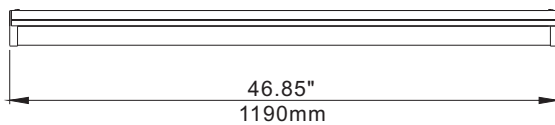


Side View




PHOTOMETRIC REPORT

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

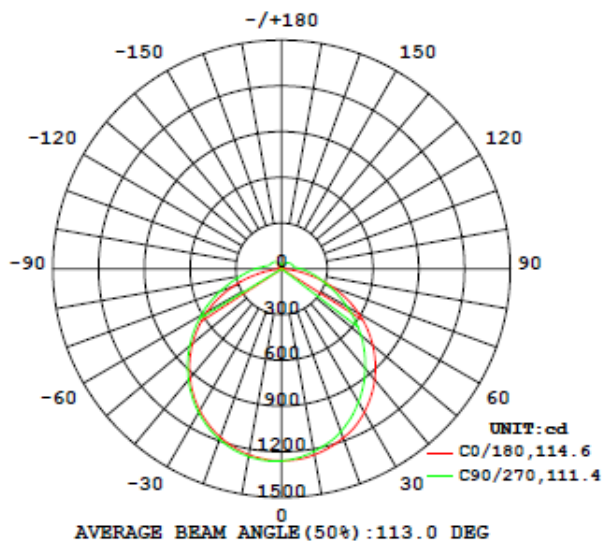

C0 PLANE ISOLUX DIAGRAM (UNIT: lx)

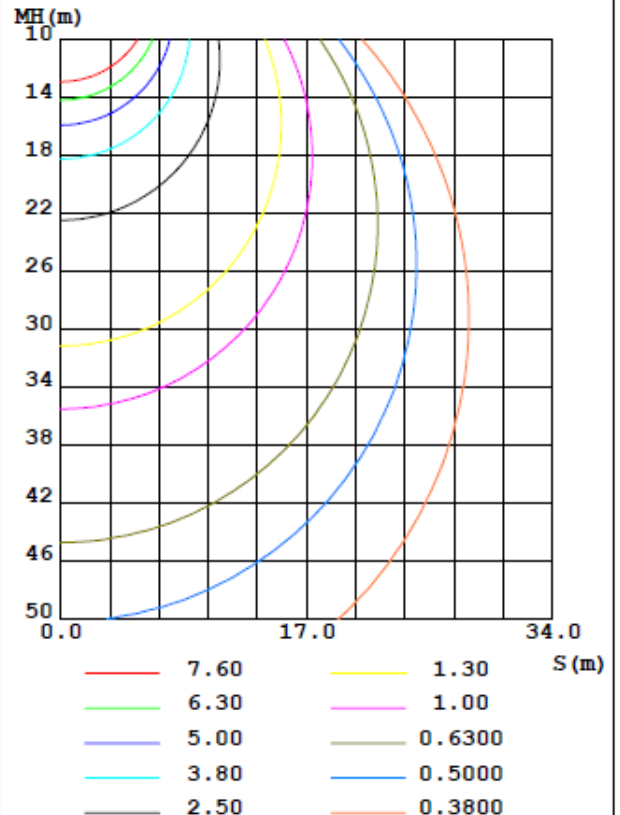



LED Wraparound - LW102 Series

INSTALLATION

