



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

Header 4

List View

General Information | [Contact](#) | [Default Values](#) | [Discount](#) | [Document Information](#) | [Clarification Request](#)

Procurement Folder: 1813976

Procurement Type: Central Purchase Order

Vendor ID:

Legal Name: FASTENAL COMPANY

Alias/DBA:

Total Bid: \$13,731.48

Response Date:

Response Time:

Responded By User ID:

First Name:

Last Name:

Email:

Phone:

SO Doc Code: CRFQ

SO Dept: 0403

SO Doc ID: DBS2600000003

Published Date: 10/31/25

Close Date: 11/13/25

Close Time: 13:30

Status: Closed

Solicitation Description:

Total of Header Attachments: 4

Total of All Attachments: 4



Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Solicitation Response

Proc Folder: 1813976
Solicitation Description: LIGHT FIXTURES
Proc Type: Central Purchase Order

Solicitation Closes	Solicitation Response	Version
2025-11-13 13:30	SR 0403 ESR11132500000003117	1

VENDOR
000000184243
FASTENAL COMPANY

Solicitation Number: CRFQ 0403 DBS2600000003
Total Bid: 13731.4799999999956344254314 **Response Date:** 2025-11-13 **Response Time:** 12:44:02
Comments: Bid is for equivalent or greater fixtures. 10-14 business day delivery from receipt of purchase order.

FOR INFORMATION CONTACT THE BUYER
James W Atkins
(304) 558-0094
james.w.atkins@wv.gov

Vendor		
Signature X	FEIN#	DATE

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	2X4 STANDARD PANEL	160.00000	EA	61.330000	9812.80

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: additional information/specs attached

Extended Description:

2X4 STANDARD PANEL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	2X4 PANEL WITH EMERGENCY	8.00000	EA	152.000000	1216.00

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: additional information/specs attached

Extended Description:

2X4 PANEL WITH EMERGENCY

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
3	2X2 STANDARD PANEL	8.00000	EA	45.000000	360.00

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: additional information/specs attached

Extended Description:

2X2 STANDARD PANEL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
4	2X2 PANEL WITH EMERGENCY	4.00000	EA	130.670000	522.68

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: additional information/specs attached

Extended Description:

2X2 PANEL WITH EMERGENCY

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
5	6X4 PANEL	35.00000	EA	52.000000	1820.00

Comm Code	Manufacturer	Specification	Model #
39111500			

Commodity Line Comments: additional information/specs attached

Extended Description:

6X4 PANEL

Date:	Project:	Type:	Notes:	Catalog #:
-------	----------	-------	--------	------------

FPB-AOK-H SERIES Adjustable Output LED Backlit Flat Panel

The FPB-AOK Series is a kit designed to distribute light spaciouly along both vertical and horizontal planes. Adjustability includes three lumen outputs, three color temperatures in each of the three fixtures offered.



Features & Specifications

Applications

Ideal for use in offices, retail, schools, hallways, multi-purpose rooms and hospitality.

Construction

Housing made from cold rolled steel and extruded aluminum and finished with a post- production baked white powder coat. Frosted polystyrene diffuser.

Mounting

Recessed mount. Surface & suspended mount option offered.

Electrical

Utilizes high-efficiency LED power supply and circuit boards. 120-277V & 0-10V dimming standard. 50/60HZ input frequency.

Operating Temperature

Suitable for -20°C – 50°C Ambient

CRI

80

Lumen Maintenance

L70 rating of 100,000 hours

Warranty

Five-year warranty. Terms and Conditions Apply. See warranty documentation for more information.

Certification

UL Damp Listed. Adheres to LM79, LM80 and TM21 industry standards. DesignLights Consortium® (DLC) 5.1 Premium. RoHS Compliant. IC Rated.



Performance Data

FSC Part # (DLC Part #)	Form Factor	Rated Wattage	Kelvin Temp	Delivered Lumens	Efficacy
FPB-24-9300L-AOK-H (BPL5-22-72W-L-H)	2x4	30	3000	3900	130
		30	3500	3900	130
		30	4000	3900	130
		30	5000	3900	130
		30	6500	3900	130
		40	3000	5200	130
		40	3500	5200	130
		40	4000	5200	130
		40	5000	5200	130
		40	6500	5200	130
		50	3000	6500	130
		50	3500	6500	130
		50	4000	6500	130
		50	5000	6500	130
		50	6500	6500	130
		60	3000	7800	130
		60	3500	7800	130
		60	4000	7800	130
		60	5000	7800	130
		60	6500	7800	130
		72	3000	9360	130
		72	3500	9360	130
		72	4000	9360	130
		72	5000	9360	130
		72	6500	9360	130
FPB-22-5200L-AOK-H (BPL5-22-40W-L-H)	2x2	20	3000	2600	130
		20	3500	2600	130
		20	4000	2600	130
		20	5000	2600	130
		20	6500	2600	130
		25	3000	3250	130
		25	3500	3250	130
		25	4000	3250	130
		25	5000	3250	130
		25	6500	3250	130
		30	3000	3900	130
		30	3500	3900	130
		30	4000	3900	130
		30	5000	3900	130
		30	6500	3900	130
		35	3000	4550	130
		35	3500	4550	130
		35	4000	4550	130
		35	5000	4550	130
		35	6500	4550	130
		40	3000	5200	130
		40	3500	5200	130
		40	4000	5200	130
		40	5000	5200	130
		40	6500	5200	130
FPB-14-5200L-AOK-H (BPL5-14-40W-L-H)	1x4	20	3000	2600	130
		20	3500	2600	130
		20	4000	2600	130
		20	5000	2600	130
		20	6500	2600	130
		25	3000	3250	130
		25	3500	3250	130
		25	4000	3250	130
		25	5000	3250	130
		25	6500	3250	130
		30	3000	3900	130
		30	3500	3900	130
		30	4000	3900	130
		30	5000	3900	130
		30	6500	3900	130
		35	3000	4550	130
		35	3500	4550	130
		35	4000	4550	130
		35	5000	4550	130
		35	6500	4550	130
		40	3000	5200	130
		40	3500	5200	130
		40	4000	5200	130
		40	5000	5200	130
		40	6500	5200	130

Catalog Ordering

Sample Part # FPB-22-5200L-AOK-H

FPB								
1	2	3	4	5	5	5		

1 - Series

FPB

2 - Dimensions

24-9300L (2x4 / 30 Watt)
(2x4 / 40 Watt)
(2x4 / 50 Watt)
(2x4 / 60 Watt)
(2x4 / 72 Watt)

22-5200L (2x2 / 20 Watt)
(2x2 / 25 Watt)
(2x2 / 30 Watt)
(2x2 / 35 Watt)
(2x2 / 40 Watt)

14- 5200L (1x4 / 20 Watt)
(1x4 / 25 Watt)
(1x4 / 30 Watt)
(1x4 / 35 Watt)
(1x4 / 40 Watt)

3 - Type

AOK-H (Adjustable Output and Kelvin Temp 30K, 35K, 40K, 50K 65K)

4- Accessories

EM8W 8W EMBB

EM10WT20-BW EMBB with Installation Bracket and Whip

FPB-14 Surface Mount Kit 1 x 4

FPB-22 Surface Mount Kit 2 x 2

FPB-24 Surface Mount Kit 2 x 4

L7414-FLG Flange Kit 1 x 4


L7422-FLG Flange Kit 2 x 2

L7424-FLG Flange Kit 2 x 4

Physical Characteristics

Dimensions

Version	(A) Length	(B) Width	(C) Depth	Weight
2x4	47.75"	23.74"	1.5"	9.6lbs
2x2	23.74"	23.74"	1.5"	4.9lbs
1x4	47.75"	11.93"	1.5"	5.2lbs

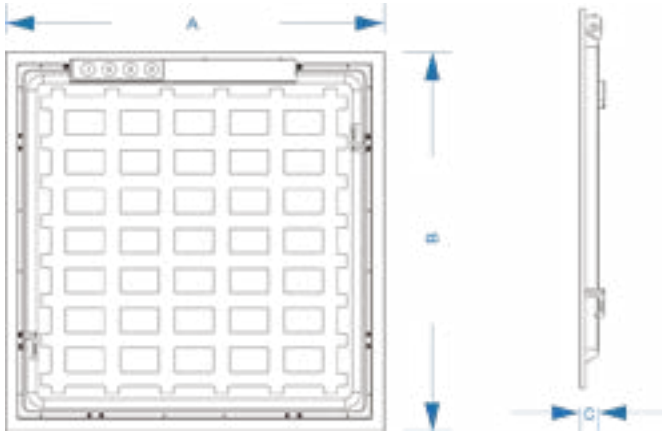

EWRE-6L-LKFS

Lumen and Kelvin Field Selectable Wrap Light Economy



FEATURES

- Field selectable 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.*
- Long-life LEDs provide 196,000 hours of operation with at least 70% of initial lumen output (L₇₀), and 60,000 hours with at least 90% of initial lumen output (L₉₀).**
- LED chromaticity based on ≤ 7-step ANSI quadrangles.
- Selectable lumen outputs range from 4,000, 5,000 to 6,000 nominal lumens.*
- Universal 120-277 AC voltage (50-60Hz) is standard.
- 0-10vdc dimming is standard.
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Color rendering index > 80.
- Steel housing.
- Polycarbonate lens.
- Easy installation in new construction or retrofit applications.


* Contact factory for other color temperatures and lumen packages.

** L70 hours are IES TM-21-11 calculated hours.

WARRANTY & LISTINGS

- cULus listed for damp locations in ambient temperatures from -25°C to 50°C (-13°F to 122°F)
- DLC approved
- Complies with FCC Part 15, class A.
- Complies with IEEE C.62.41-2002, input transient protection (1.0kV).
- Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level).
- 5-year warranty of all electronics and housing.

DIMENSIONS

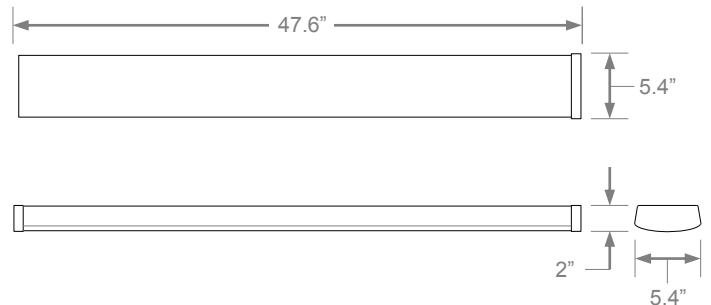

Weight: 3.7 lbs.

ORDERING INFORMATION

Example: EWRE-6L-LKFS

Model#	Nominal Lumen Output		Select
	6L	6,000 nominal lumens	
EWRE	6L	6,000 nominal lumens	LKFS

ELECTRICAL DATA

Model#	Measurements	Low Lumens			Mid Lumens			High Lumens		
		3500K	4000K	5000K	3500K	4000K	5000K	3500K	4000K	5000K
EWRE-6L-LKFS	Lumens	3827	3925	3966	4756	5017	4936	5531	5880	5732
	Watts	30	30	30	39	39	39	47	45	47
	Efficacy	126	131	131	122	128	127	118	131	122
	Input Current (A)	120V = 0.25A	120V = 0.25A	120V = 0.25A	120V = 0.33A	120V = 0.33A	120V = 0.33A	120V = 0.39A	120V = 0.38A	120V = 0.39A
		240V = 0.13A	240V = 0.13A	240V = 0.13A	240V = 0.16A	240V = 0.16A	240V = 0.16A	240V = 0.20A	240V = 0.19A	240V = 0.20A
		277V = 0.11A	277V = 0.11A	277V = 0.11A	277V = 0.14A	277V = 0.14A	277V = 0.14A	277V = 0.17A	277V = 0.16A	277V = 0.17A


PHOTOMETRIC DATA

EWRE-6L-LKFS
Luminaire Data

Description	4" WRAP LIGHT ECONOMY 6L 5K - LKFS
Total Lumens	5,734
Input Wattage	47
Efficacy (lm/W)	123
Spacing Criterion (0-180°)	1.22
Spacing Criterion (90-270°)	1.14

Zonal Lumen Summary

Zone	Lumens	%Fixt
0-20°	795	13.9%
0-30°	1,667	29.1%
0-40°	2,683	46.8%
20-50°	2,897	50.5%
40-70°	2,517	43.9%
0-60°	4,560	79.5%
0-80°	5,568	97.1%
0-90°	5,694	99.3%
90-180°	40	0.7%
0-180°	5,734	100.0%

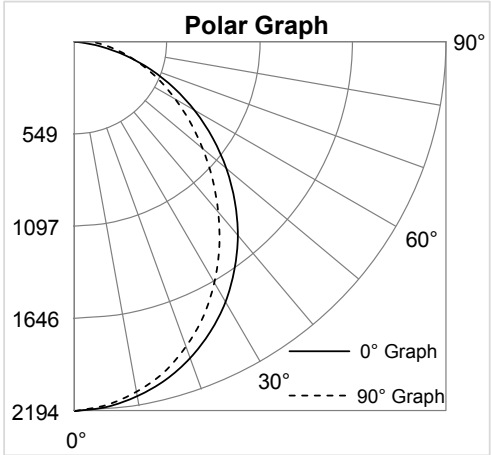

COMPATIBLE DIMMERS & CONTROLS

Manufacturer	Model Number	Dimming Range	Load Switching Capacity
Best Lighting	DWS-010V-T	10%-100%	600W
Best Lighting	DWS-010V-D	10%-100%	600W
Leviton	IP710-LFZ	10%-100%	1200W
Lutron	DVSTV	10%-100%	450W



Price Quotation

CONFIDENTIAL

11/13/2025

WV DIVISION OF ADMIN SERVICES - DCR

301 E Main St

ROMNEY, WV 26757 USA

Phone: 304-558-0094

Email: james.w.atkins@wv.gov

Contract #: 758-2500000414

ATTN: James Atkins

The store serving you is:

Fastenal Company

2851 Benedum Dr

BRIDGEPORT, WV 26330 USA

Email: WVG1@stores.fastenal.com

This Quote and Document are subject to the "Terms of Purchase" posted on www.fastenal.com

Account #: BHWV0152

PO #: CRFQ-0403-DBS2600000003-2

Due Date:

Quote #: 33013

Job #: WVSD&B lighting

Expiration Date:

12/13/2025

<u>Part #</u>	<u>Customer Part #</u>	<u>Description</u>	<u>Quantity</u>	<u>Price/EA</u>	<u>Extended Price</u>
14871-04276		2x4 LED D/CS fixture	160	\$61.3300	\$9,812.80
FPB-24-9300L-AOK-H 2x4 3000-4000K dimmable LED fixture					
14871-04277		LED, D/CS w/ E batt	8	\$152.0000	\$1,216.00
FPB-24-9300L-AOK-H-EM8W recessed fixture, dimmable, 3000-4000K, emergency battery					
14871-04278		2x2 LED rec, D/CS WH	8	\$45.0000	\$360.00
FPB-22-5200L-AOK-HFP 2x2 3000-4000K dimmable LED fixture					
14871-04279		2x2 LED D/CS E batt	4	\$130.6700	\$522.68
FPB-22-5200L-AOK-HFP 2x2 3000-4000K dimmable LED fixture w/ emergency battery					
14871-04280		4' 4000K linear fixt	35	\$52.0000	\$1,820.00
EWRE-6L-LKFS Surface Mount 48" wrap light 4000K					
TOTAL (USD):					\$13,731.48

Comments:

Pricing may be subject to change with tariffs.

Thank you!



*Shipping & Handling charges are subject to change.

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: CRFQ DBS26*03

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

- | | |
|--|--|
| ☒ Addendum No. 1 | ☐ Addendum No. 6 |
| ☐ Addendum No. 2 | ☐ Addendum No. 7 |
| ☐ Addendum No. 3 | ☐ Addendum No. 8 |
| ☐ Addendum No. 4 | ☐ Addendum No. 9 |
| ☐ Addendum No. 5 | ☐ Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Fastenal Company
Company

[Signature]
Authorized Signature

13 NOV 2025
Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.