



Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

State of West Virginia
Master Agreement

Order Date: 2018-04-26

CORRECT ORDER NUMBER
 MUST APPEAR ON ALL PACKAGES,
 INVOICES, AND SHIPPING PAPERS.
 QUESTIONS CONCERNING THIS
 ORDER SHOULD BE DIRECTED TO
 THE DEPARTMENT CONTACT.

Order Number: CMA 0212 0212 LIGHT18		Procurement Folder: 444708
Document Name: Statewide contract for Light bulbs and Ballasts		Reason for Modification:
Document Description: Light bulbs and Ballasts		Award of CRFQ SWC1800000012
Procurement Type: Central Master Agreement		
Buyer Name: Melissa Pettrey		
Telephone: (304) 558-0094		
Email: melissa.k.pettrey@wv.gov		
Shipping Method: Best Way		Effective Start Date: 2018-05-01
Free on Board: FOB Dest, Freight Prepaid		Effective End Date: 2019-04-30

VENDOR	DEPARTMENT CONTACT
Vendor Customer Code: 000000200158 WV ELECTRIC SUPPLY CO 250 12th Street West Huntington WV 25704 US Vendor Contact Phone: (304) 255-5067 Extension: Discount Percentage: 0.0000 Discount Days: 0	Requestor Name: Guy Nisbet Requestor Phone: (304) 558-2596 Requestor Email: guy.i.nisbet@wv.gov

INVOICE TO	SHIP TO
ALL STATE AGENCIES VARIOUS LOCATIONS AS INDICATED BY ORDER No City WV 99999 US	STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER No City WV 99999 US

Total Order Amount	Open End
--------------------	----------

AGENCY COPY

MKD
4/27/18

PURCHASING DIVISION AUTHORIZATION SIGNED BY: Guy Nisbet DATE: 2018-04-19 ELECTRONIC SIGNATURE ON FILE	ATTORNEY GENERAL APPROVAL AS TO FORM SIGNED BY: [Signature] DATE: 5/2/18 ELECTRONIC SIGNATURE ON FILE	ENCUMBRANCE CERTIFICATION SIGNED BY: Beverly Tolson DATE: MAY 9 2018 ELECTRONIC SIGNATURE ON FILE
--	--	--

5/2/18

Extended Description:

Statewide Contract for Light bulbs and Ballasts

Open-End

The Vendor: West Virginia Electric Supply of Huntington, WV, agrees to enter into this open-end contract with the State of West Virginia and Political Subdivisions to provide light bulbs and ballasts per the bid requirements, specifications, terms and conditions, Addendum No.1 dated 02/16/2018, Addendum No. 2 dated 02/23/2018 and the Vendor's submitted and accepted bid dated 02/28/2018, and per the attached Pricing Page and Catalog Price Book, all incorporated herein and made a part of hereof.

Line	Commodity Code	Manufacturer	Model No	Unit	Unit Price
1	39100000			EA	\$0.000000
	Service From	Service To			

Commodity Line Description: LIGHT BULBS & BALLAST

Extended Description:

See Vendors submitted Catalog Price Book as attached.

LIGHT18	Document Phase Draft	Document Description Light bulbs and Ballasts	Page 3
----------------	--------------------------------	---	---------------

ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions

GENERAL TERMS AND CONDITIONS:

- 1. CONTRACTUAL AGREEMENT:** Issuance of a Award Document signed by the Purchasing Division Director, or his designee, and approved as to form by the Attorney General's office constitutes acceptance of this Contract made by and between the State of West Virginia and the Vendor. Vendor's signature on its bid signifies Vendor's agreement to be bound by and accept the terms and conditions contained in this Contract.
- 2. DEFINITIONS:** As used in this Solicitation/Contract, the following terms shall have the meanings attributed to them below. Additional definitions may be found in the specifications included with this Solicitation/Contract.
 - 2.1. "Agency" or "Agencies"** means the agency, board, commission, or other entity of the State of West Virginia that is identified on the first page of the Solicitation or any other public entity seeking to procure goods or services under this Contract.
 - 2.2. "Bid" or "Proposal"** means the vendors submitted response to this solicitation.
 - 2.3. "Contract"** means the binding agreement that is entered into between the State and the Vendor to provide the goods or services requested in the Solicitation.
 - 2.4. "Director"** means the Director of the West Virginia Department of Administration, Purchasing Division.
 - 2.5. "Purchasing Division"** means the West Virginia Department of Administration, Purchasing Division.
 - 2.6. "Award Document"** means the document signed by the Agency and the Purchasing Division, and approved as to form by the Attorney General, that identifies the Vendor as the contract holder.
 - 2.7. "Solicitation"** means the official notice of an opportunity to supply the State with goods or services that is published by the Purchasing Division.
 - 2.8. "State"** means the State of West Virginia and/or any of its agencies, commissions, boards, etc. as context requires.
 - 2.9. "Vendor" or "Vendors"** means any entity submitting a bid in response to the Solicitation, the entity that has been selected as the lowest responsible bidder, or the entity that has been awarded the Contract as context requires.

3. CONTRACT TERM; RENEWAL; EXTENSION: The term of this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below:

Term Contract

Initial Contract Term: **Initial Contract Term:** This Contract becomes effective on 05/01/2018 and extends for a period of ONE (1) year(s).

Renewal Term: This Contract may be renewed upon the mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). Any request for renewal should be delivered to the Agency and then submitted to the Purchasing Division thirty (30) days prior to the expiration date of the initial contract term or appropriate renewal term. A Contract renewal shall be in accordance with the terms and conditions of the original contract. Unless otherwise specified below, renewal of this Contract is limited to THREE (3) successive one (1) year periods or multiple renewal periods of less than one year, provided that the multiple renewal periods do not exceed the total number of months available in all renewal years combined. Automatic renewal of this Contract is prohibited. Renewals must be approved by the Vendor, Agency, Purchasing Division and Attorney General's office (Attorney General approval is as to form only)

Alternate Renewal Term – This contract may be renewed for _____ successive _____ year periods or shorter periods provided that they do not exceed the total number of months contained in all available renewals. Automatic renewal of this Contract is prohibited. Renewals must be approved by the Vendor, Agency, Purchasing Division and Attorney General's office (Attorney General approval is as to form only)

Delivery Order Limitations: In the event that this contract permits delivery orders, a delivery order may only be issued during the time this Contract is in effect. Any delivery order issued within one year of the expiration of this Contract shall be effective for one year from the date the delivery order is issued. No delivery order may be extended beyond one year after this Contract has expired.

Fixed Period Contract: This Contract becomes effective upon Vendor's receipt of the notice to proceed and must be completed within _____ days.

Fixed Period Contract with Renewals: This Contract becomes effective upon Vendor's receipt of the notice to proceed and part of the Contract more fully described in the attached specifications must be completed within _____ days. Upon completion of the work covered by the preceding sentence, the vendor agrees that maintenance, monitoring, or warranty services will be provided for _____ year(s) thereafter.

One Time Purchase: The term of this Contract shall run from the issuance of the Award Document until all of the goods contracted for have been delivered, but in no event will this Contract extend for more than one fiscal year.

Other: See attached.

4. NOTICE TO PROCEED: Vendor shall begin performance of this Contract immediately upon receiving notice to proceed unless otherwise instructed by the Agency. Unless otherwise specified, the fully executed Award Document will be considered notice to proceed.

5. QUANTITIES: The quantities required under this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below.

Open End Contract: Quantities listed in this Solicitation are approximations only, based on estimates supplied by the Agency. It is understood and agreed that the Contract shall cover the quantities actually ordered for delivery during the term of the Contract, whether more or less than the quantities shown.

Service: The scope of the service to be provided will be more clearly defined in the specifications included herewith.

Combined Service and Goods: The scope of the service and deliverable goods to be provided will be more clearly defined in the specifications included herewith.

One Time Purchase: This Contract is for the purchase of a set quantity of goods that are identified in the specifications included herewith. Once those items have been delivered, no additional goods may be procured under this Contract without an appropriate change order approved by the Vendor, Agency, Purchasing Division, and Attorney General's office.

6. EMERGENCY PURCHASES: The Purchasing Division Director may authorize the Agency to purchase goods or services in the open market that Vendor would otherwise provide under this Contract if those goods or services are for immediate or expedited delivery in an emergency. Emergencies shall include, but are not limited to, delays in transportation or an unanticipated increase in the volume of work. An emergency purchase in the open market, approved by the Purchasing Division Director, shall not constitute a breach of this Contract and shall not entitle the Vendor to any form of compensation or damages. This provision does not excuse the State from fulfilling its obligations under a One Time Purchase contract.

7. REQUIRED DOCUMENTS: All of the items checked below must be provided to the Purchasing Division by the Vendor as specified below.

BID BOND (Construction Only): Pursuant to the requirements contained in W. Va. Code § 5-22-1(c), All Vendors submitting a bid on a construction project shall furnish a valid bid bond in the amount of five percent (5%) of the total amount of the bid protecting the State of West Virginia. The bid bond must be submitted with the bid.

PERFORMANCE BOND: The apparent successful Vendor shall provide a performance bond in the amount of _____. The performance bond must be received by the Purchasing Division prior to Contract award. On construction contracts, the performance bond must be 100% of the Contract value.

LABOR/MATERIAL PAYMENT BOND: The apparent successful Vendor shall provide a labor/material payment bond in the amount of 100% of the Contract value. The labor/material payment bond must be delivered to the Purchasing Division prior to Contract award.

In lieu of the Bid Bond, Performance Bond, and Labor/Material Payment Bond, the Vendor may provide certified checks, cashier's checks, or irrevocable letters of credit. Any certified check, cashier's check, or irrevocable letter of credit provided in lieu of a bond must be of the same amount and delivered on the same schedule as the bond it replaces. A letter of credit submitted in lieu of a performance and labor/material payment bond will only be allowed for projects under \$100,000. Personal or business checks are not acceptable. Notwithstanding the foregoing, West Virginia Code § 5-22-1 (d) mandates that a vendor provide a performance and labor/material payment bond for construction projects. Accordingly, substitutions for the performance and labor/material payment bonds for construction projects is not permitted.

MAINTENANCE BOND: The apparent successful Vendor shall provide a two (2) year maintenance bond covering the roofing system. The maintenance bond must be issued and delivered to the Purchasing Division prior to Contract award.

LICENSE(S) / CERTIFICATIONS / PERMITS: In addition to anything required under the Section entitled Licensing, of the General Terms and Conditions, the apparent successful Vendor shall furnish proof of the following licenses, certifications, and/or permits prior to Contract award, in a form acceptable to the Purchasing Division.

The apparent successful Vendor shall also furnish proof of any additional licenses or certifications contained in the specifications prior to Contract award regardless of whether or not that requirement is listed above.

8. INSURANCE: The apparent successful Vendor shall furnish proof of the insurance identified by a checkmark below prior to Contract award. Subsequent to contract award, and prior to the insurance expiration date, Vendor shall provide the Agency with proof that the insurance mandated herein has been continued. Vendor must also provide Agency with immediate notice of any changes in its insurance policies mandated herein, including but not limited to, policy cancelation, policy reduction, or change in insurers. The insurance coverages identified below must be maintained throughout the life of this contract. The apparent successful Vendor shall also furnish proof of any additional insurance requirements contained in the specifications prior to Contract award regardless of whether or not that insurance requirement is listed in this section.

Vendor must maintain:

Commercial General Liability Insurance in at least an amount of:

\$500,000.00

Automobile Liability Insurance in at least an amount of: \$500,000.00

Professional/Malpractice/Errors and Omission Insurance in at least an amount of:

Commercial Crime and Third Party Fidelity Insurance in an amount of:

Cyber Liability Insurance in an amount of: _____

Builders Risk Insurance in an amount equal to 100% of the amount of the Contract.

9. WORKERS' COMPENSATION INSURANCE: The apparent successful Vendor shall comply with laws relating to workers compensation, shall maintain workers' compensation insurance when required, and shall furnish proof of workers' compensation insurance upon request.

10. [Reserved]

11. LIQUIDATED DAMAGES: This clause shall in no way be considered exclusive and shall not limit the State or Agency's right to pursue any other available remedy. Vendor shall pay liquidated damages in the amount specified below or as described in the specifications:

_____ for _____

Liquidated Damages Contained in the Specifications

12. ACCEPTANCE: Vendor's signature on its bid, or on the certification and signature page, constitutes an offer to the State that cannot be unilaterally withdrawn, signifies that the product or service proposed by vendor meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise indicated, and signifies acceptance of the terms and conditions contained in the Solicitation unless otherwise indicated.

13. PRICING: The pricing set forth herein is firm for the life of the Contract, unless specified elsewhere within this Solicitation/Contract by the State. A Vendor's inclusion of price adjustment provisions in its bid, without an express authorization from the State in the Solicitation to do so, may result in bid disqualification.

14. PAYMENT: Payment in advance is prohibited under this Contract. Payment may only be made after the delivery and acceptance of goods or services. The Vendor shall submit invoices, in arrears.

15. PURCHASING CARD ACCEPTANCE: The State of West Virginia currently utilizes a Purchasing Card program, administered under contract by a banking institution, to process payment for goods and services. The Vendor must accept the State of West Virginia's Purchasing Card for payment of all orders under this Contract unless the box below is checked.

Vendor is not required to accept the State of West Virginia's Purchasing Card as payment for all goods and services.

16. TAXES: The Vendor shall pay any applicable sales, use, personal property or any other taxes arising out of this Contract and the transactions contemplated thereby. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.

17. ADDITIONAL FEES: Vendor is not permitted to charge additional fees or assess additional charges that were not either expressly provided for in the solicitation published by the State of West Virginia or included in the unit price or lump sum bid amount that Vendor is required by the solicitation to provide. Including such fees or charges as notes to the solicitation may result in rejection of vendor's bid. Requesting such fees or charges be paid after the contract has been awarded may result in cancellation of the contract.

18. FUNDING: This Contract shall continue for the term stated herein, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise made available, this Contract becomes void and of no effect beginning on July 1 of the fiscal year for which funding has not been appropriated or otherwise made available.

19. CANCELLATION: The Purchasing Division Director reserves the right to cancel this Contract immediately upon written notice to the vendor if the materials or workmanship supplied do not conform to the specifications contained in the Contract. The Purchasing Division Director may also cancel any purchase or Contract upon 30 days written notice to the Vendor in accordance with West Virginia Code of State Rules § 148-1-5.2.b.

20. TIME: Time is of the essence with regard to all matters of time and performance in this Contract.

21. APPLICABLE LAW: This Contract is governed by and interpreted under West Virginia law without giving effect to its choice of law principles. Any information provided in specification manuals, or any other source, verbal or written, which contradicts or violates the West Virginia Constitution, West Virginia Code or West Virginia Code of State Rules is void and of no effect.

22. COMPLIANCE WITH LAWS: Vendor shall comply with all applicable federal, state, and local laws, regulations and ordinances. By submitting a bid, Vendor acknowledges that it has reviewed, understands, and will comply with all applicable laws, regulations, and ordinances.

SUBCONTRACTOR COMPLIANCE: Vendor shall notify all subcontractors providing commodities or services related to this Contract that as subcontractors, they too are required to comply with all applicable laws, regulations, and ordinances. Notification under this provision must occur prior to the performance of any work under the contract by the subcontractor.

23. ARBITRATION: Any references made to arbitration contained in this Contract, Vendor's bid, or in any American Institute of Architects documents pertaining to this Contract are hereby deleted, void, and of no effect.

- 24. MODIFICATIONS:** This writing is the parties' final expression of intent. Notwithstanding anything contained in this Contract to the contrary no modification of this Contract shall be binding without mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). Any change to existing contracts that adds work or changes contract cost, and were not included in the original contract, must be approved by the Purchasing Division and the Attorney General's Office (as to form) prior to the implementation of the change or commencement of work affected by the change.
- 25. WAIVER:** The failure of either party to insist upon a strict performance of any of the terms or provision of this Contract, or to exercise any option, right, or remedy herein contained, shall not be construed as a waiver or a relinquishment for the future of such term, provision, option, right, or remedy, but the same shall continue in full force and effect. Any waiver must be expressly stated in writing and signed by the waiving party.
- 26. SUBSEQUENT FORMS:** The terms and conditions contained in this Contract shall supersede any and all subsequent terms and conditions which may appear on any form documents submitted by Vendor to the Agency or Purchasing Division such as price lists, order forms, invoices, sales agreements, or maintenance agreements, and includes internet websites or other electronic documents. Acceptance or use of Vendor's forms does not constitute acceptance of the terms and conditions contained thereon.
- 27. ASSIGNMENT:** Neither this Contract nor any monies due, or to become due hereunder, may be assigned by the Vendor without the express written consent of the Agency, the Purchasing Division, the Attorney General's office (as to form only), and any other government agency or office that may be required to approve such assignments. Notwithstanding the foregoing, Purchasing Division approval may or may not be required on certain agency delegated or exempt purchases.
- 28. WARRANTY:** The Vendor expressly warrants that the goods and/or services covered by this Contract will: (a) conform to the specifications, drawings, samples, or other description furnished or specified by the Agency; (b) be merchantable and fit for the purpose intended; and (c) be free from defect in material and workmanship.
- 29. STATE EMPLOYEES:** State employees are not permitted to utilize this Contract for personal use and the Vendor is prohibited from permitting or facilitating the same.
- 30. BANKRUPTCY:** In the event the Vendor files for bankruptcy protection, the State of West Virginia may deem this Contract null and void, and terminate this Contract without notice.
- 31. PRIVACY, SECURITY, AND CONFIDENTIALITY:** The Vendor agrees that it will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the Agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the Agency's policies, procedures, and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchasc/privacy/default.html>.

32. YOUR SUBMISSION IS A PUBLIC DOCUMENT: Vendor's entire response to the Solicitation and the resulting Contract are public documents. As public documents, they will be disclosed to the public following the bid/proposal opening or award of the contract, as required by the competitive bidding laws of West Virginia Code §§ 5A-3-1 et seq., 5-22-1 et seq., and 5G-1-1 et seq. and the Freedom of Information Act West Virginia Code §§ 29B-1-1 et seq.

DO NOT SUBMIT MATERIAL YOU CONSIDER TO BE CONFIDENTIAL, A TRADE SECRET, OR OTHERWISE NOT SUBJECT TO PUBLIC DISCLOSURE.

Submission of any bid, proposal, or other document to the Purchasing Division constitutes your explicit consent to the subsequent public disclosure of the bid, proposal, or document. The Purchasing Division will disclose any document labeled "confidential," "proprietary," "trade secret," "private," or labeled with any other claim against public disclosure of the documents, to include any "trade secrets" as defined by West Virginia Code § 47-22-1 et seq. All submissions are subject to public disclosure without notice.

33. LICENSING: In accordance with West Virginia Code of State Rules § 148-1-6.1.e, Vendor must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agency or political subdivision. Obligations related to political subdivisions may include, but are not limited to, business licensing, business and occupation taxes, inspection compliance, permitting, etc. Upon request, the Vendor must provide all necessary releases to obtain information to enable the Purchasing Division Director or the Agency to verify that the Vendor is licensed and in good standing with the above entities.

SUBCONTRACTOR COMPLIANCE: Vendor shall notify all subcontractors providing commodities or services related to this Contract that as subcontractors, they too are required to be licensed, in good standing, and up-to-date on all state and local obligations as described in this section. Obligations related to political subdivisions may include, but are not limited to, business licensing, business and occupation taxes, inspection compliance, permitting, etc. Notification under this provision must occur prior to the performance of any work under the contract by the subcontractor.

34. ANTITRUST: In submitting a bid to, signing a contract with, or accepting a Award Document from any agency of the State of West Virginia, the Vendor agrees to convey, sell, assign, or transfer to the State of West Virginia all rights, title, and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the State of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to Vendor.

35. VENDOR CERTIFICATIONS: By signing its bid or entering into this Contract, Vendor certifies (1) that its bid or offer was made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership, person or entity submitting a bid or offer for the same material, supplies, equipment or services; (2) that its bid or offer is in all respects fair and without collusion or fraud; (3) that this Contract is accepted or entered into without any prior understanding, agreement, or connection to any other entity that could be considered a violation of law; and (4) that it has reviewed this Solicitation in its entirety; understands the requirements, terms and conditions, and other information contained herein.

Vendor's signature on its bid or offer also affirms that neither it nor its representatives have any interest, nor shall acquire any interest, direct or indirect, which would compromise the performance of its services hereunder. Any such interests shall be promptly presented in detail to the Agency. The individual signing this bid or offer on behalf of Vendor certifies that he or she is authorized by the Vendor to execute this bid or offer or any documents related thereto on Vendor's behalf; that he or she is authorized to bind the Vendor in a contractual relationship; and that, to the best of his or her knowledge, the Vendor has properly registered with any State agency that may require registration.

36. VENDOR RELATIONSHIP: The relationship of the Vendor to the State shall be that of an independent contractor and no principal-agent relationship or employer-employee relationship is contemplated or created by this Contract. The Vendor as an independent contractor is solely liable for the acts and omissions of its employees and agents. Vendor shall be responsible for selecting, supervising, and compensating any and all individuals employed pursuant to the terms of this Solicitation and resulting contract. Neither the Vendor, nor any employees or subcontractors of the Vendor, shall be deemed to be employees of the State for any purpose whatsoever. Vendor shall be exclusively responsible for payment of employees and contractors for all wages and salaries, taxes, withholding payments, penalties, fees, fringe benefits, professional liability insurance premiums, contributions to insurance and pension, or other deferred compensation plans, including but not limited to, Workers' Compensation and Social Security obligations, licensing fees, etc. and the filing of all necessary documents, forms, and returns pertinent to all of the foregoing.

Vendor shall hold harmless the State, and shall provide the State and Agency with a defense against any and all claims including, but not limited to, the foregoing payments, withholdings, contributions, taxes, Social Security taxes, and employer income tax returns.

37. INDEMNIFICATION: The Vendor agrees to indemnify, defend, and hold harmless the State and the Agency, their officers, and employees from and against: (1) Any claims or losses for services rendered by any subcontractor, person, or firm performing or supplying services, materials, or supplies in connection with the performance of the Contract; (2) Any claims or losses resulting to any person or entity injured or damaged by the Vendor, its officers, employees, or subcontractors by the publication, translation, reproduction, delivery, performance, use, or disposition of any data used under the Contract in a manner not authorized by the Contract, or by Federal or State statutes or regulations; and (3) Any failure of the Vendor, its officers, employees, or subcontractors to observe State and Federal laws including, but not limited to, labor and wage and hour laws.

38. PURCHASING AFFIDAVIT: In accordance with West Virginia Code § 5-22-1(i), the contracting public entity shall not award a contract for a construction project to any bidder that is known to be in default on any monetary obligation owed to the state or a political subdivision of the state, including, but not limited to, obligations related to payroll taxes, property taxes, sales and use taxes, fire service fees, or other fines or fees. Accordingly, prior to contract award, Vendors are required to sign, notarize, and submit the Purchasing Affidavit to the Purchasing Division affirming under oath that it is not in default on any monetary obligation owed to the state or a political subdivision of the state.

39. ADDITIONAL AGENCY AND LOCAL GOVERNMENT USE: This Contract may be utilized by other agencies, spending units, and political subdivisions of the State of West Virginia; county, municipal, and other local government bodies; and school districts ("Other Government Entities"). Any extension of this Contract to the aforementioned Other Government Entities must be on the same prices, terms, and conditions as those offered and agreed to in this Contract, provided that such extension is in compliance with the applicable laws, rules, and ordinances of the Other Government Entity. If the Vendor does not wish to extend the prices, terms, and conditions of its bid and subsequent contract to the Other Government Entities, the Vendor must clearly indicate such refusal in its bid. A refusal to extend this Contract to the Other Government Entities shall not impact or influence the award of this Contract in any manner.

40. CONFLICT OF INTEREST: Vendor, its officers or members or employees, shall not presently have or acquire an interest, direct or indirect, which would conflict with or compromise the performance of its obligations hereunder. Vendor shall periodically inquire of its officers, members and employees to ensure that a conflict of interest does not arise. Any conflict of interest discovered shall be promptly presented in detail to the Agency.

41. REPORTS: Vendor shall provide the Agency and/or the Purchasing Division with the following reports identified by a checked box below:

Such reports as the Agency and/or the Purchasing Division may request. Requested reports may include, but are not limited to, quantities purchased, agencies utilizing the contract, total contract expenditures by agency, etc.

Quarterly reports detailing the total quantity of purchases in units and dollars, along with a listing of purchases by agency. Quarterly reports should be delivered to the Purchasing Division via email at purchasing.requisitions@wv.gov.

42. BACKGROUND CHECK: In accordance with W. Va. Code § 15-2D-3, the Director of the Division of Protective Services shall require any service provider whose employees are regularly employed on the grounds or in the buildings of the Capitol complex or who have access to sensitive or critical information to submit to a fingerprint-based state and federal background inquiry through the state repository. The service provider is responsible for any costs associated with the fingerprint-based state and federal background inquiry.

After the contract for such services has been approved, but before any such employees are permitted to be on the grounds or in the buildings of the Capitol complex or have access to sensitive or critical information, the service provider shall submit a list of all persons who will be physically present and working at the Capitol complex to the Director of the Division of

Protective Services for purposes of verifying compliance with this provision. The State reserves the right to prohibit a service provider's employees from accessing sensitive or critical information or to be present at the Capitol complex based upon results addressed from a criminal background check.

Service providers should contact the West Virginia Division of Protective Services by phone at (304) 558-9911 for more information.

43. PREFERENCE FOR USE OF DOMESTIC STEEL PRODUCTS: Except when authorized by the Director of the Purchasing Division pursuant to W. Va. Code § 5A-3-56, no contractor may use or supply steel products for a State Contract Project other than those steel products made in the United States. A contractor who uses steel products in violation of this section may be subject to civil penalties pursuant to W. Va. Code § 5A-3-56. As used in this section:

- a. "State Contract Project" means any erection or construction of, or any addition to, alteration of or other improvement to any building or structure, including, but not limited to, roads or highways, or the installation of any heating or cooling or ventilating plants or other equipment, or the supply of and materials for such projects, pursuant to a contract with the State of West Virginia for which bids were solicited on or after June 6, 2001.
- b. "Steel Products" means products rolled, formed, shaped, drawn, extruded, forged, cast, fabricated or otherwise similarly processed, or processed by a combination of two or more or such operations, from steel made by the open heath, basic oxygen, electric furnace, Bessemer or other steel making process. The Purchasing Division Director may, in writing, authorize the use of foreign steel products if:
- c. The cost for each contract item used does not exceed one tenth of one percent (.1%) of the total contract cost or two thousand five hundred dollars (\$2,500.00), whichever is greater. For the purposes of this section, the cost is the value of the steel product as delivered to the project; or
- d. The Director of the Purchasing Division determines that specified steel materials are not produced in the United States in sufficient quantity or otherwise are not reasonably available to meet contract requirements.

44. PREFERENCE FOR USE OF DOMESTIC ALUMINUM, GLASS, AND STEEL: In Accordance with W. Va. Code § 5-19-1 et seq., and W. Va. CSR § 148-10-1 et seq., for every contract or subcontract, subject to the limitations contained herein, for the construction, reconstruction, alteration, repair, improvement or maintenance of public works or for the purchase of any item of machinery or equipment to be used at sites of public works, only domestic aluminum, glass or steel products shall be supplied unless the spending officer determines, in writing, after the receipt of offers or bids, (1) that the cost of domestic aluminum, glass or steel products is unreasonable or inconsistent with the public interest of the State of West Virginia, (2) that domestic aluminum, glass or steel products are not produced in sufficient quantities to meet the contract requirements, or (3) the available domestic aluminum, glass, or steel do not meet the contract specifications. This provision only applies to public works contracts awarded in an amount more than fifty thousand dollars (\$50,000) or public works contracts that require more than ten thousand pounds of steel products.

The cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than twenty percent (20%) of the bid or offered price for foreign made aluminum, glass, or steel products. If the domestic aluminum, glass or steel products to be supplied or produced in a "substantial labor surplus area", as defined by the United States Department of Labor, the cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than thirty percent (30%) of the bid or offered price for foreign made aluminum, glass, or steel products. This preference shall be applied to an item of machinery or equipment, as indicated above, when the item is a single unit of equipment or machinery manufactured primarily of aluminum, glass or steel, is part of a public works contract and has the sole purpose or of being a permanent part of a single public works project. This provision does not apply to equipment or machinery purchased by a spending unit for use by that spending unit and not as part of a single public works project.

All bids and offers including domestic aluminum, glass or steel products that exceed bid or offer prices including foreign aluminum, glass or steel products after application of the preferences provided in this provision may be reduced to a price equal to or lower than the lowest bid or offer price for foreign aluminum, glass or steel products plus the applicable preference. If the reduced bid or offer prices are made in writing and supersede the prior bid or offer prices, all bids or offers, including the reduced bid or offer prices, will be reevaluated in accordance with this rule.

45. INTERESTED PARTY SUPPLEMENTAL DISCLOSURE: W. Va. Code § 6D-1-2 requires that for contracts with an actual or estimated value of at least \$100,000, the vendor must submit to the Agency a supplemental disclosure of interested parties reflecting any new or differing interested parties to the contract, which were not included in the original pre-award interested party disclosure, within 30 days following the completion or termination of the contract. A copy of that form is included with this solicitation or can be obtained from the WV Ethics Commission. "Interested parties" means: (1) A business entity performing work or service pursuant to, or in furtherance of, the applicable contract, including specifically sub-contractors; (2) the person(s) who have an ownership interest equal to or greater than 25% in the business entity performing work or service pursuant to, or in furtherance of, the applicable contract; and (3) the person or business entity, if any, that served as a compensated broker or intermediary to actively facilitate the applicable contract or negotiated the terms of the applicable contract with the state agency: Provided, That subdivision (2) shall be inapplicable if a business entity is a publicly traded company: Provided, however, That subdivision (3) shall not include persons or business entities performing legal services related to the negotiation or drafting of the applicable contract. The Agency shall submit a copy of the disclosure to the Ethics Commission within 15 days after receiving the supplemental disclosure of interested parties.

DESIGNATED CONTACT: Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

Erin Jones
 (Name, Title)
Erin Jones
 (Printed Name and Title)
250 125th W Huntington, WV. 25704
 (Address)
1-800-624-3433 (304)523-5337
 (Phone Number) / (Fax Number)
erin.jones@wvaelectric.com
 (email address)

CERTIFICATION AND SIGNATURE: By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

Wva Electric Supply
 (Company)
Tony Barber VP
 (Authorized Signature) (Representative Name, Title)
TONY BARBER VP
 (Printed Name and Title of Authorized Representative)
2/27/2018
 (Date)
304-525-0361 ext. 4530 Fax (304)525-2726
 (Phone Number) (Fax Number)

Light18 - Bulbs, and Ballast

SPECIFICATIONS

- 1. PURPOSE AND SCOPE:** The West Virginia Purchasing Division is soliciting bids on behalf of the State of West Virginia to establish an Open-End Contract for lights bulbs and ballast for all West Virginia Agencies and Political Subdivisions as well as county and city municipalities within the State of West Virginia's 55 counties.

The West Virginia Purchasing Division, with this Solicitation and resulting Contract, seeks to encourage the sale and purchase of products that meet its customers' need for healthy, pleasant and ample lighting in the State's offices, worksites and public areas. These products should offer long life and low day-to-day energy-usage costs; guarantee safety to human life and health during operation; and have a minimal impact to the environment at the end of their useful lives.

This Contract will define a supplier of: Compact Fluorescent Lights (CFL) Fluorescent Bulbs, Metal Halide Bulbs, Light-Emitting Diode (LED) Bulbs, Incandescent Bulbs, Halogen Bulbs, High Pressure Sodium Bulbs, and associated Ballast.

This Solicitation does not include lighting fixtures. The Contract awarded from this CRFQ shall cover all awarded Product Categories from Vendor's Catalog as submitted with this solicitation.

- 2. DEFINITIONS:** The terms listed below shall have the meanings assigned to them below. Additional definitions can be found in section 2 of the General Terms and Conditions.
- 2.1 "Catalog"** means the price list or sales catalog that includes all items that Vendor can and will sell under this Contract, per the Vendor's lowest published Pricelist.
- 2.2 "Catalog Price"** means the lowest price listed for an Eligible Item in Vendor's Catalog. (Ex. A box of 200 bulbs priced at \$4.00 per box has a catalog price of \$4.00. A crate of bulb boxes priced at \$400.00 has a catalog price of \$400.00).
- 2.3 "Contract Item or "Contract Items"** means the list of items identified in Section 3.1 below and on the Pricing Pages.
- 2.4 "ANSI"** means American National Standards Institute.
- 2.5 "Color Rendering Index"** means is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an ideal or

Light18 - Bulbs, and Ballast

natural light source. <https://www.lumens.com/light-bulb-facts/color-rendering-index.html>

- 2.6 “BALLAST”** means Electronic devices that fluorescent lights use to function. There are three types of lighting ballasts: (1) Magnetic – A device that uses a core and coil assembly transformer to perform the minimum functions required to start and operate the lamp; (2) Hybrid – A magnetic ballast with a few electric components that switch off voltage to the lamp coil once the lamp has started; (3) High frequency electronic – A ballast that operates lamps at frequencies above 20,000 Hz.
- 2.7 “Compact Fluorescent Lamp (CFL)”** means A fluorescent lamp with a small diameter glass tube (T5 or less) that is folded, bent, or bridged to create a long discharge path in a small volume. The lamp design generally includes an amalgam and a cold chamber, or a cold spot to control the mercury vapor pressure and light output (ANSI/IES RP-16-10). For purposes of this specification, compact fluorescent lamps include integral electronic ballasts and are equipped with an ANSI standard base.
<https://www.energystar.gov/sites/default/files/asset/document/ENERGY%20STAR%20Lamps%20V2%20Revised%20Spec.pdf>
- 2.8 “Lumen”** is a measure of the total visible light output of a light source.
- 2.9 “Discount Percentage”** means the percentage discount that Vendor will apply to all Agency purchases of Eligible Items in a given product category
- 2.10 “Discounted Price”** means the price that the Vendor will charge Agencies for the purchase of Eligible Items under this Contract. The Discounted Price is the Catalog Price reduced by the Discount Percentage.
- 2.11 “Discounted Unit Price”** means the discounted price of one Unit of an Eligible Item purchased under this Contract. *The Discounted Unit Price will only be used for evaluation purposes.*
- 2.12 “Eligible Item”** means lights, lamps, bulbs, ballast and other related lighting items.
- 2.13 “Energy Independence & Security Act of 2007 (EISA)”** means An Act to move the United States toward greater energy independence and security, to increase the production of clean renewable fuels, to protect consumers, to increase the efficiency of products, buildings, and vehicles, to promote research on and deploy greenhouse gas capture and storage options, and to improve the energy performance of the Federal Government, and for other purposes.

Light18 - Bulbs, and Ballast

- 2.14 **“EPA”** means the U.S. Environmental Protection Agency
- 2.15 **“Fluorescent Lamp”** means a low-pressure mercury-vapor gas-discharge lamp that uses fluorescence to produce visible light. An electric current in the gas excites mercury vapor, which produces short-wave ultraviolet light that then causes a phosphor coating on the inside of the lamp to glow.
https://en.wikipedia.org/wiki/Fluorescent_lamp
- 2.16 **“Light-Emitting Diode (LED)”** means an electric light or light bulb for use in lighting fixtures that produces light using light-emitting diodes (LEDs). LED lamps have a lifespan and electrical efficiency which are several times greater than incandescent lamps, and are significantly more efficient than most fluorescent lamps,
- 2.17 **“High-intensity Discharge Lamp (HID)”** means a type of electrical gas-discharge lamp which produces light by means of an electric arc between tungsten electrodes housed inside a translucent or transparent fused quartz or fused alumina arc tube. [
https://en.wikipedia.org/wiki/High-intensity_discharge_lamp]
- 2.18 **“Metal Halide Lamp”** means A type of HID lamp that is filled with metal halides in addition to the argon and mercury used in mercury vapor lamps.
- 2.19 **“NEMA”** means the National Electrical Manufacturers Association
- 2.20 **“PCBs”** means is an organic chlorine compound with the formula $C_{12}H_{10-x}Cl_x$. Polychlorinated biphenyls were once widely deployed as dielectric and coolant fluids in electrical apparatus
- 2.21 **“Pricing Page”** or **“Pricing Pages”** means the schedule of prices, Discount Percentage, estimated usage, contained in wvOASIS or attached hereto as Exhibit A and used to evaluate the Solicitation responses.
- 2.22 **“Routine Items”** means Items that are delivered as a result of normal ordering procedures to replace expended supplies or to build up reserve stock.
- 2.23 **“Solicitation”** means the official notice of an opportunity to supply the State with goods or services that is published by the Purchasing Division.
- 2.24 **“Watt”** is a measure of the total power output of a light source.
- 2.25 **“Routine Items”** means items that are delivered as a result of normal ordering procedures to replace expended supplies or to build up reserve stock.

Light18 - Bulbs, and Ballast

- 2.26** “**Total Bid Amount**” means the sum of the bid total column on the Pricing Pages shown below the bid total column and identified as the Total Bid Amount.
- 2.27** “**Unit**” means the smallest measurable amount of an Eligible Item and is identified on the Pricing Pages in the Unit column. The Unit will only be utilized for bid evaluation purposes.
- 2.28** “**Unit Price**” means the price of an individual unit of an Eligible Item as shown on the Pricing Pages.
- 2.29** “**Units Provided for Catalog Price**” means the total number of units of an Eligible Item contained in the package advertised for sale in Vendor’s Catalog that corresponds with the Catalog Price. (Ex. A box of 200 nuts advertised in vendor’s catalog for \$4.00 has a Units Provided for Catalog Price of 200. A crate of nuts advertised in Vendor’s catalog for \$400.00, each containing 100 boxes with 200 nuts per box, yields Units Provided for Catalog Price of 20,000.)

3 GENERAL REQUIREMENTS:

- 3.1 Mandatory Eligible Item Requirements:** Eligible Items must meet or exceed the mandatory requirements listed below.
- 3.1.1 Eligible Items must be OSRAM, Sylvania, General Electric, Philips, or Equal and comply with the following:**
- 3.1.1.1 Eligible Items must be compatible with applicable ANSI product standards.**
- 3.1.1.2 Eligible Items must meet the Energy Star Product Specifications and Requirements for Lamps Version 2.0 (February 2016 and later)
ATTACHMENT “B”**
- 3.1.1.3 All light bulbs and or ballast shall be certified for the specific type of application (wet, dry, damp, etc.).**
- 3.1.1.4 All light bulbs and or ballast must be of current manufacture and must carry a safety certification by an approved testing laboratory (UL, CE, ETL, etc.)**
- 3.1.1.5 All lamps, ballasts serving the same fixture must be fully compatible, providing full operability of all components without reduction in component performance or service life.**

Light18 - Bulbs, and Ballast

3.1.1.6 Eligible Items must meet the January 2017 NRDC Energy Efficiency Standards. ATTACHMENT "C"

3.1.2 COMPACT FLOURESCENT LAMPS (CFL)

3.1.2.1 Must meet Color Rendering Index of a minimum of 82

3.1.2.2 Bulb Primary Application should not be restricted to one function.

3.1.2.3 Should Contribute to Reducing Energy Consumption

3.1.2.4 Lighting Technology – (Fluorescent)

3.1.3 FLUORESCENT LAMPS

3.1.3.1 Must meet Color Rendering Index of a minimum of 60

3.1.3.2 Bulb Primary Application should not be restricted to one function

3.1.3.3 Lighting Technology – (Fluorescent)

3.1.3.4 Should contribute to Reducing Energy Consumption

3.1.4 METAL HALIDE LAMP

3.1.4.1 Must meet Color Rendering Index of a minimum of 65

3.1.4.2 Lighting Technology – (Metal Halide)

3.1.4.3 Bulb Finish Clear

3.1.4.4 Bulb Type - High Output

3.1.5 LED LAMPS

3.1.5.1 Must be a compatible drop in replacement for incandescent or fluorescent lamps with the same base.

3.1.5.2 Must meet Color Rendering Index minimum of 80

3.1.5.3 Should be Energy Star compliant where possible

3.1.5.5 Lighting Technology – (LED)

Light18 - Bulbs, and Ballast

3.1.6 INCANDESCENT LAMPS

3.1.6.1 Lighting Technology Incandescent

3.1.7 HALOGEN LAMPS

3.1.7.1 Bulb Finish Clear

3.1.7.2 Lighting Technology – (Halogen)

3.1.7.3 Mercury lamps mounted in interior fixtures shall be self-extinguishing in the event of breakage of the outer glass.

3.1.8 HIGH PRESSURE SODIUM

3.1.8.1 Mercury lamps mounted in interior fixtures shall be self-extinguishing in the event of breakage of the outer glass.

3.1.8.2 Bulb Finish Clear

3.1.8.3 Color Rendering Index a minimum of 20

3.1.8.4 Green Environment Attribute Product Contributes to Reducing Energy Consumption.

3.1.9 FLUORESCENT LAMP BALLASTS and HID BALLAST

3.1.9.1 Ballast must be Underwriter Laboratories (UL) approved.

3.1.9.2 Ballast shall not contain PCBs.

3.1.9.3 All ballast shall be Class “A” sound rated.

3.1.9.4 Ballast shall be capable of starting the designated lamp at the minimum temperature established by the lamp manufacture.

3.1.9.5 HID ballast must have a wattage value of 100% of full light output.

4 CONTRACT AWARD, PERCENTAGE DISCOUNT, CATALOG:

Light18 - Bulbs, and Ballast

- 4.1 **Contract Award:** The Contract is intended to provide the Agency with a discounted price on all Eligible Items. The Contract shall be awarded to the Vendor that meets the Solicitation specifications and provides the lowest Total Bid Amount for the Eligible Items listed on the Pricing Pages. Notwithstanding the foregoing, the Purchasing Division reserves the right to award this Contract to multiple Vendors if it deems such action necessary.
- 4.2 **Discount Percentage:** Vendor shall quote a single Discount Percentage *per each of the eight (8) Product Category's* that will reduce the lowest price shown in the Catalog for every Eligible Item. The resulting Discounted Price shall be the price Agencies pay for purchases of that Eligible Item under this Contract.

Vendor shall not incorporate Discount Percentages into its Catalog unless the Vendor clearly shows the Catalog Price and then separately lists the applicable Discount Percentage and the Discounted Price for each Eligible Item.

The Discount Percentage and subsequent Discounted Price derived from that discount must take into account any and all fees, charges, or other miscellaneous costs that Vendor may require, including delivery charges as indicated below, because those fees, charges, or other miscellaneous costs will not be paid separately. The Agency shall only pay the appropriate Discounted Unit Price for items purchased under this Contract.

- 4.3 **Pricing Pages:** Vendor should complete the Pricing Pages by filling in Catalogue Price and Units Provided for Catalogue Price. The information requested on the Pricing Pages for each frequently purchased Eligible Item includes the Vendor's Eligible Item manufacturer, the manufacturer's number for each Eligible Item, Catalog Prices, Units Provided for Catalog Price, Unit Prices, Discount Percentage, Discounted Unit Prices, and item total costs. The Vendor should also include the Total Bid Amount. Vendor should complete all columns as failure to complete the Pricing Pages in their entirety may result in Vendor's bid being disqualified.

The Pricing Pages contain a list of frequently purchased items and estimated unit quantity that will be purchased. The estimated unit quantity for each item represents the approximate volume of anticipated purchases only. No future use of the Contract or any individual item is guaranteed or implied.

Notwithstanding anything contained herein, the Purchasing Division may correct errors on the Pricing Pages. Vendors are **strongly encouraged** to complete the Pricing Pages electronically in Microsoft Excel. Doing so will reduce the number of, and the possibility for, calculation errors. The Pricing Pages were created as a Microsoft Excel document and Vendor can download from the wvOASIS Vendor Self-Serve (VSS) website.

Light18 - Bulbs, and Ballast

The Purchasing Division reserves the right to take Vendor's Pricing Pages and insert the appropriate numbers into the Microsoft Excel spreadsheet if Vendor chooses to complete the Pricing Pages in any other way.

Vendor's who wish to respond to a Centralized Request for Quotation (CRFQ) online may submit information through the State's wvOASIS Vendor Self Service (VSS). Vendors should download the Exhibit "A": Pricing Page that is attached separately to the CRFQ and published to the VSS. Vendors must complete this form with their pricing information and include it as an attachment to their online response before bid opening date and time.

If unable to respond online Vendor must submit the Exhibit "A" Pricing Pages in their entirety with your bid prior to the scheduled bid opening date and time.

4.3.1 Pricing Page Calculations. The Pricing Pages require Vendor to insert its Catalogue Price, Units Provided for Catalogue Price, and Single Whole Number Discount Percentage per each Category listed thereon. *When inserting Discount per Category at the bottom of the Pricing Page this information will auto populate within the Pricing Page* That information, along with information that is already included on the Pricing Pages will be used to calculate the Unit Price, Discounted Unit Price, item total cost, and Total Bid Cost. If Vendor completes the Pricing Pages electronically using the Microsoft Excel version from the Purchasing Division, these calculations will be automatically completed.

4.3.1.1 Unit Price Calculation – The Unit Price is calculated by dividing the Catalogue Price by the Units Provided for Catalogue Price.

Example: \$10 per box divided by 10 nuts per box equals a Unit Price of \$1.

4.3.1.2 Discounted Unit Price – The Discounted Unit Price is calculated by applying the Discount Percentage to the Unit Price

Example: \$1 Unit Price reduced by a 10% Discount Percentage equals a \$0.90 Discounted Unit Price.

4.3.1.3 Item Total Cost – The item total cost is calculated by multiplying the estimated unit quantity by the Discounted Unit Price.

Light18 - Bulbs, and Ballast

Example: An estimated unit quantity of 10,000 nuts multiplied by a Discounted Unit Price of \$0.90 equals a \$9,000 item total cost for that item.

4.3.1.4 Total Bid Cost – The Total Bid Cost is calculated by adding the item total cost for every item listed on the Pricing Pages.

Example: Item total costs of \$9,000 and \$1,000 would equal a Total Bid Cost of \$10,000 (assuming that the Pricing Pages contained only two items).

5 Catalog:

5.1 Submission. Vendor must submit its Catalog prior to award of this Contract for evaluation purposes. Vendor shall also mail the Catalog free of charge to any Agency desiring to use this contract. Copies of the Catalog may be requested in an electronic format and should be provided in that format if possible. Vendor's Catalog will be used by Agencies to order Eligible Items under this Contract. Vendor may be required to input its Catalog data into wvOASIS utilizing the format required by wvOASIS. Copies of the Catalog may also be requested in an electronic format. Vendor's Catalog, or data from the Catalog entered into wvOASIS will be used by Agencies to order Eligible Items under this Contract.

Vendor should identify all items listed on the Pricing Pages by circling or highlighting those items in its Catalog and earmarking or tabbing the pages for those items, to assist in the evaluation and verification of the bids and pricing. If any discrepancies exist between the Pricing Pages and the actual price listed in the Catalog, the actual price shall prevail and the Pricing Pages may be corrected by the Purchasing Division buyer for evaluation purposes.

5.1 Catalog Modification. The Purchasing Division may permit Vendor to update its Catalog at each renewal date. Determination of whether or not to allow a Catalog update is at the sole discretion of the Purchasing Division. Any request by Vendor to update its Catalog must include a detailed listing of the following: (1) any Eligible Items being removed, Discounted Unit Prices for those items, Agencies quantity usage of those items, and total spent by Agencies on those items; (2) any Eligible Items being added to the Catalog and the Discounted Unit Price of those items; (3) all changes in the Discounted Unit Price to Eligible Items, estimated usage relating to items that have changed in price, and the total impact of the price change on the State; and (4) justification for updating its Catalog. The Purchasing Division may waive the detailed listing requirement if it finds that doing so is in the best interest of the State. Unless an updated catalog is approved, the Eligible Items available under

Light18 - Bulbs, and Ballast

this Contract and prices for those items shall remain unchanged during the term of this Contract.

6 ORDERING AND PAYMENT:

- 6.1 Ordering:** Vendor shall accept Agency Delivery Orders (ADO) by regular mail, facsimile, e-mail, or any other written forms of communication. Vendor may, but is not required to, accept on-line orders through a secure internet ordering portal/website. If Vendor has the ability to accept on-line orders, it should include in its response a brief description of how Agencies may utilize the on-line ordering system. Any on-line ordering system must have the capability to restrict prices and available items to conform to the Catalog originally submitted with this RFQ. Vendor shall ensure that its on-line ordering system is properly secured prior to processing Agency orders on-line.

Vendor shall provide the Purchasing Division with access to its internet ordering portal/website, if one will be used under this Contract, to allow the Purchasing Division to ensure that the requirements of this Contract are being met.

- 6.2 Invoicing and Payment:** Vendor shall indicate the discount received on each invoice submitted for payment. Vendor shall accept payment in accordance with the payment procedures of the State of West Virginia. Methods of acceptable payment must include the West Virginia Purchasing Card. Payment in advance is not permitted under this Contract.
- 6.3 Ordering Procedures:** Spending units shall issue a wvOASIS ADO to the vendor for commodities covered by this contract.

7 DELIVERY AND RETURN:

- 7.1 Delivery Time and Place:** Vendor shall deliver standard orders within five (5) calendar days after orders are received. Vendor shall deliver emergency orders within two (2) calendar day after orders are received. Vendor shall ship all orders in accordance with the above schedule and shall not hold orders until a minimum delivery quantity is met. Eligible Items must be delivered to Agency at any West Virginia State agency located within the State.
- 7.2** Orders in Excess of \$100.00 In-State Destination, shall be delivered FOB; Destination when shipped to a single facility location. Orders that total less than \$100.00 may be shipped prepaid, with transportation charges added to the invoice as a separate item. The original bill for transportation must be provided to the Agency at delivery.

Light18 - Bulbs, and Ballast

Minimum shipment shall be \$100.00 per order.

Agencies may make purchases that fall under the \$100.00 limit at a local source if pricing includes delivery and a savings results to avoid the delivery charges. No agency shall issue a series of requisitions to circumvent the \$25,000 yearly threshold. Violation of the \$25,000 threshold is commonly referred to as "stringing," and is prohibited by law.

All deliveries must be made during normal working hours for the delivery location.

- 7.3 Late Delivery:** The Agency placing the order under this Contract must be notified in writing if orders will be delayed for any reason. Any delay in delivery that could cause harm to an Agency will be grounds for cancellation of the delayed order, and/or obtaining the items ordered from a third party. Any Agency seeking to obtain items from a third party under this provision must first obtain approval of the Purchasing Division.
- 7.4 Delivery Payment/Risk of Loss:** Standard order delivery shall be F.O.B. destination to the Agency's location. Vendor shall include the cost of standard order delivery charges in its bid pricing/discount and is not permitted to charge the Agency separately for such delivery. The Agency will pay delivery charges on all emergency orders provided that Vendor invoices those delivery costs as a separate charge with the original freight bill attached to the invoice.
- 7.5 Return of Unacceptable Items:** Items that Agency deems unacceptable shall be returned to Vendor at Vendor's expense and with no restocking charge. Vendor shall either make arrangements for the return within seven (7) days of being notified that items are unacceptable, or permit the Agency to arrange for the return and reimburse Agency for delivery expenses. If the original packaging cannot be utilized for the return, Vendor will supply the Agency with appropriate return packaging upon request. All returns of unacceptable items shall be F.O.B. the Agency's location. The returned product shall either be replaced, or the Agency shall receive a full credit or refund for the purchase price, at the Agency's discretion.
- 7.6 Return Due to Agency Error:** Items ordered in error by the Agency will be returned for credit within 30 days of receipt, F.O.B. Vendor's location. Vendor shall not charge a restocking fee if returned products are in a resalable condition. Items shall be deemed to be in a resalable condition if they are unused and in the original packaging. Any restocking fee for items not in a resalable condition shall be the lower of the Vendor's customary restocking fee or 5% of the total invoiced value of the returned items.

Light18 - Bulbs, and Ballast

8. **VENDOR DEFAULT:**

- 8.1 The following shall be considered a vendor default under this Contract.
 - 8.1.1 Failure to provide Eligible Items in accordance with the requirements contained herein.
 - 8.1.2 Failure to comply with other specifications and requirements contained herein.
 - 8.1.3 Failure to comply with any laws, rules, and ordinances applicable to the Contract Services provided under this Contract.
 - 8.1.4 Failure to remedy deficient performance upon request.
- 8.2 The following remedies shall be available to Agency upon default.
 - 8.2.1 Immediate cancellation of the Contract.
 - 8.2.2 Immediate cancellation of one or more release orders issued under this Contract.
 - 8.2.3 Any other remedies available in law or equity.

9. **MISCELLANEOUS:**

- 9.1 **No Substitutions:** Vendor shall supply only Eligible Items contained in its Catalog submitted in response to the CRFQ or an updated Catalog approved by the Purchasing Division as described above. Vendor shall not supply substitute items.
- 9.2 **Vendor Supply:** Vendor must carry sufficient inventory of the Eligible Items being offered to fulfill its obligations under this Contract. By signing its bid, Vendor certifies that it can supply the Eligible Items contained in its bid response.
- 9.3 **Reports:** Vendor shall provide quarterly reports and annual summaries to the Agency showing the Agency's items purchased, quantities of items purchased, and total dollar value of the items purchased. Vendor shall also provide reports, upon request, showing the items purchased during the term of this Contract, the quantity purchased for each of those items, and the total value of purchases for each of those items. Failure to supply such reports may be grounds for cancellation of this Contract.

Light18 - Bulbs, and Ballast

- 9.4 **Contract Manager:** During its performance of this Contract, Vendor must designate and maintain a primary contract manager responsible for overseeing Vendor's responsibilities under this Contract. The Contract manager must be available during normal business hours to address any customer service or other issues related to this Contract. Vendor should list its Contract manager and his or her contact information below.

Contract Manager: Erin Jones

Telephone Number: 1-800-624-3433

Fax Number: 304-523-5337

Email Address: erin.jones@wvaelectric.com



**ENERGY STAR® Program Requirements
Product Specification for Lamps (Light Bulbs)**

**Eligibility Criteria
Version 2.0**

Following is the Version 2.0 product specification for ENERGY STAR certified Lamps. A product shall meet all of the identified criteria if it is to earn the ENERGY STAR.

To certify a lamp for ENERGY STAR, first determine which requirements in this document are applicable to the specific lamp. ENERGY STAR requirements are specific to lamps classified by the program as omnidirectional, directional, or decorative. This specification is generally organized by the requirements, not by lamp type or by light source technology. Partners are advised to review each section, and take note of exceptions where specific performance criteria need not be evaluated.

1. SPECIFICATION SCOPE & LAMP CLASSIFICATION

1.1. Included Products

The ENERGY STAR Lamps specification ("this specification") scope includes the lamp types intended to replace incandescent lamps as outlined in Table 1. The scope of this specification is limited to lamps with:

- Integrated ballasts and drivers intended to be connected to the electric power grid with the following ANSI standard base types: E26, E26d, E17, E11, E12, G4, G9, GU10, GU24, GU5.3, and GX5.3; and
- Rated nominal operating voltages of 120, 240 or 277 VAC, or 12 or 24 VAC or VDC.

Table 1: Specification Scope and Classification

Lamp Purpose and Performance Description	ANSI Standard Lamp Shape ¹	Non-Standard Lamp Form Factor
Omnidirectional – Lamps intended for general purpose that meet applicable omnidirectional performance requirements in this specification.	A, BT, P, PS, S and T	Self-ballasted compact fluorescent lamps (CFLs) intended to replace ANSI standard incandescent lamps that do not meet Lamp Shape Dimension requirements. The following self-ballasted compact fluorescent lamps are included: <ul style="list-style-type: none"> • Bare spiral • Bare mini-spiral • Bare twin tube • Bare triple tube • Bare quadruple tube • Covered CFLs • Covered CFLs with reflectors • Induction-driven electrodeless fluorescent lamp
Decorative – Lamps of common decorative shapes meeting applicable decorative performance requirements in this specification.	B, BA, C, CA, DC, F, G, and ST	
Directional – Lamps meeting applicable directional performance requirements in this specification.	R, BR, ER, MR, MRX and PAR	

1.2. Excluded Products:

- Lamps, other than MR and halogen capsule replacements, that operate only on an external (i.e., not integral to the lamp) ballast, driver or transformer, e.g., pin-based fluorescent lamps (linear and compact) or their solid-state replacements.
- LED lamps intended to replace linear fluorescent lamps.
- LED lamps intended to replace pin-based compact fluorescent lamps.
- LED lamps intended to replace high-intensity discharge lamps.
- Lamps powered by an internal power source (e.g., solar-powered cell).

¹ Standard form factor lamps must meet the ANSI standard lamp type dimensional requirements in the specification and may claim wattage and ANSI lamp type equivalency. All solid-state lamps must meet standard lamp dimensional requirements.

- Lamps incorporating power-consuming features in the on or off state which are not related to control of illumination (e.g., audio functions, air fresheners, or cameras).
- Lamp technologies lacking applicable industry standardized methods of measurement.
- Lamps with bases not covered in ANSI standards.
- Zhaga compliant LED light engines.
- LED lamps that could be mistaken for general purpose A-lamp replacements (e.g., a G18.5 or G19 lamp), that do not meet the omnidirectional luminous intensity distribution requirements. This would include decorative lamps that fall within the minimum and maximum diameter of common A-shape lamps (between 41mm and 78mm) with the exception of G16.5 and G25 lamps.

2. EFFECTIVE DATE

The ENERGY STAR Lamps Version 2.0 specification shall take effect January 2, 2017. To qualify for ENERGY STAR, a product model shall meet the ENERGY STAR specification in effect on its date of manufacture. The date of manufacture is specific to each unit and is the exact date on which a unit is considered to be completely assembled.

3. FUTURE SPECIFICATION REVISIONS

EPA reserves the right to change this specification should technological and/or market changes affect its usefulness to consumers, industry, or the environment. In keeping with current policy, revisions to the specification are arrived at through stakeholder discussions. In the event of a specification revision, please note that ENERGY STAR certification is not automatically granted for the life of a product model.

While this document currently refers to industry standards and test procedures for fluorescent and solid-state lighting sources, as new technologies emerge that have equal or better performance to the levels proposed here, consistent with a technology neutral approach, EPA may amend the program requirements by adding additional requirements, methods of measurement and reference documents.

3.1. Considerations for Future Revisions

EPA is committed to continuing to develop performance levels for lamps that account for special features and functionality that benefit consumers. EPA and the U. S. Department of Energy (DOE) actively monitor the activities of lighting standards working groups and regulatory activities that may impact ENERGY STAR specifications. EPA will continue to monitor the market and work with stakeholders to explore and refine methods for evaluating the below features, test methods, and performance criteria.

- 3.1.1. Luminous intensity distribution requirements for all lamp types
- 3.1.2. Enhanced requirements for dimmable lamps
- 3.1.3. Zhaga compliant LED light engines
- 3.1.4. Industry and DOE test methods in development
- 3.1.5. Transient Protection
- 3.1.6. CRI as an allowable product variation
- 3.1.7. Standby power reduction
- 3.1.8. Additional lamp shapes and base types.
- 3.1.9. Product variations.

TABLE OF CONTENTS

1. Specification Scope & Lamp Classification	1
1.1. Included Products.....	1
1.2. Excluded Products:.....	1
2. Effective Date	2
3. Future Specification Revisions	2
3.1. Considerations for Future Revisions.....	2
4. Definitions	5
5. Test Criteria	8
5.1. Testing Color Tunable Lamps.....	8
6. United States Federal Regulations	9
6.1. U.S. Department of Energy (DOE).....	9
6.2. U.S. Federal Trade Commission (FTC).....	9
6.3. U.S. Federal Communications Commission (FCC).....	9
7. Product Certification	9
7.1. Product Variations.....	9
7.2. Solid-State Lumen Maintenance Performance Data.....	10
7.3. Temperature Measurements.....	10
7.4. Photographs.....	10
7.5. Significant Digits and Rounding.....	10
8. Methods of Measurement and Reference Documents	11
9. Photometric Performance	12
9.1. Luminous Efficacy: All Lamps.....	12
9.2. Light Output.....	13
9.3. Elevated Temperature Light Output Ratio: All Directional Lamps.....	14
9.4. Center Beam Intensity: PAR, MR and MRX Lamps.....	14
9.5. Luminous Intensity Distribution: ANSI Standard Omnidirectional and Decorative.....	15
9.6. Correlated Color Temperature (CCT): All Lamps.....	15
9.7. Color Rendering: All Lamps.....	16
9.8. Color Maintenance: All Solid-State Lamps.....	16
9.9. Color Angular Uniformity: Solid-State Directional Lamps.....	16
10. Lumen Maintenance and Rated Life	17
10.1. Lumen Maintenance: All Lamps.....	17
10.2. Rated Life: All Lamps.....	19
10.3. Rapid Cycle Stress Test: Compact Fluorescent Lamps.....	20
11. Electrical Performance Requirements	21
11.1. Electrical Safety: All Lamps.....	21
11.2. Power Factor: All Lamps.....	21
11.3. Frequency: All Lamps.....	21
11.4. Start Time: All Lamps.....	22
11.5. Run-Up Time: All Compact Fluorescent Lamps.....	22
11.6. Transient Protection: All Line Voltage Lamps.....	22
11.7. Standby Power Consumption: All Lamps.....	22
12. Controls Requirements: Lamps employing any control mechanism	23
12.1. Dimming Performance: All Lamps Marketed as Dimmable.....	23
12.2. Maximum Light Output:.....	23
12.3. Minimum Light Output:.....	23
12.4. Flicker:.....	24
12.5. Audible Noise:.....	24
12.6. Products with Connected Functionality – Optional.....	24
12.7. Connected Product Criteria:.....	24
12.8. Open Access.....	25
12.9. Energy Consumption Reporting.....	25

12.10. Operational Status Reporting	25
12.11. Remote Management	25
12.12. Information to Consumers	25
13. Lamp Toxics Reduction	26
13.1. Lamp Toxics Reduction: All Lamps	26
14. Dimensional Requirements	27
14.1. Lamp Shape Dimensions: All ANSI Standard Lamps and GU-24 base Solid-state Lamps	27
(Exemption: Non-Standard Lamps).....	27
15. Lamp Labeling, Packaging & Warranty Requirements	27
15.1. Lamp Labeling: All Lamps	27
15.2. Lamp Packaging: All Lamps except as Noted	28
15.3. Warranty: All Lamps.....	29
Appendix A-1: LUMINOUS Intensity Distribution Diagram for Omnidirectional Lamp	30
Appendix A-2: LUMINOUS Intensity Distribution Diagram for Decorative Lamp	31
Appendix B: CERTIFICATION Milestones for Rated Life Testing	32

4. DEFINITIONS

Active Mode: The state where the energy using product is connected to a mains power source and the primary light-producing function is activated. (Adapted from IEC 62301 Edition 2.0 2011-01)

ANSI: American National Standards Institute.

ASTM: American Society for Testing of Materials.

Beam Angle: The angle, in degrees, between the two opposite directions in which the average intensity is 50% of the center beam intensity as measured in at least two rotational planes, 90° from each other, around and through the beam axis. (ANSI C78.379-2006)

CFL: See Compact Fluorescent Lamp.

CIE: Commission Internationale de l'Éclairage. (International Commission on Illumination)

Color Rendering: Effect of an illuminant on the color appearance of objects by conscious or subconscious comparison with their color appearance under a reference illuminant. (CIE 17.4, ANSI/IES RP-16-10)

Color Rendering Index (CRI): The measured degree of color shift objects undergo when illuminated by a light source as compared with the color of those same objects when illuminated by a reference source of comparable color temperature. (10CFR430.2)

Color Tunable Lamp: For the purpose of this specification, these products allow the end user to alter the color appearance of the light generated by the lamp, including any of the following features:

Color Shifting Dimmable (aka Dim-to-Warm): A feature where CCT is automatically reduced as the product is dimmed, to simulate the behavior of incandescent lamps.

Full-Color-Tunable: A feature allowing the end user to adjust the light output to create white or colored light. This tuning must include white light that is capable of meeting the specification's color requirements, and can alter the color appearance along the black body curve, and also extend to colors beyond the ANSI defined correlated color temperature ranges (e.g., 2700K and 6500K) outside of the seven step MacAdam ellipse or the ANSI quadrangles.

White-Tunable: A feature allowing the end user to adjust the light output over a range of CCTs. This tuning must include white light that is capable of meeting the specification's color requirements along the black body curve.

Compact Fluorescent Lamp (CFL): A fluorescent lamp with a small diameter glass tube (T5 or less) that is folded, bent, or bridged to create a long discharge path in a small volume. The lamp design generally includes an amalgam and a cold chamber, or a cold spot to control the mercury vapor pressure and light output (ANSI/IES RP-16-10). For purposes of this specification, compact fluorescent lamps include integral electronic ballasts and are equipped with an ANSI standard base.

Connected Lamp: An ENERGY STAR eligible connected lamp includes elements (hardware and software or firmware) or instructions required to enable communication in response to consumer-authorized energy or performance related commands and complies with all requirements for connected lamps in the specification. These elements may reside inside or outside of the base lamp.

Correlated Color Temperature (CCT): The absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. (10CFR430.2)

Covered Lamp: A lamp with an integral ballast or driver and a translucent envelope over the light source(s). See Envelope.

Decorative Lamp: A lamp with a candle-like or globe shape envelope including shapes B, BA, C, CA, DC, G and F as defined in ANSI C79.1-2002. For purposes of this specification, lamps with candelabra bases and compact fluorescent lamps with purely decorative outer envelopes including those emulating A shape incandescent bulbs may be tested and evaluated as decorative lamps.

Device Under Test (DUT): An LED lamp under test. (Adapted from IES TM-28-14)

Dimmable Lamp: A lamp that is capable of producing varying levels of light when paired with a suitable control. For the purposes of this specification, the lamp must be capable of reducing light output to 20% (or lower) when paired with a control or dimmer while meeting the associated performance requirements in the specification.

Directional Lamp: ANSI standard PAR and MR lamps having at least 80% light output with a solid angle of π steradians, corresponding to a cone with an angle of 120°, self-ballasted compact fluorescent forms that utilize a reflector, and ANSI standard R, BR and ER shapes.

Envelope: A transparent or translucent enclosure over a light source. An envelope can also consist of a reflector with integral front cover. (Adapted from ANSI C78.357-2010)

FTC: United States Federal Trade Commission.

Field Angle: The angle between the two directions for which the intensity is 10% of the maximum intensity as measured in a plane through the nominal beam centerline. (ANSI/IES RP-16-10)

Flicker: The impression of unsteadiness of visual perception induced by a light stimulus whose luminance or spectral distribution fluctuates with time. (CIE 17.443 e-ILV) This term is for a static observer in a static environment.

Flicker Index: A measure of the cyclic variation in output of a light source taking into account the waveform of the light output. It is the ratio of the area under the light output curve that is above the average light output level to the total area under the light output curve for a single cycle. (ANSI/IES RP-16-10)

GU24 Based Integrated Lamp: A lamp unit that integrates the light source and its ballast or driver. It does not include any replaceable or interchangeable parts, and utilizes the ANSI standardized GU24-base type.

IEC: International Electrotechnical Commission.

IES: Illuminating Engineering Society.

Induction Driven Electrodeless Fluorescent Lamp: A fluorescent lamp that uses electromagnetic induction to generate a discharge current, forming a closed loop inside the tube structure which excites internal gases and converts this into visible

light through phosphor. For purposes of this specification, these lamps include integral electronic ballasts and are equipped with an ANSI standard base, and are also referred to as "induction lamps".

Input Power: The power draw in watts of a ballast or driver and a light source system operating in a normal mode.

Integrated LED Lamp: An integrated assembly comprised of LED packages (components) or LED arrays (modules), LED driver, ANSI standard base and other optical, thermal, mechanical and electrical components. The device is intended to connect directly to the branch circuit through a corresponding ANSI standard lamp-holder (socket). (ANSI/IES RP-16-10)

Labeled Wattage: The highest wattage marked on the lamp and/or lamp packaging. (US DOE)

Lamp: A generic term for a man-made source created to produce optical radiation. By extension, the term is also used to denote sources that radiate in regions of the spectrum adjacent to the visible. (ANSI/IES RP-16-10)

LED: See Light-emitting Diode.

LED Array or Module: An assembly of LED packages (components) or dies on a printed circuit board or substrate, possibly with optical elements and additional thermal, mechanical, and electrical interfaces that are intended to connect to the load side of a LED driver. Power source and ANSI standard base are not incorporated into the device. The device cannot be connected directly to the branch circuit. (ANSI/IES RP-16-10)

LED Driver Case Temperature Measurement Point (TMP_c): A location on an LED driver case, designated by its manufacturer, which will have the highest temperature of any point on the driver case during normal operation.

LED Package: An assembly of one or more LED dies that includes wire bond or other type of electrical connections, possibly with an optical element and thermal, mechanical, and electrical interfaces. Power source and ANSI standardized base are not incorporated into the device. The device cannot be connected directly to the branch circuit. (ANSI/IES RP-16-10)

LED Temperature Measurement Point (TMP_{LED}): A location on an LED package/module/array, designated by its manufacturer, which provides a surrogate temperature measurement location for the actual LED junction. The TMP_{LED} may be a solder joint at the board attachment site, a point on the LED package case, or a location on the board of an LED module or array.

Light-emitting Diode (LED): A p-n junction solid-state device of which the radiated output, either in the infrared region, the visible region, or the ultraviolet region, is a function of the physical construction, material used, and exciting current of the device. (10CFR430.2)

Lumen Maintenance: The lumen output measured at a given time in the life of the lamp and expressed as a percentage of the measured initial lumen output, respectively. Lumen maintenance is the converse of lumen depreciation.

Lumens per Watt (lm/W): The quotient of the total luminous flux emitted by the total light source power input. It is expressed in lm/W. (Adapted from ANSI/IES RP-16-10: "Luminous Efficacy of a Source of Light")

MacAdam Color Ellipse: A space around a chromaticity coordinate that sets the boundary at which a given percentage of people are able to determine that two colors, one with chromaticity coordinates at the center of the ellipse, and one with chromaticity coordinates on the ellipse, are just noticeably different. (Adapted from IES Handbook 10th Edition)

Measured value: The directly measured value from testing equipment for a given unit under test.

Multi-power Lamp: A lamp designed to produce multiple discrete light levels when inserted into a lamp socket controlled by a switching mechanism and is designated on the lamp packaging as being a multi-power lamp, e.g., 3-way lamp.

NEMA: National Electrical Manufacturers Association.

NRTL: Nationally Recognized Testing Laboratory as recognized by OSHA's NRTL Program, which is a part of OSHA's Directorate of Technical Support.

Off Mode: The state where the energy using product is connected to a mains power source and is not providing any standby mode, network mode, or active mode function. (IEC 62301 Edition 2.0 2011-01)

Omnidirectional Lamp: A general service replacement lamp with an ANSI standard base that emits the majority of light produced in an even distribution. See Luminous Intensity Distribution requirement for omnidirectional lamps. These lamps can be standard; having an ANSI standard lamp shape of A, BT, P, PS, S or T, or non-standard, such as a self-ballasted compact fluorescent that utilizes a bare spiral.

OSHA: Occupational Safety & Health Administration.

Percent Flicker: A relative measure of the cyclic variation in output of a light source (percent modulation). It is given by the expression $100(A-B)/(A+B)$, where A is the maximum and B is the minimum output during a cycle. (IES RP-16-10)

Periodic Frequency: The frequency at which the entire periodic flicker waveform pattern repeats.

Power Factor: The input power in watts divided by the product of RMS input voltage and RMS input current of a ballast or driver.

Rated Lumen Maintenance Life (L_p): The elapsed operating time over which the LED light source will maintain the percentage, p, of its initial light output, e.g., L₇₀ (hours): time to 70% lumen maintenance. (IES LM-80-08)

Rated Wattage: The wattage marked on the lamp (referred to as "labeled wattage" by DOE). (10 CFR 430 Appendix W to Subpart B)

Referenced Incandescent Lamp: A traditional incandescent lamp that predates the federal efficiency standards in the 2007 Energy Independence and Security Act.

Reflector: A device used to redirect the flux from a source primarily by the process of reflection. (IES RP-16-10)

Reported value: The value reported for purposes of compliance with DOE (referred to as "represented value" by DOE) and/or ENERGY STAR requirements according to the criteria in each applicable section.

Run-up Time: The time between the application of power to the device and the time when the light output first reaches a specified percentage of stable light output, i.e., 80%, 90%, etc.

Secondary Optics: Materials modifying the distribution of light from, but not integral to a light source, including but not limited to lamp envelopes, reflectors, and total internal reflection optics.

Solid-State Lighting (SSL): The term "solid-state" refers to the fact that light is emitted from a material by a semiconducting process of electron transition from a conduction band to valence band process whether or not the wavelength of this light is converted by additional components.

Standardized Color Ellipse: A MacAdam color ellipse defined by center chromaticity coordinates (CIE x, y) and a measure of certainty for detecting a color difference specified in standard deviation units called steps. (ANSI C78.376-2001)

Standby Mode: The condition in which the energy-using product is connected to a main power source; and offers one or more of the following user-oriented or protective functions: to facilitate the activation or deactivation of other functions (including active mode) by remote switch (including remote control), internal sensor, or timer; or continuous functions, including information or status displays (including clocks) or sensor-based functions. (US DOE)

Stroboscopic Effect: The appearance of multiple, discrete images of moving objects as a result of temporally unstable illumination. The effect may also change the appearance of the objects in their motion. (IEEE Std 1789™-2015) This term is for a static observer in a non-static environment.

Temporal Light Artifact (TLA): An undesired change in visual perception induced by a light stimulus whose luminance or spectral distribution fluctuates with time for an observer in a certain environment. Depending on the details of the fluctuations, TLA consists of flicker and/or stroboscopic effect. (NEMA TLAs-2015)

TMP_C: See LED Driver Case Temperature Measurement Point.

TMP_{LED}: See LED Temperature Measurement Point.

5. TEST CRITERIA

Performance requirements in this specification are determined in part by referencing the performance data of a traditional incandescent lamp (the "referenced incandescent lamp"). Referenced incandescent lamp performance data shall include shape designations appearing in ANSI C79.1-2002 (e.g., A, C, G, MR, PAR etc.), lamp diameter in eighths of an inch (e.g., MR-16 diameter = 16 eighths of an inch), nominal wattage, and beam angle for directional types.

Performance requirements in this specification are also determined by the replacement lamps' type and form factor per Table 1. Lamps claiming equivalency with an ANSI lamp shape on the lamp, its base or packaging, product literature or point-of-purchase materials, either printed or electronic, shall meet all requirements detailed in this specification for ANSI standard lamps.

When testing lamps, the methods of measurement identified for each performance characteristic in the "Methods of Measurement and/or Reference Documents" column of the performance requirements tables presented within this specification shall be used along with the sampling requirements in the calculation of reported values to determine ENERGY STAR certification.

All tests shall be conducted with the lamp connected to a supply circuit of rated frequency. For lamps with multiple operating voltages, the lamp shall be operated at 120 volts throughout testing. If the lamp is not rated for 120 volts, it shall be operated at the highest rated voltage.

For dimmable or multi-power lamps, measurements shall be taken at the highest wattage setting listed for the model, unless otherwise specified. This includes color shifting dimmable (dim-to-warm) lamps unless the lamp can also be tuned to a different chromaticity at full output.

IES LM-65-14 and IES LM-66-14 are applicable to both hot and cold cathode lamps, and induction lamps.

5.1. Testing Color Tunable Lamps

The requirements of this section do not apply to products that only have color shifting dimmable (dim-to-warm) functionality because they are only evaluated at the highest wattage setting.

For full-color-tunable and white-tunable lamps:

- All tests and evaluations included in this specification shall be performed at the most consumptive white light setting covered by this specification²; and
- Watts, lumens, chromaticity, and CRI shall be tested and reported for default and most consumptive white light setting covered by this specification.

In order to facilitate compliance testing, the partner shall provide detailed instructions for the control settings or control signals (as applicable) for reaching the default, and most consumptive white light modes as applicable.

² 2200K and 2500K nominal CCTs are only applicable to filament style lamps.

6. UNITED STATES FEDERAL REGULATIONS

Various U.S. federal regulations (U.S laws) may apply to lamps covered under the scope of this specification. As a reminder, EPA has included references to the rules and/or rule-making. Partners should consult the appropriate federal agencies regarding compliance with the regulations.

6.1. U.S. Department of Energy (DOE)

The scope of this specification includes bare and covered medium base compact fluorescent lamps which are regulated by the U.S. Department of Energy (DOE). This specification includes references to the Code of Federal Regulations (CFR), such as CFR Title 10 Part 429 and Part 430, as guidance, highlighting efforts by EPA and DOE to align the testing requirements where there is overlap in scope. Any DOE issued guidance for medium base CFLs must be used in determining ratings. (<http://www1.eere.energy.gov/guidance/default.aspx?pid=2&spid=1>).

For information on the Code of Federal Regulations (CFR), including CFR Title 10 Parts 429 and 430, see DOE website, www.eere.energy.gov/buildings.

6.2. U.S. Federal Trade Commission (FTC)

CFR Title 16 Part 305, see FTC website www.ftc.gov/energy for additional information.

6.3. U.S. Federal Communications Commission (FCC)

CFR Title 47 Parts 15 and 18, see FCC website www.fcc.gov or contact the FCC <http://www.fcc.gov/labhelp> and submit an inquiry.

7. PRODUCT CERTIFICATION

7.1. Product Variations

Product variations are allowed so long as variations will not negatively impact a lamp's compliance with any performance criteria in this specification.

Variants shall be identical to the tested representative model with the exception of allowed variations listed in Table 2. In addition, variants are permitted to reference the test reports of the tested representative model to satisfy certification requirements with the exception of the required tests outlined in Table 2. The model which the partner expects to have the greatest difficulty meeting the performance requirements outlined in this specification shall be tested ("tested representative model").

The following shall be satisfied for product variations listed below:

- 7.1.1. The tested representative model and the variant(s) shall have the same rated input voltage(s).
- 7.1.2. Across a sample of up to five units of a variant, the average of *in situ* temperatures of critical components shall be no greater than 2.5°C above the same average of *in situ* temperatures in a sample of up to five units of the tested representative model. Critical components include (as applicable) the highest temperature LED package/array/module measured at TMP_{LED}, LED driver measured at TMP_C, ballast case temperature at T_C, capacitors and fuses.
- 7.1.3. For solid-state lamps, variation is not allowed where the *in situ* temperatures measured at each unit's highest temperature or the average of up to 5 unit samples TMP_{LED} is greater than the maximum case temperature tested in the corresponding IES LM-80 report.
- 7.1.4. OSHA NRTL safety listing or certification report shall be available that includes descriptions of both the tested representative model and variant(s) demonstrating their identical construction except for the allowable variations detailed in Table 2, as applicable.
- 7.1.5. Test report(s) shall be available from EPA-recognized laboratory(ies) for the tested representative model and the variant(s) demonstrating that variant performance for the following parameters varies by no more than the percent indicated while meeting this specification's requirements:
 - i. Input current and input wattage: ±10%
 - ii. Power factor: ±5%
 - iii. Maximum overall length, except as affected only by variations in lamp base or envelope shape: ±5%
 - iv. Maximum overall diameter: ±5%

Table 2: Allowable Variations

Lamp Attribute	Allowable Variation	Additional Test Data Required For Each Variant ³
Heat Sink Paint Color (solid-state only)	Lamp body color/pigment. (Not the type of paint or plastic).	None
Beam Angle (solid-state only)	The dimensions of lamp secondary optics (e.g., lens thickness, refractor patterns). Variation in secondary optical material not allowed.	<ul style="list-style-type: none"> Luminous intensity distribution data Center Beam Intensity Color Angular Uniformity
Lamp Base (ANSI base adapter)	Lamp base type (e.g., ANSI E26, GU24, etc.)	None
Envelope Shape (decorative shapes only)	Lamp envelope shape, so long as the envelope material and thickness are unchanged. The surface area and volume of the tested representative model's envelope shall be less than or equal to that of the variant.	None
Envelope Finish (decorative shapes only)	Lamp envelope finish, so long as the envelope material and thickness are unchanged. The surface area and volume of the tested representative model's envelope shall be less than or equal to that of the variant.	<ul style="list-style-type: none"> Luminous Efficacy Light Output Correlated Color Temperature Color Rendering
Correlated Color Temperature	<p>This allows sharing of specific test data, as applicable, for CFL and SSL lamps where the only variation is in phosphor:</p> <ul style="list-style-type: none"> Lumen Maintenance Rated Life Color Maintenance Electrical Safety Electrical - Rapid Cycle Stress, Power Factor, Transient Protection, Frequency and Start Time Dimming Performance— Minimum and Maximum Light Output, Audible Noise, and Flicker Lamp Shape Dimensions Lamp Toxics Reduction <p>Only the tested representative model is required to complete lumen maintenance and full rated life testing as applicable.</p>	<ul style="list-style-type: none"> Luminous Efficacy Light Output Elevated Temperature Light Output Ratio (as applicable) Center Beam Intensity (as applicable) Luminous Intensity Distribution (as applicable) Correlated Color Temperature Color Rendering Color Angular Uniformity (SSL only and as applicable) Run-Up Time (CFLs only)
Lamp Neck	Applicable to PAR30 Long Neck (PAR30L) lamps where the representative model has the shortest MOL, and the only component changed is the neck of the lamp. Changes to heat sink or driver are not allowed.	None

7.2. Solid-State Lumen Maintenance Performance Data

Content and application of IES LM-80 reports for LED lamps shall comply with [ENERGY STAR Program Guidance Regarding LED Package, LED Array and LED Module Lumen Maintenance Performance Data Supporting Certification of Lighting Products](#).

7.3. Temperature Measurements

All temperature measurements including *in situ* measurements (i.e., TMP_{LED} , ballast case, driver case) shall be made in accordance with temperature test methods and apparatus outlined in ANSI/UL 1993. For purposes of thermocouple access, minimally sized holes may be drilled into lamps under test and tightly sealed with flexible sealant. All access holes shall be photographed for repeatability.

7.4. Photographs

Photographs shall be taken of lamp optics, lamp profile and lamp labeling, and shall be maintained in records.

7.5. Significant Digits and Rounding

7.5.1. Measurements shall be recorded at the resolution of the test instrumentation for each unit in the sample set.

³ All variations listed in Table 2 shall satisfy the requirements in 7.1.1-7.1.5 in addition to the additional test data required in Table 2.

7.5.2. All calculations shall be carried out on a per unit basis with directly measured (unrounded) values.

7.5.3. Compliance with the specification limits shall be evaluated against the reported value for each model.

7.5.4. Rounding is defined as follows:

- (i) A fractional number at or above the midpoint between two consecutive decimal places or whole numbers shall be rounded up to the higher of the two decimal places or whole numbers; or
- (ii) A fractional number below the midpoint between two consecutive decimal places or whole numbers shall be rounded down to the lower of the two decimal places or whole number.

8. METHODS OF MEASUREMENT AND REFERENCE DOCUMENTS

Organization	Identifier	Description
ANSI/IEEE	<u>C62.41.2-2002</u>	IEEE Recommended Practice on Characterization of Surges in Low Voltage (1000V and Less) AC Power Circuits
ANSI	<u>C78.20:2003</u>	Electric Lamps – A, G, PS and Similar Shapes with E26 Medium Screw Bases
ANSI	<u>C78.21-2011</u>	Electric Lamps – PAR and R Shapes
ANSI	<u>C78.50-2014</u>	Electric Lamps – Assigned LED Lamp Codes
ANSI	<u>C78.79-2014</u>	Electric Lamps – Nomenclature for Envelope Shapes Intended for Use with Electric Lamps
ANSI	<u>C78.23:1995 (R2003)</u>	Incandescent Lamps – Miscellaneous Types
ANSI/ANSLG	<u>C78.357-2010</u>	For Incandescent Lamps: Tungsten Halogen Lamps (non-vehicle)
ANSI	<u>C78.376-2014</u>	Specifications for the Chromaticity of Fluorescent Lamps
ANSI/ANSLG	<u>C78.377-2015</u>	Specifications for the Chromaticity of Solid-state Lighting Products
ANSI	<u>C79.1-2002</u>	Nomenclature for Glass Bulbs Intended for Use with Electric Lamps
ANSI/ANSLG	<u>C81.61-2009</u>	Specifications for Bases (Caps) for Electric Lamps
ANSI	<u>C82.77-10-2014</u>	Harmonic Emission Limits – Related Power Quality Requirements for Lighting Equipment
ANSI/IES	<u>RP-16-10</u>	Nomenclature and Definitions for Illuminating Engineering
ANSI/UL	<u>1993-2012</u>	Standard for Safety of Self-Ballasted Lamps and Lamp Adapters
ANSI/UL	<u>8750-2009</u>	Standard for Light Emitting Diode (LED) Equipment for Use in Lighting Products
ASA	<u>S12.55-2012 / ISO3745:2012</u>	Determination of Sound Power Levels of Noise Sources Using Sound Pressure - Precision Methods Anechoic and Semi-Anechoic Rooms
CIE	<u>013.3-1995</u>	Method of Measuring and Specifying Color Rendering of Light Sources
CIE	<u>15-2004</u>	Colorimetry
DOE	<u>10 CFR 429</u>	Certification, Compliance, and Enforcement for Consumer Products and Commercial and Industrial Equipment
DOE	<u>10 CFR 430</u>	Energy Conservation Program for Consumer Products
DOE	<u>TBD</u>	Energy Conservation Test Procedures for Compact Fluorescent Lamps
DOE	<u>TBD</u>	Energy Conservation Test Procedures for Integrated Light-Emitting Diode Lamps
IEC	<u>62321 ED.1.0 B:2008</u>	Electrotechnical Products – Determination Of Levels Of Six Regulated Substances (lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, polybrominated diphenyl ethers)
IEC	<u>62301 Edition 2.0 2011-01</u>	Household electrical appliances - Measurement of standby power
IEEE	<u>1789-2015</u>	Recommended Practices for Modulating Current in High-Brightness LEDs for Mitigating Health Risks to Viewers
IES	<u>LM-20-13</u>	Photometric Testing of Reflector – Type Lamps
IES	<u>LM-54-12</u>	Guide to Lamp Seasoning
IES	<u>LM-65-14</u>	Life Testing of Compact Fluorescent Lamps
IES	<u>LM-66-14</u>	Electrical and Photometric Measurements of Single-Based Fluorescent Lamps
IES	<u>LM-79-08</u>	Electrical and Photometric Measurements of Solid-State Lighting Products
IES	<u>LM-80-08</u>	Measuring Lumen Maintenance of LED Light Sources
IES	<u>LM-82-12</u>	Method for the Characterization of LED Light Engines and Integrated LED Lamps for Electrical and Photometric Properties as a Function of Temperature
IES	<u>LM-84-14</u>	Measuring Luminous Flux and Color Maintenance of LED Lamps, Light Engines, and Luminaires
IES	<u>TM-21-11</u>	Projecting Long Term Lumen Maintenance of LED Light Sources
IES	<u>TM-27-14</u>	Standard Format for the Electronic Transfer of Spectral Data
IES	<u>TM-28-14</u>	Projecting Long-Term Luminous Flux Maintenance of LED Lamps and Luminaires
IES	<u>TM-30-15</u>	Evaluating Light Source Color Rendition
ISO	<u>7574-4:1985</u>	Statistical Methods for Determining and Verifying Stated Noise Emission Values of Machinery and Equipment
NEMA	<u>SSL 7A-2013</u>	Phase Cut Dimming for Solid-State Lighting – Basic Compatibility

9. PHOTOMETRIC PERFORMANCE

9.1. Luminous Efficacy: All Lamps

Lamp Type	ENERGY STAR Requirements		Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
	Reported values for each lamp model shall meet the applicable requirement in the table below. Additionally eight or more units individually shall meet the requirement.		Measurement (fluorescent): 10 CFR Part 430 Appendix W to Subpart B or U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final) Measurement (solid-state): IES LM-79-08 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final) Reference Documents for all lamps not covered by DOE: IES LM-54-12	Sample Size: 10 units per model; 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. For CFLs lamp efficacy testing shall be conducted according to 10 CFR Part 430 Appendix W to Subpart B and sampling per 10 CFR 429.35. The reported value shall be in accordance with 10 CFR 429. For LED lamps all calculations of efficacy values shall be carried out on a per unit basis with directly measured (unrounded) values. No tolerances should be applied and the reported value for the sample shall be the average of the calculated efficacies (initial luminous flux divided by measured wattage) for all units in the sample. The reported value shall be the average of the unit values rounded to the nearest tenth.
	Minimum Lamp Efficacy (initial lm/W)			
	CRI ≥ 90	CRI < 90		
Omnidirectional	70	80		
Directional	61	70		
Decorative	65			

9.2. Light Output

Wattage equivalency claims on the lamp, its base or packaging, product literature or point-of-purchase materials, either printed or electronic may not exceed values certified according to the tables below.

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance																												
Omnidirectional	<p>Reported initial light output (in lumens) value for each lamp model shall fall within the range of the referenced incandescent lamp per the table below. Additionally 8 or more units individually shall meet the requirement⁴</p> <table border="1" data-bbox="448 531 935 905"> <thead> <tr> <th>Rated Wattage of the Referenced Incandescent Lamp (watts)</th> <th>Light Output (Lumens)</th> </tr> </thead> <tbody> <tr><td>25</td><td>250-449</td></tr> <tr><td>40</td><td>450-799</td></tr> <tr><td>60</td><td>800-1,099</td></tr> <tr><td>75</td><td>1,100-1,599</td></tr> <tr><td>100</td><td>1,600-1,999</td></tr> <tr><td>125</td><td>2,000-2,549</td></tr> <tr><td>150</td><td>2,550-3,000</td></tr> <tr><td>200</td><td>3,001-3,999</td></tr> <tr><td>300</td><td>4,000-6,000</td></tr> <tr><td>30-60-100</td><td></td></tr> <tr><td>30-70-100</td><td>1,200-1,999</td></tr> <tr><td>40-60-100</td><td></td></tr> <tr><td>50-100-150</td><td>2,150-3,000</td></tr> </tbody> </table> <p>3-way lamps shall be evaluated for equivalency claims based on tested results at the highest input (i.e., highest light output) setting.</p>	Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output (Lumens)	25	250-449	40	450-799	60	800-1,099	75	1,100-1,599	100	1,600-1,999	125	2,000-2,549	150	2,550-3,000	200	3,001-3,999	300	4,000-6,000	30-60-100		30-70-100	1,200-1,999	40-60-100		50-100-150	2,150-3,000	<p>Measurement (fluorescent): 10 CFR Part 430 Appendix W to Subpart B or U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final)</p> <p>Measurement (solid-state): IES LM-79-08 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)</p>	<p>Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position.</p> <p>For CFL lamps the light output testing shall be conducted according to 10 CFR Part 430 Appendix W to Subpart B and sampling per 10 CFR 429.35. The reported value shall be in accordance with 10 CFR 429.</p> <p>For LED lamps the reported value shall be the average of the unit measured values rounded to three significant figures. No tolerances shall be applied.</p>
Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output (Lumens)																														
25	250-449																														
40	450-799																														
60	800-1,099																														
75	1,100-1,599																														
100	1,600-1,999																														
125	2,000-2,549																														
150	2,550-3,000																														
200	3,001-3,999																														
300	4,000-6,000																														
30-60-100																															
30-70-100	1,200-1,999																														
40-60-100																															
50-100-150	2,150-3,000																														
Directional (R, BR and ER)	<p>Reported lamp initial light output (in lumens) shall be greater than or equal to ten times the incandescent lamp's rated wattage for the following referenced incandescent lamps:</p> <ul style="list-style-type: none"> • 65 watt BR30, BR40 and ER40 lamps • BR30, ER30, BR40 and ER40 lamps ≤ 50 watts • R20 lamps ≤ 45 watts • Lamps ≤ 40 watts • Lamps smaller than 2.25" diameter <p>For example, a lamp replacing a 25W incandescent shall produce ≥ 250 lumens.</p> <p>For all other directional lamps not included above, reported lamp light output (in lumens) shall be greater than or equal to the product of the claimed wattage equivalency and the light output multiplier in the table below. Additionally 8 or more units individually shall meet the requirement.</p> <table border="1" data-bbox="448 1430 935 1654"> <thead> <tr> <th>Rated Wattage of the Referenced Incandescent Lamp (watts)</th> <th>Light Output Multiplier</th> </tr> </thead> <tbody> <tr><td>40 - 50 W</td><td>10.5</td></tr> <tr><td>51 - 66 W</td><td>11.0</td></tr> <tr><td>67 - 85 W</td><td>12.5</td></tr> <tr><td>86 - 115 W</td><td>14.0</td></tr> <tr><td>116 - 155 W</td><td>14.5</td></tr> <tr><td>156 - 205 W</td><td>15.0</td></tr> </tbody> </table>	Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output Multiplier	40 - 50 W	10.5	51 - 66 W	11.0	67 - 85 W	12.5	86 - 115 W	14.0	116 - 155 W	14.5	156 - 205 W	15.0	<p>Reference Documents: IES LM-54-12</p> <p>Reference Document for all lamps covered by FTC: 16 CFR § 305.2.</p>															
Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output Multiplier																														
40 - 50 W	10.5																														
51 - 66 W	11.0																														
67 - 85 W	12.5																														
86 - 115 W	14.0																														
116 - 155 W	14.5																														
156 - 205 W	15.0																														
Directional (PAR, MR and MRX)	<p>Lamp initial light output (in lumens) shall be reported as the average of ten units. For equivalency claims see section 9.4.</p>																														

⁴Consistent with FTC and DOE regulations, reported values may be more conservative.

Decorative	Reported lamp initial light output (in lumens) shall fall within the range of the referenced incandescent lamp per the table below. Additionally 8 or more units individually shall meet the requirement.																																			
	<table border="1"> <thead> <tr> <th rowspan="2">Rated Wattage of the Referenced Incandescent Lamp (watts)</th> <th colspan="2">Light Output (Lumens)</th> </tr> <tr> <th>Decorative</th> <th>Globe (G) Shape</th> </tr> </thead> <tbody> <tr> <td>10</td> <td>70-89</td> <td>--</td> </tr> <tr> <td>15</td> <td>90-149</td> <td>--</td> </tr> <tr> <td>25</td> <td>150-299</td> <td>250-349</td> </tr> <tr> <td>40</td> <td>300-499</td> <td>350-499</td> </tr> <tr> <td>60</td> <td>500-699</td> <td>500-574</td> </tr> <tr> <td>75</td> <td>--</td> <td>575-649</td> </tr> <tr> <td>100</td> <td>--</td> <td>650-1,099</td> </tr> <tr> <td>125</td> <td>--</td> <td>--</td> </tr> <tr> <td>150</td> <td>--</td> <td>1,100-1,300</td> </tr> </tbody> </table>		Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output (Lumens)		Decorative	Globe (G) Shape	10	70-89	--	15	90-149	--	25	150-299	250-349	40	300-499	350-499	60	500-699	500-574	75	--	575-649	100	--	650-1,099	125	--	--	150	--	1,100-1,300		
	Rated Wattage of the Referenced Incandescent Lamp (watts)	Light Output (Lumens)																																		
		Decorative	Globe (G) Shape																																	
	10	70-89	--																																	
	15	90-149	--																																	
	25	150-299	250-349																																	
	40	300-499	350-499																																	
	60	500-699	500-574																																	
	75	--	575-649																																	
100	--	650-1,099																																		
125	--	--																																		
150	--	1,100-1,300																																		

9.3. Elevated Temperature Light Output Ratio: All Directional Lamps
 (Exemption: Omnidirectional, decorative, and lamps labeled "not for use in recessed fixtures" or equivalent statement)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Directional	Lamp shall maintain ≥ 90% of initial light output (total luminous flux) measured at ambient temperature (25°C ±5°C) when tested in the same elevated temperature condition required by the Lumen Maintenance requirement. Calculation of the elevated temperature light output ratio shall be carried out with directly measured (unrounded) values.	Measurement: <u>ENERGY STAR Elevated Temperature Light Output Ratio Test</u> or IES LM-82-12	Sample Size: One unit tested base-up. The reported value shall be the calculated ratio for the unit rounded to the nearest tenth. To utilize LM-82-12, the partner must designate a temperature measurement point (T _b) for attaching the thermocouple.

9.4. Center Beam Intensity: PAR, MR and MRX Lamps

Wattage equivalency claims on the lamp, its base or packaging, product literature or point-of-purchase materials, either printed or electronic may not exceed values certified. This specification does not support equivalency claims to reference incandescent or halogen products that have not been commercially available.

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
ANSI Standard PAR, MR and MRX Lamps	Lamp center beam intensity measured value shall be greater than or equal to the center beam intensity value calculated by the <u>ENERGY STAR® Lamp Center Beam Intensity Benchmark Tool</u> for the referenced incandescent lamp. (www.energystar.gov/LampsCBCP) For equivalency claims not supported by this tool, lamp must meet or exceed the measured center beam candlepower (CBCP) of the referenced incandescent or halogen product with the same nominal beam spread.	Measurement (fluorescent): IES LM-66-14 Measurement (solid-state): IES LM-79-08 Measurement (incandescent): IES LM-20-13 Reference Documents: IES LM-54-12	Sample Size: One new unit. The sample may be the same unit for testing color angular uniformity as applicable. The reported value shall be the measured candela value rounded to the nearest whole number.

9.5. Luminous Intensity Distribution: ANSI Standard Omnidirectional and Decorative

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
ANSI Standard Omnidirectional Lamps Refer to Section 1.1 for eligible ANSI standard lamp shapes	Lamp luminous intensity distribution shall emulate that of the referenced incandescent lamp as follows: 80% of the luminous intensity measured values (candelas) shall vary by no more than 35% from the average of all measured values in the 0° to 130° zone. All measured values (candelas) in the 0° to 130° zone shall vary by no more than 60% from the average of all measured values in that zone. No less than 5% of total flux (zonal lumens) shall be emitted in the 130° to 180° zone. See Appendix A-1 for illustration.	Measurement (solid-state): IES LM-79-08 Reference Document: ENERGY STAR Luminous Intensity Distribution Tool	Sample Size: One unit. Lamp luminous intensity shall be measured about the lamp (polar) axis, in maximum increments of 22.5° from 0° to at least 180° about the polar axis. Within each vertical plane luminous intensity measurements shall be taken from 0° to 180° at 5° vertical angle increments (maximum).
ANSI Standard Decorative Lamps Refer to Section 1.1 for eligible ANSI standard lamp shapes	Lamp luminous intensity distribution shall emulate that of the referenced incandescent lamp as follows: No less than 5% of total flux (lumens) shall be emitted in the 110° to 180° zone. See Appendix A-2 for illustration.		Sample Size: One unit.

9.6. Correlated Color Temperature (CCT): All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	Reported lamp model light color temperature shall correlate to one of the following nominal CCTs, additionally 9 out of 10 units shall fall within a 7-step MacAdam ellipse or ANSI quadrangle for the designated CCT, per the referenced ANSI document: <ul style="list-style-type: none"> • 2200K* • 2500K* • 2700K • 3000K • 3500K • 4000/4100K • 5000K • 6500K 	Measurement: IES LM-66-14 or U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final) Calculation: CIE 15-2004 Reference Documents: ANSI C78.376-2014 Sections 2 and 4, and Table 2 IES LM-54-12	Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. Measurements shall be taken at the end of 100 hours of seasoning according to IES LM-54-12. Reported CCT shall be the average of the unit measured values rounded to the nearest 100K.
Solid-State	(Continued from above)	Measurement: IES LM-79-08 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final) Calculation: CIE 15.2004 Reference Document: ANSI C78.377-2015	Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. Reported CCT shall be the average of the unit measured values rounded to the nearest 100K.

*These nominal CCTs are limited to filament-style lamps and are not eligible for early interim certification.

9.7. Color Rendering: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	<p>Lamp shall have a color rendering index (R_a) ≥ 80. The average of units tested shall meet the requirements and no more than 3 units shall have $R_a < 77$. No unit shall have $R_a < 75$.</p> <p>Lamp R_0 value shall be reported.</p> <p>Spectral power distribution shall be reported for wavelengths from 380 nm to 780 nm (at a minimum), with an interval not greater than 5 nm.</p>	<p>Calculation: CIE 13.3-1995 or U.S. Department of Energy Conservation Test Procedure for Compact Fluorescent Lamps (once final)</p> <p>Measurement: IES LM-66-14 or U.S. Department of Energy Conservation Test Procedure for Compact Fluorescent Lamps (once final)</p> <p>Reference Document: IES TM-27-14 IES TM-30-15</p>	<p>Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position.</p>
Solid-State	<p>Lamp shall have a color rendering index (R_a) ≥ 80. The average of units tested shall meet the requirements and no more than 3 units shall have $R_a < 77$. No unit shall have $R_a < 75$.</p> <p>Lamp shall have an $R_0 > 0$.</p> <p>Spectral power distribution shall be reported for wavelengths from 380 nm to 780 nm (at a minimum), with an interval not greater than 5 nm.</p>	<p>Calculation: CIE 13.3-1995 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)</p> <p>Measurement: IES LM-79-08 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)</p> <p>Reference Document: IES TM-27-14 IES TM-30-15</p>	<p>Reported values shall be the average of the unit measured values rounded to the nearest whole number.</p>

9.8. Color Maintenance: All Solid-State Lamps

(Exemption: Compact Fluorescent Lamps)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Solid-State	<p>Lamp change in chromaticity coordinates from 0-hour measurement, at any measurement point required by the specification or reference test method during operation, shall be within a total linear distance of 0.007 on the CIE 1976 u'v' diagram. All units shall meet this requirement.</p>	<p>Measurement: IES LM-79-08 IES LM-80-08 (for early interim certification)</p> <p>or</p> <p>IES LM-84-14 in conjunction with U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)</p> <p>Reference Document: ANSI C78.377-2015</p>	<p>Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position.</p> <p>Reported color maintenance shall be the calculated value for each unit rounded to the nearest significant digit.</p>

9.9. Color Angular Uniformity: Solid-State Directional Lamps

(Exemption: All Other Lamps)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Solid-State Directional	<p>Variation of chromaticity across the beam angle of the lamp shall be within a total linear distance of 0.006 from the weighted average point on the CIE 1976 (u'v') diagram.</p>	<p>Measurement: IES LM-79-08</p> <p>Reference Document: ANSI C78.377-2015</p>	<p>Sample Size: One unit. The sample may be the same unit for testing Center Beam Intensity, as applicable.</p> <p>Lamp shall be scanned on two planes separated by 90 degrees. Maximum vertical scanning resolution shall be 2° for beam angles less than 15° and 5° for beam angles 15° or greater.</p> <p>Complete luminous intensity distribution data shall be reported.</p>

10. LUMEN MAINTENANCE AND RATED LIFE

Required durations of lumen maintenance and rapid cycle stress testing corresponding to lamp's rated life claim shall be completed. Rated life claims on the lamp, its base or packaging, product literature or point-of-purchase materials, either printed or electronic may not exceed values certified according to this specification. The highest wattage, be it the measured wattage of a single unit sample or the rated wattage for the model, should be used to determine the testing temperature.

10.1. Lumen Maintenance: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance																		
Compact Fluorescent	<p>Lamp shall maintain $\geq 90\%$ of initial lumen output at 1,000-hours. The reported value shall be the average lumen maintenance of 10 units. All units shall be surviving at 1,000-hours.</p> <p>Lamp shall maintain $\geq 80\%$ of initial lumen output at 40% of rated life. The reported value shall be the average lumen maintenance of ≥ 9 surviving units, and shall meet the requirement for the designated life claim, and no more than 3 units may have lumen maintenance $< 75\%$ at 40% of rated life.</p> <p>Initial Certification: A product may be certified based on partial life testing, and shall meet all other requirements of the specification as certified by an EPA-recognized Certification Body. Initial certification occurs at 40% of rated life for CFLs and 3,000 hours for LED lamps. A product photo is required to identify the current version of the certified product.</p> <p>Packaging Review: Electronic or hard copy labeling and packaging samples are required for the specific model. Packaging must meet all of the requirements identified under the Lifetime and Packaging Requirements. The specific certified model must be distributed within this approved product packaging.</p> <p>Due Date: A due date for the final average rated life time test report must be established based on the date the lifetime test began and the rated lifetime of the model. Products that meet the above requirements may be considered certified for ENERGY STAR and may be labeled.</p> <p>Full Qualification: The final rated life time test results must be certified within 60 days of completion of the test and must demonstrate that the product meets the rated lifetime claim established during initial certification.</p> <p>Upgrading the Lifetime of a Certified Product: The lifetime of a product certified using the procedures above may be increased</p>	<p>Measurement (fluorescent): <u>ENERGY STAR Elevated Temperature Life Test</u></p> <p>IES LM-65-14 IES LM-66-14</p> <p>10 CFR Part 429 and Part 430 Appendix W to Subpart B as applicable</p> <p>Reference Documents for all lamps not covered by DOE: IES LM-54-12</p>	<p>Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. If Option A is selected then all 10 lamps may be tested base-up. The sample size for lamps covered by DOE's regulatory program that require elevated temperature life testing as prescribed below shall include sampling and testing in accordance with 10 CFR 430 Appendix W to Subpart B and only 5 units tested at the elevated temperature as prescribe below.</p> <p>Prescribed test time is the total ON time and shall not include the OFF time during lamp cycling.</p> <p>The following shall be tested according to the test standard and operating temperatures outlined below:</p> <table border="1"> <thead> <tr> <th>Lamp Type/Wattage</th> <th>Methods of Measurement and/or Reference Documents</th> <th>Operating Temperature</th> </tr> </thead> <tbody> <tr> <td>Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging</td> <td>IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B</td> <td>Ambient temperature conditions (25°C \pm1°C)</td> </tr> <tr> <td>Directional lamps ≤ 20 watts</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 45°C \pm5°C</td> </tr> <tr> <td>Directional lamps > 20 watts</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 55°C \pm5°C</td> </tr> <tr> <td>All other lamps not covered by DOE</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 45°C \pm5°C</td> </tr> <tr> <td>Lamps covered by DOE</td> <td>IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B</td> <td>Ambient temperature conditions (25°C \pm1°C)</td> </tr> </tbody> </table>	Lamp Type/Wattage	Methods of Measurement and/or Reference Documents	Operating Temperature	Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging	IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B	Ambient temperature conditions (25°C \pm 1°C)	Directional lamps ≤ 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C \pm 5°C	Directional lamps > 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 55°C \pm 5°C	All other lamps not covered by DOE	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C \pm 5°C	Lamps covered by DOE	IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B	Ambient temperature conditions (25°C \pm 1°C)
			Lamp Type/Wattage	Methods of Measurement and/or Reference Documents	Operating Temperature																
Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging	IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B	Ambient temperature conditions (25°C \pm 1°C)																			
Directional lamps ≤ 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C \pm 5°C																			
Directional lamps > 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 55°C \pm 5°C																			
All other lamps not covered by DOE	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C \pm 5°C																			
Lamps covered by DOE	IES LM-65-14; IES LM-66-14 for photometric measurements; 10 CFR Appendix W to Subpart B	Ambient temperature conditions (25°C \pm 1°C)																			
			<p>For CFLs not covered by DOE's regulatory program, initial lumen output measurements shall be taken at the end of 100 hours of seasoning according to IES LM-54-12. The reported value shall</p>																		

	<p>only by demonstrating full compliance with the ENERGY STAR criteria at the new lifetime. Packaging proofs must be reviewed as in the initial certification process.</p> <table border="1" data-bbox="406 325 787 504"> <thead> <tr> <th>Rated Lifetime (hours)</th> <th>Early Interim (40% Rated Life) (hours)</th> <th>Full Certification (hours)</th> </tr> </thead> <tbody> <tr> <td>10,000</td> <td>4,000</td> <td>10,000</td> </tr> <tr> <td>12,000</td> <td>4,800</td> <td>12,000</td> </tr> <tr> <td>15,000</td> <td>6,000</td> <td>15,000</td> </tr> <tr> <td>20,000</td> <td>8,000</td> <td>20,000</td> </tr> </tbody> </table>	Rated Lifetime (hours)	Early Interim (40% Rated Life) (hours)	Full Certification (hours)	10,000	4,000	10,000	12,000	4,800	12,000	15,000	6,000	15,000	20,000	8,000	20,000	<p>be the average of the unit values rounded to the nearest tenth of a percent.</p> <p>For CFLs covered by DOE's regulatory program (i.e., medium base CFLs without reflectors or 3-way capabilities), the value should be calculated according to the 10 CFR 429.35.</p> <p>Subsequent to initial certification, It is suggested that Initial Rapid Cycle Stress Test be completed in anticipation of final product lifetime. The following tests must be completed: Rapid Cycle Stress Test, Lumen Maintenance, Interim Life and Lifetime Test.</p>																														
Rated Lifetime (hours)	Early Interim (40% Rated Life) (hours)	Full Certification (hours)																																													
10,000	4,000	10,000																																													
12,000	4,800	12,000																																													
15,000	6,000	15,000																																													
20,000	8,000	20,000																																													
<p>Solid-State</p>	<p>Lamp shall maintain minimum percentage of 0-hour light output after completion of the 6000-hr test duration per the table(s) below. The reported value shall be the average lumen maintenance of 10 units and shall meet the minimum requirement for the designated lifetime claim in Section 10.2. Lamp may earn optional early interim certification after 3,000 hours, with a rated life claim ≤ 25,000 hours, per the provisions below.</p> <table border="1" data-bbox="397 819 787 1134"> <thead> <tr> <th>Maximum Life Claim (hours to L₇₀)</th> <th>Minimum Lumen Maintenance After Test Duration</th> <th>Status After Completion of Test Duration</th> </tr> </thead> <tbody> <tr> <td>15,000</td> <td>86.7%</td> <td rowspan="3">Final certification testing completed.</td> </tr> <tr> <td>20,000</td> <td>89.9%</td> </tr> <tr> <td>25,000</td> <td>91.8%</td> </tr> <tr> <td>30,000</td> <td>93.1%</td> <td rowspan="4">Interim certification; continue testing per below.</td> </tr> <tr> <td>35,000</td> <td>94.1%</td> </tr> <tr> <td>40,000</td> <td>94.8%</td> </tr> <tr> <td>45,000</td> <td>95.4%</td> </tr> <tr> <td>50,000</td> <td>95.8%</td> <td></td> </tr> </tbody> </table> <p>To Qualify For Early Interim Certification After 3,000 Hours: Lamp average lumen maintenance of the 10 units shall meet the minimum percentages of 0-hour light output corresponding to the lamp's life claim per the table below, and shall meet all other requirements in this specification. A lumen maintenance projection calculation using the applicable LM-80-08 test report for the employed LED package/module/array model ("device"), the <i>in situ</i> temperature of highest temperature TMP_{LED}, and the forward drive current applied to each device shall support a rated lumen maintenance life greater than or equal to the lamp rated life value to be claimed on product packaging as determined by IES TM-21-11.</p> <table border="1" data-bbox="373 1648 738 1795"> <thead> <tr> <th>Maximum Life Claim (hours to L₇₀)</th> <th>Minimum Lumen Maintenance After 3,000 Hours</th> </tr> </thead> <tbody> <tr> <td>15,000</td> <td>93.1%</td> </tr> <tr> <td>20,000</td> <td>94.8%</td> </tr> <tr> <td>25,000</td> <td>95.8%</td> </tr> </tbody> </table> <p>For Extended Lifetime Claims: For lamp life claims >25,000 hours, lamp shall maintain ≥ 91.5% of 0-hour light output after completion of the test</p>	Maximum Life Claim (hours to L ₇₀)	Minimum Lumen Maintenance After Test Duration	Status After Completion of Test Duration	15,000	86.7%	Final certification testing completed.	20,000	89.9%	25,000	91.8%	30,000	93.1%	Interim certification; continue testing per below.	35,000	94.1%	40,000	94.8%	45,000	95.4%	50,000	95.8%		Maximum Life Claim (hours to L ₇₀)	Minimum Lumen Maintenance After 3,000 Hours	15,000	93.1%	20,000	94.8%	25,000	95.8%	<p>Method of Measurement (lamps): <u>ENERGY STAR Elevated Temperature Life Test</u> <u>ENERGY STAR Ambient Temperature Life Test</u></p> <p>LED Lumen Maintenance Test Method: IES LM-80-08</p> <p>Lumen Maintenance Projection Method: IES TM-21-11</p> <p>Reference Document: <u>ENERGY STAR TM-21 Calculator</u></p> <p>Or: U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)</p> <p>Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. If Option A is selected then all 10 lamps may be tested base-up.</p> <p>The following shall be tested according to the test standard and operating temperatures outlined below:</p> <table border="1" data-bbox="982 787 1477 1344"> <thead> <tr> <th>Lamp Type/Wattage</th> <th>Methods of Measurement and/or Reference Documents*</th> <th>Operating Temperature</th> </tr> </thead> <tbody> <tr> <td>Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging</td> <td>ENERGY STAR Ambient Temperature Life Test</td> <td>Between 20°C and 35°C</td> </tr> <tr> <td>Directional lamps ≤ 20 watts</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 45°C ±5°C</td> </tr> <tr> <td>Directional lamps > 20 watts</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 55°C ±5°C</td> </tr> <tr> <td>All other omnidirectional and decorative lamps</td> <td>ENERGY STAR Elevated Temperature Life Test</td> <td>Option A or B or C at 45°C ±5°C</td> </tr> </tbody> </table> <p>*Temperature ranges for applicable lamp types shall remain if the DOE final test method allows.</p> <p>Testing for early interim and final certification shall be conducted on the same samples, which shall also satisfy the 6,000 hour testing for the rated life requirements (next section).</p> <p>A 3% tolerance may be applied to all measured luminous flux values (e.g., [luminous flux X 1.03]) except at the 0-hour measurement, if the calculated lumen maintenance value fails to meet the requirement without the tolerance. No other tolerances should be applied.</p> <p>Lamp Sample Size for Early Interim Certification Temperature Test: One lamp per model for <i>in situ</i> measurement of highest temperature TMP_{LED}.</p> <p>Device Sample Size for Early Interim Certification: Minimum sample size of 20 units for LED packages, or 10 units for LED arrays or LED modules, for each T₈ and drive current combination (refer to IES TM-21-11, Section 4.2).</p>	Lamp Type/Wattage	Methods of Measurement and/or Reference Documents*	Operating Temperature	Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging	ENERGY STAR Ambient Temperature Life Test	Between 20°C and 35°C	Directional lamps ≤ 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C ±5°C	Directional lamps > 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 55°C ±5°C	All other omnidirectional and decorative lamps	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C ±5°C
Maximum Life Claim (hours to L ₇₀)	Minimum Lumen Maintenance After Test Duration	Status After Completion of Test Duration																																													
15,000	86.7%	Final certification testing completed.																																													
20,000	89.9%																																														
25,000	91.8%																																														
30,000	93.1%	Interim certification; continue testing per below.																																													
35,000	94.1%																																														
40,000	94.8%																																														
45,000	95.4%																																														
50,000	95.8%																																														
Maximum Life Claim (hours to L ₇₀)	Minimum Lumen Maintenance After 3,000 Hours																																														
15,000	93.1%																																														
20,000	94.8%																																														
25,000	95.8%																																														
Lamp Type/Wattage	Methods of Measurement and/or Reference Documents*	Operating Temperature																																													
Lamps labeled 1) "not for use in totally enclosed luminaires" (or equivalent statement), and 2) "not for use in recessed luminaires" (or equivalent statement) on lamp and lamp packaging	ENERGY STAR Ambient Temperature Life Test	Between 20°C and 35°C																																													
Directional lamps ≤ 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C ±5°C																																													
Directional lamps > 20 watts	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 55°C ±5°C																																													
All other omnidirectional and decorative lamps	ENERGY STAR Elevated Temperature Life Test	Option A or B or C at 45°C ±5°C																																													

	<p>duration corresponding to lamp's life claim per the table below.</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Maximum Life Claim (hours to L₇₀)</th> <th>Test Duration (hours) *</th> </tr> </thead> <tbody> <tr> <td>30,000</td> <td>7,500</td> </tr> <tr> <td>35,000</td> <td>8,750</td> </tr> <tr> <td>40,000</td> <td>10,000</td> </tr> <tr> <td>45,000</td> <td>11,250</td> </tr> <tr> <td>50,000</td> <td>12,500</td> </tr> </tbody> </table> <p>* Prescribed test duration is the total ON time and shall not include the OFF time.</p>	Maximum Life Claim (hours to L ₇₀)	Test Duration (hours) *	30,000	7,500	35,000	8,750	40,000	10,000	45,000	11,250	50,000	12,500	<p>For color tunable lamps, the TM-21-11 projection for all LED sources used shall meet the requirement.</p> <p>Compliance with the above shall be documented with a TM-21 lumen maintenance life projection report as detailed in TM-21, section 7. The report shall be generated using data from the LM-80 test report for the employed LED package/module/array model ("device"), the forward drive current applied to each device, and the <i>in situ</i> TMP_{LED} temperature of the hottest device in the lamp. In addition to LM-80 reporting requirements, the following information shall be reported:</p> <ul style="list-style-type: none"> • Sampling method and sample size (per LM-80 section 4.3) • Test results for each T_s and drive current combination • Description of device including model number and whether device is an LED package, module or array (see Definitions) • ANSI target, and calculated CCT value(s) for each device in sample set • Δ u'v' chromaticity shift value on the CIE 1976 diagram for each device in sample set • A detailed rationale, with supporting data, for application of results to other devices (e.g., LED packages with other CCTs) <p>If units are tested both base-up and base-down, the average of surviving unit measured values shall be calculated for each orientation. If the difference between these averages is:</p> <ul style="list-style-type: none"> • Greater than 3%, the reported lumen maintenance shall be the lesser of the two averages rounded to the nearest tenth of a percent. • Less than 3%, the reported lumen maintenance shall be the average of all surviving units rounded to the nearest tenth of a percent. <p>If units are tested in one orientation, the average of surviving unit measured values shall be reported rounded to the nearest tenth percent.</p>
Maximum Life Claim (hours to L ₇₀)	Test Duration (hours) *													
30,000	7,500													
35,000	8,750													
40,000	10,000													
45,000	11,250													
50,000	12,500													

10.2. Rated Life: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	<p>Lamp shall have a rated life ≥ 10,000 hours.</p> <p>At 40% of rated life 90% of the tested units shall be operational.</p> <p>≥ 50% of the tested units shall be operational at rated life.</p>	<p>See Section 10.1 Lumen Maintenance Requirements.</p>	<p>Sample Size: Same samples used for lumen maintenance testing, see Section 10.1.</p> <p>For CFLs covered by DOE's regulatory program (i.e., medium base CFLs without reflectors or 3-way capabilities), the reported value shall be in accordance with 10 CFR 429.35.</p> <p>For lamps not covered by DOE's regulatory program, the reported value shall be the rated life in hours.</p>
Solid-State	<p>Omnidirectional and decorative lamps shall have a rated life ≥ 15,000 hours.</p> <p>Directional lamps shall have a rated life ≥ 25,000 hours.</p> <p>All tested units shall be operational at all applicable lumen maintenance measurement points designated in Section 10.1.</p>		

10.3. Rapid Cycle Stress Test: Compact Fluorescent Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	<p>Lamp, when cycled at 5 minutes on, 5 minutes off, shall survive the lesser number of cycles: one cycle per hour of rated life or 15,000 cycles. At least 5 units shall survive the minimum number of cycles.</p> <p>CFLs with a start time \leq 100 milliseconds, shall survive cycling once per every two hours of rated life, at 5 minutes on, 5 minutes off.</p>	<p>Measurement: (fluorescent not covered by DOE): IES LM-65-14 (clauses 4,5,6)</p> <p>Measurement (fluorescent covered by DOE): 10 CFR Part 430 Appendix W Subpart B</p>	<p>Sample Size: 6 units per model. The samples shall be unique for this test.</p> <p>For dimmable or multi-power lamps, testing shall be conducted at the highest wattage setting listed for the model.</p> <p>The reported value shall be the number of units surviving the minimum number of cycles.</p>

11. ELECTRICAL PERFORMANCE REQUIREMENTS

11.1. Electrical Safety: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Lamps	Lamp shall comply with ANSI/UL 1993-2012 and ANSI/UL 8750-2009 as applicable.	Reference: ANSI/UL 1993-2012 ANSI/UL 8750-2009	Connected products must continue to comply with the applicable product safety standards – the addition of the functionality described in Section 12.7 Connected Product Criteria shall not override existing safety protections and functions.

11.2. Power Factor: All Lamps (Exemption: Lamps \leq 5 Watts)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	Reported value for each lamp model shall have a reported value \geq 0.5.	Measurement: ANSI C82.77-10-2014 or U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final)	Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position.
Solid-State	Omnidirectional lamps with rated/reported input power \leq 10 watts shall have a reported value \geq 0.6. All other lamps shall have a reported value \geq 0.7.	Measurement: ANSI C82.77-10-2014 or U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)	Tested units, including low voltage lamps, shall be operated at rated voltage. The reported value shall be the average measured values of units tested rounded to the nearest tenth.

11.3. Frequency: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	Lamp shall have a frequency within 20 to 33 kHz, or \geq 40 kHz.		Sample Size: One unit per model. For purposes of third-party certification documentation shall not be reviewed when products are certified or during verification testing.
Solid-State	Lamp light output shall have a frequency \geq 120 Hz.	Method of Measurement: None referenced Reference Document: IEEE Std 1789™-2015	Sample Size: One unit per model. Light output waveform shall be measured with a photodetector with a rise time of 10 microseconds or less, transimpedance amplifier and oscilloscope. Employed equipment models and method of measurement shall be documented. Temporal response, amplification and filtering characteristics of the system shall be suitably designed to capture the photometric waveform. Digitized photometric waveform data and an image of the relative photometric amplitude waveform shall be recorded. Measured data shall be recorded to a digital file with an interval between each measurement no greater than 0.00005 sec (50 microseconds) corresponding to an equipment measurement rate of no less than 20 kHz, and capture at least 1 second of data. For purposes of third-party certification documentation shall not be reviewed when products are certified or during verification testing.

11.4. Start Time: All Lamps

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Non-Connected Lamps	Reported value of time for lamp to remain continuously illuminated shall be within 750 milliseconds of application of electrical power.	Measurement: <u>ENERGY STAR Start Time Test</u>	Sample Size: 3 units per model. The reported value shall be the average of measured unit values tested, rounded to the nearest millisecond.
Connected Lamps	Reported value of time for lamp to remain continuously illuminated shall be within 1 second of application of electrical power.	Measurement (fluorescent): U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final)	

11.5. Run-Up Time: All Compact Fluorescent Lamps (Exemption: LED Lamps)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Compact Fluorescent	Reported value of time for lamp to achieve 80% stabilized light output shall be \leq 45 seconds.	Measurement: <u>ENERGY STAR Run-Up Time Test</u> Reference Documents: IES LM-54-12	Sample Size: 10 units per model: 5 units tested base-up and 5 units tested base-down unless the manufacturer restricts specific use or position. If position is restricted, all units shall be tested in restricted position. Measurements shall be taken at the end of 100 hours of seasoning. The reported value shall be the average measured values of units tested, rounded to the nearest second.

11.6. Transient Protection: All Line Voltage Lamps (Exemption: Low Voltage Lamps)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Line Voltage Lamps	Lamp shall survive 7 strikes of a 100 kHz ring wave, 2.5 kV level. All units shall be fully operational at the completion of testing.	Measurement: ANSI/IEEE C82.41.2-2002, Category A Location.	Sample Size: 5 units per model. The sample shall be unique for this test.

11.7. Standby Power Consumption: All Lamps

Source Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Source Types	Lamps without integral controls shall not draw power in the off mode. Exception: Lamps with integral controls (e.g., motion sensors, photosensors, wireless control, standby mode, or connected functionality) shall consume no more than 0.5 watt in standby mode or network mode. Standby power (if applicable) shall be reported for equipment (outside of the lamp) required for connectivity (e.g., gateways, hubs, and network controllers, excluding equipment typically found in the home such as a Wi-Fi router).	IEC 62301 Edition 2.0 2011-01 Household electrical appliances - Measurement of standby power U.S. Department of Energy Conservation Test Procedures for Compact Fluorescent Lamps (once final) U.S. Department of Energy Conservation Test Procedure for Integrated Light-Emitting Diode Lamps (once final)	Sample Size: One unit per model. Laboratory test results shall detail off-state power consumption to the tenth of a watt. This applies to lamps that may have wireless controllability but may not meet all connected criteria as identified in the specification definition for connected lamp and <u>Section 12.7 Connected Product Criteria</u> . If required for connectivity, the lamp manufacturer shall specify one set of representative equipment (outside of the lamp) for which standby power shall be reported.

12. CONTROLS REQUIREMENTS: LAMPS EMPLOYING ANY CONTROL MECHANISM

12.1. Dimming Performance: All Lamps Marketed as Dimmable

Lamps designed for phase cut dimming operation (alterations to the line voltage to the lamp), shall be tested against all dimming performance requirements with a minimum of 5 dimmers from at least 2 different manufacturers. The lamp manufacturer shall specify and report the dimmers used for testing by the manufacturer name, model number and load ratings including current and wattage. EPA's intent is for the dimmers selected to be varied in electrical construction and to represent a wide range of potential consumer situations. For example, a selection of five dimmers might include at least one dimmer specified for use with energy efficient lighting (such as CFL or LED lamps), one that has pre-set levels, one forward-phase dimmer rated 600W, and one reverse-phase dimmer. As an alternative, a lamp designed to be compliant with NEMA SSL 7A may be tested against all dimming performance requirements with a corresponding NEMA SSL 7A compliant dimmer⁵. Lamp manufacturers of low voltage products shall specify and report the transformer(s) to be used for dimming testing by manufacturer name and model number.

Lamps compatible with a non-phase cut control device (e.g., a dimmer that does not alter the line voltage to the lamp, such as wireless controls), shall be tested with the control device(s) and application(s) specified by the partner against all dimming performance requirements. The lamp packaging and online product marketing materials shall call out the controls that can be used with the lamp. An asterisk or similar mark should appear next to the word "dimmable" and point to a statement similar to "only compatible with..." that indicates which dimmers the lamp is compatible with.

The tested minimum light level on dimmers or controls shall be the minimum light level claimed by the manufacturer (or 20% if no minimum is claimed), and the lamp shall meet audible noise requirements at this level. For purposes of third-party certification, maximum light output, minimum light output, flicker and noise levels shall be reported by the partner to the certification body. Partners may elect to provide the certification body with supporting test data and may request that this data be provided to EPA on their behalf. Review of supporting test data is not required for certification or for verification testing. However, EPA reserves the right to request this documentation at any time.

12.2. Maximum Light Output:

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Lamps Marketed As Dimmable	Lamp light output on the maximum setting of a dimmer/control shall not fall below the lamp's baseline light output when operated without a dimmer by more than 20%. 80% of tested lamp/dimmer combinations must meet the requirement.	Measurement: <u>ENERGY STAR Recommended Practice - Light Output on a Dimmer</u>	Sample Size: 1 lamp per dimmer. See Section 8 of the Recommended Practice - Light Output on a Dimmer, for reporting information.

12.3. Minimum Light Output:

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Lamps Marketed As Dimmable	Lamp light output on a dimmer/control shall be no more than 20% of the maximum light output of the lamp on each tested dimmer/control. 80% of tested lamp/dimmer combinations must meet the requirement.	Measurement: <u>ENERGY STAR Recommended Practice - Light Output on a Dimmer</u>	Sample Size: 1 lamp per dimmer. See Section 8 of the Recommended Practice - Light Output on a Dimmer, for reporting information.

⁵ The compatibility testing pathway of NEMA SSL 7A is available once the marketing guidelines for matching compliant lamps to compliant dimmer types have been set.

12.4. Flicker:

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Lamps Marketed As Dimmable	Lamp average light output periodic frequency, highest percent flicker, and highest flicker index shall be reported.	Measurement: <u>ENERGY STAR Recommended Practice - Light Source Flicker</u>	Sample Size: 1 lamp per dimmer. See Section 8 of the Recommended Practice - Light Source Flicker, for reporting information.

12.5. Audible Noise:

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All Lamps Marketed as Dimmable	Lamp shall not emit noise above 24 dBA at 1 meter or less. 80% of tested lamp/dimmer combinations must meet the requirement.	Measurement: <u>ENERGY STAR Test Method - Noise</u> Reference: ISO 7574-4:1985, B.2.1 ANSI S12.55-2012/ISO3745:2012	Sample Size: 1 lamp per dimmer. Measurement shall be on a single lamp. See Section 8 of the Test Method – Noise, for reporting information. The baseline sound level may be corrected for in accordance with ISO 7574-4:1985, B.2.1. This allows for testing to be performed in chambers that are not fully anechoic. The reported sound level value shall be the loudest measurement of all lamp/dimmer combinations.

12.6. Products with Connected Functionality – Optional

Source Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
All source types	Product must continue to comply with the applicable product safety standards – the addition of the functionality shall not override existing safety protections and functions. Product must comply with Section 11.7 Standby Power Consumption. Power consumption (if applicable) shall be reported for equipment (outside of the lamp) required for connectivity (e.g., gateways, hubs, and network controllers, excluding equipment typically found in the home such as a Wi-Fi router).	Measurement: None	Test Requirements: Connected products without color tuning capabilities shall be tested at full power for all applicable requirements. Connected products with color tuning capabilities shall be tested under the conditions specified under <u>Section 5.1</u> . Compliance with connected functionality requirements, in Sections 12.7-12.12, shall be demonstrated through examination of product and/or product documentation. If required for connectivity, the lamp manufacturer shall specify one set of representative equipment (outside of the lamp) for which power consumption shall be reported.

12.7. Connected Product Criteria:

To be recognized as connected, a “connected lamp” shall include elements (hardware and software or firmware) or instructions required to enable communication in response to consumer-authorized energy or performance related commands (e.g., instructions for downloading a mobile application, Bluetooth syncing guidance) and shall meet the requirements in Sections 12.8-12.12. These elements may reside inside or outside of the base lamp. For example, a “base lamp” may connect wirelessly via a home gateway or network controller to a cloud service that implements energy estimation functions.

The specific design and implementation of the connected lamp is at the manufacturer’s discretion provided it is interoperable with other devices via open communications protocol and enables economical, consumer-authorized third party access to the functionalities provided for in sections 12.9, 12.10 and 12.11. Capabilities of system controller and connected protocol shall be reported as applicable.

12.8. Open Access

The product shall enable connectivity by one of following means:

1. Open-standards communications from the lamp, or
2. Open-standards communications from an external controller, included with the product or available separately.
3. Where no suitable open standards communications method exists (e.g., an IP interface), an available and documented communication method must be used. In these cases, a manufacturer-specific method to implement the functions in sections 12.9, 12.10, and 12.11 shall be published for use with the product.

To enable interconnection with the product; an interface specification, Application Programming Interface (API) or similar documentation shall be made available to interested parties that enables sections 12.9, 12.10 and 12.11 connected functionality, and includes accuracy, units and measurement or estimation interval for Energy Consumption Reporting.

12.9. Energy Consumption Reporting

The lamp, or the gateway device or cloud service connected to it, shall be capable of interconnecting with consumer authorized entities to communicate data representative of its interval energy consumption. It is recommended that data be reported in watt-hours for intervals of 15 minutes; however, representative data may also be reported in alternate units and intervals as specified in the product manufacturer's interface specification or API. If the lamp does not provide power consumption directly in watts, the manufacturer shall make available a method for estimating power consumption, in watts, from the representative data that is provided by the lamp.

12.10. Operational Status Reporting

At a minimum, the lamp, or the gateway device or cloud service connected to it, shall be capable of providing the following information to energy management systems and other consumer authorized devices, services or applications via a communication link: operational status (e.g., on/off).

12.11. Remote Management

The product shall be capable of receiving and responding to energy management system or other consumer authorized remote requests, via devices, services or applications, similar to hard-wired consumer controllable functions.

12.12. Information to Consumers

If additional devices, services, and/or infrastructure are required to activate the product's connected capabilities, prominent labels, or other forms of consumer notifications shall be displayed at the point of purchase and in the product literature. (e.g., "This product has Z-wave control capability and requires interconnection with a Z-wave controller to enable local lighting control.")

13. LAMP TOXICS REDUCTION

13.1. Lamp Toxics Reduction: All Lamps

Lamp Type	ENERGY STAR Requirements	Method of Compliance
All Lamps	<p>Lamps \leq 23.0 rated watts shall contain \leq 2.5 milligrams (mg) mercury per lamp.</p> <p>Lamps $>$ 23.0 rated watts shall contain \leq 3.0 milligrams (mg) mercury per lamp.</p> <p>When present, lamp shall contain restricted levels of the following materials, where the maximum concentration values allowed by weight in homogeneous materials are:</p> <ul style="list-style-type: none"> • Lead: 0.1% • Cadmium: 0.01% • Hexavalent chromium: 0.1% • Polybrominated biphenyls (PBB): 0.1% • Polybrominated diphenyl ethers (PBDE): 0.1% <p><u>Exemptions:</u></p> <ol style="list-style-type: none"> 1. Copper alloy containing up to 4% lead by weight 2. Lead in high melting temperature type solders (i.e. lead- based alloys containing 85% by weight or more lead) 3. Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g., piezoelectronic devices, or in a glass or ceramic matrix compound 4. Lead in dielectric ceramic in capacitors 5. Lead in white glasses used for optical applications 6. Lead in solders to complete a viable electrical connection between semiconductor die and carrier within integrated circuit flip chip packages 7. Lead in glass of cathode ray tubes, electronic components and fluorescent tubes 8. Cadmium and its compounds in electrical contacts 9. Cadmium in color-converting II-IV LEDs ($<$ 10 μg Cd per mm² of light-emitting area) for use in solid state illumination or display systems 10. Lead as an alloying element in aluminum containing up to 0.4% lead by weight 11. Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses 	<p>For purposes of third-party certification, lamp toxics documentation shall not be reviewed when products are initially certified or during verification testing. Instead manufacturer shall maintain documentation on file to demonstrate that certified products meet these requirements. EPA reserves the right to request this documentation at any time. For the purposes of documenting mercury content, the following test procedure shall be used: IEC 62554 Ed 1.0 Sample Preparation for Measurement of Mercury Level in Fluorescent Lamps (2011-08-19).</p> <p>For materials other than mercury, manufacturer may rely on component suppliers to provide certification or declaration documents to show that homogenous materials used in lamps comply with the requirement. Alternatively, manufacturer may have lamp components tested in accordance with IEC 62321 or other appropriate analytical technique to verify that homogenous materials do not exceed the concentration limits of the six regulated substances. Handheld XRF analyzers/scanners may also be used to verify compliance.</p>

14. DIMENSIONAL REQUIREMENTS

14.1. Lamp Shape Dimensions: All ANSI Standard Lamps and GU-24 base Solid-state Lamps

(Exemption: Non-Standard Lamps)

Lamp Type	ENERGY STAR Requirements	Methods of Measurement and/or Reference Documents	Supplemental Testing Guidance
Omnidirectional ANSI Standard Lamps	Lamp shall comply with ANSI minimum overall length (min OAL), maximum overall length (MOL) and maximum lamp diameter values, where they exist.	Reference Documents: ANSI C78.20:2003 ANSI C78.23:1995 (R2003)	Sample Size: One unit per model. GU24 base lamps may qualify as an allowable variation of an ANSI standard lamp, and shall meet the min OAL and MOL of the ANSI standard lamp.
Directional ANSI Standard Lamps	Lamp shall comply with ANSI minimum overall length (min OAL), maximum overall length (MOL) and maximum lamp diameter values, where they exist.	Reference Documents: ANSI C78.21-2011 ANSI C78.50-2014 ANSI C78.79-2014	
Decorative ANSI Standard Lamps	Lamp shall comply with ANSI minimum overall length (min OAL), maximum overall length (MOL) and maximum lamp diameter values, where they exist. Where no ANSI maximum lamp space drawing exists, lamp maximum outside diameter shall be within $\pm 15\%$ of the lamp nominal diameter. Globe lamps should be essentially spherical and have a ratio of the maximum overall diameter to maximum overall length (excluding base/cap length per ANSI C81.61) of greater than 0.80.	Reference Documents: ANSI C78.23:1995 (R2003)	A +5% tolerance may be applied to the measured maximum overall length (MOL) of an omnidirectional lamp if the lamp fails to meet the requirement without the tolerance.

15. LAMP LABELING, PACKAGING & WARRANTY REQUIREMENTS

15.1. Lamp Labeling: All Lamps

Lamp Type	ENERGY STAR Requirement
All Lamps	<p>Each of the following shall be printed on the lamp:</p> <ul style="list-style-type: none"> • ENERGY STAR partner, lamp manufacturer or brand name • Lamp model or retail SKU number consistent with model number or identifying information in the ENERGY STAR listing of certified models • Lamp nominal correlated color temperature including "Kelvin" or "K" • Rated wattage in watts (lamps not covered by FTC requirements)* • For lamps not covered by FTC requirements, lamp rated lumen output in lumens or lamp nominal beam angle in degrees for applicable products (i.e., MR, MRX). <p>*The lamp correlated color temperature and wattage may be included in the lamp model number and must use "K" or "W" after each respective number.</p>

15.2. Lamp Packaging: All Lamps except as Noted⁶

Criteria	ENERGY STAR Requirement
General	Packaging and marketing claims shall represent the product consistent with its certification.
Model Number	Lamp packaging shall include model number or retail SKU number consistent with model number or identifying information in the ENERGY STAR listing of certified models.
Controls Compatibility	<p>Lamp packaging exterior shall display on the front panel in ≥ 8 point type an indication of the lamp's dimming capability: "dimmable", "for dimmers", "non-dimmable", "do not use with dimmers" or the like. Dimmable lamp packaging shall indicate that the lamp may not be compatible with all dimmers, and shall reference a website providing regularly updated dimmer compatibility information for the lamp model. Lamps that are dimmable with a limited set of controls, e.g., designed for non-phase cut dimmers, that elect to test and list compatibility with the limited set of controls must list all compatible controls on packaging. Lamps that use the SSL7A compatibility testing must use the labeling guidelines for SSL7A complaint products. See Section 12: Dimming.</p> <p>Packaging for lamps not designed for operation with photosensors, motion sensors or timing devices shall indicate in ≥ 8 point type "not compatible with photosensors", "not compatible with timers", "not compatible with motion sensors", "not compatible with photosensors, motion sensors, or timers", or the like.</p>
Application Exceptions	<p>Lamp packaging exterior shall clearly state specific application restrictions (e.g., totally enclosed luminaires, recessed luminaires, insulated ceiling air-tight (ICAT) recessed downlights, damp locations) that would compromise the performance of the lamp and could result in a lamp's noncompliance with the ENERGY STAR specification performance requirements. All application exceptions that appear on the lamp shall also be listed on the lamp package exterior. (≥ 8 point type and/or bold text is recommended.)</p> <p>LED MR Lamps Intended for use on Low-Voltage Circuits: Lamp package must state compatibility with low-voltage transformers. Lamp package and product information sheet must include a caution label indicating the lamp may not be compatible with all low-voltage transformers used in existing light fixtures and identifying the Web address (URL) to find up-to-date low-voltage transformer compatibility and appropriate use information. A voltage waveform (AC or DC) for which a low voltage MR lamp does not provide the certified performance shall be considered an application exception which shall be detailed on lamp packaging: "Not intended for AC operation." or "Not intended for operation on AC transformers." or "Not for use with AC transformers." or the like, where "DC" may be substituted for "AC", as applicable.</p>
Restricted Position	If lamp is tested in a limited orientation, lamp packaging shall indicate the performance ratings are based on that orientation as applicable (e.g., base up only).
Minimum Starting/Operating Temperature	Lamp packaging shall state the minimum starting or operating ambient temperature and shall state any other conditions required for reliable starting as designated by the partner.
Warranty	Lamp packaging shall include warranty information see Warranty Requirements Section of this specification.
CCT Descriptor	<p>If packaging includes a color descriptor term, EPA recommends the following corresponding nomenclature as outlined below.</p> <ul style="list-style-type: none"> • 2200K – Amber Light • 2500K – Sunset Light • 2700K – Soft White • 3000K – Warm White • 3500K – Neutral White • 4000/4100K – Cool White • 5000K – Daylight • 6500K – Daylight


⁶ Packaging requirements must appear on the exterior of lamp packaging and except for model number and retail SKU number, packaging requirements may not be on the bottom of lamp packaging. The outermost package of bulk packaged (e.g. multi-packs for retail or commercial sales) lamps facing the intended end user shall meet these requirements.

15.3. Warranty: All Lamps


Criteria	ENERGY STAR Requirement									
Warranty	<p>Per the table below lamps shall be backed by a minimum warranty corresponding to the lamp life rating and based on continuous operation over the corresponding number of hours per day.</p> <table border="1" data-bbox="397 380 1008 506"> <thead> <tr> <th>Lamp Life Rating (Hours)</th> <th>Minimum Warranty (Years From Date of Purchase)</th> <th>Hours of Use Per Day</th> </tr> </thead> <tbody> <tr> <td>< 15,000</td> <td>2</td> <td>3</td> </tr> <tr> <td>≥ 15,000</td> <td>3</td> <td>3</td> </tr> </tbody> </table> <p>Lamp packaging exterior shall state "Warranty" or "Limited Warranty" and the warranty period (in years) per the above table, and provide a phone number or website address for consumer complaint resolution.</p> <p>If the complete written warranty is not included within the lamp packaging, it shall be available at a website address provided on the packaging exterior.</p>	Lamp Life Rating (Hours)	Minimum Warranty (Years From Date of Purchase)	Hours of Use Per Day	< 15,000	2	3	≥ 15,000	3	3
Lamp Life Rating (Hours)	Minimum Warranty (Years From Date of Purchase)	Hours of Use Per Day								
< 15,000	2	3								
≥ 15,000	3	3								

END OF SPECIFICATION

APPENDIX A-1: LUMINOUS INTENSITY DISTRIBUTION DIAGRAM FOR OMNIDIRECTIONAL LAMP

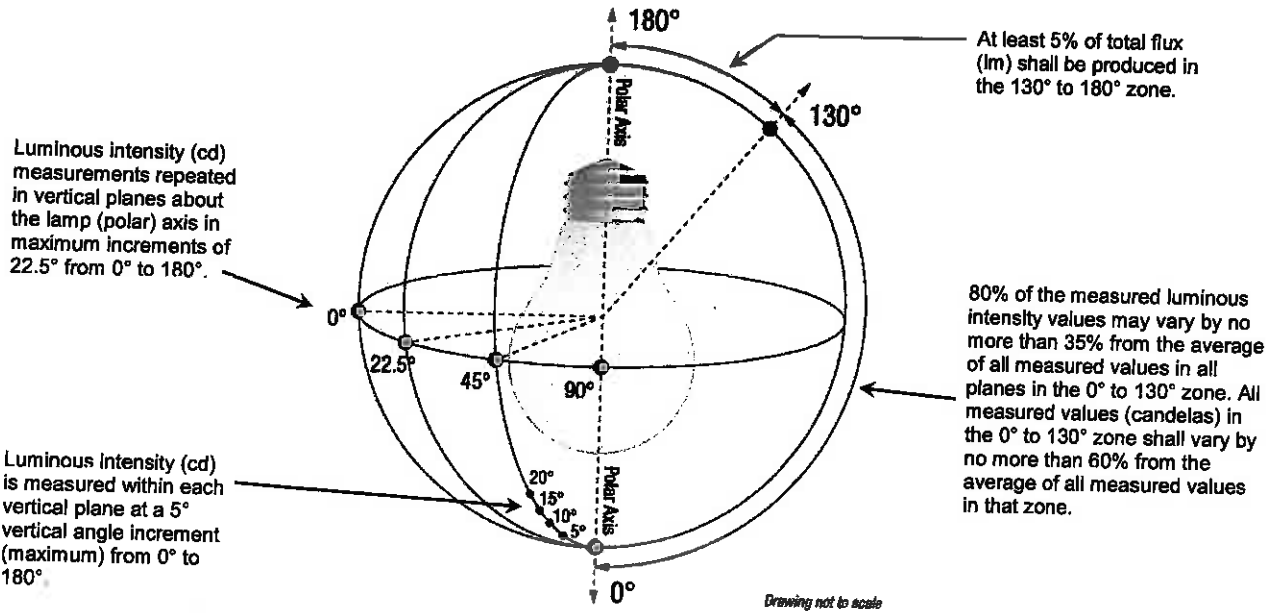

APPENDIX A-2: LUMINOUS INTENSITY DISTRIBUTION DIAGRAM FOR DECORATIVE LAMP

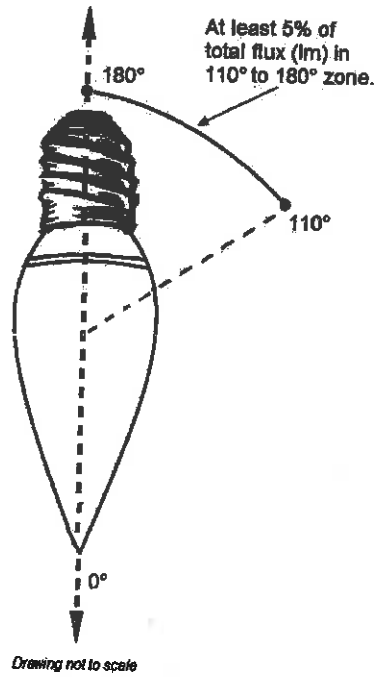

APPENDIX B: CERTIFICATION MILESTONES FOR RATED LIFE TESTING

Example Milestones for Rated Lifetime/Lumen Maintenance			
Lifetime Rating	1 st (Early Interim) Certification Milestone ¹	2nd (Interim) Certification Milestone ²	Full Lifetime Certification
CFL - 10,000 Hrs.	4,000 Hrs. (40% of Life)	-	10,000 Hrs. (100% of Life) ³
CFL - 12,000 Hrs.	4,800 Hrs. (40% of Life)	-	12,000 Hrs. (100% of Life) ³
CFL - 15,000 Hrs.	6,000 Hrs. (40% of Life)	-	15,000 Hrs. (100% of Life) ³
LED - 15,000 Hrs.	3,000 Hrs.	6,000 Hrs.	
LED - 20,000 Hrs.	3,000 Hrs.	6,000 Hrs.	
LED - 25,000 Hrs.	3,000 Hrs.	6,000 Hrs.	
LED - 30,000 Hrs.	-	6,000 Hrs.	7,500 Hrs.
LED - 35,000 Hrs.	-	6,000 Hrs.	8,750 Hrs.
LED - 40,000 Hrs.	-	6,000 Hrs.	10,000 Hrs.
LED - 45,000 Hrs.	-	6,000 Hrs.	11,250 Hrs.
LED - 50,000 Hrs.	-	6,000 Hrs.	12,500 Hrs.


¹ 100% of solid-state lamps and 90% of compact fluorescent must be operational

² 100% of solid-state lamps must be operational

³ 50% of compact fluorescent lamps must be operational



FACT SHEET

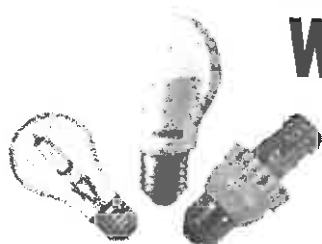

NEW LIGHT BULB ENERGY EFFICIENCY STANDARDS WILL SAVE CONSUMERS BILLIONS, REDUCE HARMFUL POLLUTION, AND CREATE JOBS

New energy efficiency standards for light bulbs were part of the Energy Independence and Security Act (EISA) of 2007, which passed Congress on a bipartisan vote with support from the lighting industry. The EISA was signed into law by President George W. Bush, representing the first significant makeover of light bulbs since the days of Thomas Edison. The first tier of standards, phased in between 2012 and 2014, required bulbs to use 25 to 30 percent less energy than old-style incandescent bulbs. A second tier will become effective in 2020, requiring everyday light bulbs—which are called general service lamps (GSLs) in the law—to use about 65 percent less energy than the original incandescent bulbs while delivering the same amount of light.

Once the second tier is fully in effect, the transition to more efficient bulbs will:

- Cut the nation's electricity costs by about \$12.5 billion annually, saving every household about \$100 a year. A state breakdown of savings is available on Page 2 of <http://www.nrdc.org/energy/files/betterbulbs.pdf>.
- Avoid the equivalent of 30 new power plants, preventing tens of millions of tons of carbon emissions annually.

WHAT WILL THE NEW STANDARDS DO?

The new standards would ensure that our light bulbs are even more energy efficient. As required by the 2007 law, general service light bulbs must achieve 45 lumens per watt (45 LPW) as of Jan. 1, 2020. (Lumens measure the amount of light a bulb produces and watts measure the power it consumes.) Newly manufactured incandescent bulbs sold in the United States as of that date can use only one-third as much power as the old incandescent; instead of 60 watts, the new bulbs will use 18 watts or less.

As a practical matter, incandescent bulbs will likely be phased out unless a manufacturer can redesign the bulb and bring a qualifying version to the market. Since LED bulbs look and perform the same as incandescents—but last longer and lower energy bills—they will almost certainly become the bulb of choice. More than 1,000 LED models already meet the new standards, but there are no such incandescent bulbs for sale or near commercialization.

WHY ARE THE STANDARDS NEEDED?

Energy efficiency standards have been established for a wide range of products in our homes and businesses, which will save consumers and business owners \$63 billion this year. Given the success of these standards, Congress decided in 2007 to require that light bulbs become more efficient through a phased-in process. There are 2 billion or so sockets nationally that still contain an inefficient incandescent or halogen light bulb, illustrating the need for the second tier of efficiency standards. Today's incandescent halogen bulbs, which use four times more power than LED bulbs, represent a large share of the market. But few actions can reduce carbon pollution as cheaply and easily as installing more efficient bulbs. The new standards will set a floor that removes the most inefficient products from the market, helping achieve greater cost savings and emissions reductions.

WHEN WILL THE UPDATED DEFINITIONS AND STANDARDS BE EFFECTIVE?

The new standards are due to go into effect in 2020. In January 2017, DOE published an updated definition for GSLs that details which bulbs will be covered by the regulations and which are exempted. The updated definition was the result of a multi-year process led by DOE that included numerous opportunities for input from manufacturers and other stakeholders. All everyday light bulbs are covered, but specialty bulbs like appliance bulbs for ovens and custom bulbs for projectors are exempted.

For more information, please contact:

mhorowitz@nrdc.org

www.nrdc.org/policy
www.facebook.com/nrdc.org
www.twitter.com/NRDCEnergy


A provision in the law allows California to move up the effective date of the Tier 2 standards to January 1, 2018—two years before the rest of the nation. The European Union established similar regulations phasing out incandescent and halogen lamps in all 28 countries as of July 1, 2018, 18 months ahead of the United States.

DO LED BULBS COST A LOT MORE?

LED bulbs that replace the old 60-watt incandescent bulb cost as little as \$2.50 per bulb when purchased in a multi-pack and prices are expected to decrease further as their production increases. While today's incandescent halogen bulbs cost about \$1.50 when purchased in a multi-pack, they burn out every year. LED bulbs cost a little more upfront but create big savings after purchase by using four times less energy to deliver the same amount of light and last 10 to 25 times longer. LED bulbs can save consumers \$50 to \$150 in electricity costs before burning out.

HOW LONG DOES EACH TYPE OF LIGHT BULB LAST?

Most incandescent bulbs—both the old-fashioned and the improved versions—last 750 to 1,000 hours; CFL bulbs, 10,000 hours; and LED bulbs last 10,000 to 25,000 hours. Under typical use of three hours per day, incandescent bulbs last 1 year and LED bulbs stay lit 10 to 25 years.

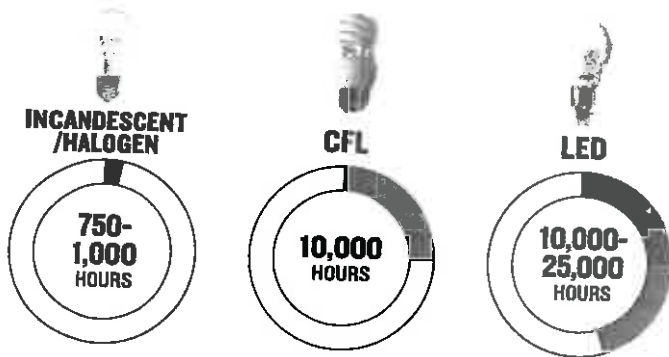

ARE THE NEW BULBS DIMMABLE?

Most LED bulbs on the market are dimmable, unless stated otherwise on the package.

WILL I BE ABLE TO BUY AN LED FOR EVERY FIXTURE IN MY HOUSE?

Yes, LED bulbs come in every shape and brightness level. These include the everyday pear-shaped bulb similar to old incandescent bulbs, flame-shaped bulbs for chandeliers, reflector lamps for recessed can down lights and track lighting, bulbs for ceiling fans, and three-way lamps.

HOW IS THE LIGHTING QUALITY OF LED BULBS?

Consumers are extremely happy with LED lighting because they are a perfect drop-in replacement for incandescent bulbs as they provide equivalent light, are dimmable, reach full brightness instantly, and last up to 25 times longer. All new light bulb packages list the light output, operating cost, and the type of light produced (indicating whether it is similar to the yellowish white light of an incandescent or a cooler, more bluish white light, which some consumers prefer).

CAN CONSUMERS BUY BULBS THAT MEET THE NEW STANDARDS NOW?

There are more than 1,000 LED models on the market that already meet the Tier 2 standards. They are made by well-known companies like General Electric, Philips, and Sylvania, as well as new companies such as Cree, TCP, and Soraa Lighting. The bulbs are widely available at big box retailers, local hardware stores, and on the Internet.

WHICH LIGHT BULBS CONTAIN MERCURY?

There is no mercury in LED bulbs. CFL bulbs contain extremely low levels of mercury—less than 3 milligrams per bulb—and should be properly recycled.

WHY DO THE LIGHT BULB STANDARDS NEED TO BE ENFORCED?

Some members of Congress are leading an all-out assault on regulation, introducing broad regulatory reform bills that put at risk the tremendous financial gains to consumers, jobs supported through energy efficiency, and U.S. competitiveness.

These threats can take many forms, from measures attached to spending bills that limit the DOE's ability to enforce standards, to authorizing legislation to end energy efficiency standards outright. The perennial spending bill rider sponsored by Representative Michael Burgess (R-Texas) currently restricts the DOE's ability to enforce these lighting energy efficiency standards. However, it has not had an impact on technological progress. The standards have spurred innovation throughout the lighting industry, which invested tens of millions of dollars in research and development and adjusting supply chains to meet the 2012 standards and is gearing up for the 2020 requirements.

Anti-regulatory legislative pursuits can have serious consequences. For example, DOE's inability to enforce the lighting standards leaves the door open for overseas manufacturers to produce inefficient, cheap light bulbs and sell them in the United States, harming American manufacturers and putting U.S. jobs at risk. In addition, many of the benefits of the standards—lower consumer electric bills and avoided power plant pollution—would be reduced. To prevent this, Congress should not renew the rider and should protect the law delivering these dollar savings to consumers.

HOW WILL THE SECOND TIER OF STANDARDS AFFECT U.S. JOBS?

Thousands of U.S. jobs have been created to design, test, and produce the next generation of energy-saving light bulbs. These include Cree's facilities in North Carolina that design and manufacture LED components and bulbs, and Lumileds' plant in California that makes the LEDs that go into light bulbs and car headlights. And even more LED-related jobs are on the way, including a new factory in upstate NY by Soraa, which produces the high-end LED directional lamps favored by retailers. The number of domestic LED jobs dwarfs the few hundred jobs remaining in the United States to produce incandescent and halogen bulbs. (Most incandescent halogen bulbs still sold in America are made in factories in Mexico, China, and Hungary.) There's no reason the improved standards can't lead to even more U.S. jobs.



Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

State of West Virginia
 Request for Quotation
 27 - Miscellaneous

65

Proc Folder: 423113

Doc Description: Addendum No.1 Statewide contract for Light bulbs and Ballas

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2018-02-16	2018-02-28 13:30:00	CRFQ 0212 SWC1800000012	2

BID RECEIVING LOCATION

BID CLERK
 DEPARTMENT OF ADMINISTRATION
 PURCHASING DIVISION
 2019 WASHINGTON ST E
 CHARLESTON WV 25305
 US

VENDOR

Vendor Name, Address and Telephone Number:

FOR INFORMATION CONTACT THE BUYER

Melissa Pettrey
 (304) 558-0094
 melissa.k.pettrey@wv.gov

Signature X

FEIN #

DATE

All offers subject to all terms and conditions contained in this solicitation

SOLICITATION NUMBER: SWC1800000012
Addendum Number: 1

The purpose of this addendum is to modify the solicitation identified as SWC1800000012 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- Modify bid opening date and time
- Modify specifications of product or service being sought
- Attachment of vendor questions and responses
- Attachment of pre-bid sign-in sheet
- Correction of error
- Other

Description of Modification to Solicitation:

1. To publish vendor questions and responses.
2. Bid opening date remains 02/28/2018 @ 1:30 P.M. EST

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

1. If offering an alternate item, how and where does a bidder make that notation/change on the Pricing Page? Should a columns be added in case bidding an alternate?

Response: Please see the attached, REVISED pricing pages dated: 02/16/2018. A line has been added below each item for those Vendors wishing to submit alternate product brands and Numbers. Vendors are encouraged to provide documentation to support or Equal claim with their submitted bid response, this information may be required before award of contract. Vendor should use the pricing section of the original item line.

2. GE Lighting is phasing out Compact Fluorescent Lamps (Category I). Can we substitute with LED's?

Response: Compact Fluorescent Lamps (Category I) will remain, these items are still in use. LED items are listed in Category IV.



Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

State of West Virginia
 Request for Quotation
 27 - Miscellaneous

68

Proc Folder: 423113

Doc Description: Addendum No.2 Statewide contract for Light bulbs and Ballas

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2018-02-23	2018-02-28 13:30:00	CRFQ 0212 SWC1800000012	3

BID RECEIVING LOCATION

BID CLERK
 DEPARTMENT OF ADMINISTRATION
 PURCHASING DIVISION
 2019 WASHINGTON ST E
 CHARLESTON WV 25305
 US

VENDOR

Vendor Name, Address and Telephone Number:

FOR INFORMATION CONTACT THE BUYER

Melissa Pettrey
 (304) 558-0094
 melissa.k.pettrey@wv.gov

Signature X

FEIN #

DATE

All offers subject to all terms and conditions contained in this solicitation

SOLICITATION NUMBER: SWC1800000012
Addendum Number: 2

The purpose of this addendum is to modify the solicitation identified as SWC1800000012 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- Modify bid opening date and time
- Modify specifications of product or service being sought
- Attachment of vendor questions and responses
- Attachment of pre-bid sign-in sheet
- Correction of error
- Other

Description of Modification to Solicitation:

1. To amend the Exhibit A pricing page.
2. Bid opening remains 02/28/2018 @ 1:30 P.M. EST

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

VENDORS SHOULD COMPLETE ALL GREEN SHADED COLUMNS					
Pricing Page Eligible Item Description					
All references to brand names are for illustration purposes only and vendors may bid the brand listed or an equal product.					
Item #	Product Category	Description	Manufacturer	Item #	Mfr. Model
1	Compact Fluorescent	23 watts Screw-In CFL, T3, Medium Screw (E26), 1600 Lumens 4100K Bulb Color Temp.	Lumapro	12T274	12T274
Vendor submitted or Equal	Compact Fluorescent	23 watts Screw-In CFL, T3, Medium Screw (E26), 1600 Lumens 4100K Bulb Color Temp.	EIKO GLOBAL LLC	SP23/41K	49326
2	Compact Fluorescent	23 watts Screw-In CFL, T3, Medium Screw (E26), 1600 Lumens 2700K Bulb Color Temp.	GE Lighting	19RT47	FLE23HT3/2/827
Vendor submitted or Equal	Compact Fluorescent	23 watts Screw-In CFL, T3, Medium Screw (E26), 1600 Lumens 2700K Bulb Color Temp.	EIKO GLOBAL LLC	SP23/27K	49325
3	Compact Fluorescent	32 watts Plug-In CFL, T4 PL, 4-Pin (GX24Q-3), 2400 Lumens 3500K Bulb Color Temp.	GE Lighting	1PH44	F32TBX/835/A/ECO
Vendor submitted or Equal	Compact Fluorescent	32 watts Plug-In CFL, T4 PL, 4-Pin (GX24Q-3), 2400 Lumens 3500K Bulb Color Temp.	EIKO GLOBAL LLC	TT32/35	49273
4	Compact Fluorescent	13.0 watts Screw-In CFL, T2 Medium Screw (E26), 800 Lumen 4100K Bulb Color Temp.	Lumapro	2CUU5	2CUU5
Vendor submitted or Equal	Compact Fluorescent	13.0 watts Screw-In CFL, T2 Medium Screw (E26), 800 Lumen 4100K Bulb Color Temp.	EIKO GLOBAL LLC	SP13/41K	60033
5	Compact Fluorescent	23 watts Screw-In CFL, T2, Medium Screw (E26), 1600 Lumen 4100K Bulb Color Temp.	Lumapro	2CUU1	2CUU1
Vendor submitted or Equal	Compact Fluorescent	23 watts Screw-In CFL, T2, Medium Screw (E26), 1600 Lumen 4100K Bulb Color Temp.	EIKO GLOBAL LLC	SP23/41K	49326
6	Compact Fluorescent	40 watts Screw-In CFL, T4, Medium Screw (E26), 2400 Lumen 4100K Bulb Color Temp.	Lumapro	2CUU4	2CUU4

Discounted Unit Price Calculation		
Unit Price	Discount Percentage	Discounted Unit Price
\$2.57	25%	\$1.93
\$2.57	25%	\$1.93
\$2.33	25%	\$1.75
\$1.89	25%	\$1.42
\$2.57	25%	\$1.93
\$4.85	25%	\$3.64

Lighting 18 - PRICING PAGE revised 02/16/2018

Vendor submitted or Equal	Compact Fluorescent	40 watts Screw-In CFL, T4, Medium Screw (E28), 2400 Lumen 4100K Bulb Color Temp.	EIKO GLOBAL LLC	SP42/41K	05422
7	Compact Fluorescent	28 watts Plug-In CFL, T4PL, 2-Pin (G24D-3), 1500 Lumen, 2700K Bulb Color Temp.	Lumapro	3EMW2	3EMW2
Vendor submitted or Equal	Compact Fluorescent	28 watts Plug-In CFL, T4PL, 2-Pin (G24D-3), 1500 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	QT28/27	15588
8	Compact Fluorescent	13.0 watts Plug-In CFL, T4PL, 4-Pin (2G7), 800 Lumen, 4100K Bulb Color Temp.	Lumapro	3EMX9	3EMX9
Vendor submitted or Equal	Compact Fluorescent	13.0 watts Plug-In CFL, T4PL, 4-Pin (2G7), 800 Lumen, 4100K Bulb Color Temp.	SYLVANIA LIGHTING	CF13DT/W841/ECO	20894
9	Compact Fluorescent	13.0 watts Screw-In CFL, T2, Medium Screw (E26), 800 Lumen, 6500K Bulb Color Temp.	Lumapro	3TFP5	3TFP5
Vendor submitted or Equal	Compact Fluorescent	13.0 watts Screw-In CFL, T2, Medium Screw (E26), 800 Lumen, 6500K Bulb Color Temp.	EIKO GLOBAL LLC	SP13/85K	06131
16	Fluorescent Lamps	18 inch 15.0 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 825 Lumen, 4100K Bulb color Temp.	GE Lighting	1V173	F15T8/CW
Vendor submitted or Equal	Fluorescent Lamps	18 inch 15.0 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 825 Lumen, 4100K Bulb color Temp.	EIKO GLOBAL LLC	F15T8/CW	15521
17	Fluorescent Lamps	48 inch 32 watts Linear Fluorescent Lamp, T8, Bi-Pin (G13), 2900 Lumen, 4100K Bulb Color Temp.	GE Lighting	4PL16	F32T8/SPP41/ECO
Vendor submitted or Equal	Fluorescent Lamps	48 inch 32 watts Linear Fluorescent Lamp, T8, Bi-Pin (G13), 2900 Lumen, 4100K Bulb Color Temp.	EIKO GLOBAL LLC	F32T8/841K	49589
18	Fluorescent Lamps	21-18/32 inch 14.0 watts Linear Fluorescent Lamp, T5, Miniature Bi-Pin (G5), 1350 Lumen	GE Lighting	5AE13	F14WT5/835/ECO
Vendor submitted or Equal	Fluorescent Lamps	21-18/32 inch 14.0 watts Linear Fluorescent Lamp, T5, Miniature Bi-Pin (G5), 1350 Lumen	EIKO GLOBAL LLC	F14TS/835	81147
19	Fluorescent Lamps	32 watts U-Shaped Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2000 Lumen, 3500K Bulb Color Temp.	Lumapro	5NPL5	5NPL5

\$1.74	25%	\$1.31
\$1.80	25%	\$1.43
\$1.90	25%	\$1.43
\$1.29	25%	\$0.97
\$1.56	25%	\$1.17
\$1.93	25%	\$1.45
\$5.53	25%	\$4.15

Lighting 18 - PRICING PAGE revised 02/16/2018

Vendor submitted or Equal	Fluorescent Lamps	32 watts U-Stepped Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2800 Lumen, 3500K Bulb Color Temp.	EIKO GLOBAL LLC	F32T8/63SK/U6	02403
20	Fluorescent Lamps	24 inch, 17.0 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 1325 Lumen, 4100K Bulb Color Temp.	GE Lighting	6X780	F17T8/SP41/ECO
Vendor submitted or Equal	Fluorescent Lamps	24 inch, 17.0 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 1325 Lumen, 4100K Bulb Color Temp.	EIKO GLOBAL LLC	F17T8/841K	49577
21	Fluorescent Lamps	36 inch 25 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2080 Lumen, 4100K Bulb Color Temp.	GE Lighting	6XV06	F25T8/SP41/ECO
Vendor submitted or Equal	Fluorescent Lamps	36 inch 25 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2080 Lumen, 4100K Bulb Color Temp.	EIKO GLOBAL LLC	F25T8/841K	49583
22	Fluorescent Lamps	36 inch 30 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2150 Lumen, 4100K Bulb Color Temp.	GE Lighting	4V439	F30T8/CW
Vendor submitted or Equal	Fluorescent Lamps	36 inch 30 watts Linear Fluorescent Lamp, T8, Medium Bi-Pin (G13), 2150 Lumen, 4100K Bulb Color Temp.	EIKO GLOBAL LLC	F25T8/841K	49583
23	Metal Halide	250 watts Metal Halide HID, BT26, Mogul Screw (E38), 21,300 Lumen, 4000K Bulb Color Temp.	GE Lighting	2PB28	MPR250/VBU/O
Vendor submitted or Equal	Metal Halide	250 watts Metal Halide HID, BT26, Mogul Screw (E38), 21,300 Lumen, 4000K Bulb Color Temp.	EIKO GLOBAL LLC	MH250U	49195
24	Metal Halide	1000 watts Metal Halide HID, BT36, Mogul Screw (E38), 4000K Bulb Color Temp.	GE Lighting	2V659	MVR1000/U
Vendor submitted or Equal	Metal Halide	1000 watts Metal Halide HID, BT36, Mogul Screw (E38), 4000K Bulb Color Temp.	EIKO GLOBAL LLC	MH1000/U	49199
25	Metal Halide	70 watts Metal Halide HID, ED17, Medium Screw (E26), 5600 Lumen, 4200K Bulb Color Temp.	Lumapro	2YGD5	2YGD5
Vendor submitted or Equal	Metal Halide	70 watts Metal Halide HID, ED17, Medium Screw (E26), 5600 Lumen, 4200K Bulb Color Temp.	EIKO GLOBAL LLC	MH70/UMED	15410
26	Metal Halide	1000 watts Metal Halide HID, BT37, Mogul Screw (E38), 110,000 Lumen, 4200K Bulb Color Temp.	Lumapro	2YGE1	2YGE1

\$1.64	25%	\$1.23
\$2.14	25%	\$1.61
\$2.14	25%	\$1.61
\$9.36	25%	\$7.02
\$22.01	25%	\$16.51
\$9.36	25%	\$7.02
\$21.96	25%	\$16.47

Lighting 18 - PRICING PAGE revised 02/16/2018

Vendor submitted or Equal	Metal Halide	1000 watts Metal Halide HID, BT37, Mogul Screw (E38), 110,000 Lumen, 4200K Bulb Color Temp.	EIKO GLOBAL LLC	MH1000U/BT37	49557
27	Metal Halide	174 watts Metal Halide HID, ED28, Mogul Screw (E38), 13,800 Lumen, 4000K Bulb Color Temp.	GE Lighting	4V550	MVR175U
Vendor submitted or Equal	Metal Halide	174 watts Metal Halide HID, ED28, Mogul Screw (E38), 13,800 Lumen, 4000K Bulb Color Temp.	EIKO GLOBAL LLC	MH175U	49193
28	Metal Halide	400 watts Metal Halide HID, ED37, Mogul Screw (E38), 44,000 Lumen, 4000K Bulb Color Temp.	GE Lighting	3JJ96	MVR400VBU/XHO/PA
Vendor submitted or Equal	Metal Halide	400 watts Metal Halide HID, ED37, Mogul Screw (E38), 44,000 Lumen, 4000K Bulb Color Temp.	EIKO GLOBAL LLC	MH400U	49197
29	Metal Halide	175 watts Metal Halide HID, ED17, Medium Screw (E28), 14400 Lume, 4200K Bulb Color Temp.	Lumapro	2YGE9	2YGE9
Vendor submitted or Equal	Metal Halide	175 watts Metal Halide HID, ED17, Medium Screw (E28), 14400 Lume, 4200K Bulb Color Temp.	EIKO GLOBAL LLC	MH175U/MED	15414
30	LED	28 watts LED Lamp, PAR38, Medium Screw (E28) 1850 Lumen, 4000K Bulb Color Temp.	GE Lighting	48F247	LED2CDP38S840/10
Vendor submitted or Equal	LED	28 watts LED Lamp, PAR38, Medium Screw (E28) 1850 Lumen, 4000K Bulb Color Temp.	EIKO GLOBAL LLC	LED28WPAR38	09172
31	LED	6.0 watts LED Lamp, MR16, 2-Pin (GU5.3), 400 Lumen, 2700K Bulb Color Temp.	GE Lighting	4SAU71	LED5.5DMR1682736
Vendor submitted or Equal	LED	6.0 watts LED Lamp, MR16, 2-Pin (GU5.3), 400 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	LED7WMR16	09493
32	LED	6.0 watts LED Lamp, MR16, 2-Pin (GU5.3), 400 Lumen, 2700K Bulb Color Temp.	GE Lighting	4SAU72	LED5.5DMR1682736
Vendor submitted or Equal	LED	6.0 watts LED Lamp, MR16, 2-Pin (GU5.3), 400 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	LED7WMR16	09493
33	LED	17.5 watts LED Lamp, A21, Medium Screw (E28), 1800 Lumen, 2700K Bulb Color Temp.	Lumapro	44ZX56	44ZX56
Vendor submitted or Equal	LED	17.5 watts LED Lamp, A21, Medium Screw (E28), 1800 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	LED15WA190MN/827	09886

\$8.70	25%	\$6.53
\$9.50	25%	\$7.13
\$8.70	25%	\$6.53
\$12.65	25%	\$9.49
\$3.44	25%	\$2.58
\$3.44	25%	\$2.58
\$4.21	25%	\$3.16

Lighting 18 - PRICING PAGE revised 02/16/2018

34	LED	14.0 watts LED Lamp, A21, Medium Screw (E26), 1100 Lumen, 2700K Bulb Color Temp	GE Lighting	32WX12	LED14DA21/827W
Vendor submitted or Equal	LED	14.0 watts LED Lamp, A21, Medium Screw (E26), 1100 Lumen, 2700K Bulb Color Temp	EIKO GLOBAL LLC	LED19WA19/OMN/827	09885
35	LED	11.0 watts LED Lamp, A19, Medium Screw (E26), 800 Lumen, 2700K Bulb Color Temp.	GE Lighting	32WX16	LED11DA19/827
Vendor submitted or Equal	LED	11.0 watts LED Lamp, A19, Medium Screw (E26), 800 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	LED9.5WA18/OMN/827	09888
36	Incandescent	40 watts Incandescent Lamp, B10, Candelabra Screw (E12), 370 Lumens, 2500K Bulb Color Temp	GE Lighting	1E337	40B
Vendor submitted or Equal	Incandescent	40 watts Incandescent Lamp, B10, Candelabra Screw (E12), 370 Lumens, 2500K Bulb Color Temp	SYLVANIA LIGHTING	40B10C	13458
37	Incandescent	25 watts Incandescent Lamp, CA10, Candelabra Screw (E12), 235 Lumens, 2500K Bulb Color Temp	GE Lighting	1E343	25CAC
Vendor submitted or Equal	Incandescent	25 watts Incandescent Lamp, CA10, Candelabra Screw (E12), 235 Lumens, 2500K Bulb Color Temp	SYLVANIA LIGHTING	25B10C	13452
38	Incandescent	40 watts Incandescent Lamp, A15, Medium Screw (E26), 415 Lumen, 2800K Bulb Color Temp.	GE Lighting	5V755	40A15CD
Vendor submitted or Equal	Incandescent	40 watts Incandescent Lamp, A15, Medium Screw (E26), 415 Lumen, 2800K Bulb Color Temp.	SYLVANIA LIGHTING	40A15	10141
39	Incandescent	6.0 watts Incandescent Lamp, S6, Candelabra Screw (E12), 50 Lumen, 2700K Bulb Color Temp.	GE Lighting	4V751	6S6-145V
Vendor submitted or Equal	Incandescent	6.0 watts Incandescent Lamp, S6, Candelabra Screw (E12), 50 Lumen, 2700K Bulb Color Temp.	EIKO GLOBAL LLC	6S6/145V	40789
40	Incandescent	40 watts Incandescent Lamp, B13, Medium Screw (E26), 485 Lumen, 2800K Bulb Color Temp.	GE Lighting	3VA65	40BFM/CD2
Vendor submitted or Equal	Incandescent	40 watts Incandescent Lamp, B13, Medium Screw (E26), 485 Lumen, 2800K Bulb Color Temp.	SYLVANIA LIGHTING	40B13C	13367

\$3.10	25%	\$2.33
\$1.85	25%	\$1.39
\$0.53	25%	\$0.40
\$0.53	25%	\$0.40
\$0.60	25%	\$0.45
\$0.40	25%	\$0.30
\$0.60	25%	\$0.45

Lighting 18 - PRICING PAGE revised 02/16/2018

41	Halogen	250 watts Halogen Lamp, T4, Double Contact Bayonet (BA15d), 5000 Lumen, 2950K Bulb Color Temp.	GE Lighting	ZV703	Q250CL/DC(E8S)-120V
Vendor submitted or Equal	Halogen	250 watts Halogen Lamp, T4, Double Contact Bayonet (BA15d), 5000 Lumen, 2950K Bulb Color Temp.	EIKO GLOBAL LLC	Q250CL/DC-120V	49610
42	Halogen	250 watts Halogen Lamp, T4, Double Contact Bayonet (BA15d), 5000 Lumen, 3000K Bulb Color Temp.	GE Lighting	5V053	Q250CL/DC-130V
Vendor submitted or Equal	Halogen	250 watts Halogen Lamp, T4, Double Contact Bayonet (BA15d), 5000 Lumen, 3000K Bulb Color Temp.	EIKO GLOBAL LLC	Q250CL/DC-130V	15284
46	High Pressure Sodium	70 watts High Pressure Sodium HID, ED23-1/2, Mogul Screw (E39), 6400 Lumen, 1900K Bulb Color Temp.	GE Lighting	ZVAD4	LU70/MECO
Vendor submitted or Equal	High Pressure Sodium	70 watts High Pressure Sodium HID, ED23-1/2, Mogul Screw (E39), 6400 Lumen, 1900K Bulb Color Temp.	EIKO GLOBAL LLC	LU70	15368
47	High Pressure Sodium	1000 watts High Pressure Sodium HID, E25, Mogul Screw (E39), 130,000 Lumen, 2100K Bulb Color Temp.	GE Lighting	ZV764	LU1000/ECO
Vendor submitted or Equal	High Pressure Sodium	1000 watts High Pressure Sodium HID, E25, Mogul Screw (E39), 130,000 Lumen, 2100K Bulb Color Temp.	EIKO GLOBAL LLC	LU1000	15324
48	High Pressure Sodium	150 watts High Pressure Sodium HID, ED17, Medium Screw (E26), 14,500 Lumen, 2000K Bulb Color Temp.	Lumapro	ZYGF8	ZYGF8
Vendor submitted or Equal	High Pressure Sodium	150 watts High Pressure Sodium HID, ED17, Medium Screw (E26), 14,500 Lumen, 2000K Bulb Color Temp.	EIKO GLOBAL LLC	LU150/56/MED	15314
49	High Pressure Sodium	400 watts High Pressure Sodium HID, ED18, Mogul Screw (E39), 51,000 Lumen, 2100K Bulb Color Temp.	GE Lighting	SAPT6	LU400/MECO

\$1.86	25%	\$1.40
\$1.86	25%	\$1.40
\$5.97	25%	\$4.48
\$27.09	25%	\$20.32
\$5.50	25%	\$4.13
\$7.10	25%	\$5.33

Lighting 18 - PRICING PAGE revised 02/16/2018

Vendor submitted or Equal	High Pressure Sodium	400 watts High Pressure Sodium HID, ED18, Mogul Screw (E39), 51,000 Lumen, 2100K Bulb Color Temp.	EIKO GLOBAL LLC	LU400	15322
51	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	Philips Advance	5KB46	ICN-2M32-MC
Vendor submitted or Equal	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	EIKO GLOBAL LLC	PM-2X3278-UNV-IS	07825
52	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	Philips Advance	3HWH4	ICN-1P32-N
Vendor submitted or Equal	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	EIKO GLOBAL LLC	PM-2X3278-UNV-IS	07825
53	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277 V, Instant Start, No Dimming	Philips Advance	1VN22	ICN-4P32-N
Vendor submitted or Equal	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277 V, Instant Start, No Dimming	EIKO GLOBAL LLC	PM-4X3278-UNV-IS	07826
54	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	Philips Advance	1VN21	ICN-3P32-N
Vendor submitted or Equal	Ballast	Electronic Ballast, 32 Max. Lamp Watts, 120/277V, Instant Start, No Dimming	EIKO GLOBAL LLC	PM-3X3278-UNV-IS	07866
55	Ballast	Electronic Ballast, 54 Max. Lamp Watts, 347/480V, Programmed	GE Lighting	25XO12	GE454P5347/480-E
Vendor submitted or Equal	Ballast	Electronic Ballast, 54 Max. Lamp Watts, 347/480V, Programmed	EIKO GLOBAL LLC	PM-4X3278-UNV-IS	07826
56	Ballast	CFL Ballast, 42V, Programmed/Rapid Ballast Start Type	GE Lighting	36J667	GEC242-MVPS-SE
Vendor submitted or Equal	Ballast	CFL Ballast, 42V, Programmed/Rapid Ballast Start Type	SYLVANIA LIGHTING	QTP2X28/32/42	51843

\$9.66	25%	\$7.25
\$9.66	25%	\$7.25
\$11.69	25%	\$8.77
\$10.66	25%	\$8.00
\$38.40	25%	\$27.30
\$21.47	25%	\$16.10

Lighting 18 - PRICING PAGE revised 02/16/2018

57	Ballast	High Pressure Sodium HID Ballast Kit, 250 Max. Lamp Watts, 120/208/240/277/480 V, Pulse Ballast Start	Lumapro	1XUF8	1XUF8
Vendor submitted or Equal	Ballast	High Pressure Sodium HID Ballast Kit, 250 Max. Lamp Watts, 120/208/240/277/480 V, Pulse Ballast Start	SYLVANIA LIGHTING	LU250/SUPER 5-KIT	47634
58	Ballast	High Pressure Sodium HID Ballast Kit, 1000 Max. Lamp Watts, 120/208/240/277/480V, Pulse Start	Philps Advance	1FYE2	71A8753-001
Vendor submitted or Equal	Ballast	High Pressure Sodium HID Ballast Kit, 1000 Max. Lamp Watts, 120/208/240/277/480V, Pulse Start	SYLVANIA LIGHTING	LU1000/SUPER 5-KIT	47659

\$78.67	25%	\$57.50
\$131.80	25%	\$98.85

List of Discount Percentages:		
(Use additional sheets if needed for number of discount percentages being offered.)		
	Category	DISCOUNT PERCENTAGE
I	Compact Fluorescent Lamps (CFL)	25%
II	Fluorescent Lamps	25%
III	Metal Halide Lamps	25%
IV	LED Lamps	25%
V	Incandescent	25%
VI	Halogen	25%
VII	High Pressure Sodium	25%
VIII	Ballast	25%

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Cat#	Retail Price	Wholesale Price
216754	Eiko Global	100A/RS/TF/130V	\$ 1.29	\$ 0.97
224899	Eiko Global	10C7DC/120V	\$ 0.23	\$ 0.17
224760	Eiko Global	ESP	\$ 6.76	\$ 5.07
210800	Eiko Global	15T6C-145V	\$ 0.50	\$ 0.37
217158	Eiko Global	15T7C-130V	\$ 0.50	\$ 0.37
210109	Eiko Global	15T7N-130V	\$ 0.50	\$ 0.37
221057	Eiko Global	20T6-1/2/F-130V	\$ 1.00	\$ 0.75
216197	Eiko Global	20T6-1/2N-130V	\$ 1.00	\$ 0.75
224607	Eiko Global	25T8/DC-130V	\$ 0.81	\$ 0.61
230779	Eiko Global	25T8C-120V	\$ 0.68	\$ 0.51
210108	Eiko Global	25T8N-130V	\$ 0.65	\$ 0.49
213516	Eiko Global	30R20/FL-130V	\$ 1.37	\$ 1.03
210732	Eiko Global	40A15-130V	\$ 0.59	\$ 0.44
210757	Eiko Global	40S11N	\$ 1.44	\$ 1.08
211048	Eiko Global	40T10-130V	\$ 0.75	\$ 0.56
216167	Eiko Global	40T6-1/2N-130V	\$ 1.00	\$ 0.75
210733	Eiko Global	45R20/FL-130V	\$ 1.29	\$ 0.97
212690	Eiko Global	4C7/130V	\$ 0.54	\$ 0.40
212711	Eiko Global	6S6/130V	\$ 0.43	\$ 0.32
240362	Eiko Global	755	\$ 0.52	\$ 0.39
212689	Eiko Global	7C7/130V	\$ 0.54	\$ 0.40
223942	Eiko Global	EVR	\$ 9.81	\$ 7.36
220835	Eiko Global	EXN-FG-GU10-130V	\$ 1.88	\$ 1.41
221324	Eiko Global	F13T5/CW	\$ 2.01	\$ 1.51
229955	Eiko Global	F13T8/CW	\$ 1.72	\$ 1.29
217633	Eiko Global	F14T5/841	\$ 2.69	\$ 2.02
221851	Eiko Global	F14T8/CW	\$ 2.42	\$ 1.81
214623	Eiko Global	F14T8/CW	\$ 1.69	\$ 1.27
210066	Eiko Global	F25T8/841K	\$ 2.61	\$ 1.61
221810	Eiko Global	F4T5/CW	\$ 2.42	\$ 1.81
209180	Eiko Global	F54T5/HO/841	\$ 3.36	\$ 2.52
209743	Eiko Global	F54T5HO/830	\$ 3.36	\$ 2.52
213655	Eiko Global	F6T5/CW	\$ 2.42	\$ 1.81
216296	Eiko Global	F8T5/CW	\$ 0.84	\$ 0.63
220526	Eiko Global	FC12T9/CW	\$ 10.00	\$ 7.50
222838	Eiko Global	FC8T9/CW	\$ 3.71	\$ 2.78
210085	Eiko Global	FML27/65	\$ 5.73	\$ 4.30
242098	Eiko Global	GLASS	\$ 12.85	\$ 9.54
210807	Eiko Global	H33GL-400/DX	\$ 8.91	\$ 6.68
210805	Eiko Global	H37KC-250/DX	\$ 7.40	\$ 5.55
215138	Eiko Global	H38MP-100DX	\$ 19.17	\$ 14.38

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part	Retail Price	Qty. Price
202583	Eiko Global	H39KC-175/DX	\$ 6.00	\$ 4.50
220806	Eiko Global	JCD130V40WG9	\$ 1.65	\$ 1.24
237781	Eiko Global	LED-120-MB-G	\$ 5.21	\$ 3.91
212654	Eiko Global	LED-120-MB-W	\$ 5.21	\$ 3.91
231907	Eiko Global	LED-DK4-15W/827K-DIM	\$ 16.07	\$ 12.05
234272	Eiko Global	LED-DK6-17W830-DIM-C	\$ 19.30	\$ 14.47
236706	Eiko Global	LED100WPT40KMOG-G6	\$ 186.89	\$ 140.17
223236	Eiko Global	LED10WA19/300/827K-I	\$ 7.22	\$ 5.42
232739	Eiko Global	LED10WA19/300/830K/I	\$ 7.22	\$ 5.42
238966	Eiko Global	LED11WA19/OMN/827K	\$ 6.90	\$ 5.18
238967	Eiko Global	LED11WA19/OMN/830K	\$ 15.42	\$ 11.57
238968	Eiko Global	LED11WA19/OMN/840K	\$ 6.90	\$ 5.18
231906	Eiko Global	LED11WBR30/827K-DIM	\$ 11.00	\$ 8.25
241056	Eiko Global	LED120WPT50MOG-G6	\$ 175.25	\$ 131.44
236023	Eiko Global	LED12WT8F36840K-G7C	\$ 11.31	\$ 8.48
242319	Eiko Global	LED15WA21/OMN/827K	\$ 21.85	\$ 16.39
238973	Eiko Global	LED15WA21/OMN/840K	\$ 10.60	\$ 7.95
238208	Eiko Global	LED15WA21/OMN/850K	\$ 10.60	\$ 7.95
238270	Eiko Global	LED15WT8F/48/840K-G7	\$ 11.56	\$ 8.67
241675	Eiko Global	LED15WPAR38/FL/840-I	\$ 12.85	\$ 9.64
241633	Eiko Global	LED17WT8/48/840/DBL	\$ 12.06	\$ 9.05
239514	Eiko Global	LED17WT8/P/48/850-G7	\$ 13.25	\$ 9.94
235311	Eiko Global	LED18T8F/48/850-G6DR	\$ 9.32	\$ 6.99
235762	Eiko Global	LED18T8F/U6/840-G5DF	\$ 21.71	\$ 16.28
238479	Eiko Global	LED18WT8F/48/840-G7I	\$ 9.81	\$ 7.36
222616	Eiko Global	LED18WT8F/48/840/G5I	\$ 19.72	\$ 14.79
236425	Eiko Global	LED18WT8F/48/850-G5I	\$ 13.25	\$ 9.94
240447	Eiko Global	LED18WT8F/48/850-G7I	\$ 9.81	\$ 7.36
237374	Eiko Global	LED19WPT40KMED-G7	\$ 52.26	\$ 39.19
237396	Eiko Global	LED19WPT50KMED-G7	\$ 52.26	\$ 39.19
232154	Eiko Global	LED20WPAR38-FL/840K	\$ 20.57	\$ 9.49
238700	Eiko Global	LED20WPAR38/FL/830K	\$ 19.28	\$ 14.46
237888	Eiko Global	LED24WPT50KMED-G7	\$ 61.72	\$ 46.29
240295	Eiko Global	LED27WPT40KMOG-G7	\$ 66.47	\$ 49.86
234665	Eiko Global	LED27WPT50KMED-G5	\$ 77.16	\$ 57.87
241802	Eiko Global	LED27WPT50KMOG-G7	\$ 72.35	\$ 54.26
232434	Eiko Global	LED36WPT40KMOG-G5	\$ 86.82	\$ 65.12
239964	Eiko Global	LED36WPT50KMOG-G7	\$ 86.82	\$ 65.12
240839	Eiko Global	LED43WT8/96/840-DBL	\$ 28.93	\$ 21.70
240740	Eiko Global	LED43WT8/96/850-DBL	\$ 28.93	\$ 21.70
238884	Eiko Global	LED45WPT40KMOG-G7	\$ 96.45	\$ 72.34

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item #	Manufacturer	Code	Retail Price	Orig. Price
238071	Eiko Global	LED45WPT50KMOG-G7	\$ 96.45	\$ 72.34
238397	Eiko Global	LED4WB11E12/FIL/827K	\$ 6.16	\$ 4.62
229099	Eiko Global	LED54WPT40KMED-G5	\$ 91.59	\$ 68.69
242687	Eiko Global	LED54WPT40KMED-G7	\$ 88.62	\$ 66.46
229448	Eiko Global	LED54WPT40KMOG-G5	\$ 99.68	\$ 74.76
237262	Eiko Global	LED54WPT40KMOG-G7	\$ 96.45	\$ 72.34
238994	Eiko Global	LED54WPT50KMOG-G7	\$ 96.45	\$ 72.34
221815	Eiko Global	LED5WB11/E12/830-DIM	\$ 7.71	\$ 5.78
225128	Eiko Global	LED5WB11/E26/830-DIM	\$ 7.72	\$ 5.79
223462	Eiko Global	LED6WG25/827K-DIM-G	\$ 6.42	\$ 4.82
229965	Eiko Global	LED7WA19/240/827K-D	\$ 4.17	\$ 3.13
232798	Eiko Global	LED7WBR20/827K/DIM-	\$ 7.06	\$ 5.30
239007	Eiko Global	LED7WBR20/830K/DIM-	\$ 7.06	\$ 5.30
233144	Eiko Global	LED7WBR20/840K-DIM-	\$ 11.24	\$ 8.43
237531	Eiko Global	LED9WA19/240/840K-D	\$ 7.34	\$ 5.50
241569	Eiko Global	LED9WA19/ADV/850-DI	\$ 5.62	\$ 4.21
238683	Eiko Global	LED9WA19/ADV/850K-C	\$ 7.34	\$ 5.50
238969	Eiko Global	LED9WA19/OMN/827K-	\$ 7.71	\$ 5.78
238971	Eiko Global	LED9WA19/OMN/830K-	\$ 7.71	\$ 5.78
238972	Eiko Global	LED9WA19/OMN/840K-	\$ 7.71	\$ 5.78
238347	Eiko Global	LED9WT8/D/24/840-G7I	\$ 11.56	\$ 8.67
213450	Eiko Global	LEDP-11WR30/827-DIM	\$ 27.32	\$ 20.49
213624	Eiko Global	LEDP-13WPAR30/FL/827	\$ 35.36	\$ 26.52
212359	Eiko Global	LEDP-8WR20/827-DIM3	\$ 12.85	\$ 9.64
241639	Eiko Global	LLH-2C-50K-U	\$ 205.78	\$ 154.33
241504	Eiko Global	LLH-2C-U	\$ 136.66	\$ 102.50
240625	Eiko Global	LLH-3C-50K-U	\$ 329.59	\$ 247.19
229681	Eiko Global	LU1000	\$ 32.32	\$ 20.32
222676	Eiko Global	LU150/55/MED	\$ 7.64	\$ 4.88
202582	Eiko Global	LU250	\$ 8.03	\$ 6.02
202577	Eiko Global	LU400	\$ 8.03	\$ 5.33
222677	Eiko Global	LU50/MED	\$ 9.41	\$ 7.06
211047	Eiko Global	LU70	\$ 9.88	\$ 4.48
213062	Eiko Global	LU70MED	\$ 9.41	\$ 7.06
213720	Eiko Global	MH1000/U	\$ 25.73	\$ 16.51
223522	Eiko Global	MH1000/U/BT37	\$ 30.66	\$ 16.47
218289	Eiko Global	MH1500/U	\$ 27.32	\$ 20.49
202578	Eiko Global	MH175/U	\$ 12.64	\$ 6.53
202580	Eiko Global	MH175/U/MED	\$ 9.63	\$ 6.53
202581	Eiko Global	MH250/U	\$ 11.24	\$ 7.02
216675	Eiko Global	MH400/BU/PS	\$ 12.85	\$ 9.64

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Retail Price	Wholesale Price
202576	Eiko Global	MH400/U	\$ 9.51	\$ 7.13
220563	Eiko Global	MH400/U/ED28	\$ 15.02	\$ 11.27
222479	Eiko Global	MP100/U/MED/4K	\$ 16.85	\$ 12.64
227491	Eiko Global	MP400/BU/ED28/P	\$ 26.66	\$ 20.00
218897	Eiko Global	MP400/BU/P	\$ 13.65	\$ 10.24
220926	Eiko Global	MP50/U/MED/3K	\$ 16.82	\$ 12.62
221058	Eiko Global	MP70/U/MED/4K	\$ 16.82	\$ 12.62
202566	Eiko Global	PAR30LN/15/30K	\$ 7.24	\$ 5.43
202567	Eiko Global	PAR38/23/27K	\$ 8.93	\$ 6.70
217495	Eiko Global	Q100/MC-120V	\$ 1.61	\$ 1.21
209143	Eiko Global	Q1500T3/CL	\$ 2.42	\$ 1.81
218087	Eiko Global	Q150T3/CL/120V	\$ 1.12	\$ 0.84
202586	Eiko Global	Q300T3/CL	\$ 1.05	\$ 0.79
210515	Eiko Global	Q500T3/CL	\$ 1.05	\$ 0.79
216152	Eiko Global	Q50CL/MC	\$ 1.61	\$ 1.21
238354	Eiko Global	SLM22-3C-40K-U	\$ 56.27	\$ 42.21
238291	Eiko Global	SLM24-5C-40K-U	\$ 88.43	\$ 66.32
200619	Eiko Global	SP105-50-MED	\$ 30.18	\$ 22.64
202561	Eiko Global	SP13/27K	\$ 2.27	\$ 1.70
209829	Eiko Global	SP13/41-GU24	\$ 2.50	\$ 1.88
202594	Eiko Global	SP13/41K	\$ 2.34	\$ 1.42
210068	Eiko Global	SP13/50K	\$ 2.34	\$ 1.75
202568	Eiko Global	SP14/R20/27K	\$ 5.63	\$ 4.22
202565	Eiko Global	SP15/R30/27K	\$ 5.63	\$ 4.22
211131	Eiko Global	SP15/R30/65K	\$ 6.42	\$ 4.82
202562	Eiko Global	SP19/27K	\$ 3.14	\$ 2.36
202595	Eiko Global	SP19/41K	\$ 3.14	\$ 2.36
210069	Eiko Global	SP19/50K	\$ 3.14	\$ 2.36
202563	Eiko Global	SP23/27K	\$ 3.14	\$ 1.93
202596	Eiko Global	SP23/41K	\$ 3.14	\$ 1.93
211259	Eiko Global	SP23/50K	\$ 3.30	\$ 2.48
202564	Eiko Global	SP27/27K	\$ 3.62	\$ 2.72
233991	Eiko Global	WPC-1C-120	\$ 72.35	\$ 54.26
242891	Eiko Global	MH70/U/MED	\$ 9.36	\$ 7.02
242892	Eiko Global	MH100/U/MED	\$ 7.87	\$ 5.90
242905	Eiko Global	TT32/35	\$ 2.50	\$ 1.75
242915	Eiko Global	F17T8/841K	\$ 1.81	\$ 1.23
242919	Eiko Global	F32T8/841K	\$ 1.72	\$ 1.17
242923	Eiko Global	PM-2X32T8-UNV-IS	\$ 12.06	\$ 7.25
242924	Eiko Global	PM-3X32T8-UNV-IS	\$ 13.67	\$ 8.00
242925	Eiko Global	PM-4X32T8-UNV-IS	\$ 15.44	\$ 8.77

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Retail Price	Cost Price
243538	Eiko Global	LED27WPT50KMED-G7	\$ 77.16	\$ 57.87
243545	Eiko Global	LED12WA19/ADV/850K-	\$ 12.34	\$ 9.25
233762	Eiko Global	LED18T8F/48-840-G6DR	\$ 9.32	\$ 6.99
243681	Eiko Global	DTD-2C-50K-U	\$ 109.31	\$ 81.99
243936	Eiko Global	LED110WAL40KMOG-G7	\$ 277.80	\$ 208.35
243938	Eiko Global	LED110WAL50KMOG-G7	\$ 277.80	\$ 208.35
243939	Eiko Global	LED80WAL40KMOG-G7	\$ 237.93	\$ 178.45
243940	Eiko Global	LED80WAL50KMOG-G7	\$ 237.93	\$ 178.45
243941	Eiko Global	LED115WB40KMOG-G7	\$ 243.09	\$ 182.32
243942	Eiko Global	LED115WB50KMOG-G7	\$ 217.05	\$ 162.79
244805	Eiko Global	BAY-4C-50K-U	\$ 233.12	\$ 174.84
244953	Eiko Global	LLW-4CP-40K-U	\$ 77.17	\$ 57.88
245089	Eiko Global	LLW-5CP-40K-U	\$ 80.39	\$ 60.29
245168	Eiko Global	WPT1-88/850-BZ-U	\$ 173.64	\$ 130.23
245169	Eiko Global	PCB1	\$ 13.81	\$ 10.36
245502	Eiko Global	LED6WA19/OMN/827K-	\$ 7.71	\$ 5.78
245554	Eiko Global	TMP-5C-50K-U	\$ 218.64	\$ 163.98
245556	Eiko Global	TMP-4C-50K-U	\$ 180.05	\$ 135.04
245557	Eiko Global	TMP-3C-50K-U	\$ 128.61	\$ 96.46
245606	Eiko Global	PM-2X54T5-UNV-PS	\$ 30.54	\$ 22.90
245607	Eiko Global	PM-4X54T5-UNV-PS	\$ 48.22	\$ 27.30
245612	Eiko Global	LLH-1C-50K-U	\$ 136.66	\$ 102.50
245663	Eiko Global	WMC-2C-50K-U	\$ 77.16	\$ 57.87
245664	Eiko Global	WMC-3C-50K-U	\$ 90.02	\$ 67.52
245666	Eiko Global	WMG-1C-50K-U	\$ 102.88	\$ 77.16
245667	Eiko Global	WMG-2C-50K-U	\$ 128.61	\$ 96.46
245668	Eiko Global	WMG-4C-50K-U	\$ 180.05	\$ 135.04
245669	Eiko Global	WMG-5C-50K-U	\$ 295.81	\$ 221.86
245820	Eiko Global	BAY-3C-50K-V	\$ 281.35	\$ 211.02
245836	Eiko Global	DOME	\$ 33.43	\$ 25.07
245955	Eiko Global	LED7WBR20/830-DIM-G	\$ 7.06	\$ 5.30
245999	Eiko Global	SLM24-6CB-40K-U	\$ 89.96	\$ 67.47
246013	Eiko Global	LED-DK6-11W940-DIM-C	\$ 10.44	\$ 7.83
246086	Eiko Global	LED9WA19/OMN/830-D	\$ 2.69	\$ 2.02
246220	Eiko Global	LED11.5WT8/48/850-G7	\$ 10.00	\$ 7.50
246877	Eiko Global	LED12WT8/48/850-G8D	\$ 9.63	\$ 7.23
246888	Eiko Global	LED12.5WT5HE/46/850-	\$ 16.71	\$ 12.53
247369	Eiko Global	LED25WT5HO/46/850/C	\$ 17.99	\$ 13.50
247460	Eiko Global	LED15WT8F/U6/840-G7	\$ 21.85	\$ 16.39
247587	Eiko Global	SLM22	\$ 6.03	\$ 4.53
247694	Eiko Global	SP23/41-GU24	\$ 4.65	\$ 3.49

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Part#	Manufacturer	Code	Retail Price	Yield Price
247722	Eiko Global	25T10-130V	\$ 0.81	\$ 0.61
247762	Eiko Global	LED15WA19/OMN/840-	\$ 5.78	\$ 4.33
247814	Eiko Global	LED11WA19/OMN/840-	\$ 3.45	\$ 2.58
247884	Eiko Global	LED9WA19/OMN/827-D	\$ 2.69	\$ 2.02
247937	Eiko Global	FHSCP-UNV-7.8WL	\$ 125.73	\$ 94.30
248179	Eiko Global	LED7WPAR20/FL/827K-I	\$ 5.78	\$ 4.33
248249	Eiko Global	LED14WT8/P/48/840-G	\$ 12.85	\$ 9.64
248257	Eiko Global	LED36WPT40KMOG-G7	\$ 86.82	\$ 65.12
226209	Eiko Global	LED36WPT40KMED-G5	\$ 86.82	\$ 65.12
248400	Eiko Global	LEDAFL-3C-W-U	\$ 287.79	\$ 215.84
248406	Eiko Global	SLM24-4CB-40K-U	\$ 88.43	\$ 66.32
248433	Eiko Global	LED15WA19/OMN/850-	\$ 5.78	\$ 4.33
248482	Eiko Global	SP13/65K	\$ 2.50	\$ 1.43
248483	Eiko Global	F15T8/CW	\$ 1.39	\$ 0.97
248485	Eiko Global	LED7WMR16/FL/827-DII	\$ 6.42	\$ 2.58
248486	Eiko Global	LED15WA19/OMN/827-	\$ 5.78	\$ 3.16
248487	Eiko Global	LED11WA19/OMN/827-	\$ 3.85	\$ 2.33
248488	Eiko Global	LED9.5WA19/OMN/827-	\$ 2.43	\$ 1.39
248489	Eiko Global	6S6/145V	\$ 0.45	\$ 0.30
248490	Eiko Global	Q250CL/DC-120V	\$ 2.14	\$ 1.40
248491	Eiko Global	Q250CL/DC-130V	\$ 2.14	\$ 1.40
20836	Sylvania LEDvance	100A/90/SSXL-120V	\$ 5.04	\$ 3.78
23329	Sylvania LEDvance	100A/90/SSXL-130V	\$ 1.36	\$ 1.02
12294	Sylvania LEDvance	100A/RS/2/RP-130V	\$ 2.24	\$ 1.68
7264	Sylvania LEDvance	100A21/RS/SL/RP-120V	\$ 5.61	\$ 4.21
3336	Sylvania LEDvance	100A21/SL-120V	\$ 14.06	\$ 10.55
23339	Sylvania LEDvance	100BT15/HAL/W/BL	\$ 19.32	\$ 14.49
6915	Sylvania LEDvance	100PAR38/FL/R/RP-120	\$ 35.73	\$ 26.79
8965	Sylvania LEDvance	100Q/CL/MC(ESN)-120V	\$ 16.61	\$ 12.46
43539	Sylvania LEDvance	100T3Q/S/CL-120V	\$ 3.93	\$ 2.95
141	Sylvania LEDvance	10S6230V	\$ 9.80	\$ 7.35
9107	Sylvania LEDvance	11S6	\$ 2.07	\$ 1.55
11449	Sylvania LEDvance	11S14-130V	\$ 7.72	\$ 5.79
397	Sylvania LEDvance	120MB	\$ 1.13	\$ 0.85
15589	Sylvania LEDvance	135A21/TS/8M/SS-120-	\$ 28.34	\$ 21.26
12328	Sylvania LEDvance	1500T3Q/CL-240V	\$ 25.11	\$ 18.83
15291	Sylvania LEDvance	150A21/99/XL	\$ 8.61	\$ 6.46
11549	Sylvania LEDvance	150A21/CL-130V	\$ 8.95	\$ 6.71
840	Sylvania LEDvance	150A23-120V	\$ 7.95	\$ 5.97
2408	Sylvania LEDvance	150G40/W/RP	\$ 21.40	\$ 16.05
14989	Sylvania LEDvance	150T3Q/S/CL/RP-120V	\$ 29.52	\$ 22.14

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item	Manufacturer	Code	Retail Price	Your Price
4016	Sylvania LEDvance	15A15/CL-120V	\$ 2.69	\$ 2.02
9392	Sylvania LEDvance	15A15/W/RP-120V	\$ 2.69	\$ 2.02
7707	Sylvania LEDvance	15B10C/BL/2PK-120V	\$ 3.79	\$ 2.84
11304	Sylvania LEDvance	15G16.5C-120V	\$ 1.57	\$ 1.18
2539	Sylvania LEDvance	15T6-120V	\$ 10.35	\$ 7.77
5253	Sylvania LEDvance	15T7C-120V	\$ 8.31	\$ 6.23
18629	Sylvania LEDvance	161	\$ 1.45	\$ 1.09
17417	Sylvania LEDvance	175PAR38/HEAT/RED-12	\$ 37.29	\$ 27.97
13759	Sylvania LEDvance	1816	\$ 1.60	\$ 1.20
734	Sylvania LEDvance	1819	\$ 1.68	\$ 1.26
1784	Sylvania LEDvance	1820	\$ 0.38	\$ 0.28
3680	Sylvania LEDvance	200A21-130V	\$ 3.84	\$ 2.88
14338	Sylvania LEDvance	200A23-120V	\$ 6.96	\$ 5.22
29989	Sylvania LEDvance	200PS/CL/99/XL-130V	\$ 21.32	\$ 15.99
15456	Sylvania LEDvance	20MR16/FL35/C(BAB)-1	\$ 5.23	\$ 3.92
5706	Sylvania LEDvance	20T3Q/CL-12V	\$ 5.20	\$ 3.90
13633	Sylvania LEDvance	20T6.5/IF-120V	\$ 5.63	\$ 4.22
279	Sylvania LEDvance	20T6.5DC/IF-120V	\$ 6.86	\$ 5.15
10048	Sylvania LEDvance	250K/BR38/FL	\$ 79.77	\$ 59.83
3570	Sylvania LEDvance	250Q/CL/DC(ESS)-120V	\$ 33.40	\$ 25.05
12643	Sylvania LEDvance	250Q/CL/MC(EHT)-120V	\$ 12.94	\$ 9.71
3803	Sylvania LEDvance	250Q/CL/MC-130V	\$ 32.78	\$ 24.58
25127	Sylvania LEDvance	250Q/MC(ESM)-120V	\$ 91.70	\$ 68.78
9521	Sylvania LEDvance	259	\$ 1.00	\$ 0.75
3432	Sylvania LEDvance	25B10/BL/2PK-120V	\$ 3.79	\$ 2.84
5957	Sylvania LEDvance	25B10C/BL/2PK-120V	\$ 1.13	\$ 0.40
41777	Sylvania LEDvance	25G16.5/BL-120V	\$ 1.75	\$ 1.32
7231	Sylvania LEDvance	25G16.5C-120V	\$ 1.68	\$ 1.26
1957	Sylvania LEDvance	25G16.5C/4M-120V	\$ 5.21	\$ 3.91
18194	Sylvania LEDvance	25G16.5C/W/BL-120V	\$ 2.35	\$ 1.76
8027	Sylvania LEDvance	25G25-120V	\$ 1.85	\$ 1.39
5918	Sylvania LEDvance	25G25/W-120V	\$ 2.43	\$ 1.82
6564	Sylvania LEDvance	25R14/RP-120V	\$ 8.06	\$ 6.05
42015	Sylvania LEDvance	25R14N/RP-120V	\$ 8.06	\$ 6.05
20709	Sylvania LEDvance	25T10/CL/BL/6PK-120V	\$ 10.39	\$ 7.79
5534	Sylvania LEDvance	25T6.5-120V	\$ 5.41	\$ 4.06
13786	Sylvania LEDvance	25T6.5/IF-130V	\$ 7.76	\$ 5.82
733	Sylvania LEDvance	25T8DC-120V	\$ 9.71	\$ 7.28
5192	Sylvania LEDvance	25T8DC-130V	\$ 9.97	\$ 7.47
2563	Sylvania LEDvance	300M/CL-120V	\$ 7.01	\$ 5.26
10367	Sylvania LEDvance	300M/CL-130V	\$ 16.64	\$ 12.48

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Description	QTY	Retail Price	Your Price
43450	Sylvania LEDvance	35MR16/FL35/C(FMW)1	\$ 5.24	\$ 3.93
15695	Sylvania LEDvance	36PAR36/HAL/WFL30-1:	\$ 40.17	\$ 30.13
8938	Sylvania LEDvance	375R40/1-120V	\$ 56.37	\$ 42.28
200575	Sylvania LEDvance	39PAR20/HAL/FL30-120	\$ 7.52	\$ 5.64
200576	Sylvania LEDvance	39PAR20/HAL/FL30-130	\$ 8.02	\$ 6.01
223861	Sylvania LEDvance	39PAR20/HAL/FL30/DL-	\$ 9.23	\$ 6.92
200828	Sylvania LEDvance	39PAR20/HAL/SP10-120	\$ 8.09	\$ 6.07
200182	Sylvania LEDvance	39PAR30/HAL/WFL50-1:	\$ 8.09	\$ 6.07
197950	Sylvania LEDvance	39PAR30LN/HAL/NFL25-	\$ 7.97	\$ 5.98
209414	Sylvania LEDvance	39PAR30LN/HAL/SP10-1	\$ 18.76	\$ 14.07
198202	Sylvania LEDvance	39PAR30LN/HAL/WFL50	\$ 8.38	\$ 6.29
12782	Sylvania LEDvance	3S6-130V	\$ 12.51	\$ 9.38
9378	Sylvania LEDvance	40A/CL-130V	\$ 0.71	\$ 0.53
15693	Sylvania LEDvance	40A/W/4/RP-120V	\$ 3.23	\$ 2.43
10660	Sylvania LEDvance	40A15-120V	\$ 1.50	\$ 1.12
1603	Sylvania LEDvance	40A15/2PK/RP-120V	\$ 3.45	\$ 0.45
4132	Sylvania LEDvance	40A15/CL/BL-120V	\$ 2.47	\$ 1.85
41761	Sylvania LEDvance	40A15/CL/DL/APPL/2/1	\$ 7.66	\$ 5.75
9106	Sylvania LEDvance	40A15/SL-120V	\$ 8.09	\$ 6.07
575	Sylvania LEDvance	40B10/BL/2PK-120V	\$ 1.54	\$ 1.15
8903	Sylvania LEDvance	40B10/F/BL/2PK-120V	\$ 1.54	\$ 1.15
2138	Sylvania LEDvance	40B10C/BL/2PK-120V	\$ 1.04	\$ 0.40
305	Sylvania LEDvance	40B10C/DL/BL/4PK-120	\$ 4.08	\$ 3.06
14230	Sylvania LEDvance	40F/CL-120V	\$ 4.18	\$ 3.13
18506	Sylvania LEDvance	40F/IC/BL/2PK-120V	\$ 5.63	\$ 4.22
41977	Sylvania LEDvance	40G25-120V	\$ 2.67	\$ 2.01
9027	Sylvania LEDvance	40G25/RP-120V	\$ 3.34	\$ 2.51
11006	Sylvania LEDvance	40G40/W/RP-120V	\$ 10.72	\$ 8.04
9079	Sylvania LEDvance	40R14/RP-120V	\$ 6.04	\$ 4.53
12080	Sylvania LEDvance	40S11N/BL-120V	\$ 12.44	\$ 9.33
42186	Sylvania LEDvance	43A/HAL/SSW/2-120V	\$ 3.36	\$ 2.52
237692	Sylvania LEDvance	50/150A21/W/2PK/12-1	\$ 8.58	\$ 6.44
9924	Sylvania LEDvance	50/150A21/W/RP-120V	\$ 8.58	\$ 6.44
7083	Sylvania LEDvance	50/250A21/W/RP-120V	\$ 11.22	\$ 8.42
16320	Sylvania LEDvance	500PAR56Q/HAL/WFL-1	\$ 190.83	\$ 143.12
20285	Sylvania LEDvance	500T3Q/CL(FCL)-120V	\$ 6.56	\$ 4.92
7634	Sylvania LEDvance	500T3Q/CL/RP(FCL)-12	\$ 30.37	\$ 22.78
9398	Sylvania LEDvance	50MR16/FL35/C(EXN)-1	\$ 3.66	\$ 2.74
32899	Sylvania LEDvance	50MR16/T/NFL25/C(EXZ	\$ 7.65	\$ 5.74
28055	Sylvania LEDvance	50PAR20/HAL/DAY/NFL	\$ 14.26	\$ 10.69
43380	Sylvania LEDvance	50PAR36/HAL/WFL30-1:	\$ 45.00	\$ 33.75

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Unit Price	Year Price
308	Sylvania LEDvance	50T4Q/CL-12V	\$ 5.20	\$ 3.90
3842	Sylvania LEDvance	50T4Q/CL/AX-12V	\$ 20.00	\$ 15.00
9017	Sylvania LEDvance	52A/HAL/F-130V	\$ 7.70	\$ 5.78
9798	Sylvania LEDvance	55	\$ 1.82	\$ 1.37
10696	Sylvania LEDvance	56	\$ 1.68	\$ 1.26
460	Sylvania LEDvance	60A/52/SS-120V	\$ 0.83	\$ 0.62
6034	Sylvania LEDvance	60A/RS/2/RP-130V	\$ 2.31	\$ 1.73
12446	Sylvania LEDvance	60A/RS/SL/RP-120V	\$ 5.50	\$ 4.13
7400	Sylvania LEDvance	60A/Y/RP-120V	\$ 2.10	\$ 1.58
23646	Sylvania LEDvance	60ACL/DL/RP-120V	\$ 5.91	\$ 4.43
9458	Sylvania LEDvance	60B10/BL/2PK-120V	\$ 1.84	\$ 1.38
6235	Sylvania LEDvance	60B10/DL/BL/2PK-120V	\$ 4.08	\$ 3.06
18470	Sylvania LEDvance	60B10/DLF/BL/2PK-120	\$ 4.41	\$ 3.31
5624	Sylvania LEDvance	60B10C/BL/2PK-120V	\$ 1.13	\$ 0.85
2735	Sylvania LEDvance	60G25/DL/RP-120V	\$ 10.67	\$ 8.00
42150	Sylvania LEDvance	60G25/W/RP-120V	\$ 1.89	\$ 1.42
4647	Sylvania LEDvance	60G30/W/RP-120V	\$ 6.79	\$ 5.09
43548	Sylvania LEDvance	60PAR16/HAL/NFL30-12	\$ 11.44	\$ 8.58
202203	Sylvania LEDvance	60PAR30/HAL/S/WFL50-	\$ 9.63	\$ 7.22
209462	Sylvania LEDvance	60PAR30LN/HAL/S/NFL2	\$ 9.63	\$ 7.22
209118	Sylvania LEDvance	60PAR30LN/HAL/S/SP10	\$ 33.08	\$ 24.81
200119	Sylvania LEDvance	60PAR30LN/HAL/S/WFL	\$ 8.24	\$ 6.18
208021	Sylvania LEDvance	60PAR38/HAL/S/SP10-1	\$ 9.63	\$ 7.22
201853	Sylvania LEDvance	64514-120V	\$ 13.39	\$ 10.04
24681	Sylvania LEDvance	65BR/FL-130V	\$ 7.06	\$ 5.29
6629	Sylvania LEDvance	65BR30/FL-130V	\$ 5.46	\$ 4.10
8718	Sylvania LEDvance	65BR30/FL/CVP-130V	\$ 2.07	\$ 1.56
17958	Sylvania LEDvance	65BR30/SP/RP-120V	\$ 4.58	\$ 3.43
21226	Sylvania LEDvance	65PAR38/SP	\$ 26.05	\$ 19.54
14976	Sylvania LEDvance	69A21/TS/8M-130V	\$ 2.53	\$ 1.90
3973	Sylvania LEDvance	6S6/CL-130V	\$ 1.46	\$ 1.10
16146	Sylvania LEDvance	6S6/CL30V	\$ 11.51	\$ 8.64
198176	Sylvania LEDvance	70PAR38/HAL/S/NFL25-	\$ 10.70	\$ 8.03
200121	Sylvania LEDvance	70PAR38/HAL/S/WFL50-	\$ 10.40	\$ 7.80
199914	Sylvania LEDvance	72A/HAL/CL/2-120V	\$ 3.25	\$ 2.44
42187	Sylvania LEDvance	72A/HAL/SSW/2-120V	\$ 3.09	\$ 2.32
16108	Sylvania LEDvance	757	\$ 1.45	\$ 1.09
9949	Sylvania LEDvance	75A/RS/RP/1-130V	\$ 2.30	\$ 1.73
14203	Sylvania LEDvance	75A/W/DLSW/4PK/RP-1	\$ 4.03	\$ 3.02
4097	Sylvania LEDvance	75A21/RS/SL/RP-120V	\$ 5.61	\$ 4.21
11845	Sylvania LEDvance	75PAR30LN/HAL/NSP9-1	\$ 32.02	\$ 24.02

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Qty	Retail Price	Your Price
13094	Sylvania LEDvance	75Q/CL/MC/RP-120V	\$ 66.47	\$ 49.86
11610	Sylvania LEDvance	75T4Q/CL/AX-12V	\$ 20.00	\$ 15.00
3466	Sylvania LEDvance	7C7-120V	\$ 3.58	\$ 2.69
1349	Sylvania LEDvance	7C7-130V	\$ 4.21	\$ 3.16
1574	Sylvania LEDvance	7C7/BL/2PK-120V	\$ 3.32	\$ 2.49
197948	Sylvania LEDvance	80PAR38/HAL/S/NFL25-	\$ 16.84	\$ 12.63
7473	Sylvania LEDvance	BTN	\$ 46.23	\$ 34.67
12737	Sylvania LEDvance	CF11EL/MINI/830	\$ 5.56	\$ 4.17
187802	Sylvania LEDvance	CF13DD/827/ECO	\$ 5.77	\$ 4.33
914	Sylvania LEDvance	CF13DD/E/835/ECO	\$ 5.77	\$ 4.33
3991	Sylvania LEDvance	CF13DD/E/841/ECO	\$ 5.77	\$ 4.33
182460	Sylvania LEDvance	CF13DS/827/ECO	\$ 2.62	\$ 1.97
185377	Sylvania LEDvance	CF13DS/835/ECO	\$ 4.45	\$ 3.34
182461	Sylvania LEDvance	CF13DS/841/ECO	\$ 2.62	\$ 1.97
187797	Sylvania LEDvance	CF13DS/850/ECO	\$ 5.11	\$ 3.83
42294	Sylvania LEDvance	CF13DT/E/841/ECO	\$ 28.89	\$ 1.43
30911	Sylvania LEDvance	CF13EL/MICRO/830/ECC	\$ 5.10	\$ 3.83
23420	Sylvania LEDvance	CF13EL/MINI/827/CVP/	\$ 4.51	\$ 3.38
13781	Sylvania LEDvance	CF13EL/MINI/827/CVP/	\$ 3.86	\$ 2.89
5604	Sylvania LEDvance	CF13EL/MINI/830	\$ 4.51	\$ 3.38
34534	Sylvania LEDvance	CF13EL/MINI/841	\$ 4.51	\$ 3.38
30944	Sylvania LEDvance	CF13EL/MINI/Y/RP	\$ 12.90	\$ 9.67
237766	Sylvania LEDvance	CF13EL/SPIRAL/827	\$ 8.91	\$ 6.68
42668	Sylvania LEDvance	CF13EL/SUPER/827/RP	\$ 7.32	\$ 5.49
30890	Sylvania LEDvance	CF14EL/R20/827/DIM/R	\$ 34.51	\$ 25.88
9241	Sylvania LEDvance	CF16EL/BR30/830	\$ 10.66	\$ 8.00
182464	Sylvania LEDvance	CF18DD/835/ECO	\$ 5.76	\$ 4.32
15148	Sylvania LEDvance	CF18DD/E/827/ECO	\$ 11.74	\$ 8.81
3724	Sylvania LEDvance	CF18DD/E/835/ECO	\$ 5.76	\$ 4.32
15655	Sylvania LEDvance	CF18DD/E/841/ECO	\$ 5.76	\$ 4.32
13004	Sylvania LEDvance	CF19EL/MINI/830	\$ 6.97	\$ 5.23
193526	Sylvania LEDvance	CF23EL/GU24/827/BL	\$ 44.37	\$ 33.28
30913	Sylvania LEDvance	CF23EL/MICRO/830/ECC	\$ 7.93	\$ 5.95
12023	Sylvania LEDvance	CF23EL/MINI/830	\$ 5.77	\$ 4.33
42646	Sylvania LEDvance	CF23EL/PAR38/830	\$ 10.67	\$ 8.00
241579	Sylvania LEDvance	CF23ELSPIRAL850	\$ 57.01	\$ 42.76
182466	Sylvania LEDvance	CF26DD/827/ECO	\$ 5.77	\$ 4.33
182468	Sylvania LEDvance	CF26DD/835/ECO	\$ 14.51	\$ 10.88
182469	Sylvania LEDvance	CF26DD/841/ECO	\$ 5.77	\$ 4.33
10314	Sylvania LEDvance	CF26DD/E/827/ECO	\$ 5.76	\$ 4.32
5539	Sylvania LEDvance	CF26DD/E/835/ECO	\$ 5.77	\$ 4.33

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Retail Price	Your Price
3320	Sylvania LEDvance	CF26DD/E/841/ECO	\$ 4.93	\$ 3.70
9043	Sylvania LEDvance	CF26DT/E/IN/835/ECO	\$ 6.81	\$ 5.11
42588	Sylvania LEDvance	CF26EL/MICRO/830/ECC	\$ 9.06	\$ 6.80
9381	Sylvania LEDvance	CF28EL/3WAY/TWIST/830	\$ 17.70	\$ 13.28
8673	Sylvania LEDvance	CF30EL/TWIST/830	\$ 14.73	\$ 11.05
2894	Sylvania LEDvance	CF32DT/E/IN/835/ECO	\$ 6.82	\$ 5.11
916	Sylvania LEDvance	CF32DT/E/IN/841/ECO	\$ 6.81	\$ 5.11
30909	Sylvania LEDvance	CF40EL/TWIST//827/RP	\$ 20.94	\$ 15.70
3927	Sylvania LEDvance	CF42DT/E/IN/835/ECO	\$ 6.82	\$ 5.11
7916	Sylvania LEDvance	CF42DT/E/IN/841/ECO	\$ 5.83	\$ 4.37
23916	Sylvania LEDvance	CF4EL/DECO/CANDELAB	\$ 18.76	\$ 14.07
182470	Sylvania LEDvance	CF5DS/827/ECO	\$ 2.62	\$ 1.97
18660	Sylvania LEDvance	CF5EL/B10/C/DIM/827/	\$ 34.83	\$ 26.13
15374	Sylvania LEDvance	CF65EL/TWIST/841	\$ 31.67	\$ 23.76
182471	Sylvania LEDvance	CF7DS/827/ECO	\$ 2.62	\$ 1.91
16756	Sylvania LEDvance	CF7EL/DECO/MEDIUM/1	\$ 12.35	\$ 9.27
182473	Sylvania LEDvance	CF9DS/827/ECO	\$ 2.62	\$ 1.97
9267	Sylvania LEDvance	CF9DS/E/841	\$ 7.57	\$ 5.68
30902	Sylvania LEDvance	CF9WEL/FAN/2BL	\$ 13.63	\$ 10.23
12079	Sylvania LEDvance	DOTIT/LED/UC/S/1/BL	\$ 12.95	\$ 9.71
3345	Sylvania LEDvance	ECA-120V	\$ 10.02	\$ 7.52
26911	Sylvania LEDvance	EGJ	\$ 125.67	\$ 94.25
415	Sylvania LEDvance	EHD	\$ 97.58	\$ 73.18
15579	Sylvania LEDvance	EVW	\$ 21.35	\$ 16.01
223867	Sylvania LEDvance	F13T5/CW-25/CS	\$ 9.21	\$ 6.91
4922	Sylvania LEDvance	F13T8/CW	\$ 20.44	\$ 15.33
5596	Sylvania LEDvance	F15T12/CW	\$ 4.75	\$ 3.56
1036	Sylvania LEDvance	F15T8/CW	\$ 3.05	\$ 2.29
8776	Sylvania LEDvance	F18T8CW/K24	\$ 5.54	\$ 4.15
1255	Sylvania LEDvance	F18T8CW/K26	\$ 8.96	\$ 6.72
9689	Sylvania LEDvance	F18T8CW/K28	\$ 22.04	\$ 16.53
6035	Sylvania LEDvance	F18T8CW/K30	\$ 22.04	\$ 16.53
3156	Sylvania LEDvance	F20T12/CW	\$ 2.65	\$ 1.99
15065	Sylvania LEDvance	F20T12/D35	\$ 20.42	\$ 15.32
9889	Sylvania LEDvance	F20T12/GRO/AQ/WS/RF	\$ 16.73	\$ 12.55
1941	Sylvania LEDvance	F20T12/WW	\$ 12.88	\$ 9.66
9599	Sylvania LEDvance	F24T12/CW/HO	\$ 5.34	\$ 4.00
13005	Sylvania LEDvance	F24T12/D/HO	\$ 37.86	\$ 28.40
1389	Sylvania LEDvance	F25T12/CW/28	\$ 25.23	\$ 18.92
504	Sylvania LEDvance	F25T12/CW/33	\$ 24.53	\$ 18.40
8802	Sylvania LEDvance	F25T12/CW/RS/SS-(F30	\$ 3.15	\$ 2.37

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Retail Price	Value Price
10041	Sylvania LEDvance	F30T12/CW/HO	\$ 5.17	\$ 3.88
14265	Sylvania LEDvance	F30T12/CW/RS	\$ 4.41	\$ 3.30
18750	Sylvania LEDvance	F30T12/D830/RS	\$ 40.71	\$ 30.53
2210	Sylvania LEDvance	F30T8/CW	\$ 4.98	\$ 3.74
549	Sylvania LEDvance	F34/DX/SS-(F40/DX/SS	\$ 2.51	\$ 1.89
202598	Sylvania LEDvance	F34CWX/SS-(F40CWX/SS	\$ 1.93	\$ 1.45
3590	Sylvania LEDvance	F36T12/CW/HO	\$ 5.09	\$ 3.82
4290	Sylvania LEDvance	F40/DX	\$ 2.50	\$ 1.88
13856	Sylvania LEDvance	F42T12/CW/HO	\$ 4.93	\$ 3.69
2789	Sylvania LEDvance	F48T12/CW	\$ 8.39	\$ 6.30
23717	Sylvania LEDvance	F48T12/CW/ECO	\$ 23.79	\$ 17.84
8100	Sylvania LEDvance	F48T12/CW/HO	\$ 4.39	\$ 3.29
10764	Sylvania LEDvance	F60T12/CW	\$ 6.05	\$ 4.54
3931	Sylvania LEDvance	F60T12/CW/HO	\$ 5.32	\$ 3.99
11230	Sylvania LEDvance	F64T12/CW	\$ 30.49	\$ 22.87
3067	Sylvania LEDvance	F64T12/CW/HO	\$ 11.91	\$ 8.93
8543	Sylvania LEDvance	F64T12/D	\$ 34.50	\$ 25.88
10238	Sylvania LEDvance	F64T6/CW	\$ 39.79	\$ 29.84
5591	Sylvania LEDvance	F72T12/CW	\$ 9.29	\$ 6.96
3755	Sylvania LEDvance	F72T12/CW/HO	\$ 4.47	\$ 3.35
4964	Sylvania LEDvance	F72T12/D/HO	\$ 5.63	\$ 4.22
18322	Sylvania LEDvance	F72T12/D35/HO	\$ 39.58	\$ 29.68
14014	Sylvania LEDvance	F72T12/D830/HO	\$ 24.32	\$ 18.24
9957	Sylvania LEDvance	F72T8/CW	\$ 46.67	\$ 35.00
565	Sylvania LEDvance	F84T12/CW/HO	\$ 4.93	\$ 3.70
8967	Sylvania LEDvance	F96T12/CW/HO/COLD-T	\$ 3.74	\$ 2.81
13468	Sylvania LEDvance	F96T12/D/HO/COLD-TEMP	\$ 4.79	\$ 3.59
14620	Sylvania LEDvance	F96T12/D35/SS	\$ 36.58	\$ 27.44
15668	Sylvania LEDvance	F96T12/D35/SS/ECO	\$ 42.17	\$ 31.63
10012	Sylvania LEDvance	F96T12/DX	\$ 5.19	\$ 3.89
19655	Sylvania LEDvance	F96T12/DX/SS	\$ 6.73	\$ 5.05
197649	Sylvania LEDvance	F96T12CWXSSUPC	\$ 3.96	\$ 2.97
42487	Sylvania LEDvance	FB40/CWX/6	\$ 8.07	\$ 6.05
1550	Sylvania LEDvance	FBO31/835	\$ 15.89	\$ 11.92
8552	Sylvania LEDvance	FBO31/841	\$ 15.45	\$ 11.59
3059	Sylvania LEDvance	FBO32/735/6/ECO	\$ 9.42	\$ 7.07
3408	Sylvania LEDvance	FBO32/741/6/ECO	\$ 8.36	\$ 6.27
24579	Sylvania LEDvance	FBO32/750/6/ECO	\$ 11.37	\$ 8.53
8280	Sylvania LEDvance	FBO32/835/6/ECO	\$ 12.95	\$ 9.72
12260	Sylvania LEDvance	FBO32/841/6/ECO	\$ 12.95	\$ 9.72
19798	Sylvania LEDvance	FBO32/850XPS/6/ECO	\$ 16.98	\$ 12.73

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item #	Manufacturer	Part	Retail Price	Trade Price
193892	Sylvania LEDvance	FC16T9/CW/RS	\$ 12.00	\$ 9.00
2198	Sylvania LEDvance	FC16T9/D/RS	\$ 40.72	\$ 30.54
2124	Sylvania LEDvance	FC6T9/CW/RS	\$ 9.31	\$ 6.98
43239	Sylvania LEDvance	FDT-64628	\$ 30.56	\$ 22.92
42574	Sylvania LEDvance	FM8/841	\$ 41.98	\$ 31.49
992	Sylvania LEDvance	FO17/735/ECO	\$ 4.01	\$ 3.01
12084	Sylvania LEDvance	FO17/741/ECO	\$ 3.46	\$ 2.60
8918	Sylvania LEDvance	FO17/835/ECO	\$ 4.85	\$ 3.64
35467	Sylvania LEDvance	FO17/841/ECO	\$ 4.85	\$ 3.64
42381	Sylvania LEDvance	FO17/950/24in	\$ 31.99	\$ 24.00
13218	Sylvania LEDvance	FO25/735/ECO	\$ 4.44	\$ 3.33
6064	Sylvania LEDvance	FO25/741/ECO	\$ 4.44	\$ 3.33
13188	Sylvania LEDvance	FO25/835/ECO	\$ 5.84	\$ 4.38
8731	Sylvania LEDvance	FO28/841/XP/SS/ECO3	\$ 4.54	\$ 3.40
194117	Sylvania LEDvance	FO28/850/XV/SS/ECO	\$ 4.04	\$ 3.03
210251	Sylvania LEDvance	FO32/25W/850/XV/SS/E	\$ 4.59	\$ 3.45
14805	Sylvania LEDvance	FO32/735/ECO	\$ 2.68	\$ 2.01
17336	Sylvania LEDvance	FO32/830/ECO	\$ 2.64	\$ 1.98
8556	Sylvania LEDvance	FO32/835/ECO	\$ 2.58	\$ 1.93
4693	Sylvania LEDvance	FO32/841/ECO	\$ 2.64	\$ 1.98
5566	Sylvania LEDvance	FO32/850/ECO	\$ 2.57	\$ 1.93
219384	Sylvania LEDvance	FO32/865/ECO	\$ 2.74	\$ 2.06
20771	Sylvania LEDvance	FO32/865/XP/ECO	\$ 26.10	\$ 19.58
223133	Sylvania LEDvance	FO32/V35/ECO	\$ 2.38	\$ 1.79
220385	Sylvania LEDvance	FO32/V41/ECO	\$ 2.12	\$ 1.59
219693	Sylvania LEDvance	FO32V65-ECO	\$ 2.73	\$ 2.05
14195	Sylvania LEDvance	FO40/741/ECO	\$ 8.78	\$ 6.59
14151	Sylvania LEDvance	FO96/741/HO/ECO	\$ 13.46	\$ 10.10
10558	Sylvania LEDvance	FO96/835/ECO	\$ 10.19	\$ 7.64
22140	Sylvania LEDvance	FO96/841/ECO	\$ 9.04	\$ 6.78
17187	Sylvania LEDvance	FO96/841/HO/ECO	\$ 15.60	\$ 11.70
25520	Sylvania LEDvance	FO96/850/ECO	\$ 11.67	\$ 8.75
24386	Sylvania LEDvance	FP14/835/ECO	\$ 12.55	\$ 9.41
25099	Sylvania LEDvance	FP14/841/ECO	\$ 12.55	\$ 9.41
18328	Sylvania LEDvance	FP24/841/HO/ECO	\$ 8.36	\$ 6.27
5270	Sylvania LEDvance	FP28/835/ECO	\$ 8.05	\$ 6.04
10796	Sylvania LEDvance	FP28/841/ECO	\$ 8.05	\$ 6.04
27854	Sylvania LEDvance	FP39/835/HO/ECO	\$ 8.36	\$ 6.27
201904	Sylvania LEDvance	FP54/50W/850/HO/SS/E	\$ 11.84	\$ 8.88
12348	Sylvania LEDvance	FP54/835/HO/ECO	\$ 3.72	\$ 2.79
9167	Sylvania LEDvance	FP54/841/HO/ECO	\$ 3.72	\$ 2.79

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item #	Manufacturer	Part #	Retail Price	Orig. Price
964	Sylvania LEDvance	FP54/850/HO/ECO	\$ 8.34	\$ 6.25
14384	Sylvania LEDvance	FP54/865/HO/ECO	\$ 40.15	\$ 30.12
21315	Sylvania LEDvance	FPC22/841	\$ 27.77	\$ 20.83
9748	Sylvania LEDvance	FS-2	\$ 2.23	\$ 1.67
11811	Sylvania LEDvance	FS-25	\$ 2.70	\$ 2.02
9092	Sylvania LEDvance	FS-4	\$ 2.21	\$ 1.66
9601	Sylvania LEDvance	FS-5	\$ 2.70	\$ 2.02
6048	Sylvania LEDvance	FT36DL/835/ECO	\$ 20.72	\$ 15.54
1175	Sylvania LEDvance	FT36DL/841/ECO	\$ 9.96	\$ 7.47
17899	Sylvania LEDvance	FT40DL/830/RS/ECO	\$ 11.23	\$ 8.42
7986	Sylvania LEDvance	FT40DL/835/RS/ECO	\$ 9.12	\$ 6.84
7493	Sylvania LEDvance	FT40DL/841/RS/ECO	\$ 9.12	\$ 6.84
24648	Sylvania LEDvance	FT40DL/850/RS/ECO	\$ 40.36	\$ 30.27
18834	Sylvania LEDvance	FT50DL/835/RS/ECO	\$ 16.02	\$ 12.01
19227	Sylvania LEDvance	FT55DL/835/ECO	\$ 20.94	\$ 15.70
930	Sylvania LEDvance	FT55DL/841/ECO	\$ 20.94	\$ 15.70
21385	Sylvania LEDvance	FXL	\$ 21.15	\$ 15.87
18778	Sylvania LEDvance	HPL-575/115-(UCF)	\$ 43.80	\$ 32.85
17202	Sylvania LEDvance	IGNITOR/HPS/50-150	\$ 21.82	\$ 16.36
238829	Sylvania LEDvance	LED/15/HIDR/1500/840	\$ 59.53	\$ 44.65
237810	Sylvania LEDvance	LED/2500/CL/840/RP	\$ 49.61	\$ 37.21
231965	Sylvania LEDvance	LED/700/CL/827/RP	\$ 19.79	\$ 14.84
233463	Sylvania LEDvance	LED/700/CL/840/RP	\$ 23.17	\$ 17.38
236267	Sylvania LEDvance	LED/9A19/F827/G4	\$ 2.49	\$ 1.87
224251	Sylvania LEDvance	LED/LD/900/830/FL120	\$ 18.20	\$ 13.65
238257	Sylvania LEDvance	LED/LD/900/930/FL120	\$ 24.55	\$ 18.42
44102	Sylvania LEDvance	LED/MOTION/LINEAR/W	\$ 12.78	\$ 9.59
231967	Sylvania LEDvance	LED/RT/5/6/625/827	\$ 18.17	\$ 13.63
238173	Sylvania LEDvance	LED/RT/5/6/625/840	\$ 17.61	\$ 13.21
224669	Sylvania LEDvance	LED/RT5/6/700/830FL8	\$ 26.06	\$ 19.55
236126	Sylvania LEDvance	LED/RT6/1500/HO/835	\$ 100.25	\$ 75.19
217929	Sylvania LEDvance	LED/RT6/G/900/830/FL	\$ 59.73	\$ 44.80
217957	Sylvania LEDvance	LED/RT8/2000/835	\$ 87.37	\$ 65.53
230836	Sylvania LEDvance	LED10A19/827/G3/BL	\$ 7.32	\$ 5.49
235411	Sylvania LEDvance	LED10A19/DIM/CLO/827	\$ 2.49	\$ 1.87
210201	Sylvania LEDvance	LED10A19/F/827/RP	\$ 3.33	\$ 2.50
220998	Sylvania LEDvance	LED10A19827G3	\$ 9.56	\$ 7.17
214297	Sylvania LEDvance	LED10A19F827G2	\$ 9.02	\$ 6.77
231626	Sylvania LEDvance	LED10PAR30LNDIM830F	\$ 18.22	\$ 13.66
218645	Sylvania LEDvance	LED11A19/DIM/O/827/C	\$ 11.96	\$ 8.97
226352	Sylvania LEDvance	LED11PAR38DIM830FL3	\$ 31.25	\$ 23.44

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item #	Manufacturer	Code	Retail Price	Your Price
236530	Sylvania LEDvance	LED1200CL840RP	\$ 29.86	\$ 22.40
233775	Sylvania LEDvance	LED12A19/F/827/10YV/	\$ 5.99	\$ 4.49
233776	Sylvania LEDvance	LED12A19/F/850/10YV/	\$ 7.88	\$ 5.91
231966	Sylvania LEDvance	LED13PAR38/830/FL45/	\$ 11.32	\$ 8.49
239604	Sylvania LEDvance	LED13PAR38/850/FL45/	\$ 11.32	\$ 8.49
237418	Sylvania LEDvance	LED14A19/F/827/10YV/	\$ 9.72	\$ 7.29
242749	Sylvania LEDvance	LED15A21/3WAY/O/827	\$ 26.43	\$ 19.82
237379	Sylvania LEDvance	LED15LT6/DIM/SK/827/	\$ 15.15	\$ 11.36
234364	Sylvania LEDvance	LED17T8/L48/FG/841/S	\$ 7.18	\$ 5.39
233240	Sylvania LEDvance	LED17T8/L48/FG/850/S	\$ 14.06	\$ 10.55
242574	Sylvania LEDvance	LED17T8/L48/FG/841/S	\$ 10.80	\$ 8.10
201302	Sylvania LEDvance	LED21PAR38/DIM/P/93C	\$ 87.43	\$ 65.58
193787	Sylvania LEDvance	LED22T8L48/850/120/1	\$ 137.33	\$ 103.00
211415	Sylvania LEDvance	LED22T8L48/F/1X1HO/8	\$ 127.51	\$ 95.63
239522	Sylvania LEDvance	LED4.5B10BLUNTDIM82	\$ 8.14	\$ 6.10
237392	Sylvania LEDvance	LED4.5B10C/BLUNT/DIM	\$ 8.33	\$ 6.25
241716	Sylvania LEDvance	LED4.5R20DIM827G3RP	\$ 8.56	\$ 6.42
200553	Sylvania LEDvance	LED4B10/BENT/DIM/827	\$ 14.66	\$ 11.00
200554	Sylvania LEDvance	LED4B10/BLUNT/DIM/827	\$ 40.53	\$ 30.40
223924	Sylvania LEDvance	LED5R20DIM827G2	\$ 14.81	\$ 11.11
233771	Sylvania LEDvance	LED6A19/F/827/10YV/R	\$ 3.32	\$ 2.49
233772	Sylvania LEDvance	LED6A19/F/850/10YV/R	\$ 4.12	\$ 3.09
215242	Sylvania LEDvance	LED7PAR20/DIM/830/FL	\$ 12.41	\$ 9.30
227840	Sylvania LEDvance	LED7PAR20/DIM/850/FL	\$ 30.93	\$ 23.20
233773	Sylvania LEDvance	LED8.5A19/F/827/10YV	\$ 3.32	\$ 2.49
228418	Sylvania LEDvance	LED8.5A19/F/850/10YV	\$ 3.32	\$ 2.49
229654	Sylvania LEDvance	LED9BR30DIM82710YVR	\$ 7.36	\$ 5.52
223894	Sylvania LEDvance	LED9BR30DIM827G2	\$ 4.67	\$ 3.50
236678	Sylvania LEDvance	LED9MR16DIM830FL35	\$ 15.12	\$ 11.34
227693	Sylvania LEDvance	LEDRT56HO900835	\$ 83.38	\$ 62.54
12416	Sylvania LEDvance	LU100/ECO	\$ 20.24	\$ 15.18
2325	Sylvania LEDvance	LU100/MED	\$ 14.80	\$ 11.10
1357	Sylvania LEDvance	LU1000/ECO	\$ 79.04	\$ 59.28
6167	Sylvania LEDvance	LU1000/SUPER5-KIT	\$ 229.92	\$ 98.85
21774	Sylvania LEDvance	LU150/480-KIT	\$ 139.39	\$ 104.55
18586	Sylvania LEDvance	LU150/55/D/MED	\$ 103.81	\$ 77.86
9002	Sylvania LEDvance	LU150/55/ECO	\$ 26.99	\$ 20.24
4885	Sylvania LEDvance	LU150/55/MED	\$ 14.93	\$ 11.20
4776	Sylvania LEDvance	LU150/55/SBY	\$ 137.95	\$ 103.46
20599	Sylvania LEDvance	LU150/MULTI-KIT	\$ 99.81	\$ 74.86
9782	Sylvania LEDvance	LU250/ECO	\$ 18.13	\$ 13.60

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Qty	Retail Price	Cost Price
5343	Sylvania LEDvance	LU250/SUPER5-KIT	\$ 101.30	\$ 57.50
10990	Sylvania LEDvance	LU35/MED	\$ 20.24	\$ 15.18
1996	Sylvania LEDvance	LU400/ECO	\$ 18.13	\$ 13.60
5783	Sylvania LEDvance	LU400/SUPER5-KIT	\$ 123.08	\$ 92.31
6891	Sylvania LEDvance	LU50/MED	\$ 14.80	\$ 11.10
1507	Sylvania LEDvance	LU70/ECO	\$ 26.99	\$ 20.24
12973	Sylvania LEDvance	LU70/MED	\$ 12.48	\$ 9.36
8432	Sylvania LEDvance	M1000/C/U	\$ 196.64	\$ 147.48
2785	Sylvania LEDvance	M1000/SUPER5-KIT	\$ 149.71	\$ 112.28
6948	Sylvania LEDvance	M1000/U	\$ 25.60	\$ 19.20
1143	Sylvania LEDvance	M1000/U/BT37	\$ 25.60	\$ 19.20
43645	Sylvania LEDvance	M150/U/MED	\$ 35.76	\$ 26.82
9802	Sylvania LEDvance	M1500/BU-HOR	\$ 62.16	\$ 46.62
4583	Sylvania LEDvance	M175/SUPER5-KIT	\$ 63.81	\$ 47.86
2021	Sylvania LEDvance	M175/U/MED	\$ 9.60	\$ 7.20
220553	Sylvania LEDvance	M175U/ED28	\$ 14.19	\$ 10.64
230722	Sylvania LEDvance	M250/PS/U/ED28	\$ 40.23	\$ 30.18
20464	Sylvania LEDvance	M250/SUPER5-KIT	\$ 82.29	\$ 61.72
220552	Sylvania LEDvance	M250U/ED28	\$ 11.20	\$ 8.40
19231	Sylvania LEDvance	M320/MULTI-PS-KIT	\$ 91.51	\$ 68.63
34508	Sylvania LEDvance	M400/PS/U	\$ 43.59	\$ 32.69
229972	Sylvania LEDvance	M400/PS/U/ED37	\$ 43.58	\$ 32.69
1707	Sylvania LEDvance	M400/SUPER5-KIT	\$ 94.73	\$ 71.05
220554	Sylvania LEDvance	M400U/ED28	\$ 14.97	\$ 11.23
220556	Sylvania LEDvance	M400U/ED37	\$ 15.35	\$ 11.51
5383	Sylvania LEDvance	MB1X22/120CIRC-SRINK	\$ 24.51	\$ 18.38
8073	Sylvania LEDvance	MB2X96/VHO/277RS-SR	\$ 195.43	\$ 146.57
20861	Sylvania LEDvance	MC150T7.5/G12/U/830-	\$ 88.99	\$ 66.75
209059	Sylvania LEDvance	MCP70/C/U/MED/940-P	\$ 197.27	\$ 147.96
24273	Sylvania LEDvance	MCP70/U/MED/830-PB	\$ 188.88	\$ 141.66
4106	Sylvania LEDvance	MP100/C/U/MED	\$ 35.13	\$ 26.35
935	Sylvania LEDvance	MP100/U/MED	\$ 15.12	\$ 11.34
13925	Sylvania LEDvance	MP1000/BU-ONLY	\$ 89.19	\$ 66.89
14649	Sylvania LEDvance	MP150/U/MED	\$ 21.70	\$ 16.28
8342	Sylvania LEDvance	MP400/BU-ONLY	\$ 43.30	\$ 32.48
8912	Sylvania LEDvance	MP50/U/MED	\$ 21.71	\$ 16.28
9333	Sylvania LEDvance	MP70/U/MED	\$ 21.70	\$ 16.28
20141	Sylvania LEDvance	MS175/PS/BU-ONLY/ME	\$ 193.77	\$ 145.33
223964	Sylvania LEDvance	MS320/PS/BU-HOR/ED2	\$ 45.46	\$ 34.10
43624	Sylvania LEDvance	MS360/C/SS/BU-HOR	\$ 33.52	\$ 25.14
14467	Sylvania LEDvance	MS360/SS/BU-HOR	\$ 31.29	\$ 23.47

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Code	Retail Price	Wholesale Price
21673	Sylvania LEDvance	MS400/BU-ONLY	\$ 41.77	\$ 31.33
18755	Sylvania LEDvance	MS400/C/PS/BU-ONLY	\$ 193.88	\$ 145.41
9636	Sylvania LEDvance	MSB-46-1240-TP	\$ 261.00	\$ 195.75
22034	Sylvania LEDvance	NL/LED/POWERLITE/CLI	\$ 11.65	\$ 8.74
239353	Sylvania LEDvance	PANEL	\$ 133.10	\$ 99.83
14572	Sylvania LEDvance	PR2	\$ 0.70	\$ 0.52
200375	Sylvania LEDvance	QHE-2X32T8/UNV-ISH-H	\$ 172.74	\$ 129.56
201421	Sylvania LEDvance	QHE-2x54T5HO/UNV-PS	\$ 98.16	\$ 73.62
28862	Sylvania LEDvance	QHE-3x32T8/UNV-ISL-S	\$ 19.53	\$ 14.65
14917	Sylvania LEDvance	QHE2X40DL/UNV-ISN-SC	\$ 46.17	\$ 34.63
43031	Sylvania LEDvance	QHE2x86T8HO/UNV-PSN	\$ 68.05	\$ 51.04
228255	Sylvania LEDvance	QHE3x32T8/UNV/DIM/T	\$ 85.33	\$ 64.00
42905	Sylvania LEDvance	QTP-2X28T5/UNV-PSN	\$ 44.59	\$ 33.45
43072	Sylvania LEDvance	QTP-2X42CF/UNV-DALI	\$ 300.31	\$ 225.23
43020	Sylvania LEDvance	QTP-3X32T8/UNV-ISN-S	\$ 18.30	\$ 13.73
18810	Sylvania LEDvance	QTP-4x32T8/UNV-ISN-S	\$ 20.35	\$ 15.27
16051	Sylvania LEDvance	QTP1X32T8/UNV-ISN-SC	\$ 16.24	\$ 12.18
20977	Sylvania LEDvance	QTP2X26/32/42CF/UNV	\$ 34.46	\$ 16.10
8844	Sylvania LEDvance	QTP2X26/CF/UNV-DM	\$ 39.45	\$ 29.59
8119	Sylvania LEDvance	QTP2X32T8/UNV-ISN-SC	\$ 13.86	\$ 10.31
9854	Sylvania LEDvance	QTP2X40T12/UNV-RS-SC	\$ 19.14	\$ 14.36
234301	Sylvania LEDvance	QTP2X40T12UNVRSSC	\$ 21.33	\$ 16.00
18762	Sylvania LEDvance	QTP2X40TT5/120PSN-F	\$ 58.48	\$ 43.86
33026	Sylvania LEDvance	QTP2X40TT5/277PSN-F	\$ 52.89	\$ 39.67
20365	Sylvania LEDvance	QTP2X54T5HOUNVPSNM	\$ 44.59	\$ 33.45
14527	Sylvania LEDvance	QTP2X59T8/UNV-ISN-SC	\$ 31.70	\$ 23.78
238179	Sylvania LEDvance	QTP2X96T12HOUNVRSS	\$ 51.19	\$ 38.39
234300	Sylvania LEDvance	QTP2X96T12UNVISSC	\$ 37.65	\$ 28.24
8225	Sylvania LEDvance	QTP3X32T8/UNV-ISN-SC	\$ 15.62	\$ 11.72
16557	Sylvania LEDvance	QTP4X32T8/UNV-ISN-SC	\$ 17.37	\$ 13.03
2689	Sylvania LEDvance	QTP4x54T5HO/UNV-PSN	\$ 64.04	\$ 48.03
184013	Sylvania LEDvance	QTP2x96T12/UNV-IS	\$ 27.65	\$ 20.74
244398	Sylvania LEDvance	LED25T5HO/L48/FG/841	\$ 23.57	\$ 17.68
244762	Sylvania LEDvance	LED17T8/L48/FG/841/B	\$ 15.12	\$ 11.34
244771	Sylvania LEDvance	LED9A19MOT827RP	\$ 21.69	\$ 16.27
5906	Sylvania LEDvance	35AR111/SSP4	\$ 36.73	\$ 27.55
3555	Sylvania LEDvance	M400/U/BT28	\$ 31.13	\$ 23.35
245359	Sylvania LEDvance	LED6PAR16/DIM/GU10/	\$ 10.06	\$ 7.55
245360	Sylvania LEDvance	FO32/835/XV/ECO	\$ 4.98	\$ 3.74
245926	Sylvania LEDvance	LED8PAR20DIM850FL40	\$ 13.55	\$ 10.16
245978	Sylvania LEDvance	OT40W/PRG1400C/UNV	\$ 169.02	\$ 126.77

Direct: (304) 399-4567
 Toll-Free: (333) 501-4739
 Fax: (304) 523-5337

W. Va. Electric
SUPPLY COMPANY

Item#	Manufacturer	Part#	Head Price	Net Price
29321	Sylvania LEDvance	QTP2x96T12HO/UNV-RS	\$ 42.11	\$ 31.58
246252	Sylvania LEDvance	LED9A19DIMO827UB	\$ 10.80	\$ 8.10
246556	Sylvania LEDvance	LED8A15DIM827G3RP[C	\$ 0.48	\$ 0.36
246557	Sylvania LEDvance	LED6A19DIMO850G5RP	\$ 2.15	\$ 1.61
246558	Sylvania LEDvance	LED4A15822VINRP	\$ 3.14	\$ 2.36
246559	Sylvania LEDvance	LED11BR30DIMHO827G	\$ 2.28	\$ 1.71
246859	Sylvania LEDvance	LED8A15CDIM827G3RP	\$ 0.75	\$ 0.56
246860	Sylvania LEDvance	LED8.5A19F82710YVRP4	\$ 2.77	\$ 2.08
246885	Sylvania LEDvance	LED12.5PAR30LN/HD/DI	\$ 23.36	\$ 17.52
247012	Sylvania LEDvance	WALPAK2N/030UNV750	\$ 209.16	\$ 156.87
247013	Sylvania LEDvance	VAPOR1A/025UNVD840	\$ 104.51	\$ 78.38
229873	Sylvania LEDvance	LED10A19/DIM/O/827/C	\$ 10.80	\$ 8.10
247086	Sylvania LEDvance	LED2.5B10CBENTDIM85	\$ 5.52	\$ 4.14
247102	Sylvania LEDvance	LED2.5B10CBENTDIM82	\$ 5.52	\$ 4.14
247395	Sylvania LEDvance	79610	\$ 6.30	\$ 4.72
247654	Sylvania LEDvance	LEDSLIMUCCONVER	\$ 95.98	\$ 71.99
247655	Sylvania LEDvance	LEDSLIMUCCONVER	\$ 74.65	\$ 55.99
247658	Sylvania LEDvance	LEDSLIMUCCONVER	\$ 46.93	\$ 35.20
247656	Sylvania LEDvance	LEDSLIMUCCONVER	\$ 53.32	\$ 39.99
248084	Sylvania LEDvance	LED4B10CBENT822V	\$ 0.64	\$ 0.48
248085	Sylvania LEDvance	LED8.5A19F82710YVRP2	\$ 2.51	\$ 1.89
248086	Sylvania LEDvance	LED9BR30DIMHO827G5	\$ 6.93	\$ 5.20
248104	Sylvania LEDvance	MS360/SS/BU-HOR/ED3	\$ 32.29	\$ 24.22
248218	Sylvania LEDvance	LED17PAR38DIM850FL4	\$ 23.04	\$ 17.28
248219	Sylvania LEDvance	LED26PAR38HODIM850I	\$ 45.88	\$ 34.41
236751	Sylvania LEDvance	LED6B13BENTDIM827RF	\$ 2.36	\$ 1.77



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
3/15/2018

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER AssuredPartners of West Virginia, LLC dba Insurance Systems 1 Insurance Way; PO Box 10 Ona WV 25545		CONTACT NAME: Brenda Kash PHONE (A/C, No, Ext): (304) 736-2222 E-MAIL ADDRESS: bkash@isi-wv.com FAX (A/C, No): (304) 302-3401															
INSURED West Virginia Electric Supply Company PO Box 6668 Huntington WV 25773-6668		<table border="1"> <thead> <tr> <th>INSURER(S) AFFORDING COVERAGE</th> <th>NAIC #</th> </tr> </thead> <tbody> <tr> <td>INSURER A: Westfield Insurance</td> <td>24112</td> </tr> <tr> <td>INSURER B: BrickStreet Mutual Insurance</td> <td>12372</td> </tr> <tr> <td>INSURER C:</td> <td></td> </tr> <tr> <td>INSURER D:</td> <td></td> </tr> <tr> <td>INSURER E:</td> <td></td> </tr> <tr> <td>INSURER F:</td> <td></td> </tr> </tbody> </table>		INSURER(S) AFFORDING COVERAGE	NAIC #	INSURER A: Westfield Insurance	24112	INSURER B: BrickStreet Mutual Insurance	12372	INSURER C:		INSURER D:		INSURER E:		INSURER F:	
INSURER(S) AFFORDING COVERAGE	NAIC #																
INSURER A: Westfield Insurance	24112																
INSURER B: BrickStreet Mutual Insurance	12372																
INSURER C:																	
INSURER D:																	
INSURER E:																	
INSURER F:																	

COVERAGES **CERTIFICATE NUMBER: 17-18 All Lines** **REVISION NUMBER:**

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL SUBR INSD WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS												
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER:		CMM3627286	7/1/2017	7/1/2018	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 500,000 MED EXP (Any one person) \$ 5,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000 Employee Benefits \$ 1,000,000												
A	<input checked="" type="checkbox"/> AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS <input type="checkbox"/> NON-OWNED AUTOS		CMM3627286	7/1/2017	7/1/2018	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ Drive other Car Medical \$												
A	<input checked="" type="checkbox"/> UMBRELLA LIAB <input type="checkbox"/> OCCUR <input type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE <input type="checkbox"/> DED <input checked="" type="checkbox"/> RETENTION \$ 0		CMM3627286	7/1/2017	7/1/2018	EACH OCCURRENCE \$ 5,000,000 AGGREGATE \$ 5,000,000												
B	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? <input type="checkbox"/> Y/N (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	N/A	WCB1018836	1/29/2018	1/29/2019	<table border="1"> <thead> <tr> <th></th> <th>PER STATUTE</th> <th>OTHER</th> </tr> </thead> <tbody> <tr> <td>E.L. EACH ACCIDENT</td> <td>\$ 1,000,000</td> <td></td> </tr> <tr> <td>E.L. DISEASE - EA EMPLOYEE</td> <td>\$ 1,000,000</td> <td></td> </tr> <tr> <td>E.L. DISEASE - POLICY LIMIT</td> <td>\$ 1,000,000</td> <td></td> </tr> </tbody> </table>		PER STATUTE	OTHER	E.L. EACH ACCIDENT	\$ 1,000,000		E.L. DISEASE - EA EMPLOYEE	\$ 1,000,000		E.L. DISEASE - POLICY LIMIT	\$ 1,000,000	
	PER STATUTE	OTHER																
E.L. EACH ACCIDENT	\$ 1,000,000																	
E.L. DISEASE - EA EMPLOYEE	\$ 1,000,000																	
E.L. DISEASE - POLICY LIMIT	\$ 1,000,000																	

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
Evidence of Insurance

CERTIFICATE HOLDER

CANCELLATION

State of West Virginia
Purchasing Division
2019 Washington Street East
Charleston, WV 25305-0130

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

Tara Shoemaker/TARAS

© 1988-2014 ACORD CORPORATION. All rights reserved.