

SECTION 015639 - TEMPORARY TREE AND PLANT PROTECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section includes general protection and pruning of existing trees and plants that are affected by execution of the Work, whether temporary or permanent construction.

1.2 DEFINITIONS

- A. Protection Zone: Area surrounding individual trees to be protected during construction, and indicated on Drawings defined by a circle concentric with each tree with a radius 1.5 times the diameter of the drip line unless otherwise indicated.

1.3 SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Samples: For each type of organic mulch in sealed plastic bags labeled with composition of materials by percentage of weight, protection-zone fencing, and protection-zone signage].
- C. Tree Pruning Schedule: Written schedule detailing scope and extent of pruning of trees to remain that interfere with or are affected by construction.
- D. Certification: From arborist, certifying that trees indicated to remain have been protected during construction according to recognized standards and that trees were promptly and properly treated and repaired when damaged.
- E. Maintenance Recommendations: From arborist, for care and protection of trees affected by construction during and after completing the Work.
- F. Existing Conditions: Documentation of existing trees and plantings indicated to remain, which establishes preconstruction conditions that might be misconstrued as damage caused by construction activities.

1.4 QUALITY ASSURANCE

- A. Arborist Qualifications: Certified Arborist as certified by ISA, licensed arborist in jurisdiction where Project is located, current member of ASCA, or registered Consulting Arborist as designated by ASCA.
- B. Preinstallation Conference: Conduct conference at Canaan Valley Resort State Park.

1.5 PROJECT CONDITIONS

- A. The following practices are prohibited within protection zones:
 - 1. Storage of construction materials, debris, or excavated material.

2. Parking vehicles or equipment.
 3. Foot traffic.
 4. Erection of sheds or structures.
 5. Impoundment of water.
 6. Excavation or other digging unless otherwise indicated.
 7. Attachment of signs to or wrapping materials around trees or plants unless otherwise indicated.
- B. Do not direct vehicle or equipment exhaust toward protection zones.
- C. Prohibit heat sources, flames, ignition sources, and smoking within or near protection zones and organic mulch.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Topsoil: Natural or cultivated top layer of the soil profile or manufactured topsoil; containing organic matter and sand, silt, and clay particles; friable, pervious, and black or a darker shade of brown, gray, or red than underlying subsoil; reasonably free of subsoil, clay lumps, gravel, and other objects more than 1 inch (25 mm)] in diameter; and free of weeds, roots, and toxic and other nonsoil materials.
- B. Topsoil: Contractor will provide topsoil.
- C. Organic Mulch: Shredded hardwood, free from deleterious materials.
- D. Protection-Zone Fencing: Fencing fixed in position and meeting one of the following requirements.
1. Chain-Link Protection-Zone Fencing: Galvanized-steel fencing fabricated from minimum 2-inch (50-mm) opening, 0.148-inch- (3.76-mm-) diameter wire chain-link fabric; with pipe posts, minimum 2-3/8-inch- (60-mm-) OD line posts, and 2-7/8-inch- (73-mm-) OD corner and pull posts; with 1-5/8-inch- (42-mm-) OD top rails and 0.177-inch- (4.5-mm-) diameter bottom tension wire; with tie wires, hog ring ties, and other accessories for a complete fence system.
 2. Plywood Protection-Zone Fencing: Plywood framed with four 2-by-4-inch (50-by-100-mm) rails, with 4-by-4-inch (100-by-100-mm) preservative-treated wood posts spaced not more than 8 feet (2.4 m) apart.
 3. Wood Protection-Zone Fencing: Constructed of two 2-by-4-inch (50-by-100-mm) horizontal rails, with 4-by-4-inch (100-by-100-mm) preservative-treated wood posts spaced not more than 8 feet (2.4 m) apart, and lower rail set halfway between top rail and ground.
 4. Plastic Protection-Zone Fencing: Plastic construction fencing constructed of high-density extruded and stretched polyethylene fabric with 2-inch (50-mm) maximum opening in pattern and supported by tubular or T-shape galvanized-steel posts spaced not more than 8 feet (2.4 m) apart. High-visibility orange color, nonfading.
 5. Height of Fencing: 6 feet (1.8 m) or 8 feet (2.4 m).
 6. Gates: Swing access gates matching material and appearance of fencing, to allow for maintenance activities within protection zones.
- E. Protection-Zone Signage: Shop-fabricated, rigid plastic or metal sheet with attachment holes prepunched and reinforced; legibly printed with nonfading lettering.

PART 3 - EXECUTION

3.1 EXAMINATION AND PREPARATION

- A. Erosion and Sedimentation Control: Examine the site to verify that temporary erosion- and sedimentation-control measures are in place. Verify that flows of water redirected from construction areas or generated by construction activity do not enter or cross protection zones.
- B. Protect tree root systems from damage caused by runoff or spillage of noxious materials while mixing, placing, or storing construction materials. Protect root systems from ponding, eroding, or excessive wetting caused by dewatering operations.
- C. Protection Zones: Mulch areas inside protection zones and other areas indicated with 4-inch (100-mm) to 6-inch (150-mm) average thickness of organic mulch. Do not place mulch within 1 foot of tree trunks.

3.2 PROTECTION ZONES

- A. Protection-Zone Fencing: Install protection-zone fencing along edges of protection zones in a manner that will prevent people from easily entering protected area except by entrance gates.
 - 1. Chain-Link Fencing: Install to comply with ASTM F 567 and with manufacturer's written instructions.
 - 2. Posts: Set or drive posts into ground one-third the total height of the fence without concrete footings. Where a post is located on existing paving or concrete to remain, provide appropriate means of post support acceptable to Architect.
 - 3. Access Gates: Install as needed.
- B. Protection-Zone Signage: Install protection-zone signage in visibly prominent locations in a manner approved by Architect.
- C. Repair or replace trees, shrubs, and other vegetation indicated to remain or be relocated that are damaged by construction operations, in a manner approved by Architect.
- D. Maintain protection-zone fencing and signage in good condition as acceptable to Architect and remove when construction operations are complete and equipment has been removed from the site.

3.3 EXCAVATION

- A. General: Excavate at edge of protection zones and for trenches indicated within protection zones according to requirements in Division 31 Section "Earth Moving."
- B. Trenching near Trees: Where utility trenches are required within protection zones, hand excavate under or around tree roots or tunnel under the roots by drilling, auger boring, or pipe jacking. Do not cut main lateral tree roots or taproots; cut only smaller roots that interfere with installation of utilities. Cut roots as required for root pruning.
- C. Do not allow exposed roots to dry out before placing permanent backfill.

3.4 ROOT PRUNING

- A. Prune roots that are affected by temporary and permanent construction. Prune roots as follows:

1. Cut roots manually by digging a trench and cutting exposed roots with sharp pruning instruments; do not break, tear, chop, or slant the cuts. Do not use a backhoe or other equipment that rips, tears, or pulls roots.
2. Temporarily support and protect roots from damage until they are permanently covered with soil.
3. Cover exposed roots with burlap and water regularly.
4. Backfill as soon as possible according to requirements in Division 31 Section "Earth Moving."

B. Root Pruning at Edge of Protection Zone: Prune roots by cleanly cutting all roots to the depth of the required excavation.

C. Root Pruning within Protection Zone: Clear and excavate by hand to the depth of the required excavation to minimize damage to root systems. Use narrow-tine spading forks, comb soil to expose roots, and cleanly cut roots as close to excavation as possible.

3.5 CROWN PRUNING

A. Prune branches that are affected by temporary and permanent construction. Prune branches as follows:

1. Prune trees to remain to compensate for root loss caused by damaging or cutting root system. Provide subsequent maintenance during Contract period as recommended by arborist.
2. Pruning Standards: Prune trees according to ANSI A300 (Part 1).
3. Cut branches with sharp pruning instruments; do not break or chop.
4. Do not apply pruning paint to wounds.

B. Chip removed branches and stockpile in areas approved by Architect.

3.6 REGRADING

A. Lowering Grade: Where new finish grade is indicated below existing grade around trees, slope grade beyond the protection zone. Maintain existing grades within the protection zone.

B. Raising Grade: Where new finish grade is indicated above existing grade around trees, slope grade beyond the protection zone. Maintain existing grades within the protection zone.

C. Minor Fill within Protection Zone: Where existing grade is 2 inches (50 mm) or less below elevation of finish grade, fill with topsoil. Place topsoil in a single uncompacted layer and hand grade to required finish elevations.

3.7 FIELD QUALITY CONTROL

A. Inspections: Engage a qualified arborist to direct plant-protection measures in the vicinity of trees, shrubs, and other vegetation indicated to remain and to prepare inspection reports.

3.8 REPAIR AND REPLACEMENT

A. General: Repair or replace trees, shrubs, and other vegetation indicated to remain or be relocated that are damaged by construction operations, in a manner approved by Architect.

1. Have arborist perform the root cutting, branch pruning, and damage repair of trees and shrubs.
2. Treat damaged trunks, limbs, and roots according to arborist's written instructions.
3. Perform repairs within 24 hours.

4. Replace vegetation that cannot be repaired and restored to full-growth status, as determined by Architect.

3.9 DISPOSAL OF SURPLUS AND WASTE MATERIALS

- A. Disposal: Remove excess excavated material, displaced trees, trash and debris, and legally dispose of them off Owner's property.

END OF SECTION 015639

SECTION 22 1113 - FACILITY WATER DISTRIBUTION PIPING

PART 1 - GENERAL

1.1 SUMMARY

- A. This Section includes water-distribution piping and related components outside the building for combined water service and fire-service mains.
- B. Utility-furnished products include water meters that will be furnished to the site, ready for installation.

1.2 ACTION SUBMITTALS

- A. Product Data: For each type of product indicated.
- B. Shop Drawings: Detail precast concrete vault assemblies and indicate dimensions, method of field assembly, and components.

1.3 INFORMATIONAL SUBMITTALS

- A. Field quality-control test reports.

1.4 CLOSEOUT SUBMITTALS

- A. Operation and maintenance data.

1.5 QUALITY ASSURANCE

- A. Regulatory Requirements:
 - 1. Comply with requirements of utility company supplying water. Include tapping of water mains and backflow prevention.
 - 2. Comply with standards of authorities having jurisdiction for potable-water-service piping, including materials, installation, testing, and disinfection.
 - 3. Comply with standards of authorities having jurisdiction for fire-suppression water-service piping, including materials, hose threads, installation, and testing.
- B. Piping materials shall bear label, stamp, or other markings of specified testing agency.
- C. Comply with ASTM F 645 for selection, design, and installation of thermoplastic water piping.
- D. Comply with FMG's "Approval Guide" or UL's "Fire Protection Equipment Directory" for fire-service-main products.

- E. NFPA Compliance: Comply with NFPA 24 for materials, installations, tests, flushing, and valve and hydrant supervision for fire-service-main piping for fire suppression.
- F. NSF Compliance:
 - 1. Comply with NSF 14 for plastic potable-water-service piping. Include marking "NSF-pw" on piping.
 - 2. Comply with NSF 61 for materials for water-service piping and specialties for domestic water.

1.6 PROJECT CONDITIONS

- A. Interruption of Existing Water-Distribution Service: Do not interrupt service to facilities occupied by Owner or others unless permitted under the following conditions and then only after arranging to provide temporary water-distribution service according to requirements indicated:
 - 1. Notify Owner no fewer than two days in advance of proposed interruption of service.
 - 2. Do not proceed with interruption of water-distribution service without Owner's written permission.

1.7 COORDINATION

- A. Coordinate connection to water main with utility company.

PART 2 - PRODUCTS

2.1 PIPE AND FITTINGS

- A. Soft Copper Tube: ASTM B 88, Type K and ASTM B 88, Type L, water tube, annealed temper.
 - 1. Copper, Solder-Joint Fittings: ASME B16.18, cast-copper-alloy or ASME B16.22, wrought-copper, solder-joint pressure type. Furnish only wrought-copper fittings if indicated.
- B. Hard Copper Tube: ASTM B 88, Type K and ASTM B 88, Type L, water tube, drawn temper.
 - 1. Copper, Solder-Joint Fittings: ASME B16.18, cast-copper-alloy or ASME B16.22, wrought-copper, solder-joint pressure type. Furnish only wrought-copper fittings if indicated.
- C. Mechanical-Joint, Ductile-Iron Pipe: AWWA C151, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated.
 - 1. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.

2. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.
- D. Push-on-Joint, Ductile-Iron Pipe: AWWA C151, with push-on-joint bell and plain spigot end unless grooved or flanged ends are indicated.
1. Push-on-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
 2. Gaskets: AWWA C111, rubber.
- E. Grooved-Joint, Ductile-Iron Pipe: AWWA C151, with cut, rounded-grooved ends.
1. Grooved-End, Ductile-Iron Pipe Appurtenances:
 - a. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - b. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 1) Anvil International, Inc.
 - 2) Victaulic Company of America.
- F. PE, Fire-Service Pipe: ASTM F 714, AWWA C906, or equivalent for PE water pipe; FMG approved, with minimum thickness equivalent to FMG Class 200.
1. Molded PE Fittings: ASTM D 3350, PE resin, socket- or butt-fusion type, made to match PE pipe dimensions and class.
- G. PVC, AWWA Pipe: AWWA C900, Class 200, with bell end with gasket, and with spigot end.
1. Comply with UL 1285 for fire-service mains if indicated.
 2. PVC Fabricated Fittings: AWWA C900, Class 200, with bell-and-spigot or double-bell ends. Include elastomeric gasket in each bell.
 3. PVC Molded Fittings: AWWA C907, Class 150, with bell-and-spigot or double-bell ends. Include elastomeric gasket in each bell.
 4. Push-on-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
 - a. Gaskets: AWWA C111, rubber.
 5. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
 - a. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.

2.2 JOINING MATERIALS

- A. Refer to Section 33 0500 "Common Work Results for Utilities" for commonly used joining materials.

- B. Brazing Filler Metals: AWS A5.8, BCuP Series.
- C. Bonding Adhesive for Fiberglass Piping: As recommended by fiberglass piping manufacturer.
- D. Plastic Pipe-Flange Gasket, Bolts, and Nuts: Type and material recommended by piping system manufacturer, unless otherwise indicated.

2.3 PIPING SPECIALTIES

- A. Transition Fittings: Manufactured fitting or coupling same size as, with pressure rating at least equal to and ends compatible with, piping to be joined.
- B. Tubular-Sleeve Pipe Couplings:
 - 1. Description: Metal, bolted, sleeve-type, reducing or transition coupling, with center sleeve, gaskets, end rings, and bolt fasteners and with ends of same sizes as piping to be joined.
 - a. Standard: AWWA C219.

2.4 GATE VALVES

- A. AWWA, Cast-Iron Gate Valves:
 - 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 - 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - 3. Basis-of-Design Product: Subject to compliance with requirements, provide a comparable product by one of the following:
 - a. American AVK Co.; Valves & Fittings Div.
 - b. American Cast Iron Pipe Co.; American Flow Control Div.
 - c. American Cast Iron Pipe Co.; Waterous Co. Subsidiary.
 - d. Crane Co.; Crane Valve Group; Stockham Div.
 - e. East Jordan Iron Works, Inc.
 - f. McWane, Inc.; Clow Valve Co. Div. (Oskaloosa).
 - g. McWane, Inc.; Kennedy Valve Div.
 - h. McWane, Inc.; M & H Valve Company Div.
 - i. McWane, Inc.; Tyler Pipe Div.; Utilities Div.
 - j. Mueller Co.; Water Products Div.
 - k. NIBCO INC.
 - l. U.S. Pipe and Foundry Company.
 - 4. Nonrising-Stem, Metal-Seated Gate Valves:
 - a. Description: Gray- or ductile-iron body and bonnet; with cast-iron or bronze double-disc gate, bronze gate rings, bronze stem, and stem nut.

- 1) Standard: AWWA C500.
 - 2) Minimum Pressure Rating: 200 psig.
 - 3) End Connections: Mechanical joint.
 - 4) Interior Coating: Complying with AWWA C550.
5. Nonrising-Stem, Resilient-Seated Gate Valves:
- a. Description: Gray- or ductile-iron body and bonnet; with bronze or gray- or ductile-iron gate, resilient seats, bronze stem, and stem nut.
 - 1) Standard: AWWA C509.
 - 2) Minimum Pressure Rating: 200 psig.
 - 3) End Connections: Mechanical joint.
 - 4) Interior Coating: Complying with AWWA C550.
6. Nonrising-Stem, High-Pressure, Resilient-Seated Gate Valves:
- a. Description: Ductile-iron body and bonnet; with bronze or ductile-iron gate, resilient seats, bronze stem, and stem nut.
 - 1) Standard: AWWA C509.
 - 2) Minimum Pressure Rating: 250 psig.
 - 3) End Connections: Push on or mechanical joint.
 - 4) Interior Coating: Complying with AWWA C550.
7. OS&Y, Rising-Stem, Metal-Seated Gate Valves:
- a. Description: Cast- or ductile-iron body and bonnet, with cast-iron double disc, bronze disc and seat rings, and bronze stem.
 - 1) Standard: AWWA C500.
 - 2) Minimum Pressure Rating: 200 psig.
 - 3) End Connections: Flanged.
8. OS&Y, Rising-Stem, Resilient-Seated Gate Valves:
- a. Description: Cast- or ductile-iron body and bonnet, with bronze or gray- or ductile-iron gate, resilient seats, and bronze stem.
 - 1) Standard: AWWA C509.
 - 2) Minimum Pressure Rating: 200 psig.
 - 3) End Connections: Flanged.
- B. UL/FMG, Cast-Iron Gate Valves:
1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:

3. Basis-of-Design Product: Subject to compliance with requirements, provide a comparable product by one of the following:
 - a. American Cast Iron Pipe Co.; American Flow Control Div.
 - b. American Cast Iron Pipe Co.; Waterous Co. Subsidiary.
 - c. Crane Co.; Crane Valve Group; Stockham Div.
 - d. McWane, Inc.; Clow Valve Co. Div. (Oskaloosa).McWane, Inc.; Kennedy Valve Div.
 - e. McWane, Inc.; M & H Valve Company Div.
 - f. Mueller Co.; Water Products Div.
 - g. NIBCO INC.
 - h. U.S. Pipe and Foundry Company.

4. UL/FMG, Nonrising-Stem Gate Valves:

- a. Description: Iron body and bonnet with flange for indicator post, bronze seating material, and inside screw.
 - 1) Standards: UL 262 and FMG approved.
 - 2) Minimum Pressure Rating: 175 psig.
 - 3) End Connections: Flanged.

5. OS&Y, Rising-Stem Gate Valves:

- a. Description: Iron body and bonnet and bronze seating material.
 - 1) Standards: UL 262 and FMG approved.
 - 2) Minimum Pressure Rating: 175 psig.
 - 3) End Connections: Flanged.

C. Bronze Gate Valves:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
3. Basis-of-Design Product: Subject to compliance with requirements, provide or a comparable product by one of the following:
 - a. Crane Co.; Crane Valve Group; Crane Valves.
 - b. Crane Co.; Crane Valve Group; Jenkins Valves.
 - c. Crane Co.; Crane Valve Group; Stockham Div.
 - d. Hammond Valve.
 - e. Milwaukee Valve Company.
 - f. NIBCO INC.
 - g. Red-White Valve Corporation.
4. OS&Y, Rising-Stem Gate Valves:

- a. Description: Bronze body and bonnet and bronze stem.
 - 1) Standards: UL 262 and FMG approved.
 - 2) Minimum Pressure Rating: 175 psig.
 - 3) End Connections: Threaded.
- 5. Nonrising-Stem Gate Valves:
 - a. Description: Class 125, Type 1, bronze with solid wedge, threaded ends, and malleable-iron handwheel.
 - 1) Standard: MSS SP-80.

2.5 GATE VALVE ACCESSORIES AND SPECIALTIES

A. Tapping-Sleeve Assemblies:

- 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- 3. Basis-of-Design Product: Subject to compliance with requirements, provide a comparable product by one of the following:
 - a. American Cast Iron Pipe Co.; Waterous Co. Subsidiary.
 - b. East Jordan Iron Works, Inc.
 - c. Flowserve.
 - d. McWane, Inc.; Clow Valve Co. Div. (Oskaloosa).
 - e. McWane, Inc.; Kennedy Valve Div.
 - f. McWane, Inc.; M & H Valve Company Div.
 - g. Mueller Co.; Water Products Div.
 - h. U.S. Pipe and Foundry Company.
- 4. Description: Sleeve and valve compatible with drilling machine.
 - a. Standard: MSS SP-60.
 - b. Tapping Sleeve: Cast- or ductile-iron or stainless-steel, two-piece bolted sleeve with flanged outlet for new branch connection. Include sleeve matching size and type of pipe material being tapped and with recessed flange for branch valve.
 - c. Valve: AWWA, cast-iron, nonrising-stem, resilient-seated gate valve with one raised face flange mating tapping-sleeve flange.

- B. Valve Boxes: Comply with AWWA M44 for cast-iron valve boxes. Include top section, adjustable extension of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over valve and with a barrel approximately 5 inches in diameter.

1. Operating Wrenches: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and socket matching valve operating nut.
- C. Indicator Posts: UL 789, FMG-approved, vertical-type, cast-iron body with operating wrench, extension rod, and adjustable cast-iron barrel of length required for depth of burial of valve.

2.6 CURB VALVES

A. Manufacturers:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 - a. Amcast Industrial Corporation; Lee Brass Co.
 - b. Ford Meter Box Company, Inc. (The); Pipe Products Div.
 - c. Jones, James Company.
 - d. Master Meter, Inc.
 - e. McDonald, A. Y. Mfg. Co.
 - f. Mueller Co.; Water Products Div.
 - g. Red Hed Manufacturing & Supply.

B. Service-Saddle Assemblies: Comply with AWWA C800. Include saddle and valve compatible with tapping machine.

1. Service Saddle: Copper alloy with seal and AWWA C800, threaded outlet for corporation valve.
2. Corporation Valve: Bronze body and ground-key plug, with AWWA C800, threaded inlet and outlet matching service piping material.
3. Manifold: Copper fitting with two to four inlets as required, with ends matching corporation valves and outlet matching service piping material.

C. Curb Valves: Comply with AWWA C800. Include bronze body, ground-key plug or ball, and wide tee head, with inlet and outlet matching service piping material.

D. Service Boxes for Curb Valves: Similar to AWWA M44 requirements for cast-iron valve boxes. Include cast-iron telescoping top section of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over curb valve and with a barrel approximately 3 inches in diameter.

1. Shutoff Rods: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and slotted end matching curb valve.

2.7 CONCRETE VAULTS

- A. Description: Precast, reinforced-concrete vault, designed for A-16 load designation according to ASTM C 857 and made according to ASTM C 858.
1. Ladder: ASTM A 36/A 36M, steel or polyethylene-encased steel steps.
 2. Manhole: ASTM A 48/A 48M Class No. 35A minimum tensile strength, gray-iron traffic frame and cover.
 - a. Dimension: 24-inch minimum diameter, unless otherwise indicated.
 3. Manhole: ASTM A 536, Grade 60-40-18, ductile-iron traffic frame and cover.
 - a. Dimension: 24-inch- minimum diameter, unless otherwise indicated.
 4. Drain: ASME A112.6.3, cast-iron floor drain with outlet of size indicated. Include body anchor flange, light-duty cast-iron grate, bottom outlet, and integral or field-installed bronze ball or clapper-type backwater valve.

2.8 FIRE HYDRANTS

A. Dry-Barrel Fire Hydrants:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
3. Basis-of-Design Product: Subject to compliance with requirements, provide or a comparable product by one of the following:
 - a. American AVK Co.; Valves & Fittings Div.
 - b. American Cast Iron Pipe Co.; American Flow Control Div.
 - c. American Cast Iron Pipe Co.; Waterous Co. Subsidiary.
 - d. American Foundry Group, Inc.
 - e. East Jordan Iron Works, Inc.
 - f. McWane, Inc.; Clow Valve Co. Div. (Oskaloosa).
 - g. McWane, Inc.; Kennedy Valve Div.
 - h. McWane, Inc.; M & H Valve Company Div.
 - i. Mueller Co.; Water Products Div.
 - j. Troy Valve; a division of Penn-Troy Manufacturing, Inc.
 - k. U.S. Pipe and Foundry Company.
4. Description: Freestanding, with one NPS 4-1/2 and two NPS 2-1/2 outlets, 5-1/4-inch main valve, drain valve, and NPS 6 mechanical-joint inlet. Include interior coating according to AWWA C550. Hydrant shall have cast-iron body, compression-type valve opening against pressure and closing with pressure.
 - a. Standard: AWWA C502.

- b. Pressure Rating: 250 psig.
5. Description: Freestanding, with one NPS 4-1/2 and two NPS 2-1/2 outlets, 5-1/4-inch main valve, drain valve, and NPS 6 mechanical-joint inlet. Hydrant shall have cast-iron body, compression-type valve opening against pressure and closing with pressure.
- a. Standards: UL 246, FMG approved.
 - b. Pressure Rating: 250 psig.
 - c. Outlet Threads: NFPA 1963, with external hose thread used by local fire department. Include cast-iron caps with steel chains.
 - d. Operating and Cap Nuts: Pentagon, 1-1/2 inches point to flat.
 - e. Direction of Opening: Open hydrant valve by turning operating nut to left or counterclockwise.
 - f. Exterior Finish: Red alkyd-gloss enamel paint, unless otherwise indicated.

B. Wet-Barrel Fire Hydrants:

- 1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
- 2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
- 3. Basis-of-Design Product: Subject to compliance with requirements, provide or a comparable product by one of the following:
 - a. American AVK Co.; Valves & Fittings Div.
 - b. Jones, James Company.
 - c. McWane, Inc.; Clow Valve Co. Div. (Corona).
 - d. McWane, Inc.; Clow Valve Co. Div. (Oskaloosa).
 - e. Mueller Co.; Water Products Div.
- 4. Description: Freestanding, with one NPS 4-1/2 and two NPS 2-1/2 outlets, NPS 6 threaded or flanged inlet, and base section with NPS 6 mechanical-joint inlet. Include interior coating according to AWWA C550.
 - a. Standard: AWWA C503.
 - b. Pressure Rating: 150 psig minimum.
- 5. Description: Freestanding, with one NPS 4-1/2 and two NPS 2-1/2 outlets, NPS 6 threaded or flanged inlet, and base section with NPS 6 mechanical-joint inlet.
 - a. Standards: UL 246 and FMG approved.
 - b. Pressure Rating: 150 psig minimum.
 - c. Outlet Threads: NFPA 1963, with external hose thread used by local fire department. Include cast-iron caps with steel chains.
 - d. Operating and Cap Nuts: Pentagon, 1-1/2 inches point to flat.
 - e. Direction of Opening: Open hydrant valves by turning operating nut to left or counterclockwise.
 - f. Exterior Finish: Red alkyd-gloss enamel paint, unless otherwise indicated.

2.9 FIRE DEPARTMENT CONNECTIONS

A. Fire Department Connections:

1. Available Manufacturers: Subject to compliance with requirements, manufacturers offering products that may be incorporated into the Work include, but are not limited to, the following:
2. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
3. Basis-of-Design Product: Subject to compliance with requirements, provide or a comparable product by one of the following:
 - a. Elkhart Brass Mfg. Co., Inc.
 - b. Fire End & Croker Corporation.
 - c. Guardian Fire Equipment, Inc.
 - d. Kidde Fire Fighting.
 - e. Potter Roemer.
 - f. Reliable Automatic Sprinkler Co., Inc.
4. Description: Freestanding, with cast-bronze body, thread inlets according to NFPA 1963 and matching local fire department hose threads, and threaded bottom outlet. Include lugged caps, gaskets, and chains; lugged swivel connection and drop clapper for each hose-connection inlet; 18-inch- high brass sleeve; and round escutcheon plate.
 - a. Standard: UL 405.
 - b. Connections: Two NPS 2-1/2 inlets and one NPS 4 outlet.
 - c. Connections: Three NPS 2-1/2 inlets and one NPS 6 outlet.
 - d. Connections: Six NPS 2-1/2 inlets and one NPS 6 outlet.
 - e. Inlet Alignment: Inline, horizontal.
 - f. Finish Including Sleeve: Polished bronze.
 - g. Escutcheon Plate Marking: "AUTO SPKR & STANDPIPE."

PART 3 - EXECUTION

3.1 EARTHWORK

- A. Refer to Section 31 2000 "Earth Moving" for excavating, trenching, and backfilling.

3.2 PIPING APPLICATIONS

- A. General: Use pipe, fittings, and joining methods for piping systems according to the following applications.
- B. Transition couplings and special fittings with pressure ratings at least equal to piping pressure rating may be used, unless otherwise indicated.
- C. Do not use flanges or unions for underground piping.

- D. Flanges, unions, and special fittings may be used, instead of joints indicated, on aboveground piping and piping in vaults.
- E. Underground water-service piping NPS 3/4 to NPS 3 shall be soft copper tube, ASTM B 88, Type K ASTM B 88, Type L; wrought-copper, solder-joint fittings; and brazed joints.
- F. Underground water-service piping NPS 4 and NPS 6 shall be the following:
 - 1. Ductile-iron, push-on-joint pipe; ductile-iron, push-on-joint fittings; and gasketed joints or
 - 2. NPS 4 and NPS 6: NPS 6 PVC, AWWA Class 150 pipe; PVC, AWWA Class 150 molded fittings; and gasketed joints.
- G. Aboveground and Vault Water-Service Piping NPS 3/4 to NPS 3 shall be hard copper tube, ASTM B 88, Type K ASTM B 88, Type L; wrought-copper, solder-joint fittings; and brazed joints.
- H. Aboveground and vault water-service piping NPS 4 and NPS 6 shall be the any of following:
 - 1. Hard copper tube, ASTM B 88, Type K ASTM B 88, Type L; wrought-copper, solder-joint fittings; and brazed joints.
 - 2. Ductile-iron, grooved-end pipe; ductile-iron, grooved-end appurtenances; and grooved joints.
- I. Underground Fire-Service-Main Piping NPS 4 to NPS 8 shall be any of the following:
 - 1. Ductile-iron, push-on-joint pipe; ductile-iron, push-on-joint fittings; and gasketed joints.
 - 2. PE, Class 200, fire-service pipe; molded PE fittings; and heat-fusion joints.
 - 3. PVC, AWWA Class 150 pipe listed for fire-protection service; PVC Class 150 fabricated or molded fittings; and gasketed joints.
 - 4. PVC, AWWA Class 200 pipe listed for fire-protection service; PVC Class 200 fabricated fittings; and gasketed joints.
- J. Aboveground and Vault Fire-Service-Main Piping NPS 4 to NPS 8 shall be ductile-iron, grooved-end pipe; ductile-iron-pipe appurtenances; and grooved joints.
- K. Underground Combined Water-Service and Fire-Service-Main Piping NPS 6 to NPS 10 shall be any of the following:
 - 1. Ductile-iron, push-on-joint pipe; ductile-iron, push-on-joint fittings; and gasketed joints.
 - 2. PVC, AWWA Class 200 pipe listed for fire-protection service; PVC fabricated or molded fittings of same class as pipe; and gasketed joints.
- L. Aboveground and Vault Combined Water Service and Fire-Service-Main Piping NPS 6 to NPS 10 shall be ductile-iron, grooved-end pipe; ductile-iron-pipe appurtenances; and grooved joints.

3.3 VALVE APPLICATIONS

- A. General Application: Use mechanical-joint-end valves for NPS 3 and larger underground installation. Use threaded- or flanged-end valves for installation in vaults. Use UL/FMG,

nonrising-stem gate valves for installation with indicator posts. Use corporation valves and curb valves with ends compatible with piping, for NPS 2 and smaller installation.

- B. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
1. Underground Valves, NPS 3 and Larger: AWWA, cast-iron, nonrising-stem, resilient-seated gate valves with valve box.
 2. Underground Valves, NPS 4 and Larger, for Indicator Posts: UL/FMG, cast-iron, nonrising-stem gate valves with indicator post.
 3. Use the following for valves in vaults and aboveground:
 - a. Gate Valves, NPS 2 and Smaller: Bronze, rising stem.
 - b. Gate Valves, NPS 3 and Larger: AWWA, cast iron, OS&Y rising stem, resilient seated.

3.4 PIPING SYSTEMS - COMMON REQUIREMENTS

- A. See Section 33 0500 "Common Work Results for Utilities" for piping-system common requirements.

3.5 PIPING INSTALLATION

- A. Water-Main Connection: Arrange with utility company for tap of size and in location indicated in water main.
- B. Water-Main Connection: Tap water main according to requirements of water utility company and of size and in location indicated.
- C. Make connections larger than NPS 2 with tapping machine according to the following:
1. Install tapping sleeve and tapping valve according to MSS SP-60.
 2. Install tapping sleeve on pipe to be tapped. Position flanged outlet for gate valve.
 3. Use tapping machine compatible with valve and tapping sleeve; cut hole in main. Remove tapping machine and connect water-service piping.
 4. Install gate valve onto tapping sleeve. Comply with MSS SP-60. Install valve with stem pointing up and with valve box.
- D. Make connections NPS 2 and smaller with drilling machine according to the following:
1. Install service-saddle assemblies and corporation valves in size, quantity, and arrangement required by utility company standards.
 2. Install service-saddle assemblies on water-service pipe to be tapped. Position outlets for corporation valves.
 3. Use drilling machine compatible with service-saddle assemblies and corporation valves. Drill hole in main. Remove drilling machine and connect water-service piping.
 4. Install corporation valves into service-saddle assemblies.
 5. Install manifold for multiple taps in water main.
 6. Install curb valve in water-service piping with head pointing up and with service box.

- E. Comply with NFPA 24 for fire-service-main piping materials and installation.
 - 1. Install copper tube and fittings according to CDA's "Copper Tube Handbook."
- F. Install ductile-iron, water-service piping according to AWWA C600 and AWWA M41.
- G. Install PE pipe according to ASTM D 2774 and ASTM F 645.
- H. Install PVC, AWWA pipe according to ASTM F 645 and AWWA M23.
- I. Bury piping with depth of cover over top at least 42 inches, with top at least 12 inches below level of maximum frost penetration.
- J. Extend water-service piping and connect to water-supply source and building-water-piping systems at outside face of building wall in locations and pipe sizes indicated.
 - 1. Terminate water-service piping at building wall until building-water-piping systems are installed. Terminate piping with caps, plugs, or flanges as required for piping material. Make connections to building-water-piping systems when those systems are installed.
- K. Sleeves are specified in Section 22 0517 "Sleeves and Sleeve Seals for Plumbing Piping."
- L. Mechanical sleeve seals are specified in Section 22 0517 "Sleeves and Sleeve Seals for Plumbing Piping."
- M. Install underground piping with restrained joints at horizontal and vertical changes in direction. Use restrained-joint piping, thrust blocks, anchors, tie-rods and clamps, and other supports.

3.6 JOINT CONSTRUCTION

- A. See Section 33 0500 "Common Work Results for Utilities" for basic piping joint construction.
- B. Make pipe joints according to the following:
 - 1. Ductile-Iron Piping, Gasketed Joints for Water-Service Piping: AWWA C600 and AWWA M41.
 - 2. Ductile-Iron Piping, Gasketed Joints for Fire-Service-Main Piping: UL 194.
 - 3. Ductile-Iron Piping, Grooved Joints: Cut-groove pipe. Assemble joints with grooved-end, ductile-iron-piping couplings, gaskets, lubricant, and bolts according to coupling manufacturer's written instructions.
 - 4. PE Piping Insert-Fitting Joints: Use plastic insert fittings and fasteners according to fitting manufacturer's written instructions.
 - 5. PVC Piping Gasketed Joints: Use joining materials according to AWWA C900. Construct joints with elastomeric seals and lubricant according to ASTM D 2774 or ASTM D 3139 and pipe manufacturer's written instructions.
 - 6. Dissimilar Materials Piping Joints: Use adapters compatible with both piping materials, with OD, and with system working pressure.

3.7 ANCHORAGE INSTALLATION

- A. Anchorage, General: Install water-distribution piping with restrained joints. Anchorages and restrained-joint types that may be used include the following:
 - 1. Concrete thrust blocks.
 - 2. Locking mechanical joints.
 - 3. Set-screw mechanical retainer glands.
 - 4. Bolted flanged joints.
 - 5. Heat-fused joints.
 - 6. Pipe clamps and tie rods.
- B. Install anchorages for tees, plugs and caps, bends, crosses, valves, and hydrant branches. Include anchorages for the following piping systems:
 - 1. Gasketed-Joint, Ductile-Iron, Water-Service Piping: According to AWWA C600.
 - 2. Gasketed-Joint, PVC Water-Service Piping: According to AWWA M23.
 - 3. Fire-Service-Main Piping: According to NFPA 24.
- C. Apply full coat of asphalt or other acceptable corrosion-resistant material to surfaces of installed ferrous anchorage devices.

3.8 VALVE INSTALLATION

- A. AWWA Gate Valves: Comply with AWWA C600 and AWWA M44. Install each underground valve with stem pointing up and with valve box.
- B. UL/FMG, Gate Valves: Comply with NFPA 24. Install each underground valve and valves in vaults with stem pointing up and with vertical cast-iron indicator post.
- C. MSS Valves: Install as component of connected piping system.
- D. Corporation Valves and Curb Valves: Install each underground curb valve with head pointed up and with service box.

3.9 CONCRETE VAULT INSTALLATION

- A. Install precast concrete vaults according to ASTM C 891.

3.10 FIRE HYDRANT INSTALLATION

- A. General: Install each fire hydrant with separate gate valve in supply pipe, anchor with restrained joints or thrust blocks, and support in upright position.
- B. Wet-Barrel Fire Hydrants: Install with valve below frost line. Provide for drainage.
- C. AWWA Fire Hydrants: Comply with AWWA M17.

- D. UL/FMG Fire Hydrants: Comply with NFPA 24.

3.11 FIRE DEPARTMENT CONNECTION INSTALLATION

- A. Install protective pipe bollards on two sides of each fire department connection. Pipe bollards are specified in Section 05 5000 "Metal Fabrications."

3.12 CONNECTIONS

- A. See Section 33 0500 "Common Work Results for Utilities" for piping connections to valves and equipment.
- B. Connect water-distribution piping to existing water main where indicated on Contract Documents. Use tapping sleeve and tapping valve.
- C. Connect water-distribution piping to interior domestic water and fire-suppression piping.
- D. Connect waste piping from concrete vault drains to storm-drainage system. See Section 33 4100 "Storm Utility Drainage Piping" for connection to storm-sewer piping.

3.13 FIELD QUALITY CONTROL

- A. Piping Tests: Conduct piping tests before joints are covered and after concrete thrust blocks have hardened sufficiently. Fill pipeline 24 hours before testing and apply test pressure to stabilize system. Use only potable water.
- B. Hydrostatic Tests: Test at not less than one-and-one-half times working pressure for two hours.
 - 1. Increase pressure in 50-psig increments and inspect each joint between increments. Hold at test pressure for 1 hour; decrease to . Slowly increase again to test pressure and hold for 1 more hour. Maximum allowable leakage is per hour per 100 joints. Remake leaking joints with new materials and repeat test until leakage is within allowed limits.
- C. Prepare reports of testing activities.

3.14 IDENTIFICATION

- A. Install continuous underground detectable warning tape during backfilling of trench for underground water-distribution piping. Locate below finished grade, directly over piping. Underground warning tapes are specified in Section 31 2000 "Earth Moving."
- B. Permanently attach equipment nameplate or marker indicating plastic water-service piping, on main electrical meter panel. See Section 33 0500 "Common Work Results for Utilities" for identifying devices.

3.15 CLEANING

A. Clean and disinfect water-distribution piping as follows:

1. Purge new water-distribution piping systems and parts of existing systems that have been altered, extended, or repaired before use.
2. Use purging and disinfecting procedure prescribed by authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in NFPA 24 for flushing of piping. Flush piping system with clean, potable water until dirty water does not appear at points of outlet.
3. Use purging and disinfecting procedure prescribed by authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in AWWA C651 or do as follows:
 - a. Fill system or part of system with water/chlorine solution containing at least 50 ppm of chlorine; isolate and allow to stand for 24 hours.
 - b. Drain system or part of system of previous solution and refill with water/chlorine solution containing at least 200 ppm of chlorine; isolate and allow to stand for 3 hours.
 - c. After standing time, flush system with clean, potable water until no chlorine remains in water coming from system.
 - d. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows evidence of contamination.

B. Prepare reports of purging and disinfecting activities.

END OF SECTION 22 1113

SECTION 22 1313 - FACILITY SANITARY SEWERS

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Pipe and fittings.
 - 2. Nonpressure and pressure couplings.
 - 3. Expansion joints.
 - 4. Cleanouts.
 - 5. Encasement for piping.
 - 6. Manholes.

1.2 ACTION SUBMITTALS

- A. Product Data: For expansion joints.
- B. Shop Drawings: For manholes. Include plans, elevations, sections, details, and frames and covers.

1.3 INFORMATIONAL SUBMITTALS

- A. Coordination Drawings: Show pipe sizes, locations, and elevations. Show other piping in same trench and clearances from sewer system piping. Indicate interface and spatial relationship between manholes, piping, and proximate structures.
- B. Product Certificates: For each type of cast-iron soil pipe and fitting, from manufacturer.
- C. Field quality-control reports.

PART 2 - PRODUCTS

2.1 PVC PIPE AND FITTINGS

- A. PVC Corrugated Sewer Piping:
 - 1. Pipe: ASTM F 949, PVC corrugated pipe with bell-and-spigot ends for gasketed joints.
 - 2. Fittings: ASTM F 949, PVC molded or fabricated, socket type.
 - 3. Gaskets: ASTM F 477, elastomeric seals.
- B. PVC Type PSM Sewer Piping:

1. Pipe: ASTM D 3034, SDR 35, PVC Type PSM sewer pipe with bell-and-spigot ends for gasketed joints.
2. Fittings: ASTM D 3034, PVC with bell ends.
3. Gaskets: ASTM F 477, elastomeric seals.

2.2 NONPRESSURE-TYPE TRANSITION COUPLINGS

- A. Comply with ASTM C 1173, elastomeric, sleeve-type, reducing or transition coupling, for joining underground nonpressure piping. Include ends of same sizes as piping to be joined and corrosion-resistant-metal tension band and tightening mechanism on each end.
- B. Sleeve Materials:
 1. For Plastic Pipes: ASTM F 477, elastomeric seal or ASTM D 5926, PVC.
 2. For Dissimilar Pipes: ASTM D 5926, PVC or other material compatible with pipe materials being joined.
- C. Unshielded, Flexible Couplings:
 1. Description: Elastomeric sleeve with corrosion-resistant-metal tension band and tightening mechanism on each end.
- D. Ring-Type, Flexible Couplings: Elastomeric compression seal with dimensions to fit inside bell of larger pipe and for spigot of smaller pipe to fit inside ring.

2.3 EXPANSION JOINTS

- A. Ductile-Iron, Flexible Expansion Joints:
 1. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
 2. Basis-of-Design Product: Subject to compliance with requirements, provide comparable product by one of the following:
 - a. EBAA Iron, Inc.
 - b. Romac Industries, Inc.
 - c. Star Pipe Products.
 - d. .
 3. Description: Compound fitting with combination of flanged and mechanical-joint ends complying with AWWA C110 or AWWA C153. Include two gasketed ball-joint sections and one or more gasketed sleeve sections, rated for 250-psig minimum working pressure and for offset and expansion indicated.

2.4 CLEANOUTS

- A. Cast-Iron Cleanouts: ASME A112.36.2M, round, gray-iron housing with clamping device and round, secured, scoriated, gray-iron cover. Include gray-iron ferrule with inside calk or spigot connection and countersunk, tapered-thread, brass closure plug.

1. Top-Loading Classification(s): Light Duty Medium Duty Heavy Duty and Extra-Heavy Duty.
2. Sewer Pipe Fitting and Riser to Cleanout: ASTM A 74, Service class, cast-iron soil pipe and fittings.

2.5 ENCASUREMENT FOR PIPING

- A. Standard: ASTM A 674 or AWWA C105.
- B. Material: high-density, cross-laminated polyethylene film of 0.004-inch minimum thickness.
- C. Form: tube.
- D. Color: Black.

2.6 MANHOLES

A. Standard Precast Concrete Manholes:

1. Description: ASTM C 478, precast, reinforced concrete, of depth indicated, with provision for sealant joints.
2. Diameter: 48 inches minimum unless otherwise indicated.
3. Ballast: Increase thickness of precast concrete sections or add concrete to base section, as required to prevent flotation.
4. Base Section: 6-inch minimum thickness for floor slab and 4-inch minimum thickness for walls and base riser section; with separate base slab or base section with integral floor.
5. Riser Sections: 4-inch minimum thickness, of length to provide depth indicated.
6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated; with top of cone of size that matches grade rings.
7. Joint Sealant: ASTM C 990, bitumen or butyl rubber.
8. Resilient Pipe Connectors: ASTM C 923, cast or fitted into manhole walls, for each pipe connection.
9. Steps: Individual FRP steps or FRP ladder; wide enough to allow worker to place both feet on one step and designed to prevent lateral slippage off step. Cast or anchor steps into sidewalls at 12- to 16-inch intervals. Omit steps if total depth from floor of manhole to finished grade is less than 60 inches.
10. Adjusting Rings: Interlocking HDPE rings, with level or sloped edge in thickness and diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope. Include sealant recommended by ring manufacturer.
11. Grade Rings: Reinforced-concrete rings, 6- to 9-inch total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.

B. Manhole Frames and Covers:

1. Description: Ferrous; 24-inch ID by 7- to 9-inch riser, with 4-inch- minimum-width flange and 26-inch- diameter cover. Include indented top design with lettering cast into cover, using wording equivalent to "SANITARY SEWER."
2. Material: ASTM A 536, Grade 60-40-18 ductile iron unless otherwise indicated.

2.7 CONCRETE

- A. General: Cast-in-place concrete complying with ACI 318, ACI 350/350R, and the following:
 1. Cement: ASTM C 150, Type II.
 2. Fine Aggregate: ASTM C 33, sand.
 3. Coarse Aggregate: ASTM C 33, crushed gravel.
 4. Water: Potable.
- B. Portland Cement Design Mix: 4000 psi minimum, with 0.45 maximum water/cementitious materials ratio.
 1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
 2. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (420 MPa) deformed steel.
- C. Manhole Channels and Benches: Factory or field formed from concrete. Portland cement design mix, 4000 psi minimum, with 0.45 maximum water/cementitious materials ratio. Include channels and benches in manholes.
 1. Channels: Concrete invert, formed to same width as connected piping, with height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope.
 - a. Invert Slope: 1 percent through manhole.
 2. Benches: Concrete, sloped to drain into channel.
 - a. Slope: 4 percent.
- D. Ballast and Pipe Supports: Portland cement design mix, 3000 psi minimum, with 0.58 maximum water/cementitious materials ratio.
 1. Reinforcing Fabric: ASTM A 185/A 185M, steel, welded wire fabric, plain.
 2. Reinforcing Bars: ASTM A 615/A 615M, Grade 60 (420 MPa) deformed steel.

PART 3 - EXECUTION

3.1 EARTHWORK

- A. Excavating, trenching, and backfilling are specified in Section 31 2000 "Earth Moving."

3.2 PIPING INSTALLATION

- A. General Locations and Arrangements: Drawing plans and details indicate general location and arrangement of underground sanitary sewer piping. Location and arrangement of piping layout take into account design considerations. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.
- B. Install piping beginning at low point, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for using lubricants, cements, and other installation requirements.
- C. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.
- D. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.
- E. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of microtunneling.
- F. Install gravity-flow, nonpressure, drainage piping according to the following:
 - 1. Install piping pitched down in direction of flow, at minimum slope of 1 percent unless otherwise indicated.
 - 2. Install piping NPS 6 and larger with restrained joints at tee fittings and at changes in direction. Use corrosion-resistant rods, pipe or fitting manufacturer's proprietary restraint system, or cast-in-place-concrete supports or anchors.
 - 3. Install piping with 42 inches minimum cover.
 - 4. Install hub-and-spigot, cast-iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook."
 - 5. Install hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook."
 - 6. Install PVC corrugated sewer piping according to ASTM D 2321 and ASTM F 1668.
 - 7. Install PVC Type PSM sewer piping according to ASTM D 2321 and ASTM F 1668.
 - 8. Install nonreinforced-concrete sewer piping according to ASTM C 1479 and ACPA's "Concrete Pipe Installation Manual."
 - 9. Install reinforced-concrete sewer piping according to ASTM C 1479 and ACPA's "Concrete Pipe Installation Manual."
- G. Install corrosion-protection piping encasement over the following underground metal piping according to ASTM A 674 or AWWA C105:
 - 1. Hub-and-spigot, cast-iron soil pipe.
 - 2. Hubless cast-iron soil pipe and fittings.
 - 3. Expansion joints.
- H. Clear interior of piping and manholes of dirt and superfluous material as work progresses. Maintain swab or drag in piping, and pull past each joint as it is completed. Place plug in end of incomplete piping at end of day and when work stops.

3.3 PIPE JOINT CONSTRUCTION

- A. Join gravity-flow, nonpressure, drainage piping according to the following:
 - 1. Join hub-and-spigot, cast-iron soil piping with gasket joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.
 - 2. Join hub-and-spigot, cast-iron soil piping with calked joints according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.
 - 3. Join hubless cast-iron soil piping according to CISPI 310 and CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless-coupling joints.
 - 4. Join PVC corrugated sewer piping according to ASTM D 2321.
 - 5. Join PVC Type PSM sewer piping according to ASTM D 2321 and ASTM D 3034 for elastomeric-seal joints or ASTM D 3034 for elastomeric-gasket joints.
 - 6. Join nonreinforced-concrete sewer piping according to ASTM C 14 and ACPA's "Concrete Pipe Installation Manual" for rubber-gasket joints.
 - 7. Join reinforced-concrete sewer piping according to ACPA's "Concrete Pipe Installation Manual" for rubber-gasket joints.
 - 8. Join dissimilar pipe materials with nonpressure-type, flexible couplings.

- B. Pipe couplings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
 - 1. Use nonpressure flexible couplings where required to join gravity-flow, nonpressure sewer piping unless otherwise indicated.
 - a. Unshielded flexible couplings for pipes of same or slightly different OD.
 - b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.
 - c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.

3.4 MANHOLE INSTALLATION

- A. General: Install manholes complete with appurtenances and accessories indicated.
- B. Install precast concrete manhole sections with sealants according to ASTM C 891.
- C. Install FRP manholes according to manufacturer's written instructions.
- D. Form continuous concrete channels and benches between inlets and outlet.
- E. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops 3 inches above finished surface elsewhere unless otherwise indicated.
- F. Install manhole-cover inserts in frame and immediately below cover.

3.5 CONCRETE PLACEMENT

- A. Place cast-in-place concrete according to ACI 318.

3.6 CLEANOUT INSTALLATION

- A. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Use cast-iron soil pipe fittings in sewer pipes at branches for cleanouts, and use cast-iron soil pipe for riser extensions to cleanouts. Install piping so cleanouts open in direction of flow in sewer pipe.
 - 1. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
 - 2. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
 - 3. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
 - 4. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.
- B. Set cleanout frames and covers in earth in cast-in-place-concrete block, 18 by 18 by 12 inches deep. Set with tops 1 inch above surrounding grade.
- C. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

3.7 CONNECTIONS

- A. Connect nonpressure, gravity-flow drainage piping to building's sanitary building drains specified in Section 22 1316 "Sanitary Waste and Vent Piping."
- B. Make connections to existing piping and underground manholes.
 - 1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe, install wye fitting into existing piping, and encase entire wye fitting plus 6-inch overlap with not less than 6 inches of concrete with 28-day compressive strength of 3000 psi.
 - 2. Make branch connections from side into existing piping, NPS 4 to NPS 20. Remove section of existing pipe, install wye fitting into existing piping, and encase entire wye with not less than 6 inches of concrete with 28-day compressive strength of 3000 psi.
 - 3. Make branch connections from side into existing piping, NPS 21 or larger, or to underground manholes by cutting opening into existing unit large enough to allow 3 inches of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe or manhole wall, encase entering connection in 6 inches of concrete for minimum length of 12 inches to provide additional support of collar from connection to undisturbed ground.
 - a. Use concrete that will attain a minimum 28-day compressive strength of 3000 psi unless otherwise indicated.
 - b. Use epoxy-bonding compound as interface between new and existing concrete and piping materials.
 - 4. Protect existing piping and manholes to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

3.8 IDENTIFICATION

- A. Materials and their installation are specified in Section 31 2000 "Earth Moving." Arrange for installation of green warning tapes directly over piping and at outside edges of underground manholes.
 - 1. Use warning tape or detectable warning tape over ferrous piping.
 - 2. Use detectable warning tape over nonferrous piping and over edges of underground manholes.

3.9 FIELD QUALITY CONTROL


- A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Inspect after approximately 24 inches of backfill is in place, and again at completion of Project.
 - 1. Submit separate report for each system inspection.
 - 2. Defects requiring correction include the following:
 - a. Alignment: Less than full diameter of inside of pipe is visible between structures.
 - b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
 - c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
 - d. Infiltration: Water leakage into piping.
 - e. Exfiltration: Water leakage from or around piping.
 - 3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
 - 4. Reinspect and repeat procedure until results are satisfactory.
- B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.
 - 1. Do not enclose, cover, or put into service before inspection and approval.
 - 2. Test completed piping systems according to requirements of authorities having jurisdiction.
 - 3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours' advance notice.
 - 4. Submit separate report for each test.
 - 5. Hydrostatic Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction and the following:
 - a. Fill sewer piping with water. Test with pressure of at least 10-foot head of water, and maintain such pressure without leakage for at least 15 minutes.
 - b. Close openings in system and fill with water.
 - c. Purge air and refill with water.
 - d. Disconnect water supply.
 - e. Test and inspect joints for leaks.
 - 6. Air Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction, UNI-B-6, and the following:

- a. Option: Test plastic gravity sewer piping according to ASTM F 1417.
 - b. Option: Test concrete gravity sewer piping according to .
7. Manholes: Perform hydraulic test according to .
- C. Leaks and loss in test pressure constitute defects that must be repaired.
- D. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

3.10 CLEANING

- A. Clean dirt and superfluous material from interior of piping. Flush with potable water.

END OF SECTION 22 1313

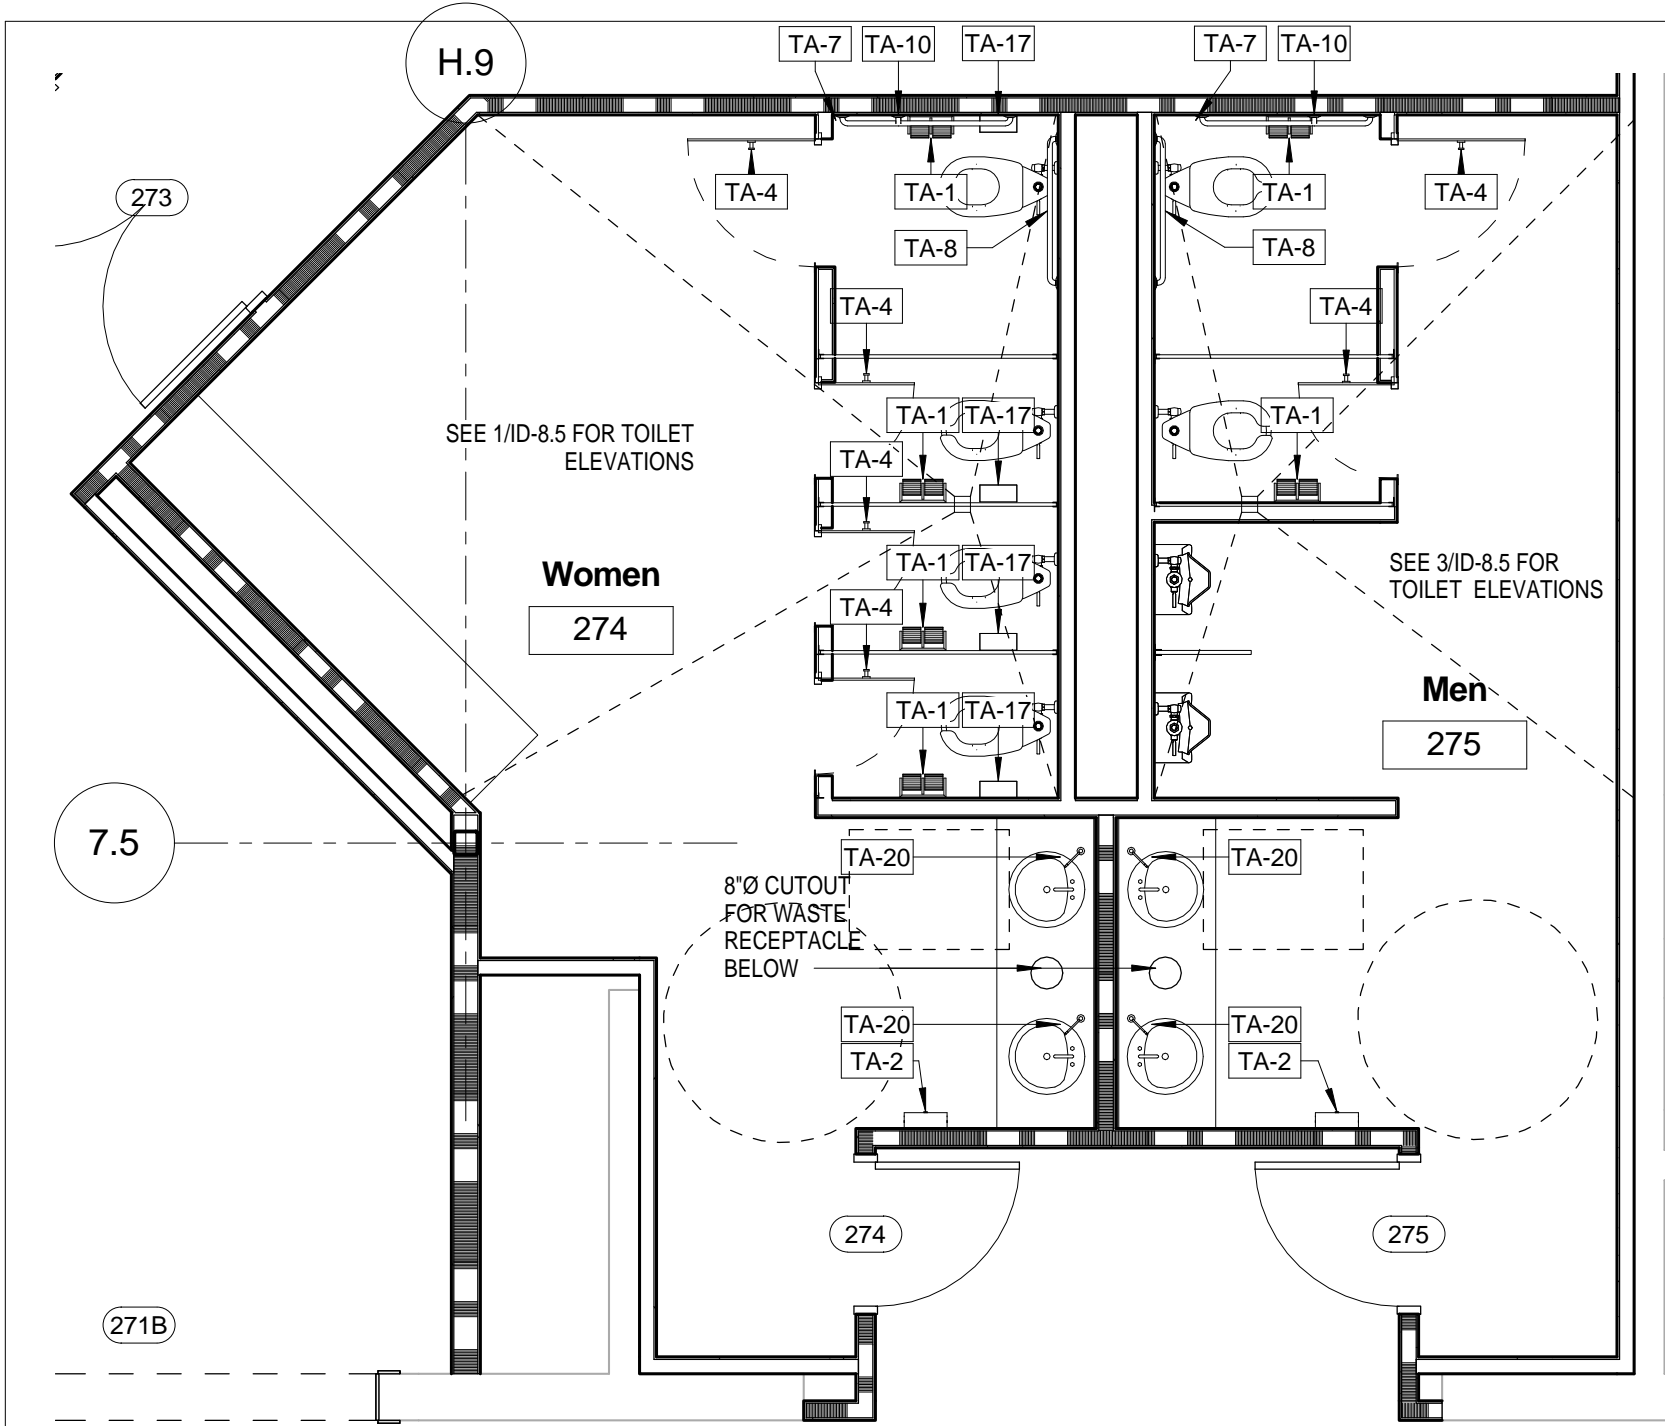

2223 Cheat Road - Suite 300
Morgantown, WV 26508
tele 304-284-5015 304-284-5014 fax

2450 Valleydale Road - Suite 150
Birmingham, AL 35244
tele 205-403-2742 205-403-2743 fax

**Canaan
Valley Resort
Renovations
and Additions**

**Davis,
West Virginia**

job number: 1078

sheet number:

BD10

©Copyright 2012
Paradigm Architecture

1/23/2012 8:32:57 AM

9B Restroom Accessories Plan

A3.03 1/4" = 1'-0"



2223 Cheat Road - Suite 300
Morgantown, WV 26508
tele 304-284-5015 304-284-5014 fax

2450 Valleydale Road - Suite 150
Birmingham, AL 35244
tele 205-403-2742 205-403-2743 fax


Canaan Valley Resort Renovations and Additions


Davis,
West Virginia

job number: 1078
date: 1.10.2012

sheet number:
BD11

©Copyright 2012
Paradigm Architecture





TOWER ENGINEERING

115 Evergreen Heights Drive, Suite 400
Pittsburgh, Pennsylvania 15229
Phone: (412) 931-8888
Fax: (412) 939-2525

Project Number:
B0091

Canaan
Valley Resort
Renovations
and Additions


Davis,
West Virginia

job number: 1078

sheet number:

BD12

©Copyright 2012
Paradigm Architecture



1H Plan Detail
A9.00 1 1/2" = 1'-0"


**Canaan
Valley Resort
Renovations
and Additions**

**Davis,
West Virginia**

job number: 1078

sheet number:

BD13




4H Section @ Lobby Fireplace
A3.02 3/4" = 1'-0"



2223 Cheat Road - Suite 300
Morgantown, WV 26508
tele 304-284-5015 304-284-5014 fax

2450 Valleydale Road - Suite 150
Birmingham, AL 35244
tele 205-403-2742 205-403-2743 fax




**Canaan
Valley Resort
Renovations
and Additions**

**Davis,
West Virginia**

job number: 1078
date: 1.10.2012

sheet number:
BD14

©Copyright 2012
Paradigm Architecture



TOWER ENGINEERING

115 Evergreen Heights Drive, Suite 400
Pittsburgh, Pennsylvania 15229
Phone: (412) 931-8888
Fax: (412) 939-2525

Project Number:
B0091

P A N E L B O A R D S C H E D U L E

VOLTAGE: 208Y/120V, 3PH, 4W
 SIZE/TYPE BUS: 200A COPPER
 SIZE/TYPE MAIN: 125A/3P MCB



PANEL TAG: 2L7
 LOCATION:

MIN. AIC: 22K
 MOUNTING: SURFACE
 OPTIONS:

| DESCRIPTION | LOCATION | LOAD (WATTS) | C/B SIZE | POS. NO. | A∅ | B∅ | C∅ | POS. NO. | C/B SIZE | LOAD (WATTS) | LOCATION | DESCRIPTION |
|--------------------------|--------------|--------------|----------|----------|----|----|----|----------|----------|-----------------------------|----------|----------------|
| RECEPTACLES | 263 | 720 | 20A/1P | 1 | * | | | 2 | 20A/1P | 360 | 260,261A | RECEPTACLES |
| RECEPTACLES | 265 | 360 | 20A/1P | 3 | | * | | 4 | 20A/1P | 540 | 261 | RECEPTACLES |
| RECEPTACLES | 262 | 720 | 20A/1P | 5 | | | * | 6 | 20A/1P | 720 | 264 | RECEPTACLES |
| LIGHTING | EXT. | | 20A/1P | 7 | * | | | 8 | 20A/1P | 360 | 264 | RECEPTACLES |
| LIGHTING | | | 20A/1P | 9 | | * | | 10 | 20A/1P | 1180 | | LIGHTING |
| LIGHTING | | | 20A/1P | 11 | | | * | 12 | 20A/1P | 720 | | LIGHTING |
| LIGHTING | | 1260 | 20A/1P | 13 | * | | | 14 | 20A/1P | 840 | | LIGHTING |
| LIGHTING | | 1260 | 20A/1P | 15 | | * | | 16 | 20A/1P | 1125 | CAFÉ | LIGHTING |
| LIGHTING | | | 20A/1P | 17 | | | * | 18 | 20A/1P | 864 | | EF-9 |
| CUH-1,2 | 259 | 300 | 20A/1P | 19 | * | | | 20 | 20A/1P | 864 | | EF-10 |
| CUH-3 | 278 | 150 | 20A/1P | 21 | | * | | 22 | 20A/1P | 1725 | CAFÉ | LIGHTING |
| LIGHTING | | 420 | 20A/1P | 23 | | | * | 24 | 20A/1P | 600 | CAFÉ | LIGHTING |
| RECEPTACLES | 271 | 720 | 20A/1P | 25 | * | | | 26 | 20A/1P | 1056 | | LIGHTING |
| RECEPTACLES | 271 | 900 | 20A/1P | 27 | | * | | 28 | 20A/1P | 1200 | 270 | RECEPTACLES |
| RECEPTACLES | 274,275 | 360 | 20A/1P | 29 | | | * | 30 | 20A/1P | 1200 | 270 | RECEPTACLES |
| RECEPTACLES | 273 | 720 | 20A/1P | 31 | * | | | 32 | 20A/1P | 500 | 270 | RECEPTACLES |
| RECEPTACLES | 269 | 900 | 20A/1P | 33 | | * | | 34 | 20A/1P | 500 | 270 | RECEPTACLES |
| RECEPTACLES | 266,268 | 540 | 20A/1P | 35 | | | * | 36 | 20A/1P | 500 | 270 | RECEPTACLES |
| EF-11 | 269A | 864 | 20A/1P | 37 | * | | | 38 | 20A/1P | 500 | 270 | RECEPTACLES |
| CU-4 | ROOF | 1352 | 20A/2P | 39 | | * | | 40 | 20A/1P | 1200 | 270 | RECEPTACLES |
| | | 1352 | | 41 | | | * | 42 | 20A/1P | 500 | 270 | RECEPTACLES |
| CU-6 | ROOF | 1872 | 30A/2P | 43 | * | | | 44 | 20A/1P | 200 | CAFÉ | BAKERY CASE |
| | | 1872 | | 45 | | * | | 46 | 20A/1P | 1200 | CAFÉ | ICE CREAM CASE |
| DOCK LEVELER | LOADING DOCK | 1656 | 30A/1P | 47 | | | * | 48 | 20A/1P | | | SPARE |
| SPARE | | | 20A/1P | 49 | * | | | 50 | 20A/1P | | | SPARE |
| SPARE | | | 20A/1P | 51 | | * | | 52 | 20A/1P | | | SPARE |
| SPARE | | | 20A/1P | 53 | | | * | 54 | 20A/1P | | | SPARE |
| CONNECTED LOAD (KW) - A∅ | | 11.14 | | | | | | | | TOTAL CONNECTED LOAD (KW) | | 36.75 |
| CONNECTED LOAD (KW) - B∅ | | 15.46 | | | | | | | | TOTAL DEMAND LOAD (KW) | | |
| CONNECTED LOAD (KW) - C∅ | | 10.15 | | | | | | | | TOTAL CONNECTED LOAD (AMPS) | | 102 |



2223 Cheat Road - Suite 300
 Morgantown, WV 26508
 tele 304-284-5015 304-284-5014 fax

2450 Valleydale Road - Suite 150
 Birmingham, AL 35244
 tele 205-403-2742 205-403-2743 fax

Canaan
 Valley Resort
 Renovations
 and Additions

Davis,
 West Virginia

job number: 1078
 date: 1.10.2012



115 Evergreen Heights Drive, Suite 400
 Pittsburgh, Pennsylvania 15229
 Phone: (412) 931-8888
 Fax: (412) 939-2525

Project Number:
 B0091

sheet number:
BD15

©Copyright 2012
 Paradigm Architecture

**Canaan
Valley Resort
Renovations
and Additions**

**Davis,
West Virginia**

job number: 1078

sheet number:

BD16

GMC-2 PER
INTERIORS DWGS.

1/4"x1/4" MAPLE TRIM
STRIPS, BRAD NAILED
AND ADHERED, FINISHED
PER INTERIORS DWGS.

LINE OF MAPLE STRIPS
ON SIDES, BEYOND

1" THK P.LAM. HALF-
DEPTH SHELF, ADJ. ON
32mm INCREMENTS

PL-2 @ ALL EXPOSED
SURFACES, U.O.N.

BIRCH VENEER
FINISHED TO MATCH
MAPLE STRIPS

PL-2 PER INTERIORS DWGS.

9"

3"

EQ

EQ

EQ

1'-0"


3'-2 1/4"

3"

4"

9D Casework Section Thru POS Station

A8.50 1" = 1'-0"



6B 250 POS Station

A3.03 3/8" = 1'-0"