


ALPHA
ASSOCIATES, INCORPORATED
ARCHITECTS ENGINEERS SURVEYORS
209 PRARIE AVENUE
MORGANTOWN, WV 26501
PHONE: 304-296-8216
FAX: 304-296-8216
TOLL FREE: 800-640-8216
EMAIL: alpha@alphaassoc.com
www.alphaassoc.com

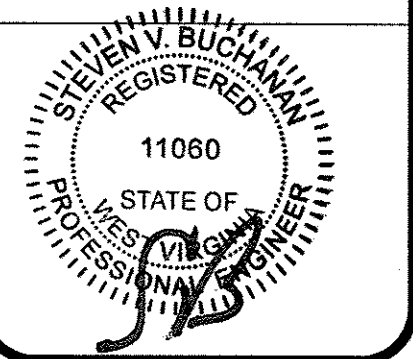


COPYRIGHT © 2010
ALPHA ASSOCIATES, INC.
ALL RIGHTS RESERVED.

REVISIONS	
ITEM	DATE


SITE DEMOLITION PLAN
SCALE: AS NOTED

THE
CLARKSBURG STATE OFFICE BUILDING
WV GENERAL SERVICES DIVISION
PHASE ONE
CLARKSBURG, WEST VIRGINIA

DR'N.: GS
P.M.: SVB P.I.C.: SVB
PROJ. NO.: 0810123.00
DATE: JULY 23, 2010
SHEET NO.:
C-1.2

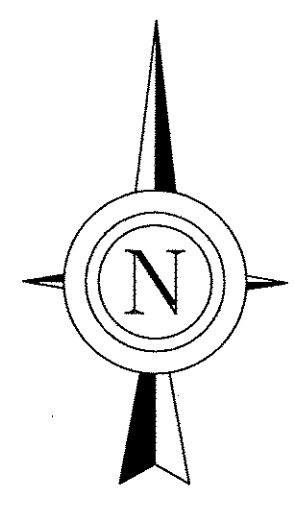

GRID NORTH: WNSPC (NAD 83 ZONE 4701)
NOTE: GRID BEARINGS WITH GROUND DISTANCES

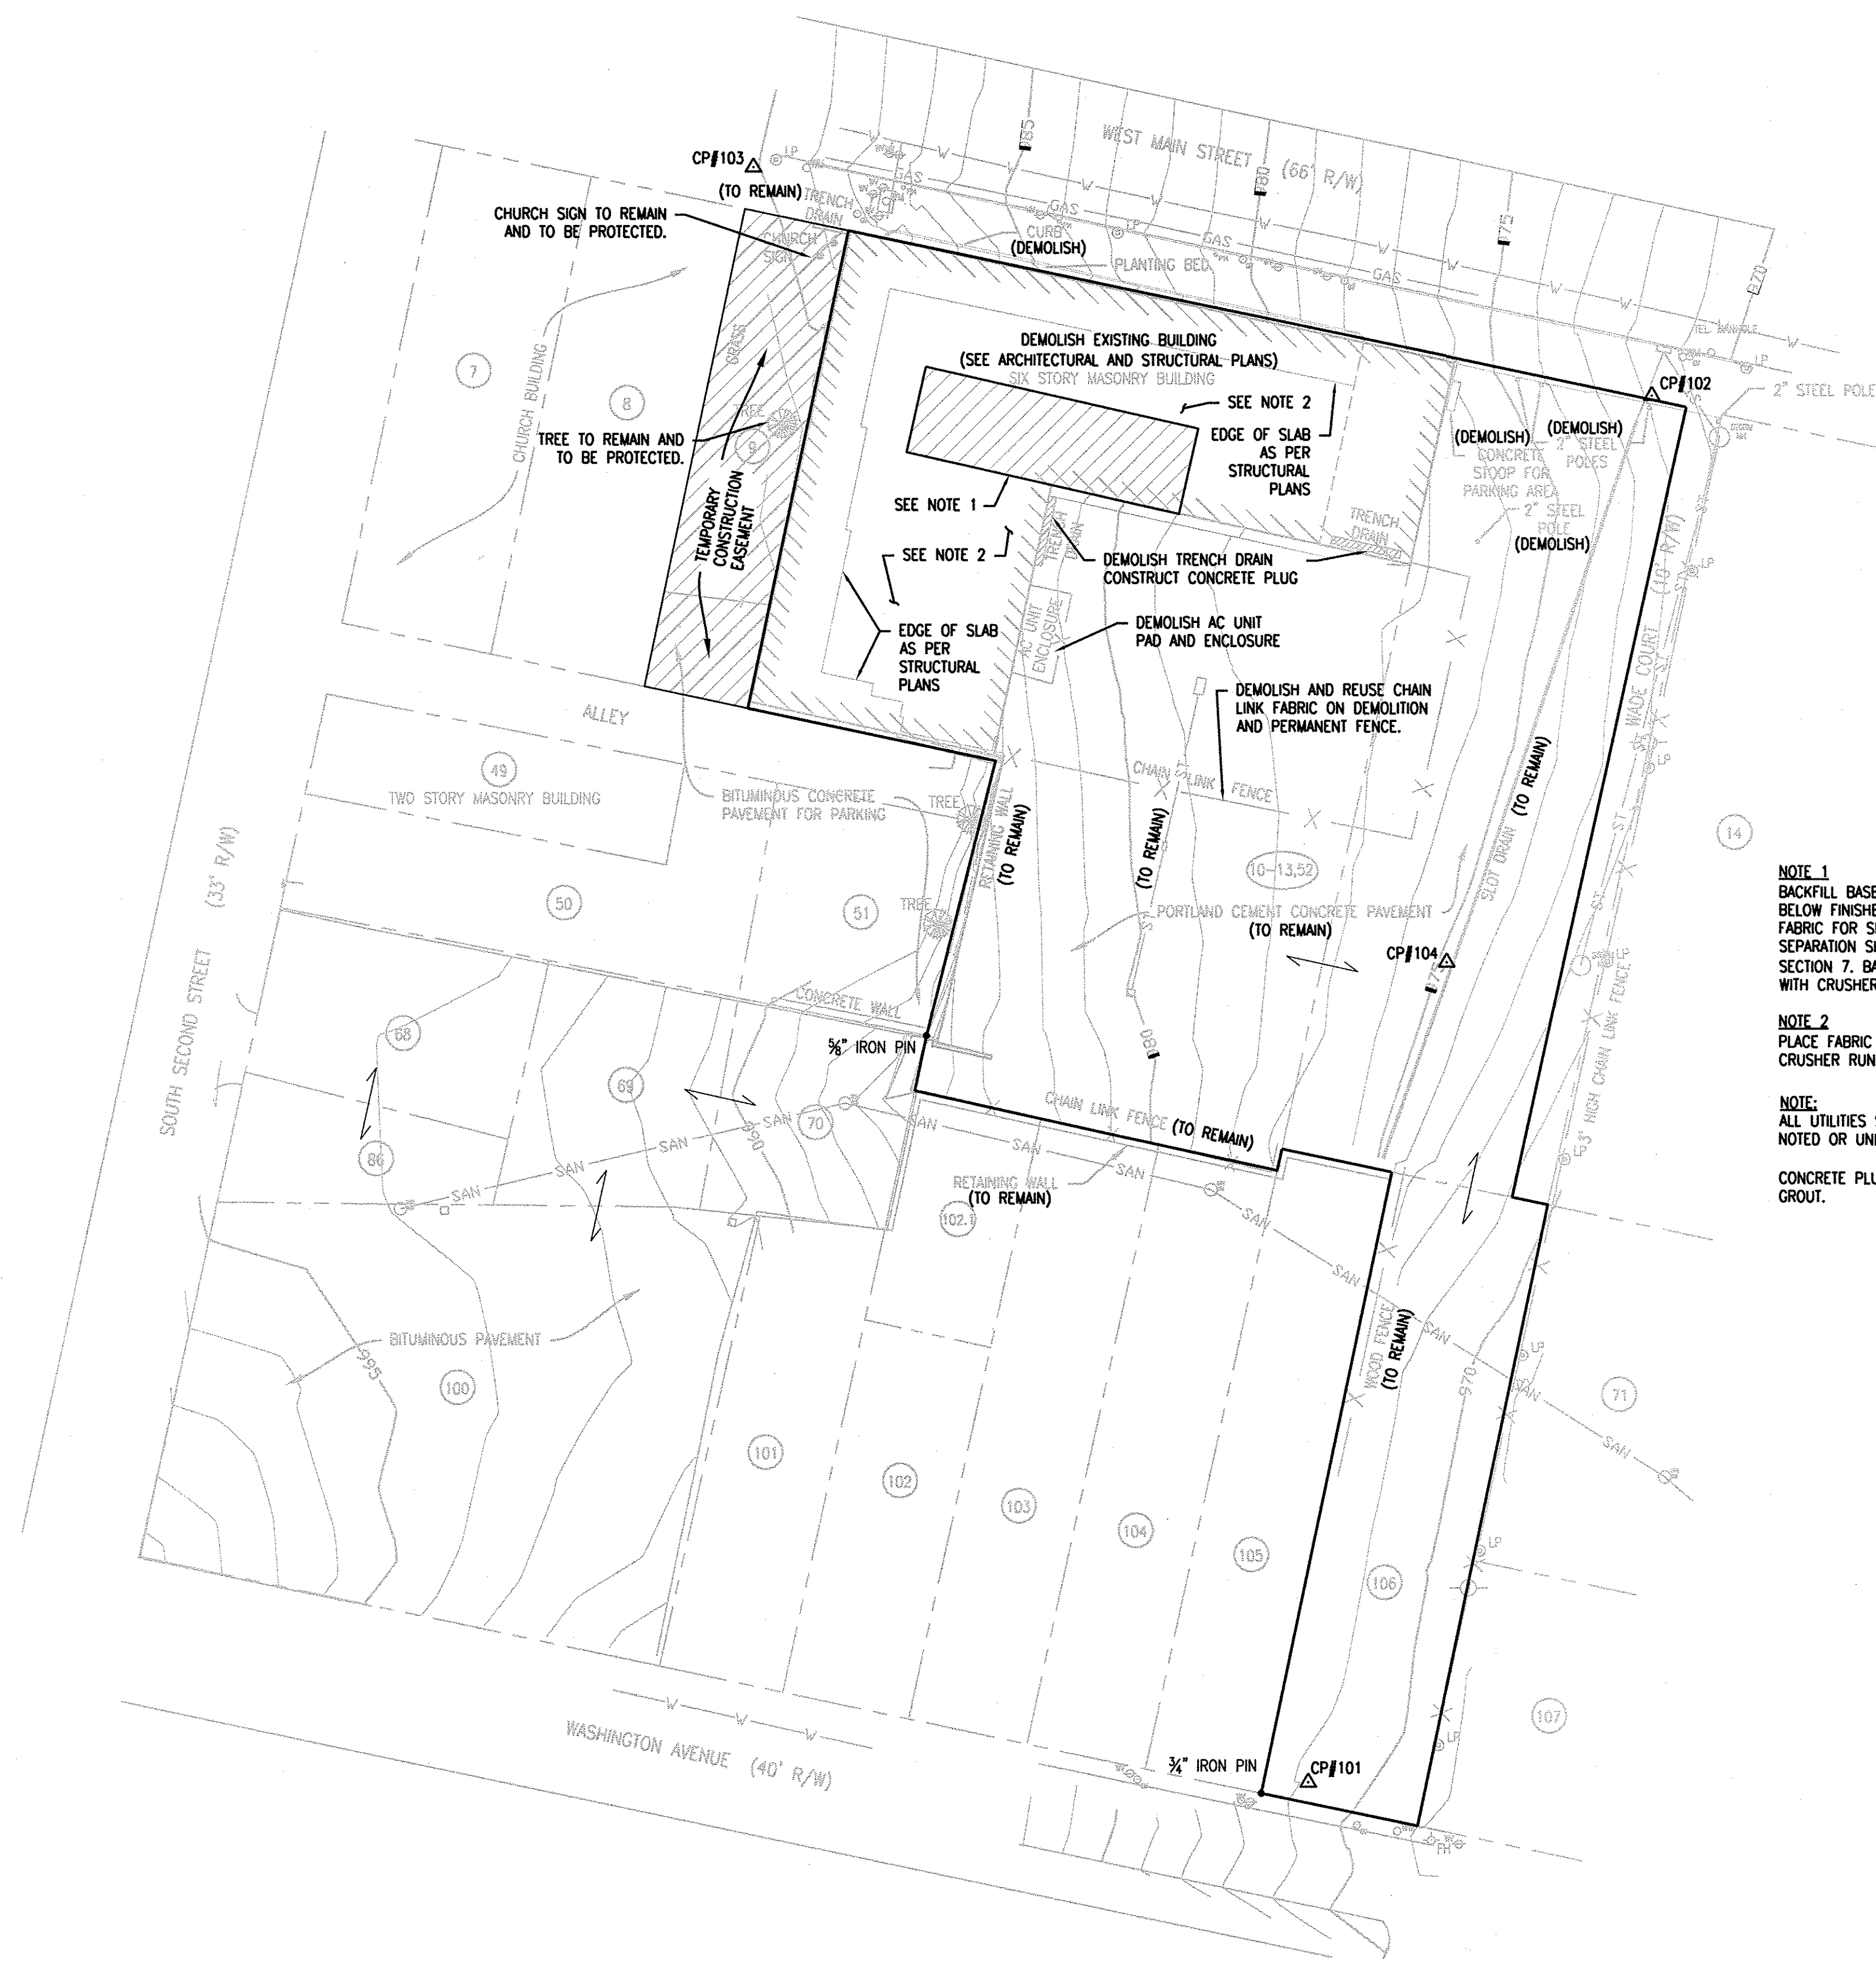

NOTE 1
BACKFILL BASEMENT AREA WITH SATISFACTORY SOILS TO ONE FOOT (1') BELOW FINISHED GRADE. SEE EARTH MOVING SPECIFICATIONS. APPLY FABRIC FOR SEPARATION OVER ENTIRE BACKFILL AREA. THE FABRIC FOR SEPARATION SHALL MEET THE REQUIREMENTS OF AASHTO M288, SECTION 7. BACKFILL THE FINAL ONE FOOT (1') TO FINISHED GRADE WITH CRUSHER RUN CRUSHED STONE.

NOTE 2
PLACE FABRIC FOR SEPARATION. BACKFILL WITH ONE FOOT (1') CRUSHER RUN CRUSHED STONE.

NOTE:
ALL UTILITIES SHALL BE ABANDONED IN PLACE UNLESS OTHERWISE NOTED OR UNLESS NECESSARY FOR EXCAVATION OR DEMOLITION.

CONCRETE PLUG SHALL BE A MINIMUM OF 1' THICK NON-SHRINK GROUT.

