

Request for BEGINGMEER

	_		
708EC	n	n	=
10055	U	v	-

ADDRESS CORRESPONDENCE TO ATTENTION OF

PAGE	
1	

JOHN JOHNSTON 304-558-2402

TYPE NAME/ADDRESS HERE Swenson Spreader LLC

RFQ COPY

127 Walnut Street Lindenwood, IL 61049 DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

DATERRI		ŢĔŗ	MS OF SAL	E	SHIP VIA		FOB		FREIGHTTERMS	
09/24	<u>/2007</u>									
	ARREST (1880)	11/13/	*********			BID (DPENING TIME	01:	:30PM	
LINE	q	JANTITY	UOP	CAT NO	TEM NUMBE	R	UNIT PRICE		TAUOMA	

0001			EA		765-66					
		1				Į.		L	71-70	
	NINE	CUBIC Y	ARD S	TAINL	ESS STEEL (HYDRAL	JLIC) SPREAD	₹R		_
}			OP	EN EN	D CONTRACT	1				
			' [
	-	OUTDE		•						
	ARRAS	TAL VAD	CORT	L YAR	U 304 STAIN Codeaded (u	LESS	TEEL DEMOUNT	ABLE		
	IN TH	E ATTAC	HED S	PECIF	ICATIONS 01	3-2-B.	IC) AS BESCE	KIRED		
]					7		ĺ		Į
	THERE	WILL B	E A MA	ANDA T	DRY PRE-BID	CONFE	RENCE AT THE			
	AT 2:	OO PH O	N IN/	26/20	07. FAILURE	D LUN	FERENCE ROOM	ا دا		
	PRE-B	ID CONF	ERENCE	E WIL	L RESULT IN	BIDD	ISQUALIFICAT	TON		
			- 1	1						Ì
	QUEST	IONS: W	RITTEN	1 Ones	STIONS WILL	BE AC	CEPTED THROU	GH		
	CEND	AUTE UTIL	RESS	ועיכ) יוסיים)	PM EST) THE PURCHASING	UESDAY C DIVI	, 10/16/2007	'•		
	JZ.ND	.com wo	-3,10	13 ,0	ATTENTION			-		
	•				2019 WASH					
				[CHARLESTO					
					/IA FAX, E~! DMIN.GOV	MAIL	OR REGULAR M	AIL.		
	FA		10311N 14-558							
						-				
	IT IS	THE VE	IDORS	RESP	NSIBILITY T	TO VER	IFY THAT THE	IR		
	OUEST	IONS HAV	E BEE	N REC	EIVED BY CA	ALLING	304-558-231	6.		
			f	- {		ļ				
ł	EXHIB	IT 2		i		- 1		ſ		
}	LIFE (DF CONTR	ACT:	THIS	CONTRACT E	BECOMES	S EFFECTIVE	אם		
			<i></i>							[
IGNATURE				SEE REVE	RSE SIDE FOR TERMS		TIONS			8
	KNI		4		TELEP		325-7323	0ATE 11-9	-07	
GOV	Sales	FEIN	20-2	1763	19				BE NOTED ABOVE	7
WHE	N RES	POUDING	O REQ. I	NSERT	NAME AND ADD	BESS IN	SPACE ABOVE LA			لہ

GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

- Awards will be made in the best interest of the State of West Virginia.
- 2. The State may accept or reject in part, or in whole, any bid
- 3. All quotations are governed by the West Virginia Code and the Legislative Rules of the Purchasing Division.
- Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee.
- All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30
- 6. Payment may only be made after the delivery and acceptance of goods or services
- Interest may be paid for late payment in accordance with the West Virginia Code.
- 8. Vendor preference will be granted upon written request in accordance with the West Virginia Code.
- 9 The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes
- 10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
- 11. The laws of the State of West Virginia and the Legislative Rules of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
- 12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
- 13. BANKRUPTCY: In the event the vendor/contractor files for bankruptcy protection, this contract is automatically null and void, and is terminated without further order
- 14. HIPAA Business Associate Addendum The West Viginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (http://www.state.wv.us/admin/purchase/vrc/hipaa.htm) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160 103) and will be disclosing Protected Health Information (45 CFR §160 103) to the vendor.

INSTRUCTIONS TO BIDDERS

- 1. Use the quotation forms provided by the Purchasing Division.
- SPECIFICATIONS: Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as EQUAL to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
- 3. Complete all sections of the quotation form.
- Unit prices shall prevail in cases of discrepancy.
- 5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
- 6. BID SUBMISSION: All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications.

SIGNED BID TO:

Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130



Request for REGNUMBER 708ECR05

708EC005

ADDRESS CORRESPONDENCE ROATTENTION OF иотгинос инос 304-558-2402

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

26201

304-472-1750

	RFQ COPY TYPE NAME/ADDRESS HERE
	Swenson Spreader LLC
	127 Walnut Street
P	Lindenwood, IL 61049

DATE PRIN	TEO.	TEF	IMS OF SALE		SHIP	VIA	F	O.B.	FREIGHTTERMS
09/24/					•				
BID OPENING DATE		11/13/	2007			BID	OPENING	TIME	01:30PM
LINE	YEAR O	R UNTI	L SUCH	"RE	STEMNU EXTENDS F ASONABLE NEW CONTR	FOR A PE	RIOD OF HEREAFTI	ER AS IS	AMQUNT:
	ORIGINA NOT EX TIME" ANY RE	AL CON CEED T THE VE ASON U	TRACT. WELVE NDOR M PON GI	TH (12) Ay T Ving	E "REASON MONTHS. ERMINATE THE DIRE EN NOTICE	ABLE TI DURING THIS CO CTOR OF	ME" PER: THIS "I NTRACT I	IOD SHALI REASONABI FOR	
	CONTRA	CT DOC	UMENT,	THE	IONS ARE TERMS, C R THE LIF	CITICHO	NS, AND	PRICING	
	SUBMIT DAYS PI BE IN A	N CONS FED TO RIOR T ACCORD AL CON	ENT OF THE D: D THE I ANCE W: TRACT	THE IREC EXPI	T MAY BE SPENDING TOR OF PU RATION DA THE TERMS SHALL BE	UNIT A RCHASIN TE. SU AND CO	ND VENDO G THIRTY CH RENEW NDITIONS	DR, / (30) /AL SHALL S OF THE	
	RIGHT T NOTICE SUPPLIE	TO CANO TO THE D ARE	CEL THI E VENDO OF AN	IS CO OR IF INFE	ECTOR OF INTRACT I THE COM ERIOR QUA OF THE	MMEDIATI MODITIES LITY OR	ELY UPON S AND/OR DO NOT	WRITTEN SERVICE CONFORM	
	AUTHORI MARKET, ESTIMAT DIATE D (INCLUE	ZE A S WITHOUTE, ITE ELIVER ING BL	SPENDIN OUT THE EMS SPE EY IN E	IG UN FIL CIFI MERG LIMI	HE DIRECT HIT TO PU LING OF A HED ON TH HENCIES D TED TO D REASE IN	RCHASE C REQUISI IS CONTR UE TO UN ELAYS IN	ON THE O ITION OR RACT FOR NFORESEE N TRANSP	PEN COST IMME- N CAUSES ORTATION	
IGNATURE	TITHAUÇ	IES:	i	ŀ	LISTED			ION ARE	
TILE	- 	FEIN	1			~~~	ADD	RESS CHANGE	S TO BE NOTED ABOVE



RFQ COPY

TYPE NAME/ADDRESS HERE

Swenson Spreader LLC 127 Walnut Street Lindenwood, IL 61049

State of West Virginia
Department of Administration
Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for MERONUMBER Quotation

708EC005

ADDRESS CORRESPONDENCE TO ATTENTION OF

NOTENHOL NHOL 304-558-2402

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

		26	3201	304-472-1750
	•			
DATE PRINTED	TERMS OF SALE SHI	⇒VIA T	FO:B	FREIGHTTERMS
09/24/2007				CHEIGHT FERMS
	13/2007	BID f	PENING TIME	01:30PM
LINE QUANTITY				
40.00	NO. ITEMAS	UMBER	UNITPRICE	AMOUNT
APPROXIMA	TIONS ONLY, BASED ON	ESTIMATES	SUPPLIES BY	THE
STATE SPE	NDING UNIT. IT IS UN	DERSTOOD	AND AGREED TH	IAT
THE CONTR	ACT SHALL COVER THE Q	UANTITIES	ACTUALLY	
ORDERED F	OR DELIVERY DURING TH	E TERM OF	CONTRACT,	1
WHETHER M	ORE OR LESS THAN THE	QUANTITIE	S SHOWN.	
annentio :				
URUERING	PROCEDURE: SPENDING	UNIT(S) S	HALL ISSUE A	
WALLIEN E	QUIPMENT CONTRACT ORD	ER CHURM	NUMBER WV-35)	
WV-38 MILE	DITIES COVERED BY THI T BE SENT TO THE PURC	S CUNIKAC	ALCION THE OKIGI	NAL
OF THE DE	PARTMENT OF ADMINISTR		FTER APPROVAL	•
AND ENCUM	BRANCE, ONE COPY OF T	HE DIBCUA	CE RODER LITT	
BE RETURNI	ED TO THE SPENDING UN	TT AND ON	SE CRUER WILL.	
WARDED TO	THE VENDOR AS AUTHOR	IZATION F	OR SHIPMENT.	
NO ORDER	IS VALID UNLESS APPRO	VED AND E	NCUMBERED	
BY THE PU	RCHASING DIVISION.			
				1
BANKRUPTC	YE IN THE EVENT THE	VENDOR/CO	NTRACTOR FILE	s
FOR BANKRI	JPTCY PROTECTION, THIS	S CONTRAC	T IS AUTOMATI	- .
CALLY NULL	. AND VOID, AND IS TE	RMINATED	WITHOUT FURTH	ER
ORDER.				
EVUIDIT				
EXHIBIT 6				
		[Į.
PRICE ADU	ISTMENT PROVISION:			j
	OF WEST VIRGINIA WILL	CONSTRE	TAUT SOTTS C	1
CONTAIN PR	OVISIONS FOR PRICE AL	LUNSIDE	K DUTOD TO TU!	
ORIGINAL E	XPIRATION OF THE CONT	RACT. PRI	OVIDED THAT	-
SUCH PRICE	ADJUSTMENT COVERS BO	TH UPWARI	D AND DOWNWAR	n
MOVEMENT O	F THE COMMODITY PRICE	, AND THA	AT ADJUSTMENT	
IS BASED O	IN THE "PASS THROUGH"	INCREASE	OR DECREASE (of
RAW MATERI	ALS AND/OR LABOR, WHI	CH MAKE L	JP ALL OR A	
SUBSTANTIA	L PART OF A PRODUCT.	ADJUSTME	NTS ARE TO BE	<u> </u>
BASED UPON	I AN ACTUAL DOLLAR FIG	URE, NOT	A PERCENTAGE	.
ALL PRICE	ADJUSTMENT REQUESTS M	IUST BE SL	JBSTANTIATED 1	(N
L	SEE REVERSE SIDE FOR T	ERMS AND CONOR	ions	
IIGNATURE		TELEPHONE		TE
TILE	FEIN	<u> </u>		
) bell?		ADDRESS CHAN	GES TO BE NOTED ABOVE



State of West Virginia
Department of Administration
Purchasing Division
Purchasing Division Street East
Part Office Rev 50100 Post Office Box 50130 Charleston, WV 25305-0130

Request for AFONUMBER

708EC005

ADDRESS CORRESPONDENCE TO A FIENTION OF

JOHN JOHNSTON 304-558-2402

TYPE NAME/ADDRESS HERE Swenson Spreader LLC 127 Walnut Street Lindenwood, IL 61049

RFQ COPY

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

DATEPRIN	TEO	TERMS OF SALE	SHIP VIA	FOB.	FREIGHTTERMS
09/24/					
BID OPENING DATE	11	/13/2007	BID (PENING TIME DI	.:30PM
LINE	QUANTIT	UOP CAT	ITEM NUMBER	UNIT PRICE	AMOUNT
		N°-22			
			THE DIRECTOR PUR		
			KS, GENERAL MARKE		
			SUCH REQUESTS F		<u> </u>
[SHOULD BI	RECEIVED IN	WRITING BY THE DI	RECTOR OF	
ł	PURCHASI	NG AT LEAST 30	DAYS IN ADVANCE	OF THE EFFECTIVE	
	DATE OF	THE INCREASE.	ANY TIME THE VEN	IDOR REQUESTS A	į
	PRICE AD	JUSTMENT, THE	PURCHASING DIVIS	ON MAY EITHER	
	ACCEPT TI	IE PRICE ADJUS	TMENT AND AMEND T	HE CONTRACT	
	ACCORDING	LY DR RELECT	THE ADUSTMENT IN	ITS ENTIRETY	
•	AND CANC	L THE CONTRAC	T'		
			ŀ		
	EXHIBIT 4	'	-		
			 L.		
		ERNMENT BODIE		ENDOR INDICATES	
	TH THE R	D HIS REFUSAL	TO EXTEND THE PR	ICES, TERMS,	
	AND CONDI	TITUNS OF THE	BID TO COUNTY, SC	HOOL, MUNICIPAL	
	AND DINES	CAL CURRENT	MENT BODIES, THE	BID SHALL EXTEN	
	VIRGINIA.	, , ,	ONS OF THE STATE		
			OR DOES NOT WISH DITIONS OF THE BI		
			OF THE STATE, TH		
	CIEVDIA I	NUTCATE SICH	REFUSAL IN HIS BI	E VENDUK MUSI	
	CLEARLI MOT	DECLIPTE TO	E AWARD OF THIS C	D. SUCH REFUSAL	
	MANNER.	FRESUDICE IN	AWARD OF INIS C	UNIRACI IN ANY	
	TAITILE !				1
	REV. 3/88			ĺ	{
					ļ
		VENDOR PRE	FERENCE CERTIFIC	ATE	ļ
			OLNIAI A		
	CERTIFICA	TION AND APPL	CATION* IS HEREB	Y MADE FOR	
	PREFERENC	E IN ACCORDANC	E WITH WEST VIRG	INIA CODF	
			TO CONSTRUCTION		
Į,	A. APPLI	CATION IS MADE	FOR 2.5% PREFERE	ENCE FOR THE	
				. }	
nous tipe		SEE REV	ASÉ SIDE FOR TERMS AND CONDI		
SIGNATURE			TELEPHONE	DATE	
TITLE	Mar Melline Mil mennen menen more	FEIN		ADDRESS CHANGES 1	TO BE NOTED ABOVE
		Į.		ADDRESS CHANGES	O RE MOIED WROAF



Request for REGINUMBER Quotation

708EC005

ADDRESS CORRESPONDENCE TO ATTENTION OF

5

JOHN JOHNSTON 304-558-2402

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

RFQ COPY TYPE NAME/ADDRESS HERE

Swenson Spreader LLC 127 Walnut St. Lindenwood, IL 61049

DATE PRINTED	TERMS OF BALE SHIP	YIA	FOB.	FREIGHTTERMS
09/24/2007		,		
BID OPENING DATE: 11/1	3/2007	BID OPEN	ING TIME 01	:30PM
LINE QUANTITY	UOP CAT: ITEM NI	UMBER	UNITPRICE	AMOUNT
DEACON OUE	CV-D.			
REASON CHE	CKED:		,	
() BIDD	ER IS AN INDIVIDUAL	BESTDENT VENI	DOD AND	
	D CONTINUOUSLY IN WE			
(G) YEARS	IMMEDIATELY PRECEDING	G THE DATE OF	F THIS	
CERTIFICAT	IDN: DR	o ma Dail o	11120	
() BIDD	ER IS A PARTNERSHIP,	ASSOCIATION	OR CORPORA-	
	ENT VENDOR AND HAS M			
QUARTERS O	R PRINCIPAL PLACE OF	BUSINESS CO	NTINUOUSLY IN	
	NIA FOR FOUR (4) YEAR			+
	F THIS CERTIFICATION			
	F BIDDER IS HELD BY			
	P, ASSOCIATION OR CO			
	INTAINED ITS HEADQUA			
	S CONTINUOUSLY IN WES			\$
	DIATELY PRECEDING THE	E DATE OF THE	LS	
CERTIFICAT	TUM; UK			1
() BIDD	ER IS A CORPORATION I	UNNDESTRENT 1	KENDUB	
	AN AFFILIATE OR SUBS			
	OF ONE HUNDRED STATE			
	INED ITS HEAQUARTERS			
	ITHIN WEST VIRGINIA (
	EARS IMMEDIATELY PREC			
CERTIFICAT				
				i
B. APPLICA	ATION IS MADE FOR 2.5	5% PREFERENCE	FOR THE	
REASON CHEC	CKED:			
	ER IS A RESIDENT VENI			
	LIFE OF THE CONTRACT			
	EMPLOYEES WORKING ON			
	TS OF WEST VIRGINIA			
	SUBMISSION OF THIS BI		INCULATELY	
RECEDINGS	JULIA STOR OF INTS BI	, ,		
	SEE REVERSESIDE FOR T			
RIGNATURE		TELEPHONE	DATE	
ITLE	FEN	<u> </u>	ADDRESS CHANGES T	O BE NOTED ABOVE



Request for REGINUMBER Quotation

708EC005

ADDRESS CORRESPONDENCE TO ATTENTION OF

PAGE

иотгинос инас 304-558-2402

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

RFQ COPY TYPE NAME/ADDRESS HERE

Swenson Spreader LLC 127 Walnut Street Lindenwood, IL 61049

DATE PRIN	eranerana and and a	TER	MS OF SAL	E.	SHIP	VIA		F.	O.8.		FREIGHTTERMS
09/24/ BID OPENING DATE				ــــــــــــــــــــــــــــــــــــــ			<u></u>	· · · · · · · · · · · · · · · · · · ·			
		11/13/	(2)(0)()(0)(0)(0)	2004200		BID	OPE	ENING	TIME	0 1	:30PM
LINE	QUA	NTITY	UOP	CAT NO	ITEM NU	VBER		UNF	PRIÇE		AMOUNT
						***************************************	1		***********	2000000000	
	OR						İ				
	I	BIDDER	IS A	NONR	ESIDENT V	ENDOR E	MPL	OYING	A		
	L .		- 1	,	STATE RE						
	NONRES	IDENT	VENDO	R WIT	H AN AFFI	LIATE O	RS	SUBSID	IARY]
					ADQUARTER						
					T VIRGINI					1	
					ESIDENTS CONTRACT						
					CUNIKACI R BIDDERS						
					ARE RESI					Δ.	
					E STATE C						
	YEARS	IMMEDI	ATELY	PREC	EDING SUB	MISSION	OF	THIS	BID.		•
			ŀ								
				3	THE SECRE		1				
	1				ER RECEIV		P				
	1	1			MEET THE		,			ļ	
					ARY MAY O Scind the						
					SSESS A P					•	
					TO EXCE					NT	
					VILL BE P						
		1	1	, ,	1 ANY UNP	AID BAL	ANC	E ON	THE		
	CONTRA	CT OR	PURCH	SE OF	RDER.						
	B. (CUB)	4.7.0.7.0				~~ 5.55					
					CERTIFICA / REQUEST						
					AUTHORI						
					LOSE TO				-141 OI.		
					INFORMAT				нат		
					UIRED BU						
					DES NOT						
					R INFORM		EEM	ED BY	THE T	AX	İ
Î	COMMIS	STUNER	TO BE	CONF	IDENTIAL	• [
	UNDER F	PENALT	OF	AW FO	R FALSE	SWEARTN	e t	WEST '	VIRCIN	TA	
1					REBY CER	r				-7	
				- X 44 447 45 45 - 24			i de la composition de la composition de la composition de la composition de la composition de la composition				
IIGNATURE				oes hevi	ASE SIDE FOR TE	RMS AND CON TELEPHONE	DLTO	NS.	ln	ATE	
TILE		FEU	ł					ADDI	RESS CHAN	IGES	TO BE NOTED ABOVE



Request for HEONUMBER

708EC005

ADDRESS CORRESPONDENCE TO ATTENTION OF

NOTENHOL NHOL 304-558-2402

DIVISION OF HIGHWAYS **EQUIPMENT DIVISION** ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

304-472-1750

RFQ COPY TYPE NAME/ADDRESS HERE

Swenson Spreader LLC 127 Waanut Street Lindenwood, IL 61049

09/24/	2007	TER	MS OF SALI		SHIP	ija.	F.(3.8	FREIGHT TERMS
BID OPENING DATE:		11/13/	2007	e e e e e e e e e e e e e e e e e e e		BID	OPENING	TIME	01:30PM
UNE	QUA	NTITY	UOP	CAT. NO	TEMNU	MEA	UNF	TPRICE	AMQUNT
	THAT I CONTAI TERM O	F A CO NED WI F THE	NTRACT THIN T CONTRA	THIS CT,	D ACCURAT ISSUED TO CERTIFICA BIDDER WI WRITING	BIDDER TE CHAN LL NOTI	AND IF GES DURI FY THE	ANYTHIN	
		;	E	IDDE	Swens	on Spre	ader LL	<u>.c.</u>	
· 			ľ	DATE:	11-09-	07	/. /		
			S	IGNE	D:	W-17		, game em province to the company term and the	
			T	ITLE	Gbverhm	el/t_Sal	es Coor	dinator	NI CO
	IN EIT ARE EN Maximu	HER "A	" OR " TO RE	B", CEIV	N OF PREF OR BOTH " E. YOU M FOR BOTH	A" AND Ay requ	"B" WHIC	H YOU	
	•			тои	CCE				
	A SIGN	ED BID	MUST	BE S	JBMITTED	то:			
	Р В	URCHAS UILDIN	ING DI G 15	VISI					
					TREET, EA 5305-0130	ST			
	THE BI	D SHOU	LD CON		THIS INF			FACE OF	-
SIGNATURE				SEE REV	erséside for ti	rms and con Telephone	DITIONS	DATI	
TALE		FEI	N				ADD	RESS CHANG	ES TO BE NOTED ABOVE



Request for REGNUMBER Quotation

708	E(0	0	5	

ADDRESS CORRESPONDENCE TO ATTENTION OF

AG		•
	8	

NOTENHOL NHOL 304-558-2402

RFQ COPY TYPE NAME/ADDRESS HERE Swenson Spreader LLC

127 Walnut Street Lindenwood, IL 61049

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201 304-472-1750

DATE PRINTED TERMS OF SALE SHIP VIA POB, FREIGHT TERMS 09/24/2007 BID OPENING DATE: 11/13/2007 BID OPENING TIME 01:30PM QUANTITY ITEM NUMBER UNIT PRICE AMOUNT THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED: SEALED BID BUYER: 33 RFQ. NO.: 708EC005 BID OPENING DATE: 11/13/2007 BID OPENING TIME: 1:30 PM PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID: . 866-310-0300 CONTACT PERSON (PLEASE PRINT CLEARLY): Ryan King THIS IS THE END OF REQ 708EC 005 ***** TOTAL: SEE REVERSE SIDE FOR TERMS AND CONDITIONS SIGNATURE TELEPHONE TILE ADDRESS CHANGES TO BE NOTED ABOVE

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS EQUIPMENT DIVISION

PROCUREMENT SPECIFICATIONS NO. 013-2-B

OPEN END CONTRACT NINE CUBIC YARD 304 STAINLESS STEEL DEMOUNTABLE ABRASIVE AND CHEMICAL SPREADER (HYDRAULIC)

1.0 PURPOSE

It is the purpose of these specifications to describe a 9 Cubic Yard 304 Stainless Steel Demountable Abrasive and Chemical Spreader (Hydraulic) (hereinafter referred to as a "spreader" or a "unit") to be purchased for use by the West Virginia Division of Highways (DOH) on an Open End Contract basis.

2.0 BIDDING PROCEDURES

The current purchasing procedures regarding bidding as established by the Department of Administration, Purchasing Division, shall apply. Failure to submit the "Request for Quotation" forms, complete in its entirety and according to directions indicated, may subject the bidder to disqualification. Each bid submitted shall also be accompanied by a Bidder's Evaluation Report completed in detail. Addendums in order, along with exception sheets, should be with Bidder's Evaluation Report. FAILURE TO SUBMIT THE BIDDER'S EVALUATION REPORT, COMPLETE IN ITS ENTIRETY, MAY RESULT IN AUTOMATIC DISQUALIFICATION.

3.0 SPECIFICATIONS

The specifications named herein, mandatory and non-mandatory, establish the acceptable level of quality only and are not intended to reflect a preference or favor any particular brand or vendor.

3.1 EXCEPTIONS TO NON-MANDATORY SPECIFICATIONS

Exception to a non-mandatory unit specification may be made by the bidder, providing the exception is not available from the manufacturer. Any such exception must be noted on the bidder's evaluation report and should be accompanied by supporting documentation/literature from the manufacturer. Any exception must be indicated on a separate attachment to the bidder's evaluation report and labeled as "Exception to Specifications". The state reserves the right to determine whether the stated exception does or does not reduce the quality and performance of the unit. Failure to provide information for any exceptions may be grounds for rejection of the bid. The

state reserves the right to waive minor irregularities in bids or specifications in accordance with §148-1-4(f) of the WV Legislative Rules and Regulations.

3.2 MANDATORY SPECIFICATIONS

All specifications preceded by "shall and/or must" or are stated as a "minimum and/or maximum" are mandatory. Any bid failing to meet any mandatory item shall be immediately disqualified. Failure to respond in the appropriate evaluation section may also be grounds for immediate disqualification at the discretion of the State.

A mandatory pre-bid conference is scheduled for this equipment purchase as stated in the RFQ. Vendors having products with variations or exceptions in specified mandatory items are expected to address any such variations or exceptions during the pre-bid conference. The State shall review and consider any such variation or exception, and may at its sole discretion, issue an addendum to change mandatory specifications deemed to be in the State's best interest. Bids from any vendor failing to attend the mandatory pre-bid shall be disqualified. Bids containing any variation or exception to a mandatory specification that was not addressed during the pre-bid conference and accepted by the issuance of an Addendum shall be disqualified.

4.0 REPRESENTATIVE UNIT FOR TEST

The successful vendor must (if specified) provide DOH one (1) completed representative unit to be observed and evaluated on each order to insure compliance with specification. If requested, the time period for testing and evaluation shall be seven (7) working days following receipt of the unit. DOH will incur no obligation for deterioration of surfaces, finishes, seals, and mechanical or electrical parts on the unit resulting from operation and testing within the limits of these specifications; nor will DOH incur obligation for damage to the unit resulting from failure to meet specifications when due care and attention is given by DOH and testing is done within the limits of these specifications. Failure of the pilot unit to satisfactorily meet specifications as bid shall be cause for cancellation of the purchase order, and return of the delivered unit along with all associated equipment to the vendor at the vendor's expense.

4.1 CONDITION OF UNIT(S) UPON DELIVERY

All units must arrive at the prescribed delivery point having been completely preserviced with oil, lubricants, and coolant. All prescribed precautions pertaining to first operations and break-in of the unit are to be posted conspicuously on the unit for ready observance by the operator.

4.2 DELIVERY

Delivery point of the completely assembled representative unit with all associated parts will be the DOH, Equipment Division, Route 33 at Brushy Fork Road, Buckhannon, West Virginia (26201).

The vendor is responsible for guaranteeing delivery of the completed units within the time specified and agreed to by the State. Delivery is preferred within 135 days after receipt of purchase agreement. The vendor is responsible for establishing and coordinating delivery terms with allied manufacturers or suppliers. Delivery terms shall be stated in the bid and the State reserves the right to accept or negotiate such terms. Failure to reach an agreement may result in rejection of the bid. The successful bidder shall provide their manufacturer's confirmation of the order to the WVDOH contact person within seven (7) working days after receiving the approved purchase order.

A completed pilot model for inspection must be provided within 45 calendar days after receipt of the purchase agreement by the successful vendor.

Delivery is an integral part of this specification and failure to comply will be cause to initiate a D.O.T. Administrative Form WV-82, Vendor Performance Form. The WV-82 Form will provide a means of officially notifying the Purchasing Division and the vendor of unsatisfactory performance; such as late deliveries, poor service, inadequate parts supplies, etc.

The decision to initiate subject Form will be at the sole discretion of the D.O.H. Commissioner's established Equipment Review Board.

Issuance of the WV-82 Vendor Complaint Form on unsatisfactory delivery against any vendor will be cause to refuse to consider similar items from those vendors on future Request For Quotations.

(NOTE: Delivery time could be altered due to labor strikes, severe inclement weather conditions, etc.)

5.0 AWARD CRITERIA

5.1 DOH will recommend the award in accordance with the RFQ evaluation criteria described in the requisition. The award shall be made to the lowest unit cost vendor that meets or exceeds the specifications.

Prices for the units shall be in quantities of 1-10, 11-20, 21-30, 31-40, 41-50, 51 and over. However, for evaluation purposes, we will use quantities 1-10. DOH reserves the right to place multiple orders in any quantity.

- 6.0 SPECIFICATIONS AND GUIDELINES GENERAL
- 6.1 IDENTIFICATION OF THE UNIT BEING PROPOSED

The bidder must identify the unit by manufacturer, model, series, and year of manufacture, in the bid to enable identification by DOH in the manufacturer's specifications of the proposed unit. The bidder will submit complete descriptive

literature of the proposed unit, to establish that the bid is the manufacturer's most current model, including latest engineering improvements, which have been, or will imminently be, regularly advertised and sold on the open market. The unit specified herein and offered to be manufactured after January 1, 2007 and be clearly identified and marked with date of manufacture.

- OPERATING AND SERVICE MANUALS AND PARTS LISTS

 An operator's manual must be included with each unit upon delivery. A "line sheet" (if applicable) and Equipment Preventative Maintenance Questionnaire (as shown in X6.2 of the Bidder's Evaluation Report) must be with pilot unit upon delivery. In addition, there must be 12 service, shop, or maintenance manuals; ten (10) to be distributed to the Districts and two (2) for the Equipment Division. Also, there must be 14 parts manuals; ten (10) to be distributed to the Districts and four (4) for Equipment Division use. CD ROM is preferred in lieu of parts manuals.
- * NOTE: MANUALS SHALL BE DELIVERED UPON COMPLETION OF DELIVERY OF TOTAL UNITS. FAILURE TO DO SO WILL DELAY PAYMENT.

6.3 TRAINING:

Manufacturers and/or dealers will be required to stage a thorough seminar on the subjects of Preventative Maintenance, Operator and Mechanic Training. In order to keep the operators and mechanics updated, the successful vendor shall conduct training with each purchase order against this open end contract. Training is preferred within 2 working days after delivery of the pilot unit on the individual purchase order.

Manufacturers and/or dealers shall be required to furnish the Training Academy with one (1) Operator's Manual to be shipped direct to Letha Lamb, WVDOH Training Academy, Post Office Box 610, Buckhannon, West Virginia 26201 prior to delivery of the pilot.

The seminar to be held at the W. Va. Division of Highways, Equipment Division, Buckhannon, West Virginia.

6.4 PREVENTIVE MAINTENANCE AND OPERATOR PROCEDURES:

Manufacturers and/or dealers will be required to submit to the Equipment Division, in addition to the operating and service manuals, booklets and pamphlets explaining the Preventive Maintenance and Operator Procedures to be used by the operators of this equipment, and must include such things as daily prestart inspection procedure, service schedule, and routine maintenance required, safety precautions, etc.

The successful vendor shall furnish all training aids; i.e., videos, projectors, etc. required in conducting the training.

6.5 WARRANTY AND SERVICE POLICY

The Manufacturers warranty or service policy is to apply to the unit. Such warranty or service policy is to be recognized at any authorized unit dealer, representing manufacturer of proposed unit throughout the State of West Virginia. The applicable warranty or service policy will not be contingent upon obtaining routine service. lubrication, and servicing of the unit from factory authorized agencies. It will be the responsibility of the bidder to have available labor to repair or replace any defective replacement parts, components and materials, and to have available those replacement parts, components, and/or materials found to be defective during the terms of the warranty period. The bidder should state the labor rates, locations where parts will be stocked, availability of parts, and discounts offered for parts, when terms of the warranty offer a pro-rated cost for parts and labor. In addition, the successful bidder should offer field work to repair or replace defective parts, components, and materials found to be defective during the terms of the warranty and should provide mechanic's travel rates. mileage charges, field mechanic rates, and any surcharge for miscellaneous items, if applicable, for field work during the warranty period. Submit to Division of Highways any technical or engineering improvements during the term of the warranty. The unit must be accompanied upon delivery by the unit's manufacturer's executed warranty or service policy.

A mandatory minimum two (2) year bumper to bumper basic parts and labor warranty is required for this unit.

THE "WARRANTY AND SERVICE POLICY QUESTIONNAIRE" ATTACHED IN THE BIDDER'S EVALUATION REPORT MUST BE COMPLETED IN ITS ENTIRETY BY THE SUCCESSFUL BIDDER OR MANUFACTURER PRIOR TO DELIVERY OF THE PILOT MODEL. (SEE SECTION X6.5 OF BIDDER'S EVALUATION REPORT).

6.6 EVALUATION COMMITTEE REQUIREMENTS

Detailed component specifications, product literature, component models, required for specification compliance determination by the Evaluation Committee should be provided with each bid. Any information supplied that is contrary to/or conflicting with the specifications and/or attached Bidders Evaluation Report may be sufficient cause for rejection of bid.

6.7 UNSPECIFIED ACCESSORIES & FEATURES

All parts, equipment, accessories, material, design and performance characteristics not specified herein, but which are necessary to provide a complete unit, must be furnished with each unit and required to conform to strength, quality of material, and quality of workmanship to those which are advertised and provided to the market in general by the unit industry.

All parts and accessories advertised and regularly supplied as standard shall be included, except those which would represent duplication of these specified, and except those which, by specification, are not to be furnished. All standard safety features, required by Federal and State Law, shall be included.

- 7.0 SPECIFICATIONS OF THE QUOTED UNIT ARE AS FOLLOWS:
- 7.1 Spreaders offered shall be of the commercial heavy-duty, self-contained, hopper type.
- 7.2 Spreaders shall consist of a 12 gauge 304 stainless steel body, feeder conveyor, spinner disc, power drive, and all components necessary to make a complete operating unit.
- 7.3 The spreader shall be capable of uniformly spreading sand, cinders, salt, calcium chloride, or other mixtures up to a width of forty (40) feet.
- 7.4 Body:
- 7.4.1 The body shall be of 304 stainless steel construction 100% welded inside and outside of the body.
- 7.4.2 The struck capacity shall be 9 cubic yards.
- 7.4.3 Inside length shall be 13 feet as measured from front of spreader hopper to the rear hopper gate and conveyor chain exit point
- 7.4.4 Overall height to be 59 inches maximum
- 7.4.5 Inside width to be 82 inches maximum.
- 7.4.6 The body sides must slope at approximately 45 degree pitch to insure free flow of materials to the conveyor.


- 7.4.7 The body sides and end-gates to be constructed with minimum 12 gauge 304 stainless steel.
- 7.4.8 Top of the body is to have a formed double crimped section for additional support.
- 7.4.9 Sills shall be of a minimum of 10 gauge 304 stainless steel with longitudinal flanges supported on rectangular formed cross sills.
- 7.4.10 Approximately six (6) each side of 12 gauge 304 stainless steel full slope body side supports rigidly tying in the formed cross sills with the body sides to give the highest degree of resistance to warping or twisting under heavy loads.
- 7.4.11 The body shall be provided with four (4) 304 stainless steel 5/8 inch round lifting eyes. The inside eye opening shall be designed to allow the passage of an alloy eye type Grade 80' 3/8 inch grab hook with a width dimension of 2 11/16 inch (with the top screen down in the rest position on top of the spreader); two (2) on each side of spreader mounted and secured in such a manner that the entire unit may be safely lifted for storage/installation purposes
- 7.4.12 All necessary hardware shall be stainless steel.
- 7.4.13 A 12 gauge 304 stainless steel cab shield to be mounted on front of body to protect cab from falling material when loading with slope design to fall in hopper as spreader unloads. Cab shield shall extend 13 inches in front of the hopper at 45 degrees.
- 7.4.14 A fold up ladder shall be mounted on rear of spreader body at right for easier access to top and secured in the folded position with two (2) flexible draw latches. Ladder to be equipped with hand holds and non-slip grip strut steps.
- 7.5 Conveyor:
- 7.5.1 The conveyor shall be located in bottom of hopper capable of engaging material along its full length and moving the material to the rear adjustable metering gate.
- 7.5.2 Conveyor to be continuous ladder type consisting of two parallel chains with cross bars on 4 1/2" centers made of 1/4" x 1-1/2" steel.
- 7.5.3 Each cross bar shall be formed and welded both top and bottom to chain links
- 7.5.4 Tensile strength of each chain shall be 21,000 pounds minimum
- 7.5.5 Overall width of chain conveyor 20 inches minimum
- 7.5.6 Replaceable rubber wear strips to prevent contact of material being spread with the chain must be provided.

- 7.5.7 A 10 gauge 304 stainless steel heavy-duty replaceable conveyor plate shall be fitted.
- 7.5.8 Chain driven by 6 tooth drop forged steel sprockets and 1 1/2 inch alloy steel front and
- 7.5.9 Conveyor shall have adjustment provisions at rear of spreader for at least 3" lateral takeup.
- 7.5.10 Additional 7 gauge 304 stainless steel reinforcing plate to be welded to longitudinal webs covering area of drive shaft bearing and idler bearing adjustment (if required).
- 7.5.11 The material composition of the adjustment mechanism shall be stainless steel.
- 7.5.12 The conveyor drive motor shall be mounted on the reduction gear box and have a ratio of approximately 50-1.
- 7.5.13 Conveyor gear box must have its drive shaft extended through the rear of gear housing, and the shaft end machined to accommodate the application rate sensor shaft for the Dickey-John Automatic Control System, Model ICS-2000. The necessary oil seal included.
- 7.5.14 A 7 gauge stainless steel adjustable discharge gate of the greasable screw jack type to be located at the body rear to properly adjust the flow of material to the spinner.
- 7.5.15 Feedgate opening 12" high x 18" wide.
- 7.5.16 Any and all exposed moving or rotating mass shall be adequately shielded in order to protect personnel while performing required operational adjustments including gear box extended input shaft when rate sensor is installed.
- 7.5.17 The pintle conveyor chain shall be heat treated formed links with locked, non-turning pins.
- 7.6 Distributor Spinner Assembly:
- 7.6.1 The distributor disc shall be of urethane material approximately 20" in diameter and equipped with six (6) fins (approximately) designed to obtain a controlled spread of four feet (4') to forty feet (40').
- 7.6.2 Material shall be guided from conveyor end to distributor disc by means of an externally adjustable material flow baffles, enclosed within the chute.
- 7.6.3 Spinner shall be vertically adjustable approximately 16 inches and provide approximately a 20 inch to 38 inch spinner position below the mounting surface.

- 7.6.4 A deflector baffle or diverter chute shall be provided in the enclosed distributor spinner hopper assembly so it can be positioned in such a manner that material can be unloaded from spreader without striking spinner.
- 7.7 Baffles:
- 7.7.1 Baffles shall be provided to control direction and width of spread. To have four (4) sections over right, left, rear, and front of spinners.
- 7.7.2 Baffle sections must be easily adjusted in desired position, from full down to horizontal, without use of tools.
- 7.8 Power Drive:
- 7.8.1 The power drive shall be hydraulic having two (2) hydraulic motors -one (1) powering the spinner and one (1) the conveyor.
- 7.8.2 The spinner hydraulic motor to be mounted below the spinner hopper assembly.
- 7.8.3 The conveyor hydraulic motor to be of the orbital, low speed, hi-torque type integrally mounted to conveyor gear box.
- 7.9 Screen Over Hopper:
- 7.9.1 A minimum of four (4) sectional screens to be hinged to 10 gauge 304 stainless steel 4 inch x 6 inch formed box beam running longitudinally the full length of spreader hopper.
- 7.9.2 Screen sections to have 3/8" diameter carbon steel rods welded forming 2-1/2" x 2-1/2" square openings with reinforcing bars at the center of each section.
- 7.9.3 Screens should not increase the overall height of spreader more than 7" down center.
- 7.9.4 Screens to be powder coated black
- 7.10 Lighting to be in accordance with the attached sketch.
- 7.10.1 Combination and marker lights to be LED type
- 7.10.2 Stop, tail, turn combination lights and marker lights shall be shielded.
- 7.10.3 Strobe light shall be "quad flash"

- 7.11 Hydraulic Components: The following hydraulics shall be supplied with each spreader (hose lengths to be determined by spreader vendor) to provide for proper installation on DOH dump trucks.
- 7.11.1 All necessary fittings for complete hookup of spreader hydraulics to DOH dump trucks central hydraulic system shall be provided.
- 7.11.2 All fittings shall be the steel type designed for hydraulic use: galvanized iron pipe or fittings not acceptable.
- 7.11.3 The truck central hydraulic system, supplied and installed by another vendor, will be complete to and including the rear manifold, located at the rear cross-member of truck. The rear manifold will have attached to it one (1) 3/4 inch I.D. pressure line with 3/4 inch quick disconnect, one (1) 1/2 inch I.D. pressure line with 1/2 inch quick disconnect. The quick disconnects will be "VH" series snap-tite. The spreader vendor shall supply proper mating quick disconnects, metal caps, and plugs for connection to truck manifold.
- 7.12 An anodized 6061T6 aluminum grease manifold block shall be mounted at the rear of the body incorporating the front bearing grease extension tubes, rear bearing grease fittings, and feedgate screw jack lubrication tube to allow for lubrication of the front bearings and feedgate screw jack from a single convenient location. Other fittings shall be placed at convenient location for normal maintenance.
- 7.12.1 The anodized 6061T6 aluminum grease manifold block shall have a minimum of six (6) ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parflex hoses to provide for adequate one location greasing of the front and rear bearings and feed gate screw jack. Any unused ports are to be properly plugged.
- 7.12.2 All hoses incorporated into the grease manifold block system shall be Parflex hose manufactured by Parker Hannifan Corporation or equal, and shall have an inside diameter of 1/8 inch, a maximum outside diameter of 0.34 inch, a maximum working pressure of 2500 psi and a minimum burst pressure of 10,000 psi. The hoses used shall be held in place by a sufficient number of rubber cushioned hose clamps.
- 7.13 One (1) piece of angle iron 3/8" x 4" x 90" and two (2) pieces of 1" round shafting ten inches (10") long shall be included to construct a safety keeper bar. State forces will add this item when the hopper is mounted, vendor shall supply material.
- 7.14 Unit shall include all other features considered as standard equipment but not specifically addressed above.

- 7.15 Paint: All parts and accessories that are not required to be stainless or rustproof to be painted manufacturers standard color.
- 7.16 Vendor must certify that spreader offered will comply with "Occupational Safety and Health Act of 1970" and subsequent amendments.
- 7.17 Advertisement: Vendors are permitted to attach a permanent metal plate 4" x 6" maximum size to the unit for identification. All other types of advertising, decals, labels, etc. will interfere with West Virginia Division of Highway's standards and are not permitted.

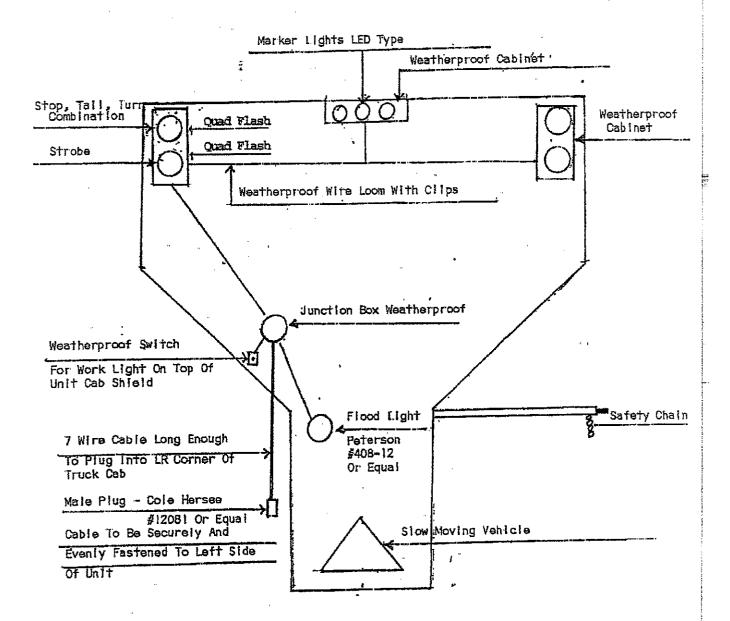

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION

21

DIVISION OF HIGHWAYS EQUIPMENT DIVISION

NOTE: Vendor should type

Bidder's Evaluation

Report.

BIDDER'S EVALUATION REPORT

PROCUREMENT SPECIFICATIONS FOR OPEN END CONTRACT NO. 012-1-Z

OPEN END CONTRACT FIVE CUBIC YARD STAINLESS STEEL DEMOUNTABLE ABRASIVE AND CHEMICAL SPREADER (HYDRAULIC)

NOTE TO BIDDER: Procurement Specification No. 012-1-Z, Paragraph 2 0 recommends the completion and submittal of this Report with your bid. Purpose of this Report is to enable the West Virginia Division of Highways Evaluation Committee to make full and fair evaluation of the bid Addendums in order, along with exception sheets, should be with Bidder's Evaluation Report. FAILURE TO SUBMIT THIS REPORT, COMPLETE IN ITS ENTIRETY, MAY SUBJECT THE BIDDER TO DISQUALIFICATION.

	Reference Requisition No.: 708EC005	
	Bidder's Name: Swenson Spreader LLC	
	Address: 127 Walnut St	
	Telephone Number: 888-825-7323	
	Years Bidder has been registered to do business with the State of West Virginia: 1	YRS
	Years Company has been an authorized dealer for proposed unit: 30	YRS
X3.2	Have you complied with all mandatory specifications? X YES NO	
X4.2 X4.2.1	DELIVERY: Delivery date of completed representative unit: 45 Calendar Days After Days A	ate of
X4.2.2	Delivery date of balance of completed units: 135 Calendar Days After Date of	eemenf.

X5.0	AWARD CRITERIA;			
X5.1	Prices for units in quantities of	1-10 11-20 21-30 31-40 41-50 51 and over	11,999,00 11,999,00 11,999,00	per unit per unit per unit per unit per unit per unit per unit
X60 X6.1	SPECIFICATIONS - GENERAL Manufacturer, model, series, and date of manufacturer, model, series, and date of manufactures. Swenson Spreader, EV, 100, Manufacture, fully describing proposed	actured up	on receipt of	P.O. SNO
	If not, why?		<u> </u>	<u>. </u>
X6.2	Will the required number of service manuals, a Equipment Division at Buckhannon upon comp	nd complete p eletion of delive	arts list be delivered ery of total units? XYES	
	Will the required Equipment Preventive Maint Report) be provided upon inspection of the pilo	enance Form (et unit?	Section X6.2 of Bidd	iers Evaluation NO

EQUIPMENT PREVENTATIVE MAINTENANCE QUESTIONNAIRE

THIS FORM MUST BE COMPLETED IN ITS ENTIRETY BY SUCCESSFUL BIDDER OR MANUFACTURER=S TECHNICAL REPRESENTATIVE PRIOR TO DELIVERY OF PILOT MODEL TO THE WYDOH.

DESCRIPT	ION: <u>EV100 V</u> -	-box salt	spreader		MAKE:_	Swenson	Spreader	
М	DDEL: EV100		YEAR:		PURCHA	SE AMOUNT		
							N/A	
	HORSEPOWER: _	N/A	CYLINDER	: N/A	ENGINE	SERIAL: N/	a	
	COOLING SYSTEM	M CAPACITY:	N/a	**) /p#* p pp 100				
BELIS:	DESCRIPTION:			PART 1	NUMBERS	: :		
	N/A			N/A		****		
				···		arthur the rooms	-V	
GVW: n/	/a	AXLE CAPAC	ITY:FRONT:	N/A			REAR: N/A	
TIRES:	FRONT MAKE & S	SIZE: N/A						
	REAR MAKE & SI	ZE: N/A						
DIMENSIO	NS OF UNII:	LENGTH:		WIDTH	I:		Height LENGTH:	
							-825-7323	
PARTS:								
BATTERY I	MAKE: N/A		MODEL:	N/A		CCA:	N/A /A HEIGHT N/A	
TOP OR SIL	DE POST: N/A	OTORE MARIE	DIMENSION	NS: LENGTI	I <u>N/a</u>	WIDTH N	A HEIGHT N/A	
SPARK PLU	P OR INTECTION PL	IMP MAKE: I	V/A	PART #	- <u>N/A</u> L: N/Δ			
AI.TERNAT	OR MAKE: N	/A		PART#	F: NI/∆			
STARTER N	MAKE: N/A			_ PART#	<u>": N/a</u>		Vac California (1947)	
TURBO CH	ARGER MAKE: KE: N/A	N/A	·	_ PART#	: <u>N/A</u>	770 A L 13 TI 1 1		
TRANS MA	KE: N/A	MODE	L: <u>N/A</u>	λαοτιει	AL	/TO/MANUAI	L: N/A	
HYDKAULI	C PUMP MAKE:	N/A		- MODE	<u>IV/A</u>			
FILTERS	MAKE	PART NO	LUI	BRICANI	M	MANUFACTU	RER TYPE	
OIL	N/A			JINE	N/	A		
OIL AIR INNER	N/A		TRA	NSMISSIO	N N/	A		
AIR OUTER	N/A		POV	VER STEER	ING N/	<u> </u>		
FUEL PRIM	ARY N/A		HYI	DRAULIC	N_/	Δ		
	NDARY N/A			FERENTIAL	/SN /.	<u>A</u>		
COOLANT HYDRAULI	N/A		~~	AKE FLUID DLANT	NI /	7		
HYDKAULI OTHER				ER	N/.	<u>a</u>		441
								

X6.3	TRAINING:			
	Will training seminar be conducted on Preventive Maintenance, Operator	and M YES	echanic T	raining
	Will you conduct training with each purchase order against this open	end c	ontract? YES	NO
	Will training be conducted within 2 working days from the delivery of the purchase order?	pilot	unit on the _YES	individual NO
	If NO, explain time frame			
	Will an Operator's Manual be furnished directly to Letha Lamb, Tradelivery of the pilot?	ining .	Academy YES	prior to the NO
X6.4	If you are the successful vendor, will you furnish all training aids, i.e. in conducting the training? X YES NO	, video	s, project	ors, required
X6.4.1	Will all manuals, booklets, etc. explaining preventive maintenance service schedule be delivered with each unit? If NO, explain	<u> X</u>	_YES	edures, and NO
X6.5	WARRANTY AND SERVICE POLICY			
	Will the warranty and service you provide comply with all areas as statedX YES No	in Sec O	tion 6.5 of	specifications
	Is warranty literature attached?	YES	NO	
	Is a minimum two (2) year bumper to bumper basic parts and labor v	varran YES	ty includ NO	ed?
	Describe: Two year bumper to bumper basic parts and laborated bump	or wa	rranty	

THIS FORM MUST BE COMPLETED IN ITS ENTIRETY BY THE SUCCESSFUL BIDDER OR MANUFACTURERS TECHNICAL REPRESENTATIVE PRIOR TO DELIVERY OF PILOT MODEL TO THE WVDOH (If additional lines are needed, make copies of form.)

1. Define the terms of the standard warranty. If not offered, so state. (Attach copy) Two year bumper to bumper parts and labor warranty				
manu	facturer's representativ	be performed at DOH facilities and warranty service to be performed at refacility. List name and location of manufacturer's representative.		
3. Lis	D	ventories that are within the State of West Virginia. Also, list availability levels, if Specialty-State Street Follansbee, WV 26037		
	ring the term of warran	ty, list the guarantee discount to manufacturer's published list price for parts that wner		
A. B. C.	Terms: Net 30 Terms: Net 60 Terms: Net 90	Manufacturer's published list price less: 0 % discount Manufacturer's published list price less: 0 % discount Manufacturer's published list price less: 0 % discount		
5. Du Highv	_	ty, will all manufacturers or engineering improvements be submitted to Division ofXYESNO		
6. Du	ring the term of warran	ty, list the guaranteed rates charged for repair to the unit.		
A.	Shop Rate	\$_60.00 per mechanic hour		
В.	Travel Time Charge (Specify if one-way)	\$ 60.00 per mechanic hour One way port to port 60.00		
C	Mileage Charge (Specify if one-way	\$.485 per vehicle mile One way; port to port .485		
D,	Field Mechanic Rate	\$ 60.00 per mechanic hour		
E.	Specify period of tim	e that prices are in effect: Life of warranty		
F	Surcharge for miscellaneous items: 0 %			

X6.6	EVALUATION COMMITTEE REQUIREMENTS 26		
	Is all component specifications, product literature, component models provided for Evaluation Committee bid determination? YESNO		
X6.7	Will all parts, equipment, accessories, material, design and performance characteristics not specified herein, but which are necessary to provide a complete unit, be furnished with the unit and conform in strength, quality of material, and quality of workmanship to those which are advertised and provided to the market in general by the unit industry?		
X6.7.1	Are all parts and accessories adequate and regularly supplied as standard to be included except those which may be duplications of specifications herein, and except these by specification are not to be furnished? XYESNO		
X6.7.2 Are all standard safety features that are required by Federal and State statutes of law included? X YESNO			
X7.0	SPECIFICATIONS OF THE QUOTED UNIT The bidder should complete the following schedule in order for the Division to compare the actual bid unit to the specifications. Should the bidder except a requirement, then such exception may be only on the basis that such feature is not offered by the manufacturer. The Division will have the sole discretion as to whether the bidder's substitution meets the requirements of the specifications		
	Manufacturer: Swenson Spreader LLC Model: EV100		
X7.1	Is spreaders offered the commercial heavy duty, self contained, hopper type? X YES NO		
X7.2	Does spreader consist of a 12 gauge 304 stainless steel body, feeder conveyor, spinner disc, power drive, and all components necessary to make a complete operating unit? XYES NO		
X7.3	Is the unit capable of uniformly spreading sand, cinders, salt, calcium chloride, or other mixtures up to a width of forty (40) feet?		
X7.4	Body:		
X7.4.1	Is the body of 304 stainless steel construction 100% welded inside and outside of the body? NO		
X7,4.2	Capacity struck: 9 cubic yards		

hopper gate and conveyor chain exit point

Overall height: 54 inches

Inside width: 82 inches

X7.4.3

X7.4.4

X7.4.5

Inside length: 13 feet as measured from front of spreader hopper to the rear

X7.4.6	Are the body sides sloped approximately 45 degree pitch to insure free flow of materials to the conveyorX_YESNO
X7.4.7	Gauge of 304 stainless steel in sides and endgates is 12 Gauge.
X7.4.8	Is a formed double crimped section on top of body for additional support? X YES NO
X7.4.9	Sills constructed of gauge 304 stainless steel.
	Supported on rectangular formed cross sills X YES NO
X7.4.10	Number of 10 gauge full slope body side supports tying the cross sills with body sides? 6
X7.4.11	Are there four (4) 304 stainless steel 5/8 inch round lifting eyes X YES NO
	Is the inside eye opening designed to allow the passage of an alloy eye type Grade 80° 3/8 inch grab hook with a width dimension of 2 11/16 inch (with the top screen down in the rest position on top of the spreader) YES NO
	Two (2) on each side of spreader mounted and secured in a manner that the entire unit may be safely lifted for storage/installation purposes
X7.4.12	Is all necessary hardware stainless steel XYESNO
X7.4.13	Will a 12 gauge 304 stainless steel cabshield be mounted on the front of body to protect cab from falling material when loading with slope design to fall in hopper as spreader unloads? XYESNO
	Does cab shield extend 13 inches in front of the hopper at 45 degrees_X_YESNO
X7.4.14	Will a fold up ladder be mounted on the rear of spreader body at right side for easier access to top and secured in the folded position with two (2) flexible draw latches XYESNO
	Does the ladder have hand holds and non slip grip strut stepsX YESNO
X7.5 Co	onveyor:
X7.5.1	Is the conveyor located in bottom of hopper and capable of engaging material along its full length and moving material to rear adjustable metering gate? X YES NO
X7.5.2	Is conveyor continuous ladder type consisting of two parallel chains with cross bars on 4 2" centers made of 1/4" x 1-1/2" steel? X YESNO
X7.5.3	Is each cross bar formed and welded both top and bottom to chain links X YES NO
X7.5.4	Tensile strength of each chain: 21,000 pounds
X7.5.5	Overall width of chain conveyor: 22 inches

X7.5.6	Are replaceable rubber wear strips provided to prevent contact of the chain?	f mater			vi di 8
X7.5.7	Is a 10 gauge 304 stainless steel heavy-duty replaceable conveyor fitted?			/16" thick NO	
X7.5.8	Is the chain drive through 1-1/2" sprockets and shafting front and rear	? <u>x</u>	YES _	NO	
X7.5.9	Does conveyor have adjustment provisions at rear of spreader for			eral takeup NO	?
X7.5.10	Is additional 7 gauge 304 stainless steel reinforcing plate welded to lo area of the drive shaft, bearing, and idler bearing provided (if required	ngitudi: 1)?	nal web	s covering t YES	he NO
X7.5.11	Is material composition of adjustment mechanism stainless steel		X	_YES	_NO
X7.5.12	Is conveyor drive motor mounted on reduction gear box and has a	ratio o		ximately 5 YES	
X7.5.13	Does conveyor gear box have its drive shaft extended through rear			ng? NO	
X7.5.13.1	Is the shaft end machined to accommodate the application rate Dickey-John Automatic Control System, Model ICS-2000?			or theNO	
X7.5.13.2	Is the necessary oil seal included?	Х	YES_	NO	
X7.5.14	Is a 7 gauge stainless steel adjustable greasable screw jack type discharear to adjust the flow of material to the spinner?	rge gate	located	d at the bod	У
X7.5.15	Feedgate opening: 12 inches high x 18 inches wide				
X7.5.16	Is any and all exposed moving or rotating mass adequately shielde personnel while performing required operational adjustments incl	d in ore	ier to p	rotect x extended	
	input shaft when rate sensor is installed?			NO	
X7.5.17	Is the pintle conveyor chain heat treated form links with locked, no			s NO	
X7.6 Dis	tributor Spinner Assembly:		x 10.7		
X7.6.1	Diameter of urethane distributor discinches				
X7.6.1.1	Number of fins: 6 =				
X7.6.1.2	Are fins designed to obtain a controlled spread of materials from (40')?) to forty fo NO	et
X7.6.2	Is material guided from conveyor end to distributor disc by means material flow baffles, enclosed within the chute?	of an e			le

X7.6.3	Is the spinner vertically adjustable to a full 16 inches? and 44 inch spinner position below mounting surface?	X YES	NO	29
X7.6.4	Is a deflector baffle or diverter chute provided in an enclosed dis- assembly so it can be positioned in such a manner that material c spreader without striking spinner?	tributor sp an be unlo YES	aded from	er
X7.7 B	affles:			
X7.7.1	Are baffles provided to control direction and width of spread?		X_YES_	NO
X7.7.1.2	Are there four (4) sections over right, left, rear and front of sp	oinners?	X_YES_	NO
X7.7.2	Are sections easily adjusted from the full down to the horizontal]			
X7.8. Po	ower Drive;	<u>X</u> XF	SNO	,
X7.8.1	Is the power drive hydraulic type?	X YE	SNO	ı
X7.8.1.2	Are two (2) hydraulic motors provided - one (1) powering the powering the conveyor?	spinner as: _X_YE	sembly and SNO	one (1)
X7.8.2	Spinner hydraulic motor mounted below the spinner hopper assembly	? <u>x</u> YE	SNO	•
X7.8.3	The conveyor hydraulic motor of the orbital, low speed, hi-torque integear box?	egrally mou	nted to conv	eyor
X7.9 Scn	een Over Hopper:			
X7.9.1	Are four (4) sectional screens hinged to 10 gauge 304 stainless stee beam running longitudinally the full length of spreader hopper?	el 4 inch x (of inch formed inc	ed box
	If not specify:			
X7.9.2	Do screen sections have 3/8" diameter carbon steel rods welded formit openings with reinforcing bars at the center of each section?	ng 2-1/2" x _XYE	2-1/2" squa SNO	are
	If not specify:			
X7.9.3	Do screens increase overall height of spreader more than 7 inches dow		r? S _xNO	
X7.9.4	Are screens powder coated black	_X_YE	SNO)
X7 10 Is l	ighting in accordance with the attached sketch?	_ <u>XYE</u>	SNO	
X7.10.1	Is the combination and marker lights LED type	_X_YE	SNO	
X7.10.2	Are stop, tail, turn combination lights and marker lights shielded	× YE	sno	•
X7.10.3	Is strobe light "quad flash"	X YE	s no	1

X7.11	Hydraulic Components:			
X7.11.	Are all necessary fittings for complete hookup of spreader hydraulics to DOH dump trucks central hydraulic system provided? YESNO			
X7.11.	2 Are all fittings of the steel type and designed for hydraulic use? X YES NO			
X7.11.	Is the truck central hydraulic system complete to and including the rear manifold, located at the rear cross member of truck X YES NO			
	Will the rear manifold have attached to it one (1) 3/4" I.D. pressure line with 3/4" quick disconnect, one (1) 2" I.D. pressure line with 2 inch quick disconnect, one (1) 1" I.D. return line with 1 1/4" quick disconnect and disconnects will be "VH" series snap-tite. X YES NO			
	Will you supply proper mating quick disconnects, metal caps, and plugs for connection to truck manifold YES NO			
X7.12 Is an anodized 6061T6 aluminum grease manifold block mounted at the rear of the body which incorporates the front bearing grease extension tubes, rear bearing grease fittings and feedgate screw jack lubrication tube to allow for lubrication of the front bearings and feedgate screw jack from a single convenient location?				
	Will other fittings be placed at convenient location for normal maintenance X YES NO			
X7.12.	Do the anodized 6061T6 aluminum grease manifold block have a minimum of 6 ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parflex hoses to provide adequate one location greasing of the front and rear bearings and feed gate screw jackX YESNO			
	Are unused ports properly pluggedX_YESNO			
X7.12.	Are hoses used in the grease manifold system Parflex hose by Parker Hannifin or equal, with 1/8 inch I.D., 0.34 inch maximum O.D., a maximum working pressure of 2500 PSI and a minimum burst pressure of 10,000 PSI?			
	Are hose assemblies held in place by a sufficient number of rubber cushioned hose clamps? XYESNO			
X7.13 (10")	Is one (1) piece of angle iron 3/8" x 4" X 90" and two (2) pieces of 1" round shafting ten inches long provided but not installed for each unit?			

Dro	op N Loc top screens require no tools to install
or	remove
Paint:	
Descri	be method of painting parts and accessories that are not required to be stainless or rustproof
Top	screens will be powdercoated
All	other paint products are environmentally friendly
4	

X YES ___NO

X7.17 Does unit conform to the advertising guidelines?

AGREEMENT ADDENDUM

WV-96 Rev. 5/94

In the event of conflict between this addendum and the agreement, this addendum shall control:

- 1. ARBITRATION Any references to arbitration contained in the agreement are hereby deleted. Disputes arising out of the agreement shall be presented to the West Virginia Court of Claims.
- 2 HOLD HARMLESS. Any clause requiring the Agency to indemnify or hold harmless any party is hereby deleted in its entirety.
- 3. GOVERNING LAW The agreement shall be governed by the laws of the State of West Virginia. This provision replaces any references to any other State's governing law.
- 4 TAXES Provisions in the agreement requiring the Agency to pay taxes are deleted. As a State entity, the Agency is exempt from Federal, State, and local taxes and will not pay taxes for any Vendor including individuals, nor will the Agency file any tax returns or reports on behalf of Vendor or any other party
- 5 PAYMENT Any references to prepayment are deleted Payment will be in arrears
- 6 INTEREST Should the agreement include a provision for interest on late payments, the Agency agrees to pay the maximum legal rate under West Virginia law.

 All other references to interest or late charges are deleted
- 7 RECOUPMENT Any language in the agreement waiving the Agency's right to set-off, counterclaim, recoupment, or other defense is hereby deleted.
- FISCAL YEAR FUNDING. Service performed under the agreement may be continued in succeeding fiscal years for the term of the agreement, contingent upon funds being appropriated by the Legislature or otherwise being available for this service. In the event funds are not appropriated or otherwise available for this service, the agreement shall terminate without penalty on June 30. After that date, the agreement becomes of no effect and is null and void. However, the Agency agrees to use its best efforts to have the amounts contemplated under the agreement included in its budget. Non-appropriation or non-funding shall not be considered an event of default.
- 9 STATUTE OF LIMITATION Any clauses limiting the time in which the Agency may bring suit against the Vendor, lessor, individual, or any other party are deleted
- 10. SIMILAR SERVICES Any provisions limiting the Agency's right to obtain similar services or equipment in the event of default or non-funding during the term of the agreement are hereby deleted.
- 11. ATTORNEY FEES. The Agency recognizes an obligation to pay attorney's fees or costs only when assessed by a court of competent jurisdiction. Any other provision is invalid and considered null and void.
- 12. ASSIGNMENT Norwithstanding any clause to the contrary, the Agency reserves the right to assign the agreement to another State of West Virginia agency, board or commission upon thirty (30) days written notice to the Vendor and Vendor shall obtain the written consent of Agency prior to assigning the agreement
- 13 LIMITATION OF LIABILITY The Agency, as a State entity, cannot agree to assume the potential liability of a Vendor. Accordingly, any provision limiting the Vendor's liability for direct damages or limiting the Vendor's liability under a warranty to a certain dollar amount or to the amount of the agreement is hereby deleted. In addition, any limitation is null and void to the extent that it precludes any action for injury to persons or for damages to personal property.
- 14 RIGHT TO TERMINATE Agency shall have the right to terminate the agreement upon thirty (30) days written notice to Vendor.
- 15 TERMINATION CHARGES. Any provision requiring the Agency to pay a fixed amount or liquidated damages upon termination of the agreement is hereby deleted. The Agency may only agree to reimburse a Vendor for actual costs incurred or losses sustained during the current fiscal year due to wrongful termination by the Agency prior to the end of any current agreement term
- 16. RENEWAL Any reference to automatic renewal is hereby deleted. The agreement may be renewed only upon mutual written agreement of the parties.
- 17 INSURANCE Any provision requiring the Agency to insure equipment or property of any kind and name the Vendor as beneficiary or as an additional insured is bereby deleted.
- 18 RIGHT TO NOTICE Any provision for repossession of equipment without notice is hereby deleted. However, the Agency does recognize a right of repossession with notice.
- 19. ACCELERATION Any reference to acceleration of payments in the event of default or non-funding is hereby deleted.
- 20. AMENDMENTS All amendments, modifications, alterations or changes to the agreement shall be in writing and signed by both parties. No amendment, modification, alteration or change may be made to this addendum without the express written approval of the Purchasing Division and the Attorney General.

ACCEPTED BY: STATE OF WEST VIRGINIA	YENDOR
Spending Unit	Company Name: Swenson Spreader LLC
Signed:	Signed:
Title:	Title: Government Sales Contr.
Date:	Date: 11/9/07

STATE OF WEST VIRGINIA Purchasing Division

PURCHASING AFFIDAVIT

West Virginia Code §5A-3-10a states: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Debtor" means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions. "Political subdivisions means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. "Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

EXCEPTION: The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

LICENSING: Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY: The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendors should visit www.state.wv.us/admin/purchase/privacy for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and are in compliance with the requirements as stated.

Vendor's Name: Swenson Spreader LIC	
Authorized Signature:	Date: 11-09-07
Purchasing Affidavit (Revised 95/15/07)	



Request for REGINUMBER Quotation

708EC005

ADDRESS:CORRESPONDENCE TO ATTENTION OF MICHAEL AUSTIN

304-558-2402

TYPE NAME/ADDRESS HERE Swenson Spreader LLC 127 Walnut St. Lindenwood, IL 61049

RFQ COPY

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201 304-472-1750

11/01, O OPENING DATE		11/13/	2007		1		В	ID C	PENING	TIME	01	:30PM	
LINE		VIIIY	UOP	CAT NO		ITEMNU				PRICE			MOUNT
					202020000			0010000000			300,000		
				ADDEN	DUM	NO. 3	L						
	CHANGE	S TO T	NE SB	FOTET	CATT	UNG E)	1E A	TTACHED				
		- 10 1	11. 31	-011 1	SA 12	. CHO	LIC 11	יב ר	TIACHED	•			
	BID OP	ENING	DATE	AND T	IME	REMAI	NS 1	1/13	/07 01:	30 P.M	.		
	NO OTH	ER CHA	NGES.										
01	•		EA		765-	66							
	NINE C	JBIC Y	ARD S	TAINL	ESS	STEEL	(HYI	RAU	LIC) SP	READER	-		
	*****	THIS	IS T	HE EN	D OF	RFQ	708	ECO	05 ****	€¥ TOT#	AL:		14
			•										
				3									
:											j		
			}										
		j									-		
:		İ										•	
				2	2089.8	***		(A) (A) (A) (A)	The second discount of the second	10010000000000000000000000000000000000			
NTURE	72		حر 1	They	ense 6	UE FOR T	FRMS AND	888 888	локs -825-73	23 PA	TE C	- 07	
	- Am	/ ISSI	//	//		1			1	20 14	1-3	-07	

GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

- 1. Awards will be made in the best interest of the State of West Virginia.
- 2. The State may accept or reject in part, or in whole, any bid
- 3. All quotations are governed by the West Virginia Code and the Legislative Rules of the Purchasing Division.
- 4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee
- 5. All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
- 6. Payment may only be made after the delivery and acceptance of goods or services.
- 7. Interest may be paid for late payment in accordance with the West Virginia Code.
- 8. Vendor preference will be granted upon written request in accordance with the West Virginia Code.
- 9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes
- 10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
- 11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
- 12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
- 13. BANKRUPTCY: In the event the vendor/contractor files for bankruptcy protection, this Contract may be deemed null and void, and terminated without further order.
- 14. HIPAA Business Associate Addendum The West Viginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (http://www.state.wv.us/admin/purchase/vrc/hipaa.htm) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor

INSTRUCTIONS TO BIDDERS

- 1. Use the quotation forms provided by the Purchasing Division
- 2. SPECIFICATIONS: Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as EQUAL to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
- 3. Complete all sections of the quotation form.
- Unit prices shall prevail in cases of discrepancy.
- 5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
- 6. BID SUBMISSION: All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Fallure of the bidder to deliver the quotations on time will result in bid disqualifications.

SIGNED BID TO:

Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

ADDENDUM #1

708EC005

OPEN END CONTRACT

9 CUBIC YARD STAINLESS STEEL (HYDRAULIC) SPREADER

CHANGES TO SPECIFICATIONS:

ADD:

7.4.13.1

A 300 series stainless steel grab handle must be mounted to the drivers side spill shield side plate at a convenient location to assist operator when climbing atop spreader to remove "chunks or debris".

FROM:

7.4.14 A fold up ladder shall be mounted on rear of spreader body at right for easier access to top and secured in the folded position with two (2) flexible draw latches. Ladder to be equipped with hand holds and non-slip grip strut steps.

IO.

7.4.14 A fold up stainless steel ladder shall be mounted on rear of spreader body at right for easier access to top. Ladder to be equipped with hand holds, non-slip strut steps, and manufacturers locking mechanism to lock ladder in up position when not in use.

ADD:

7.4.14.1 A 300 series stainless steel grip strut step plate shall be mounted on rear of spreader "spinner" housing frame, above rear baffle, full width of spinner housing.

ADD:

7.4.15 A work light to be mounted on cab shield for night shift visibility of spreader grating with weatherproof wiring.

FROM:

7.5.4 Tensile strength of each chain shall be 21,000 pounds minimum

TO:

7.5.4 Tensile strength of each chain strand shall be 21,000 pounds minimum.

Addendum #1 708EC005

FROM:

7.5.13 Conveyor box must have its drive shaft extended through the rear of gear housing, and the shaft end machined to accommodate the application rate sensor shaft for the Dickey-John Automatic Control System, Model ICS-2000. The necessary oil seal included

TO:

7.5.13 Conveyor gear box motor shall have an integral speed sensor

FROM:

7.6.3 Spinner shall be vertically adjustable approximately 16" and provide approximately a 20" to 38" spinner position below the mounting surface.

TO:

7.6.3 Spinner shall be vertically adjustable approximately 18 inches and provide approximately a 20 inch to 38 inch spinner position below the mounting surface.

FROM:

7.7.1 Baffles shall be provided to control direction and width of spread. To have four (4) sections over right, left, rear, and front of spinners.

TO:

7.7.1 Baffles shall be provided to control direction and width of spread. To have four (4) sections over right, left, rear, and front of spinners. Front spinner baffle shield (truck side) can be stationary.

FROM:

7.10 Lighting to be in accordance with the attached sketch.

TO:

7.10 Lighting to be in accordance with the attached sketch and wiring schematic

Addendum #1 708EC005

FROM:

7.11.3 The truck central hydraulic system, supplied and installed by another vendor, will be complete to and including the rear manifold, located at the rear cross-member of truck. The rear manifold will have attached to it one (1) 3/4" I.D. pressure line with 3/4" quick disconnect, one (1) 1/2" I.D. pressure line with 1/2" quick disconnect, one (1) 1" I.D. return line with 1-1/4" quick disconnect. The quick disconnects will be "VH" series snap-tite. The spreader vendor shall supply proper mating quick disconnects, metal caps, and plugs for connection to truck manifold.

TO

7.11.3 The truck central hydraulic system, supplied and installed by another vendor, will be complete to and including the rear manifold, located at the rear cross-member of truck. The rear manifold will have attached to it one (1) 3/4" I.D. pressure line with 3/4" quick disconnect, one (1) 1/2" I.D. pressure line with 1/2" quick disconnect, one (1) 1" I.D. return line with 1-1/4" quick disconnect. The quick disconnects will be "VH" series snap-tite. The spreader vendor shall supply male quick disconnects, metal caps, and plugs for connection to truck manifold.

FROM:

7.12 An anodized 6061T6 aluminum grease manifold block shall be mounted at the rear of the body incorporating the front bearing grease extension tubes, rear bearing grease fittings, and feedgate screw jack lubrication tube to allow for lubrication of the front bearings and feedgate screw jack from a single convenient location. Other fittings shall be placed at convenient location for normal maintenance.

TO:

An anodized 6061T6 aluminum or 304 stainless steel grease manifold block shall be mounted at the rear of the body incorporating the front bearing grease extension tubes, rear bearing grease fittings, and feedgate screw jack lubrication tube to allow for lubrication of the front bearings and feedgate screw jack from a single convenient location. Other fittings shall be placed at convenient location for normal maintenance.

Addendum #1 708EC005

FROM:

7.12.1 The anodized 6061T6 aluminum grease manifold block shall have a minimum of six (6) ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parslex hoses to provide for adequate one location greasing of the front and rear bearings and feed gate screw jack. Any unused ports are to be properly plugged.

TO:

7.12.1 The anodized 6061T6 aluminum or 304 stainless steel grease manifold block shall have a minimum of six (6) ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parflex hoses to provide for adequate one location greasing of the front and rear bearings and feed gate screw jack. Any unused ports are to be properly plugged.

Wiring Code 7 way Trailer End

#	Color	Gage	Circuit Function	connector interior
1	white	10	common ground	
2	blue	12	STROBEL	E DE
3	green	14	tail/running lights	
4	black	10	battery charge (+)	
5	red	14	left turn/stop	
6	brown	14	right turn/stop	THE THE PARTY OF T
7	yellow	14	auxillary/Work LighT5	

10/23/2007

ADDENDUM #1

708EC005

OPEN END CONTRACT

9 CUBIC YARD STAINLESS STEEL (HYDRAULIC) SPREADER

CHANGES TO BIDDER'S EVALUATION REPORT:

ADD:	
X7.4.13.1	Is a 300 series stainless steel grab handle mounted to the drivers side spill shield side plate at a convenient location to assist operator when climbing atop spreader to remove "chunks or debris" X YES NO
FROM: X7.4.14	Will a fold up ladder be mounted on the rear of spreader body at right side for easier access to top and secured in the folded position with two (2) flexible draw LatchesYESNO Does the ladder have hand holds and non slip grip strut stepsYESNO
TO: X7.4.14	Is a fold up stainless steel ladder mounted on rear of spreader body at right for easier access to top. X YES NO
	Is the ladder equipped with hand holds, non-slip strut steps, and manufacturers locking mechanism to lock ladder in up position when not in use. X YES NO
ADD: X7.4.14.1	Is a 300 series stainless steel grip strut step plate mounted on rear of spreader "spinner" housing frame, above rear baffle, full width of spinner housing YESNO
ADD: X7,4.15	Is a work light mounted on cab shield for night shift visibility of spreader grating

Addendu 708EC0	
FROM: X7.5.4 T	ensile strength of each chain: pounds
IO: X7.5.4 T	ensile strength of each chain strand: 21,000 pounds
FROM: X7.5.7	Is a 10 gauge 304 stainless steel heavy duty replaceable conveyor plate at least 3/16" thick fitted?NO
TO: X7.5.7	Is a 10 gauge 304 stainless steel heavy duty replaceable conveyor plate fitted? X YES NO
FROM: X7.5.13	Does conveyor gear box have its drive shaft extended through rear of gear housing?
	Is the shaft end machined to accommodate the application rate sensor shaft for the Dickey John Automatic Control System, Model ICS-2000? YES NO Is the necessary oil seal included? YES NO
TO: X7513	Does the conveyor gear box motor have an integral speed sensorYESNO
FROM: X7.6.3	Is the spinner vertically adjustable to a full 16 inches? YES NO And inch spinner position below mounting surface?
ΤΟ: X7.6.3	Spinner is vertically adjustable 16 inches and provides a 44 inches spinner position below the mounting surface.

Addendum #1 708EC005

	Will you furnish the male quick disconnects, metal ca connection to truck manifold?	
ΓΟ: X7.11.3	Will the hoses mate with the quick disconnects on the ce truck?	ntral hydraulic system of the X YESNO
FROM: X7.11.3	Will the hoses mate with the quick disconnects on the ce truck?YESNO Will you furnish proper mating quick disconnects, metal connection to truck manifold?YESNO	·
TO: X7.10	Is lighting in accordance with the attached sketch and wi	iring schematic? X YES NO
FROM: X7.10	Is lighting in accordance with the attached sketch?	YESNO
	Is front spinner baffle shield (truck side) stationary	x YES NO
X77.1.2	Are there four (4) sections over right, left, rear and f	ront of spinnersX_YESNO
IO: X7.7.1	Are baffles provided to control direction and width o	of spread <u>X</u> YESNO
FROM: X7.7.1 X7.7.1.2	Are baffles provided to control direction and width of Are there four (4) sections over right, left, rear and f spinners? YES NO	of spread?YESNO

Addendu 708EC00	
FROM: X7 12	Is an anodized 6061T6 aluminum grease manifold block mounted at the rear of the body which incorporates the front bearing grease extension tubes, rear bearing grease fittings and feedgate screw jack lubrication tube?YESNO Will other fittings be placed at convenient location for normal maintenanceYESNO
TO: X7.12	Is an anodized 6061T6 aluminum _X_YESNO (OR) 304 stainless steelYES _X_NO grease manifold block mounted at the rear of the body which incorporates the front bearing grease extension tubes, rear bearing grease fittings and feedgate screw jack lubrication tube to allow for lubrication of the front bearings and feedgate screw jack from a single convenient location?X_YESNO
	Other fittings are placed at convenient location for normal maintenance X YES NO
FROM: X7.12.1	Do the anodized 6061T6 aluminum grease manifold block have a minimum of 6 ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parflex hoses to provide adequate one location greasing of the front and rear bearings and feed gate screw jack? YESNO Are unused ports properly pluggedYESNO
TO: X7:12.1	The anodized 6061T6 aluminum _X_YESNO (OR) 304 stainless steel grease manifold blockYESX_NOhas ports tapped to accept three (3) 1/8 inch straight grease zerks and three (3) 1/8 inch grease Parflex hoses to provide for adequate one location greasing of the front and rear bearings and feed gate screw jack _X_YESNO
	Are any unused ports properly plugged X YES NO

Page ____ of ____

	SIGN IN SHEET	
F I	PRQ# 708 FC 00.5 Date: 10/24/07	
Firm & Representative Name:		Phone, Fax, & E-Mail:
1 W TRACTOR	_	P346-530(
GARY GRADY	CHARLESZOW LW	_ F346-5305
	253	mail cutractore MSN-Com
2 Benson Bubba Smith	•	1 P 483-7093 24181 F 863-3629
		mail RSmithpbonsonintloon
3. Swenson Sprender. Ceeorse Balley	LINDENWOOD, IT 61049	P <u>8/5 -393 4/45 5</u>
109043151	E-1	mail <u>spander</u> , com
4 Middletown Track	1 2032 Farmont	Aner 304-366-4690
M: Ke Share	Farment WV 26	Anc P 304-366-4690 554 F 304 -366-4698
	E⊹ı	nail Mike @ Middle ton track
5. Middletoray Trautor Sales	2032 Fairment AVE	P 304-366-4690
Zach Morsh	Fairment, WW 26554	f 304-366-4698
	E-r	nail Zach & Middletown Tractor con

Please print or write legibly!

Your fax # is essential to contact you timely!

Page	of
------	----

	SIGN IN SHEET	
R D	FQ#ate:	
Firm & Representative Name:	Mailing Address: Ph	
. 1 MONTOE T/E	1057 W 7745F	P\$00-880-0109
20NACO Kesshen	Montree, wi	F608-328-6390
,	E-ma	il <u>Deliben</u>
1. 11		MONTH TRUCK COM
2 Len Hencock	1825 EARL COME BY.	P 421307
LH Tones Equips	Mersenten 26508	F_ 797 6641
VACOS 50325 61		LEND LHJUNES ICUL
3 Logan Corporation	Rt. 2 Box 924 Clarksburg, WV 2636	P 304-641-2011
Joe Dinaldo	Clarksburg, WV 2636	71 F 304-623-5676
	E-mai	Jdinaldo @ logancorp. c
4 BONNELL HODISMUS	1385 FRANKLIN GLOVE RZ	800-851-9664 P 815-284-3819
	DIXON, IL GIOZI	F 815-284-8815
	E-mail	joebebonnell.com
5		P
		F
	E-mail	

Please print or write legibly!

Your fax # is essential to contact you timely!

ADDRESS CORRESPONDENCE TO ATTENTION OF



State of West Virginia Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

Request for REGINUMEER

708EC005

MICHAEL AUSTIN 304-558-2402

PAGE 1

888-825-7323 *917095331 SWENSON SPREADER LLC 127 WALNUT ST

LINDENWOOD IL 61049 DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

26201

DATE PR		JEF	MS OF SAL	É	SHIPVIA		FØB		FREIGHTTERMS
11/14 DOPENING DATE	/2007	 11/20 7	'2007		LBID	OPE	NING TIME	d1:30	PM-
LINE	QUAI	AMIA	UGP	CAT NO	REMNUMBER		UNITPRICE		AMOUNT
<u> </u>				ADDEN	DUM NO. 2				
	CHANGE	s to 1	HE SI	ECIFI	CATIONS				
	6.5 -	WARRAN	TY AN	D SEF	VICE POLICY				
	DISREG	ARD L	ST PA	RAGRA	PH.				
	X6.5 W	VARRÂN'	Y ANI	SERV	ICE POLICY QUES	NOZES	NAIRE		
	PAGE 2	25 MUS	BE (OMPLE	TED AND SUBMITT	ED W	ITH THE BID),	
	BID OF	ENING	DATE	AND 1	IME CHANGED				
	FROM:	11/13	/07 F	T 1:3	0 P.M.				
	TO:	11/2	/07 Z	T 1:3	O P.M.				
	Anna managan ng ang ang ang ang ang ang ang an	NO (THER	CHANG	ES				
001			EΆ		765-66				
	NINE (l CUBIC	ARD :	MIAT	ESS STEEL (HYDE	RAULI	C) SPREADER	5	Λ
	EXHIB]	IT 10			REQUISITION	NO.	708EC005	- up u .	
	ADDENI	DUM AC	KNOWLI	₹	SNT				
GNATURE		>		SPE PE	VERSE SIDE FOR TERMS AND C			DATE 11/1	.6/07
RE Gov	Sales	! / V	€ IN 20-	21763	19 RT NAME AND ADDRES				E NOTED ABOVE



*917095331

127 WALNUT ST

LINDENWOOD IL

SWENSON SPREADER LLC

State of West Virginia Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

61049

888-825-7323

Request for REGINDMEER 708EC005

2

ADDRESS CORRESPONDENCE TO AFFENTION OF

MICHAEL AUSTIN 304-558-2402

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201

DATE PRINTED	TER	MS OF SAL	E	SHEV	A		FOE		FREIC	HIETERMS
11/14/2007	1 1/20/	'2007			BID	OPEN:	ING TI	ME d	1:3CPM	
BID OPENING DATE:	EANTITY	UOP	CAT NO	ILEW NOW	30 00 000 66668		UNCEPRIO	ricensia da da		MOUNT
I HEI ADDEI PROPO ADDEI NO 40 NO NO NO NO NO EPROPO EPROPO I UN ADDE VEND REPROPORAL AND TIMEO	REBY ACHUOUM(S) DSAL, PI NDUM NO. X X X A DERSTANI NDUM(S) DR MUST ESENTAT DISCUS ANY STA' RMATTON	NOWLE AND H ANS A 'S: CLEAR ION MAY E ION E IE PER	DGE FAVE MID/OF	ECEIPT OF ADE THE N SPECIFIC SE FOR RE DERSTAND ASSUMED ETWEEN VEL IS NOT WRITING A FFICIAL A SWEET SW	THE FORECESSAR ATION, ONFIRM TO BE MENDOR'S BINDING ADDENDUM ADDENDUM SOR SOR SOR SOR SOR SOR SOR SOR SOR SOR	Y REETC. HE ROY OF VERENCE OF TO TO TO TO TO TO TO TO TO TO TO TO TO	ECEIPT BIDS RBAL DURING ESENTA NLY THE BINDING CURE	S TO ME ANY ATIVES IE		
			 Seere	VERSE SIDE FOR	TERMS AND CO	L ONDITION	5			
SIGNATURE		<u> </u>			TELEPHONE			DATE	1	
TITLE		FEIN			<u> </u>	Ĭ.	ADDRE	SS CHANG	ES TO BE NO	TED ABOVE

WV PURCHASING ACA SECT Fax 304-558-4115

Ö

Nov 14 2007 09:54am P006/006



VENDOR

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

Request for PRONUMBER 708EC005

. PAGE 3

ADDRESS CORRESPONDENCE TO ATTENTION OF

MICHAEL AUSTIN 304-558-2402

*917095331 888-825-7323 SWENSON SPREADER LLC 127 WALNUT ST LINDENWOOD IL 61049

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 26201 304-

DATE PRIN	EO	TEA	MS OF SAL	.		SHP.VI	4		FOB.		FREIGHT TERMS
11/14/		11/207	/ ว ก ก ว -					OPENTA	G TIME		:30PM
BID OPENING DATE:	12214204555555	File Heldings and in	francisco de la constant	AAT S	e erekenikasi	- Biblios Biblios Biblios Biblios Biblios Biblios	**************************************	Colorado Nación de	an recognistic de la la casa		
LINE	QUA	NITTY	UOP	CAT. NO		ITEM NUM	BEA:		UNITPRICE		AMOUNT
	REV.	11/96									
		, -					į				
	1									1	
			1								
}	****	* THIS	IS T	HE EN	D OF	RFQ	708EC	005 **	**** TO	TAL:	
]											
]]								
Ì							1	1			
<u> </u>				[
				[İ	
			1								
}			-		}						
}								ŀ			
				1							
1					1						
	}										
				ļ							
1											
]										
	}										
		***								İ	
				i Seere	VERSE S	DE FORT	RMS AND CO	NBITICNS			
SIGNATURE	والمدار وتنز وتعتقد والمساورة	· · · · · · · · · · · · · · · · · · ·	فرانيك فالمشاب بالمحسول ليوسو				TELEPHONE			DATE	
MIE		Į.	EN						ADDRESS CH	ANGES	TO BE NOTED ABOVE



State of West Virginia Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for PRONUMER 708EC005

1

ADDRESS CORRESPONDENCE TO ATTENTION OF MICHAEL AUSTIN 304-558-2402

*917095331 SWENSON SPREADER LLC 127 WALNUT ST LINDENWOOD IL

888-825-7323

61049

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV 304-472-1750 26201

DATEPRINT		TERU	IS OF SALE		SHIPVIA		000 2 12 500 2 2 2	FOB:	FREIGHTTERMS
11/14/	2007	11/20/	2007			-BID	OPE	NING TIME	01:30PM
BID OPENING DATE:					ITEM NUMBER			UNIT PRICE	TNUOWA
LINE	GUA	NTPTY	UOP NO,		33 230 (Addrage)				
	IF THI PURCHA PAGE I FOR BI SEALE	E ORIGI ASING I	TY AND SENAL BID FOR THE ADDITIONS 11/20	RVICE	EN SUBN USLY, E	ITTEL IDDER PURCH	TO S M ASI		
0001		1 CUBIC Y	EA ARD STAII	765-	STEEL		-	(C) SPREADER	
					REQUIS	ITION	NO	708EC005	
			NOWLEDGE	i					
	I TO TO TO TO	TENERAL / 423 \	NOWLEDGE AND HAVE LANS AND/	MADE	THE NE	、しせつつか	TAT .	OWING CHECKEI REVISIONS TO C.	MA
	ADDEN	OM MUCI	's:						
					SIDE FOR TE	RMS AND C	end in	ons:	
SIGNATURE			= D	WEACUOE	17	ELEPHONE 888-8		fL	11/16/7
			FEIN			000-0	<u> </u>	,	IGES TO BE NOTED ABOVE
Gov Sa	lés /			6319	NAT ALITY A	DDDEES	2 JAI 9	SPACE ABOVE LAB	
W	HEN RES	\$PONDING	i TOKRFQ, INS	ERT NA	MF AND A	ししょう	⊃ #V ≤	31 MAN WOOD AT 174P	





State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130 Charleston, WV 25305-0130

Request for MFONONBER Quotation

708EC005

888-825-7323 *917095331 SWENSON SPREADER LLC 127 WALNUT ST

LINDENWOOD IL 61049 ADDRESS CORRESPONDENCE TO ATTENTION OF MICHAEL AUSTIN 304-558-2402

DIVISION OF HIGHWAYS EQUIPMENT DIVISION ROUTE 33 BRUSHY FORK ROAD BUCKHANNON, WV

DATE PRINTED	TERMS OF BALE	SHIPVIA	EQ.E	FREIGHT JERMS
11/14/2007	- 1-3-0 / 3 0 0 - 3	BTD: (OPENING TIME OF	:30PM
BID OPENING DATE:				
INE QUANTITY NO. 1 40 2 NO. 3 NO. 4 NO. 5 I UNDERSADDENDUM VENDOR MEPRESEMORAL DISAND ANY INFORMAT	STAND THAT FAII M(S) MAY BE CAU MUST CLEARLY UN NTATION MADE OF SCUSSION HELD F STATE PERSONNE	URE TO CONFIRM TO SE FOR REJECTION DERSTAND THAT AN ASSUMED TO BE METWEEN VENDOR'S IN IS NOT BINDING WRITING AND ADDEFFICIAL ADDENDUM	HE RECEIPT OF TH OF BIDS. Y VERBAL ADE DURING ANY REPRESENTATIVES ONLY THE D TO THE	AMQUNE
REV. 11		11/16	/07 TE	
TITLE	FEN		ADDRESS CHANGES	TO BE NOTED ABOVE
11114-			Libringa at hillians	

General:	Comply	Exception
This specification shall describe a v-box material spreader capable of hauling and spreading free flowing granular materials from a width of four(4) to forty(40) feet.		
This unit will consist of a hopper, discharge/feed conveyor, spinner disc, power drive, and all components necessary to make a complete operating unit.		
The successful vendor shall provide a complete proposal drawing accurately showing the exact model to be provided including all options, and units loaded and unloaded weights and centers of gravity These drawings shall be provided within 48 hours of award.		
All stainless steel used in the production of this unit shall be corrosion resistant, non magnetic stainless steel		
The manufacturing and production of this unit shall be of the best commercial practices and only materials of the finest quality are to be used.		
Bidders must submit with their bid complete specifications on the unit they propose to furnish.		
This unit shall be factory ready to accept or retrofit servo controls.		
Any added options will be shipped loose for dealer installation		
Body: This spreader shall be constructed of 12 ga stainless steel with a double crimped top edge forming a 2" section for greater rigidity		
The hopper body length shall not be less than feet with two feet of longitudinal overhung for supporting the spinner assembly		
The hopper shall not be more than 82" outside width with the overall height not greater than"		
The capacity of the hopper shall be cubic yards water level full		
The body sides and ends shall be 12 ga stainless steel and have not less than forty five degree pitch to ensure free flow of material to the conveyor		
The body longitudinals shall be manufactured of 10 gauge stainless steel and be slotted for easy gearbox/driveshaft removal.		
The channel cross sills shall be 7 ga stainless steel that ties the lower edge of the longitudinals to each side support		

These cross supports shall be wide enough to allow the hopper	Comply	Exception
box to be mounted on various width truck frames or slide into a dump box		
A 4" x 6" formed stainless steel bolt in box beam will be elevated 3" above the top edge of the hopper, thus providing a longitudinal brace and hinge point for the top screens		
There shall be a 3" formed stainless channel welded under the H beam to each hopper side for additional side support		
The body and conveyor shall be electrically welded into a rugged solid unit		
A 10 ga stainless steel 12" x 18" stainless steel feedgate and ruler shall be provided at the rear of the hopper to allow for accurate discharge.		
The screw type jack with stainless steel crank shall be provided and be self locking.		
There shall be 12 ga stainless steel formed side supports that extend the full angle height spaced on 2' centers		
A heavy duty stainless steel lift hook shall be provided at each corner		
The rear endplate shall be reinforced inside and supported outside to give it maximum strength		
All stainless steel joints shall be welded with stainless steel welding wire.		
All sub-assemblies shall be secured with stainless steel hardware		
A mounting kit shall be provided to safely secure the hopper to the truck		
Conveyor: The conveyor system shall be of the barflight type running longitudinally with the body feeding material to the feedgate opening		
The overall conveyor width shall not be less than 24".		
To protect the chain link strands, the top edge of the longitudinals shall be formed down over the strands exposing only the drag chain bar to the material		

	Comply	Exception
The conveyor floor shall be manufactured of 10 ga stainless steel, be of the flat design, replaceable with rollover edges		
The conveyor floor shall be supported on 12 ga stainless steel cross angles spaced approximately 12" apart		
The gearbox shall have hardened and ground bronze gears mounted on a 1 1/2" diameter drive shaft and supported on tapered roller bearings.		
These gears shall be machine cut and mounted in anti-friction sealed bearings and running in oil		
The gearbox ratio shall be 25:1		
The drive sprockets shall be 6 tooth drop forged steel sprockets keyed to the 1 1/2" diameter drive shaft.		
The idler sprockets shall be 6 tooth drop forged steel, one sprocket welded and one sprocket floating on 1 1/4" diameter idler shaft.		
Both the conveyor shafts shall have heavy duty, dust sealed, self aligning ball bearings equipped with grease fittings		
A heavy duty spring loaded idler adjustment assembly shall provide approximately 4" of adjustment for proper conveyor chain tension		
An inverted vee shall be included to reduce the amount of weight on the conveyor chain.		
Conveyor Chain: The conveyor chain shall be heat treated 2 25" pitch self cleaning pintle type with 7/16" pins, and a tensile strength per strands of 21,000 pounds		
This chain shall utilize 3/8" x 1 1/2" x 18 3/4" crossbars welded on both the top and the bottom to every other link making an overall width of 22".		
The cross bars will be positioned on approximately 4 5" centers		
Spinner Assembly: The distributor disc shall be 18" in diameter, made of 7 ga abrasive resistant steel and have six replaceable formed 7 ga carbon steel fins		

	Comply	Exception
This disc shall be mounted on a cast iron hub connected directly to the hydraulic motor.		
The material shall be guided from the conveyor to the distribution disc by means of one 10 ga stainless steel adjustable, internal, material deflector.		
The entire spinner assembly shall be manufactured of not less than 12 ga stainless steel, adjustable in height to accommodate either the slip in v-box or chassis mounted v-box		
There shall be a front fixed shield, and three adjustable baffles, which are removable without the use of tools		
The entire spinner assembly shall be capable of repositioning without the use of special tools to allow for cleaning, storage and unloading from the conveyor without interference from the spinner assembly.		
Power Drive: The conveyor chain shall be driven through the worm drive gearbox by a low speed, high torque " orbital type" hydraulic motor		
This motor shall be directly coupled to the gearbox and protected from the elements by the housing		
The gearbox shall have provision for a servo sensor integral with the drive shaft.		
Top Screens: The top screens shall be constructed of 3/8" steel rods welded to form a 2.5" square mesh, which is framed by a combination of 1/4" x 1 1/2" flat steel and 2" angle iron with the edge supports reinforced by 1/4" x 1" flat bars.	· [
Top screens shall be removable and use the "Drop and Lock" type hinge. Screens utilizing hardware that may vibrate loose are not acceptable		
Painting: All stainless steel metal shall be left unpainted. Carbon steel components shall be chemically cleaned and coated with a lead free rust inhibitive primer and painted lead free black enamel.		

EV100 SS Stockbox 4/1/2007

Swenson Meets warranty specified by WV specifications. Below is our standard warranty policy.



Dealers have the responsibility of calling to the attention of their customers the following warranty prior to acceptance of an order from that customer for any SWENSON® product.

WARRANTY

WHAT THIS WARRANTY COVERS

Swenson Spreader LLC (hereinafter "Swenson") is committed to assuring Customer satisfaction with the Spreader (hereinafter "Product"). Swenson warrants to the original owner (hereinafter "Purchaser") of the Product to be free from defects in material and workmanship for the following term: Swenson warrants ALL PARTS AND ASSEMBLIES to be free from defects in material and workmanship for a period of one year from the date of purchase. Installation of the Product must be in accordance with Swenson's instructions. This warranty extends to the Purchaser and may not be assigned without the prior written approval of Swenson; except a distributor may assign this warranty to the first titled owner of the Product.

If a Product has a defect in material or workmanship covered by the warranty, Swenson will (at our option) either replace or repair said part. Swenson's has sole discretion as to repair of defects covered by this warranty, or replacement of the Product Swenson's responsibilities as described herein shall not exceed the amount of the purchase of the Product.

WHAT THIS WARRANTY DOES NOT COVER

Swenson's warranty does not extend to Product which have been misused, abused, improperly installed, repaired with non-genuine Swenson parts, improperly cared for, if materials such as lava rock or cinders are used, or for which payment has not been made. The warranty is void if repairs or alterations to the Product are made by unauthorized persons, or the Product serial numbers have been altered or defaced.

All gasoline engines and hydraulic pumps are warranted by their manufacturer and not by Swenson Spreader LLC. Electrical or hydraulic components are not to be disassembled without the express written permission of Swenson Spreader LLC.

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF THERE IS NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SWENSON'S MAXIMUM OBLIGATION AND LIABILITY UNDER THIS WARRANTY SHALL BE LIMITED TO AN AMOUNT EQUAL TO THE PRESENT PURCHASE PRICE FOR THE SWENSON PRODUCT. SWENSON SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE, WHETHER DIRECT OR INDIRECT, INCIDENTAL, CONSEQUENTIAL OR OTHERWISE ARISING OUT OF BREACH OF THIS WRITTEN WARRANTY OR ANY IMPLIED WARRANTY. Some states do not allow limitations on how long an implied warranty will last or the exclusion or limitation of incidental or consequential damages.

Defective parts returned to Swenson Spreader LLC must be accompanied by the following information:

RGA#	
Spreader Model	
Serial Number	
Date Installed	
Where Purchased	

Purchaser accepts these terms and warranty limitations unless product is returned within fifteen days for full refund of purchase price.

Effective 4/15/05