



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Solicitation

NUMBER
DEP16573

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER 304-558-2316

RFQ COPY

TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

ENVIRONMENTAL PROTECTION
 DEPARTMENT OF
 OFFICE OF AML&R
 601 57TH STREET SE
 CHARLESTON, WV
 25304 304-926-0499

DATE PRINTED
06/25/2014

BID OPENING DATE: 07/16/2014 BID OPENING TIME 1:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				ADDENDUM NO.01		
				THIS ADDENDUM IS ISSUED TO MODIFY THE ORIGINAL SOLICITATION PER THE ATTACHED DOCUMENTATION.		
0001	1	JB		962-73		
				RECLAMATION: RESTORATION OF LAND & OTHER PROPERTIES		
				***** THIS IS THE END OF RFQ DEP16573 ***** TOTAL:		

SIGNATURE		TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE	

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

SOLICITATION NUMBER: DEP16573

Addendum Number: 01

The purpose of this addendum is to modify the solicitation identified as (“Solicitation”) to reflect the change(s) identified and described below.

Applicable Addendum Category:

- Modify bid opening date and time
- Modify specifications of product or service being sought
- Attachment of vendor questions and responses
- Attachment of pre-bid sign-in sheet
- Correction of error
- Other

Description of Modification to Solicitation:

This addendum is issued for the following reasons:

- *The new bid opening date will be July 16, 2014 at 1:30 PM, EST.
- *To provide a copy of answers to vendor submitted questions.
- *To provide a copy of the mandatory pre-bid sign-in sheet.
- *To provide a diagram of the Traffic Control Plan A4 for Site 3.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

ATTACHMENT A

DEP16573
Vickers Branch (Butcher) Drainage
Addendum #1

- Item 1: The Contractor shall have 180 days from the date of the Notice to Proceed to complete construction activities on the project. The \$250 per day liquidated damage clause will be in effect after the 180 days. However, the total performance period will be 365 days from the date of the Notice to Proceed for invoicing purposes.
- Item 2: Statement: Bat gate mine seals should be installed between May 1 and August 31. However, there may be an opportunity to finish gate installation between September 1 and October 1, if the weather is warm enough that bats have not begun to hibernate and the construction equipment will not block the portal entrance at night when bats will be exiting to forage.
- Item 3: Q - Where does the drainage go? (M.O. 1-1 on site 1, sheet 10.)
A - The drainage flows from the gravel bulkhead pipes into the mine outlet conveyance pipe (for approx. 30 feet) and outlets on the proposed splash pad, and then it follows the natural drainage path to the stream below.
- Item 4: Q - Are the road restoration areas marked?
A - Yes. On the sites that have roadway restoration proposed, the start and end points are shown on the reclamation plan drawings.
- Item 5: Q - Is the entrance area to site 1 as shown on sheet 10?
A - Yes, access to site 1 is required to be at the location shown. (This is the same entrance route to site 1 that everyone used for the pre-bid conference.)
- Item 6: Statement: Since site 3 requires work on a county route (Fox Den Road, CR 4/3), a WVDOH permit was obtained, and traffic control is required. The approved traffic control plan is WVDOH Case A4, and is included at the end of this addendum as Item 22.
- Item 7: Q - If we hit rock here, can we stop? (Site 3, sheet 12, in the area of proposed underdrain beside the house on the western edge of site 3.)
A - No rock excavation is required for the underdrain installation.
- Item 8: Q - Is there a bid item for road repair for site 3 (County Route 4/3)?
A - Yes, the item is bid item 7.8 (Asphalt Pavement Replacement), and it is measured per square yard (SY).
- Item 9: Q - Does lots of water come out of the mine opening on site 3 (M.O. 3-1)?
A - We have never observed water discharging from this portal. However, there is evidence that it has discharged in the past. To cater for any potential future discharges, the mine seal conveyance pipes outlet in the grouted riprap ditch.
- Item 10: Q - Where do we put the 1000 cubic yards from the landslide excavation on site 3? (Note - The WVDEP estimated amount is 2000 cubic yards.)
A - Contractor is responsible for obtaining an approved waste area conforming to the requirements of the specifications.

DEP16573
Vickers Branch (Butcher) Drainage
Addendum #1

- Item 11: Q - Is this where the stabilized construction entrance for site 2 goes? (Sheet 11, at the edge of the large concrete pad beside the mobile home.)
A - Yes, as shown on the drawing. Note that the area proposed is a yard area, and the stabilized construction entrance will have to be removed and the area restored to a yard area after project construction is completed.
- Item 12: Q - What type of mine seal goes here, a block type? (Site 2, sheet 11, M.O. 2-4.)
A - This mine seal is a dry type of bat gate mine seal with masonry block. It is specified as a Type IV bat gate, and detailed on sheet D-5/1. (Note that the dimensions are approx. 23 feet wide by 8 feet high.)
- Item 13: Q - Does this area (site 2) drain with the regional mine dip shown on the plans?
A - The site generally drains per the regional dip shown.
- Item 14: Q - Is stone required around the bat gate mine seals on site 4?
A - Yes, both the proposed mine seals are Type I culverted bat gates, detailed on sheet D-2. (The detail specifies #1 stone gravel bulkhead and #1 bedding stone.)
- Item 15: Q - Are the site 4 mine seals dry seals, and are the drainage pipes necessary?
A - The mine seals are anticipated to be dry but the installation is per detail with pipes shown.
- Item 16: Q - How high does the earthen backfill need to be in front of the site 4 portals?
A - Backfill should be placed so as to smoothly blend in with existing contours. It should not have the ability to retain, impound or retard water runoff.
- Item 17: Q - Can we make a road through the ravine on site 4 between the two portals, and are the construction limits wide enough to do this?
A - Construction limits allow for travel across the small ravine to the second mine entry.
- Item 18: Q - Is the exposed metal gas line we crossed on site 4 active?
A - We have been previously informed that the gas line was inactive. However, please note that it is the responsibility of the contractor to verify the status of this gas line (and all utilities) and their locations on this site (and all sites).
- Item 19: Statement: On site 5, in the immediate area of the mine openings (M.O. 5-1, M.O. 5-2 and M.O. 5-3), there are several remnants of block walls not shown on the drawing. These remnants are to be removed and properly disposed of in a manner acceptable to the WVDEP. It will not be acceptable to use the blocks for any type of mine seal material or backfill. The removal and disposal cost will be considered to be incidental to the mine seal installations.

DEP16573
Vickers Branch (Butcher) Drainage
Addendum #1


Item 20: Q - Since the old, existing mine seals on site 6 are to be replaced/reworked, can we use the rock from the old mine seals for the new mine seals?

A - No.

Item 21: Note: on Type I Bat Gate Mine Seal (Drawing Number D-2) and Type II Bat Gate Mine Seal (Drawing Number D-3), the End (front) View illustrates the bat gate(s) without vertical members. The Vertical Bar Side View section includes the vertical member. The vertical bar is not required with the bat gate sizes specified.

DEP16573 Vickers Branch (Butcher) Drainage Addendum #1

Item 22: WVDOH Traffic Control Plan A4 for Site 3 is shown below.

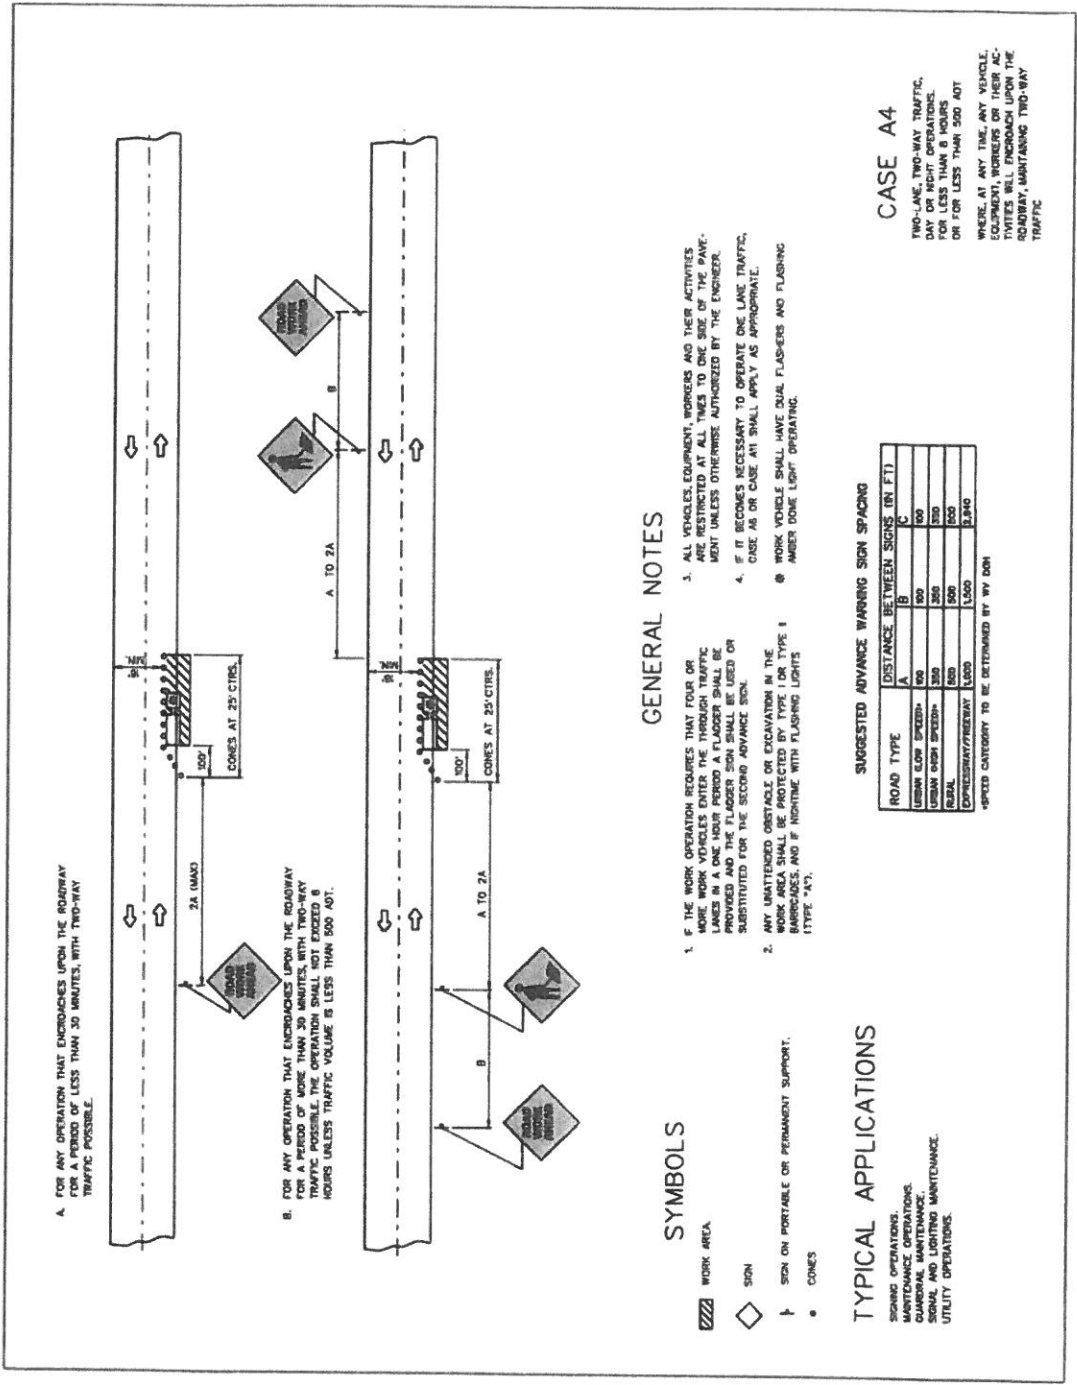

SIGN IN SHEET

DEP16573

REQUEST FOR QUOTATION NO. _____

PLEASE PRINT

Vickers Branch (Butcher) Drainage

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: Wiseman Excavating, Inc.	515 Wiseman Farms Rd.	PHONE 304-586-3736
Rep: Sharlene Wiseman	Liberty WV 25124	TOLL FREE
Email Address: wisemanfarm@aol.com		FAX 304-586-3780
Company: Barnes Ex. Inc.	P.O. Box 13384	PHONE 304-984-1725
Rep: Robert L. Barnes	Sissonville WV 25360	TOLL FREE
Email Address: Barnes Exc@aol.com		FAX 304-984-0074
Company: EASTERN ARROW	P.O. BOX 4108	PHONE 304-414-0255
Rep: BRANDI/MACKENZIE WARDWELL	CHARLESTON, WV 25364	TOLL FREE
Email Address: EasternArrow@hotmail.com		FAX 304-414-0256
Company: Breakaway Inc	1539 Old Turnpike Rd	PHONE 765-5317
Rep: Doug Vincent	Sutton WV 26601	TOLL FREE
Email Address: xxxxxxxxxxxxxxxxxxxx		FAX 765-5389
Company: Romie Spencer Inc	HC 74, Box 201	PHONE 304-344-8626
Rep: J.P. Spencer	STRANGE CREEK WV	TOLL FREE CELL - 644-8116
Email Address: JPS20@hughes.net	25043	FAX 304-344-8376

SIGN IN SHEET

DEP16573

REQUEST FOR QUOTATION NO.

PLEASE PRINT

Vickers Branch (Butcher) Drainage

*** PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD**

TELEPHONE & FAX NUMBERS

MAILING ADDRESS

FIRM & REPRESENTATIVE NAME

Company: <u>Foster Supply</u>	<u>PO Box 498</u>	PHONE <u>304-553-6565</u>
Rep: <u>DEB FOLSEMER</u>	<u>ds@fostersupply.com</u>	TOLL FREE
Email Address: <u>PO Box 498 Scott Depot WV 25860</u>	<u>SCOTT DEPOT WV 25860</u>	FAX <u>304-755-9280</u>
Company: <u>Bulldog Excavating</u>	<u>Box 58</u>	PHONE <u>304-475-3400</u>
Rep: <u>Aaron Brown</u>	<u>Naugetuck-WV 25685</u>	TOLL FREE Cell <u>304-946-5622</u>
Email Address: <u>garbrown1@gmail.com</u>		FAX <u>304-475-3900</u>
Company: <u>Carpenter Reclamation</u>	<u>PO Box 13015</u>	PHONE <u>304-984-1115</u>
Rep: <u>Randy Carpenter</u>	<u>Sissonville, WV 25360</u>	TOLL FREE
Email Address: <u>Rcarpen@32aol.com</u>		FAX <u>984-2770</u>
Company: <u>E L ROBINSON</u>		PHONE <u>304 776-7473</u>
Rep: <u>ERIC COBERLY</u>		TOLL FREE
Email Address: <u>ecoberly@elrobinson.com</u>		FAX <u>304 776-6426</u>
Company: _____		PHONE _____
Rep: _____		TOLL FREE _____
Email Address: _____		FAX _____

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: DEP16573

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

- | | |
|---|--|
| <input type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6 |
| <input type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7 |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8 |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9 |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor’s representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Company

Authorized Signature

Date

NOTE: This addendum acknowledgement should be submitted with the bid to expedite document processing.
Revised 6/8/2012