



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Solicitation

NUMBER
DEP16588

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER 304-558-2316

RFQ COPY

TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

ENVIRONMENTAL PROTECTION
 DEPARTMENT OF
 OFFICE OF AML&R
 601 57TH STREET SE
 CHARLESTON, WV
 25304 304-926-0499

DATE PRINTED
08/06/2014

BID OPENING DATE: 08/21/2014

BID OPENING TIME 1:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
ADDENDUM NO. 1						
ADDENDUM ISSUED:						
1. TO PROVIDE RESPONSES TO VENDOR'S QUESTIONS REGARDING THE ABOVE SOLICITATION.						
2. TO PROVIDE VENDORS A REVISED DRAWING AND A REVISED CONTRACTOR'S BID SHEET.						
3. TO PROVIDE VENDORS A COPY OF THE MANDATORY PRE-BID MEETING SIGN-IN SHEETS.						
4. TO MOVE THE BID OPENING DATE: FROM: 08/12/2014 @ 1:30 P.M. TO: 08/21/2014 @ 1:30 P.M.						
5. TO PROVIDE ADDENDUM ACKNOWLEDGMENT. THIS DOCUMENT SHOULD BE SIGNED AND RETURNED WITH YOUR BID. FAILURE TO SIGN AND RETURN MAY RESULT IN THE DISQUALIFICATION OF YOUR BID.						
END OF ADDENDUM NO. 1						
0001	1	JB		962-73		
RECLAMATION: RESTORATION OF LAND & OTHER PROPERTIES						

SIGNATURE		TELEPHONE		DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE		

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Solicitation

NUMBER
DEP16588

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF:
FRANK WHITTAKER 304-558-2316

RFQ COPY
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

ENVIRONMENTAL PROTECTION
 DEPARTMENT OF
 OFFICE OF AML&R
 601 57TH STREET SE
 CHARLESTON, WV
 25304 304-926-0499

DATE PRINTED
08/06/2014

BID OPENING DATE: 08/21/2014 BID OPENING TIME 1:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
***** THIS IS THE END OF RFQ DEP16588 ***** TOTAL:						

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO SOLICITATION, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

SOLICITATION NUMBER: DEP16588
Addendum Number: 1

The purpose of this addendum is to modify the solicitation identified as (“Solicitation”) to reflect the change(s) identified and described below.

Applicable Addendum Category:

- Modify bid opening date and time
- Modify specifications of product or service being sought
- Attachment of vendor questions and responses
- Attachment of pre-bid sign-in sheet
- Correction of error
- Other

Description of Modification to Solicitation:

1. To address questions and revisions regarding the above solicitation.
2. To provide a copy of the mandatory pre-bid meeting sign-in sheets.
3. To move the bid opening date;
 from: 08/12/2014 @ 1:30 P.M.
 to: 08/21/2014 @ 1:30 P.M.
4. To provide Addendum Acknowledgement.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

ATTACHMENT A

DEP16588
Amigo Portals
Addendum #1

- Item 1: The Contractor shall have 180 days from the date of the Notice to Proceed to complete construction activities on the project. The \$250 per day liquidated damage clause will be in effect after the 180 days. However, the total performance period will be 365 days from the date of the Notice to Proceed for invoicing purposes.
- Item 2: Statement - Bat gate mine seals should be installed between May 1 and August 31. However, there may be an opportunity to finish gate installation between September 1 and October 1, if the weather is warm enough that bats have not begun to hibernate and the construction equipment will not block the portal entrance at night when bats will be exiting to forage.
- Item 3: Q - Will the contractor awarded the Purchase Order be required to start construction this year?
A - Since this project has many bat gate mine seals, the selected Contractor will have the option of starting construction this year or next. Under no circumstance will the Contractor be paid twice for mobilization/demobilization.
- Item 4: Q - On the 750 feet of stream bank protection, since the material is black, how is it to be handled and how will the excavation be paid for?
A - Material excavated for stream bank protection may be disposed of on site, in various locations, including on the flat areas available. The cost for excavation is incidental to the cost of the stream bank protection (i.e. line item 7.2 on the bid sheet).
- Item 5: Q - Are the areas designated on the plans the only areas we are supposed to address for stream bank protection?
A - For stream bank protection on this project, we are only addressing those areas specifically identified on the plans, which were determined by WVDEP inspection to be the worst areas.
- Item 6: Q - Does all this material need to be hauled out?
A - Yes. Material excavated for stream bank protection may be disposed of on site, in various locations, including on the flat areas available.
- Item 7: Q - How are the rock check dams to be measured and paid for? (Bid item 5.4.)
A - "Rock Check Dams" exist as a line item on the bid sheet, but the units should be changed from "per linear foot" to "per each". Obviously, the quantity must be changed accordingly. Also, please note that the "Rock Check Dams" should be wrapped with filter cloth, Thrace-Linq 140Ex, or Engineer approved equal (this is not illustrated on the detail drawing).
Note: See the revised bid sheet, which is part of this Addendum.
- Item 8: Q - Does the location of the stabilized construction entrance on Drawing 22 need to be placed at the location shown on the plans?
A - Yes, it is required to be placed where shown on the plans.

DEP16588
Amigo Portals
Addendum #1

- Item 9: Q - Do we have to knock the sides off? (The sides of the embankment to be removed on Drawing 22.)
A - The existing embankment (including culvert) is to be removed. The existing embankment shall be graded to eliminate any impounding capability. The embankment material shall be placed in the impoundment area and graded to drain.
- Item 10: Q - What is this wire, and will it need to be moved? (Drawing 22, near the proposed stabilized construction entrance.)
A - It is assumed to be a utility guy wire. It is the Contractor's responsibility to have it identified and moved, if necessary. The cost of any utility relocations will be handled per section XV (Utilities and Other Obstructions) of the Special Provisions of the Specifications.
- Item 11: Q - Does this mine seal need a drain pipe, what is the length, and what grade is required? (Portal 2, Drawing 23.)
A - This portal has always been dry. Therefore, drain pipes have not been proposed. There is no desire to reclaim the highwall behind this portal. We are only concerned with the effective sealing of the mine opening. The backfill should be placed a minimum of 2 feet above the coal seam. The cover slope is 2H:1V. The minimum grade for the bat gate (HDPE culvert) is 2%.
Note: A revised detail has been included as Item 36 in this Addendum, and should replace the relevant profile detail on Drawing 44.
- Item 12: Q - Does the exposed metal pipe need to be replaced? (Portal 2, Drawing 23.)
A - We do not believe it is an active utility or drainage pipe, but it is the Contractor's responsibility to identify it and handle accordingly.
- Item 13: Q - Can we put the excavated material from the stream bank protection on the bench here? (The area near Portal 3 on Drawing 23.)
A - Material excavated for stream bank protection may be disposed of on site, in various locations, including on the flat areas available.
- Item 14: Q - Is there a time constraint for the stream bank protection work?
A - No, neither the U.S. Army Corps of Engineers or the WV Division of Natural Resources put any seasonal limits on this project for work in the stream.
- Item 15: Q - Are we required to purchase the rock for the stream bank protection work in this area? (The area shown on Drawing 23.)
A - Yes, commercial stone is specified for this section. The only stream bank protection area that does not require commercial stone is the area on Drawing 29.
- Item 16: Q - Do we have to put soil cover under the matting in this area? (The area shown on Drawing 23.)
A - Any exposed refuse shall be covered with soil before the matting is placed. Soil should be available in the general area. The soil cover shall be considered incidental.

DEP16588
Amigo Portals
Addendum #1

- Item 17: Q - Is this material slate? (The bench area near portal 3 on Drawing 23.)
A - No subsurface investigation was performed. The limits and composition of the refuse material is unknown.
- Item 18: Q - Do we have to cut and stack timber greater than 8 inches in diameter, and can timber/brush be windrowed?
A - All timber and brush should be handled as per section 4.0 (Site Preparation) in the Technical Specifications published for this project. Section 4.0 does require timber 8 inches in diameter or greater (at stump height) to be saw cut and stockpiled at a location acceptable to the Engineer. Windrowing of smaller timber may be allowed with the approval of the Engineer.
- Item 19: Q - Can an item for road stone be included on the bid sheet?
A - Bid Item 4.2 (Class I aggregate, per ton) is already on the bid sheet.
- Item 20: Q - Do the plastic pipes need to be tied into the proposed manhole? (Portal 4 on Drawing 22.)
A - The Contractor will not be required to tie the pipes in, but will be required to install two taps in the manhole. It will be the local residents' responsibility to attach to the taps. Note that this answer is different than what was said at the pre-bid conference.
- Item 21: Q - Will we have to punch holes in the manhole so the residents can tie into it? (Portal 4 on Drawing 22.)
A - Yes, as noted in the previous item, the Contractor will be required to install two taps in the manhole. Note that this answer is different than what was said at the pre-bid conference.
- Item 22: Q - Will the manhole be exposed, and will it hold water? (Portal 4 on Drawing 22.)
A - The intent of the manhole is to serve as a reservoir for water, and it can be exposed.
- Item 23: Q - What size are these bat gates? (Portals 7 & 8 on Drawing 25.)
A - Both are 48 inch HDPE culverts.
- Item 24: Q - Where is the access to the stream bank protection area shown on Drawing 28?
A - The access to this area on Drawing 28 starts at the stabilized construction entrance on Drawing 26, and then continues southeast the length of Drawing 27.
Note: We did not view this area during the pre-bid conference.
- Item 25: Q - How are these mine seals to be paid for? (Portals 17 & 18 on Drawing 30.)
A - They are to be filled with low slump concrete, and the payment will be on a "per each" basis (two items) as bid item 5.4. (The payment will not be based on the volume of concrete.)

DEP16588
Amigo Portals
Addendum #1

Item 26: Q - Is the concrete for the portals low slump or low strength? (Portals 17 & 18 on Drawing 30.)
 A - Section 9.2.11 (Low Slump Concrete) specifies low slump concrete, (a slump of four to five inches), and requires a compressive strength of 2,000 psi at 7 days. Section 9.3.3.5 specifies the method for placement.

Item 27: Q - Does the bat gate go in front of or behind the wall, how wide is the bat gate, and how many bat gates go here? (Portals 15 & 16 on Drawing 29.)
 A - On Drawing 29, in the area around portal numbers 15 and 16, near the rock wall, the revised scope of work is as follows:

Existing trash and debris shall be removed and properly disposed of, existing rock and rocky material to be removed and reduced in size to a D_{50} of 18 inches and placed along the existing slope as stream bank protection (illustrated on Drawing number 29), the voids along the rock wall to be filled with soil and graded to drain, and then revegetated as per specifications (note: it is anticipated that this area will require some hand work); as a result of this revised scope of work, the pay items are as follows:

- Portal 15 remains as is (bat gate - 48" HDPE culvert) and is a separate pay (line) item (same as before)
- Portal 16 is eliminated as a line item (reflected in revised quantity on bid sheet)
- Rock and rocky material removed, reduced, used as stream bank protection, incidental to project (same as before)
- Trash, debris, removed and disposed of properly, incidental to project (same as before)
- Void fill, regrade, etc. is a new line item on revised bid sheet, with a unit of "per lump sum"

Note: The revised bid sheet, which is part of this Addendum, has been revised to reflect the revised scope of work above.

Item 28: Q - What type of conveyance, and what length, for the portal drains is required at portals 15 & 16 (Drawing 29)?

A - Portal 16 has been eliminated as noted above. Portal 15 will have the pipe modified to cover the opening. It is anticipated that the standard detail will be adequate for this opening.

Item 29: Q - How much overhang do we need to remove above portals 15 & 16 on Drawing 29?


A - The contractor is responsible for maintaining and operating a safe working environment. Please refer to item 8.0 SAFETY REQUIREMENTS, and item 9.0 PROTECTION OF PERSONS & PROPERTY of the ARTICLE III – GENERAL CONDITIONS.

DEP16588
Amigo Portals
Addendum #1

- Item 30: Q - How are we supposed to install a mine seal with rock overhanging it?
A - The contractor is responsible for maintaining and operating a safe working environment. Please refer to item 8.0 SAFETY REQUIREMENTS, and item 9.0 PROTECTION OF PERSONS & PROPERTY of the ARTICLE III – GENERAL CONDITIONS.
- Item 31: Q - Do we have to relocate the exposed waterline where it crosses the stream? (The area near portals 15 & 16 on Drawing 29.)
A - No, it is upstream (southwest) of the proposed stream bank protection area.
- Item 32: Statement: In the area of portals 15 & 16 on Drawing 29 and the access route to them on Drawing 30, the Contractor needs to protect the waterline where it is in the construction work limits (buried). It is to Contractor's responsibility to locate and protect the line, since it feeds water to a local resident.
- Item 33: Statement: At portal 14 on Drawing 29, a section of temporary culvert will need to be added. This will be reflected in the revised bid sheet.
Note: We did not view this area during the pre-bid conference.
- Item 34: Statement: Black plastic waterline(s) may cross or follow the identified access route to portal 14 on Drawing 29. It is to Contractor's responsibility to locate and protect the line(s), since it feeds water to a local resident.
Note: We did not view this area during the pre-bid conference.
- Item 35: Corrections: On Drawing 41, the following items should be corrected:
- a) Vegetative Practices note - 21 days should be changed to 14 days at two places in the second bullet point.
 - b) Stream bank protection Detail 4/41 - The thickness should be 36 inches.
 - c) Stream bank protection Detail 7/41 - The thickness should be 36 inches.

DEP16588
Amigo Portals
Addendum #1

Item 36: The drawing below should replace the relevant profile drawing on sheet 44 for a culvert type of bat gate without drain pipes (Detail 1/44).

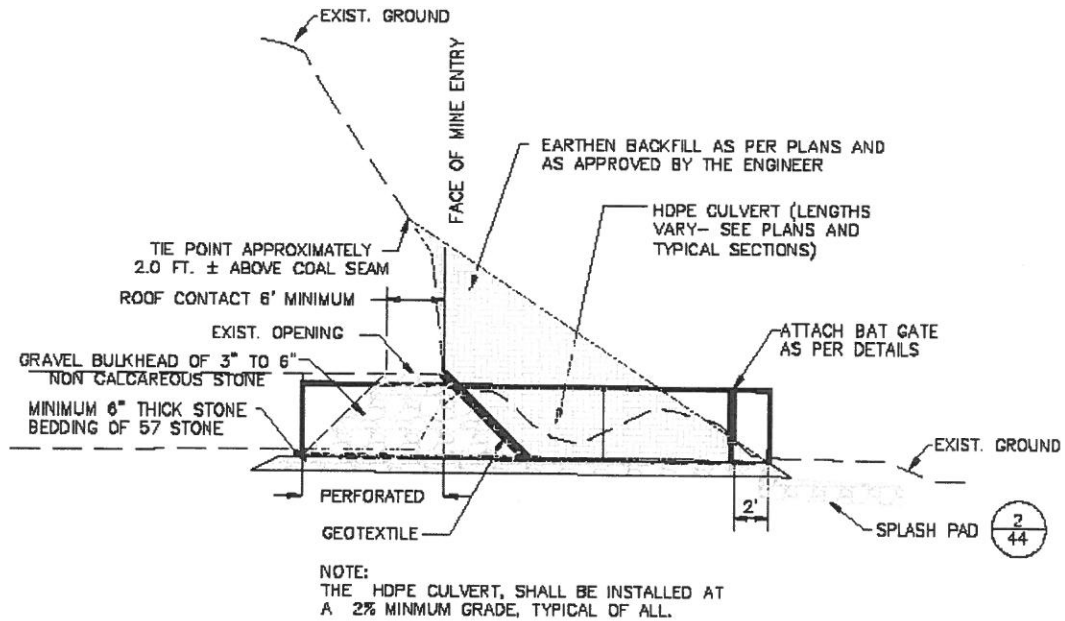

TYPICAL CONSTRUCTION DETAILS
 (APPLICABLE TO ALL BAT GATES UNLESS NOTED)

Not to Scale

AMIGO PORTALS
DEP16588
Contractor's Bid Sheet
(Revised For Addendum)

Vendors Name: _____

The DEP reserves the right to request additional information and supporting documentation regarding unit prices when the unit price appears to be unreasonable.

Item No.	Quantity	Unit	Description	Unit Price	Amount
1.0	1	LS	"Mobilization and Demobilization," per lump sum. Cannot be more than 10% of the Total Amount Bid for the project.	LS	\$
2.0	1	LS	"Construction Layout," per lump sum. Cannot be more than 3% of the Total Amount Bid for the project.	LS	\$
3.0	1	LS	"Quality Control," per lump sum. Cannot be more than 3% of the Total Amount Bid for the project.	LS	\$
4.1	1	LS	"Site Preparation," per lump sum. Cannot be more than 10% of the Total Amount Bid for the project.	LS	\$
4.2	200	TON	"Class I Aggregate," per ton	\$	\$
4.3	160	LF	"Temporary Culvert" per linear foot	\$	\$
5.1	2,700	LF	"Silt Fence," per linear foot	\$	\$
5.2	2,700	LF	"Straw Wattles," per linear foot	\$	\$
5.3	6	EA	"Stabilized Construction Entrance," per each	\$	\$
5.4	20	EA	"Rock Check Dams," per each	\$	\$
6.0	6	AC	"Revegetation," per plan view acre	\$	\$
7.1	60	LF	"2-Foot Deep Riprap 2H:1V VEE Channel," per linear foot	\$	\$
7.2	900	LF	"Stream Bank Protection," per linear foot	\$	\$
7.3	1	EA	"Type A Manhole," per each	\$	\$
9.1	2	EA	"Wet/Modified Wet Seal," per each	\$	\$
9.2	12	EA	"Bat Gate," per each	\$	\$
9.3	1	EA	"Dry Seal," per each	\$	\$
9.4	2	EA	"Low Slump Concrete Dry Seal," per each	\$	\$
9.5	100	BAG	"Soda Ash Briquettes," per 50 pound bag	\$	\$
10.1	100	LF	"Underdrain," per linear foot	\$	\$
10.2	100	LF	"12-Inch Conveyance Pipe," per linear foot	\$	\$
12.0	1,000	SY	"Erosion Control Matting," per square yard	\$	\$
			Additional addendum item		
13.0	1	LS	"Fill voids, regrade, etc. in area on drawing number 29, near rock overhang," per lump sum	LS	\$
			TOTAL		\$

REQUEST FOR QUOTATION NO. DEP16588

SIGN IN SHEET

Amigo Portals

PLEASE PRINT

Date: July 17, 2014

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>ALL-CON LLC</u> Rep: <u>Matthew Blosser</u> Email Address: <u>QTRLE@ACI-WV.COM</u>	<u>124 philpott Ln</u> <u>Beaver, WV</u> <u>25813</u>	PHONE <u>304-731-0190</u> TOLL FREE FAX
Company: <u>RONIE SPENCER INC</u> Rep: <u>I.R. SPENCER</u> Email Address: <u>RHS2@hughes.net</u>	<u>HC 74, Box 201</u> <u>STRANGE CREEK, WV</u> <u>25063</u>	PHONE <u>304-364-8626</u> TOLL FREE <u>304 644-8116 PER</u> FAX <u>- 8376</u>
Company: <u>GREEN MOUNTAIN COMPANY</u> Rep: <u>DAVID H. BOWMAN</u> Email Address: <u>DHB722@yahoo.com</u>	<u>511 50th ST</u> <u>Charleston WV</u> <u>25304</u>	PHONE <u>304-925 0253</u> TOLL FREE FAX <u>304 925-9230</u>
Company: <u>BREAK-AWAY INC</u> Rep: <u>JEFF HAMRICK</u> Email Address: <u>jeff@breakawaywv.com</u>	<u>1539 Old Turnpike Rd</u> <u>Sutton WV 26601</u>	PHONE <u>304-765-5317</u> TOLL FREE FAX
Company: <u>BARNES EXC. INC.</u> Rep: <u>ROBERT BARNES</u> Email Address: <u>BARNESEXC@AOL.COM</u>	<u>P.O. BOX 13384</u> <u>SISSONVILLE</u> <u>WV 25360</u>	PHONE <u>304-984-1725</u> TOLL FREE FAX <u>304-984-0074</u>

REQUEST FOR QUOTATION NO. DEP16588

SIGN IN SHEET

Amigo Portals

PLEASE PRINT

Date: July 17, 2014

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>M^c Cow A & Son Const.</u> Rep: <u>GARY Long</u> Email Address: <u>glong@wirefire.com</u>	<u>5802 Centralia Rd</u> <u>Sutton WV 26601</u>	PHONE <u>304 765-5288</u> TOLL FREE FAX <u>304 765-5293</u>
Company: <u>Pineville Paving & Exc. Inc</u> Rep: <u>MIKE BRADFORD</u> Email Address: <u>BMIKEPPI@AOL.COM</u>	<u>Box 1290</u> <u>Pineville W.V. 24874</u>	PHONE <u>304-732-8303</u> TOLL FREE FAX <u>304 732 7855</u>
Company: <u>EAGLE EXCAVATION INC.</u> Rep: <u>GEORGE FRESHOUR</u> Email Address: _____	<u>P.O. Box 218</u> <u>KENNA, WV</u> <u>25249</u>	PHONE <u>(304) 372-4378</u> TOLL FREE FAX <u>(304) 372-4378</u>
Company: <u>WISEMAN EXCAVATING INC</u> Rep: <u>JOE WISEMAN</u> Email Address: <u>joewiseman6@gmail.com</u>	<u>515 WISEMAN FARM ROAD</u> <u>LIBERTY, WV 25124</u>	PHONE <u>304-586-3736</u> TOLL FREE FAX <u>304-586-3780</u>
Company: <u>CARPENTER RECLAMATION</u> Rep: <u>Kelley Carpenter</u> Email Address: <u>RCARPEN103@AOL.COM</u>	<u>P.O. Box 13015 CHAS WV 25360</u>	PHONE <u>304-984-1115</u> TOLL FREE FAX <u>304-984-2770</u>

REQUEST FOR QUOTATION NO. DEP16588

SIGN IN SHEET

Amigo Portals

PLEASE PRINT

Date: July 17, 2014

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Aspen Corporation</u>	<u>2400 R. H. Dr.</u>	PHONE <u>304-887-0108</u>
Rep: <u>Richard Koger II</u>	<u>Danels WV 25832</u>	TOLL FREE
Email Address: <u>rkoger@aspen-golf.com</u>		FAX <u>304-763-4591</u>
Company: <u>Eastern Arrow Corp.</u>	<u>Box 100</u>	PHONE <u>304-414-0255</u>
Rep: <u>Jay R Wardwell</u>	<u>Charleston, WV 25301</u>	TOLL FREE
Email Address: <u>easternarrow@hotmail.com</u>		FAX
Company: <u>BPI, Inc</u>		PHONE <u>304-760-8909</u>
Rep: <u>Christian Wells</u>	<u>Po Box 315</u>	TOLL FREE
Email Address: <u>cwells@bpi-gc.com</u>	<u>Teays, W.V. 25569</u>	FAX
Company: _____		PHONE
Rep: _____		TOLL FREE
Email Address: _____		FAX
Company: _____		PHONE
Rep: _____		TOLL FREE
Email Address: _____		FAX

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: DEP16588

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

- | | |
|---|--|
| <input type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6 |
| <input type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7 |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8 |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9 |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Company

Authorized Signature

Date

NOTE: This addendum acknowledgement should be submitted with the bid to expedite document processing.
 Revised 6/8/2012