

MODULAR PLAYGROUND
PREPARED FOR
NORTH BEND
STATE PARK
CAIRO, WV
APRIL 20TH, 2009

CONTENTS

PROPOSAL
2-D DRAWING
3-D RENDERING
TECHNICAL SPECIFICATIONS
COMPLIANCE INFORMATION
ISO 9001 CERTIFICATION
GAMETIME INSURANCE POLICY
GAMETIME WARRANTY
ORDER CHECK SHEET
COLOR SELECTION SHEET
GAMETIME COLOR OPTIONS

CUNNINGHAM ASSOCIATES, INC
P.O. BOX 240981
CHARLOTTE, NC 28224
1-800-438-2780

RECEIVED

2009 APR 22 A 10:05

PROCUREMENT DIVISION
STATE OF WV



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209113

PAGE
 1

ADDRESS CORRESPONDENCE TO ATTENTION OF
 FRANK WHITTAKER
 304-558-2316


VENDOR
 *709033753 800-438-2780
 CUNNINGHAM ASSOCIATES INC
 PO BOX 240981
 CHARLOTTE NC 28224

SHIP TO
 DIVISION OF NATURAL RESOURCES
 NORTH BEND STATE PARK
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 221
 CAIRO, WV 26337 304-643-2931

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
03/20/2009				

BID OPENING DATE: 04/23/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		
<p>PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)</p> <p>THE WEST VIRGINIS PURCHASING DIVISION, FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES IS SOLICITING BIDS FROM RESPONSIBLE VENDORS FOR NEW PLAYGROUND EQUIPMENT FOR NORTH BEND STATE PARK PER THE ATTACHED SPECIFICATIONS.</p> <p>TECHNICAL QUESTIONS MAY BE SUBMITTED IN WRITING TO FRANK WHITTAKER VIA FAX AT 304-558-4115 OF VIA EMAIL AT FRANK.M.WHITTAKER@WV.GOV. DEADLINE FOR TECHNICAL QUESTIONS IS 04/08/2009 AT 4:00 PM</p> <p>A MANDATORY PRE-BID MEETING WILL BE HELD ON 04/02/09 AT 10:00 AT THE PARK HEADQUARTERS. FAILURE TO ATTEND THE MANDATORY PRE-BID MEETING WILL RESULT IN BID DISQUALIFICATION. AN INDIVIDUAL MAY NOT REPRESENT MORE THAN ONE FIRM AT THE PRE-BID MEETING.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT MAY BE DEEMED NULL AND VOID, AND TERMINATED WITHOUT FURTHER ORDER.</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE INFORMATION FOR ANY ALTERNATES MAY BE GROUNDS FOR</p>						

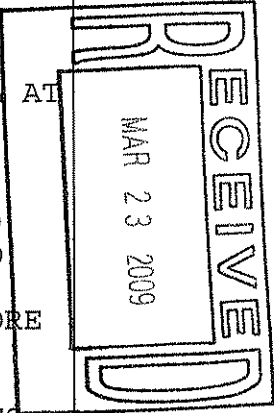

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE *JM* TELEPHONE 800-438-2780 DATE 4-20-09

TITLE Project Manager FEIN 54-0883979 ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209113

PAGE
 2

ADDRESS CORRESPONDENCE TO ATTENTION OF
 FRANK WHITTAKER
 304-558-2316

VENDOR

*709033753 800-438-2780
 CUNNINGHAM ASSOCIATES INC
 PO BOX 240981
 CHARLOTTE NC 28224

SHIP TO

DIVISION OF NATURAL RESOURCES
 NORTH BEND STATE PARK
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 221
 CAIRO, WV 26337 304-643-2931

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
03/20/2009				

BID OPENING DATE: 04/23/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>REJECTION OF THE BID. THE STATE RESERVES THE RIGHT TO WAIVE MINOR IRREGULARITIES IN BIDS OR SPECIFICATIONS IN ACCORDANCE WITH SECTION 148-1-4(F) OF THE WEST VIRGINIA LEGISLATIVE RULES AND REGULATIONS.</p> <p>NOTICE</p> <p>A SIGNED BID MUST BE SUBMITTED TO:</p> <p>DEPARTMENT OF ADMINISTRATION PURCHASING DIVISION BUILDING 15 2019 WASHINGTON STREET, EAST CHARLESTON, WV 25305-0130</p> <p>THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:</p> <p>SEALED BID</p> <p>BUYER: 44</p> <p>RFQ. NO.: DNR209122</p> <p>BID OPENING DATE: 04/23/2009</p> <p>BID OPENING TIME: 1:30 PM</p> <p>PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID:</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>JR</i>	TELEPHONE 800-438-2780	DATE 4-20-09
TITLE Project Manager	FEIN 54-0883979	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209113

PAGE
 3

ADDRESS CORRESPONDENCE TO ATTENTION OF:
 FRANK WHITTAKER
 304-558-2316

VENDOR
 *709033753 800-438-2780
 CUNNINGHAM ASSOCIATES INC
 PO BOX 240981
 CHARLOTTE NC 28224

SHIP TO
 DIVISION OF NATURAL RESOURCES
 NORTH BEND STATE PARK
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 221
 CAIRO, WV 26337 304-643-2931

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B	FREIGHT TERMS
03/20/2009				

BID OPENING DATE: 04/23/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				<i>John Cunningham</i>		
CONTACT PERSON (PLEASE PRINT CLEARLY):						
***** THIS IS THE END OF RFQ DNR209113 *****						\$ <u>49,972.76</u>

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE *[Signature]* TELEPHONE 800-438-2780 DATE 4-20-09

TITLE Project Manager FEIN 54-0883979 ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

North Bend State Park Playground Specifications

To supply playground equipment to offer play activities for children ages five (5) to twelve (12) at North Bend State Park, Cairo, West Virginia. Playground equipment will be purchased for two separate areas in the park. Park personnel will install all playground equipment. The award may be split if it is in the best interest of the West Virginia Division of Natural Resources.

RECREATION AREA PLAYGROUND

PowerScape plus Fitness Fair, Model #85214, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime swing frame, Item #12583, or equal. Frame must have a minimum of 3 1/2" OD. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime swing add-a-bay, Item #12584, or equal. Frame must have a minimum of 3 1/2" OD. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime 3 1/2" enclosed tot swing with galvanized chain, Item #8696, or equal. F. O. B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime 3 1/2" belt seat with galvanized chain, Item #8910, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

GameTime tuffclad in-ground bench Model #28009, or equal. Bench must be a minimum of 6' in length and a minimum of 10" wide seat and minimum of 10" wide backrest. Must be constructed of galvanized steel with oven cured powder coating. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

Geo-textile fabric, 2,250 sq. ft. roll or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

Geo-textile fabric, 1,125 sq. ft. roll, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

North Bend State Park Playground Specifications

Engineered wood fiber @ 8" compacted depth. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

One (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacturer's guidelines.

LODGE AREA PLAYGROUND

PrimeTime kid coral, Item #g11823, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime swing frame, Item #12583, or equal. Swing must have a minimum of 3 1/2" OD. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime swing-a-bay, item #12584, or equal. Swing must have a minimum of 3 1/2" OD. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime 3 1/2" belt seat with galvanized chain, Item #8910, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

PrimeTime 3 1/2" enclosed tot swing with galvanized chain, item #8696, or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

GameTime tuffclad in-ground bench Model #28009, or equal. Bench must be a minimum of 6' in length and a minimum of 10" wide seat and minimum of 10" wide backrest. Must be constructed of galvanized steel with oven cured powder coating. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

Geo-textile fabric, 2,250 sq. ft. roll or equal. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

Engineered wood fiber @ 8" compacted depth. F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within ninety (90) days of purchase order award.

North Bend State Park Playground Specifications

One (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacturer's guidelines.

North Bend State Park Playground Specifications

All playground equipment and engineered wood fiber must meet the following requirements:

- Compliance with U.S. Consumer Product Safety Commission, Handbook for Public Playground Safety.
- Compliance with ASTM Standard F 1487.
- Compliance with Architectural and Transportation Barriers Compliance Board, Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Play Areas.

Vendors must submit the following attachments:

- Complete manufacturer's parts specifications and warranties.
- Layout drawing to scale of the proposed play structure or equipment.
- ASTM and CPSC Statement of Compliance

Warranties:

- All equipment and engineered wood fiber must be guaranteed to be free of defects in workmanship and material for a minimum of one year from date of acceptance. However, if manufacturer warranty periods are longer than the required minimum one year warranty, those warranties shall apply.

Color scheme of equipment must be coordinated with North Bend State Park. Color of items will be selected from manufacturer's standard colors.

A mandatory pre-bid conference will be held on April 2, 2009, at North Bend State Park Headquarters at 10:00 a.m. A failure to attend the mandatory pre-bid conference will result in bid disqualification. An individual may not represent more than one firm at the pre-bid conference.

North Bend State Park
PLAYGROUND EQUIPMENT SHEET

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding "or equal" brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request For Proposal.

Item No.	Equipment	Manufacturer	Model
1	Recreation Area Playground PowerScape plus Fitness Fair, Model #85214, or equal.		See attached
2	Recreation Area Playground PrimeTime swing frame, Item #12583, or equal.		↓
3	Recreation Area Playground PrimeTime swing add-a-bay, Item #12584, or equal.		
4	Recreation Area Playground PrimeTime 3 1/2" enclosed tot swing with galvanized chain, Item #8696, or equal.		
5	Recreation Area PrimeTime 3 1/2" belt seat with galvanized chain, Item #8910, or equal.		
6	Recreation Area Playground GameTime tuffclad in-ground bench, Model #28009, or equal.		
7	Recreation Area Playground geotextile fabric, 2,250 sq. ft. roll or equal.		
8	Recreation Area Playground geotextile fabric, 1,125 sq. ft. roll or equal.		
9	Recreation Area Playground engineered wood fiber @ 8" compacted depth or equal.		

North Bend State Park

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
10	Recreation Area Playground one (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacture's guidelines.		See attached
11	Lodge Area Playground PrimeTime kid coral, Item #g11823, or equal.		
12	Lodge Area Playground PrimeTime swing frame, Item #12583, or equal.		
13	Lodge Area Playground PrimeTime swing-a-bay, item #12584, or equal.		
14	Lodge Area Playground PrimeTime 3 1/2" belt seat with galvanized chain, Item # 8910, or equal.		
15	Lodge Area Playground PrimeTime 3 1/2" enclosed tot swing with galvanized chain, item #8696, or equal.		
16	Lodge Area Playground GameTime tuffclad in-ground bench Model #28009, or equal.		
17	Lodge Area Playground geo-textile fabric, 2,250 sq. ft. roll or equal.		
18	Lodge Area Playground engineered wood fiber @ 8" compacted depth or equal.		

North Bend State Park

PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
19	Lodge Area Playground one (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacture's guidelines.		<i>See attached</i>

WVDNR209113
 North Bend State Park Playground Equipment
PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
1	1	Recreation Area Playground PowerScape plus Fitness Fair, Model #85214, or equal.		<i>See attached</i> ↓
2	1	Recreation Area Playground PrimeTime swing frame, Item #12583, or equal.		
3	1	Recreation Area Playground PrimeTime swing add-a-bay, Item #12584, or equal.		
4	2	Recreation Area Playground PrimeTime 3 1/2" enclosed tot swing with galvanized chain, Item #8696, or equal.		
5	2	Recreation Area PrimeTime 3 1/2" belt seat with galvanized chain, Item #8910, or equal.		
6	4	Recreation Area Playground GameTime tuffclad in-ground bench Model #28009, or equal.		
7	1	Recreation Area Playground geo-textile fabric, 2,250 sq. ft. roll or equal.		
8	1	Recreation Area Playground Geo-textile fabric, 1,125 sq. ft. roll, or equal.		
9	4,650 square feet	Recreation Area Playground engineered wood fiber @ 8" compacted depth or equal.		
10	1	Recreation Area Playground one (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacture's guidelines.		
11	1	Lodge Area Playground PrimeTime kid coral, Item #g11823, or equal.		

PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount	
12	1	Lodge Area Playground PrimeTime swing frame, Item #12583, or equal.		See attached	
13	1	Lodge Area Playground PrimeTime swing-a-bay, item #12584, or equal.		↓	
14	2	Lodge Area Playground PrimeTime 3 1/2" belt seat with galvanized chain, Item # 8910, or equal.			
15	2	Lodge Area Playground PrimeTime 3 1/2" enclosed tot swing with galvanized chain, item #8696, or equal.			
16	1	Lodge Area Playground GameTime tuffclad in-ground bench Model #28009, or equal.			
17	1	Lodge Area Playground geo-textile fabric, 2,250 sq. ft. roll or equal.			
18	2,516 square feet	Lodge Area Playground engineered wood fiber @ 8" compacted depth or equal.			
19	1	Lodge Area Playground one (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacture's guidelines.			
		TOTAL			\$49,972.76

North Bend
Lodge Area
Cairo, WV

No.	Revision	Date

This play equipment is recommended for children ages


Soft, resilient surfacing should be placed in the use zones of all equipment, as specified for each type of equipment, and at depths to meet the critical fall heights as specified by the U.S. Consumer Product Safety Commission, ASTM standard F 1487 and Canadian Standard CAN/CSA-Z-814.



Drawn By:

Date:

Drawing Name:

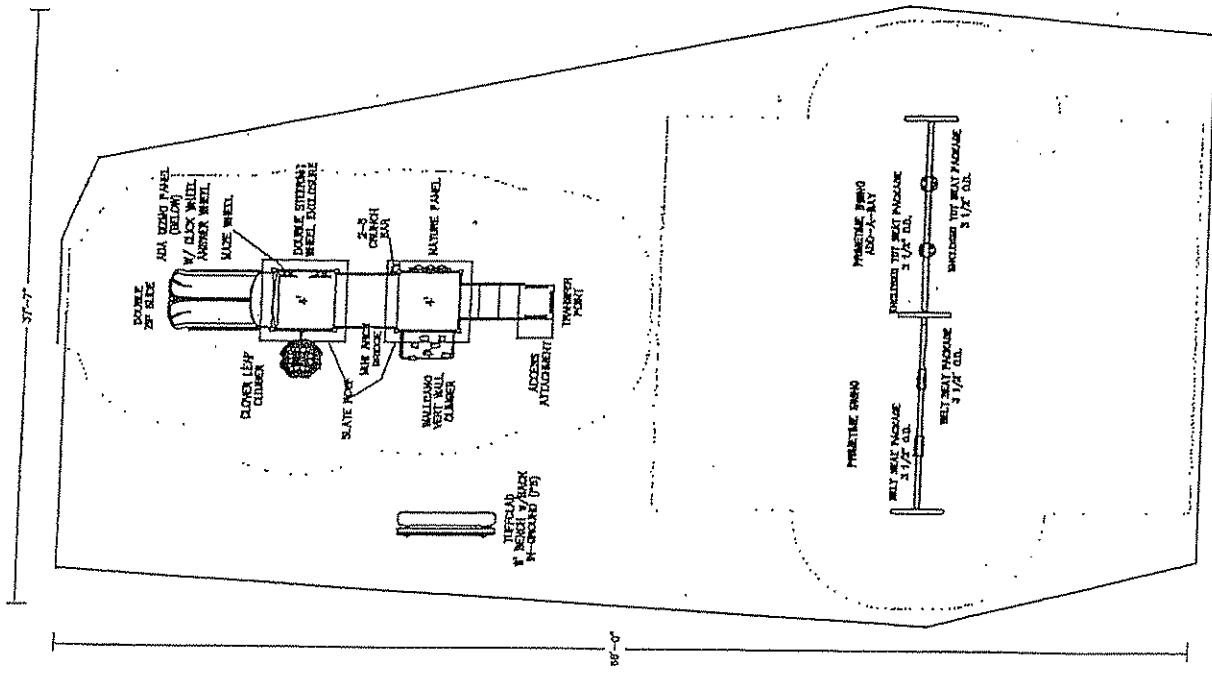



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209113

PAGE
 1

ADDRESS CORRESPONDENCE TO ATTENTION OF
 FRANK WHITTAKER
 304-558-2316

VENDOR


*709033753 800-438-2780
 CUNNINGHAM ASSOCIATES INC
 PO BOX 240981
 CHARLOTTE NC 28224

SHIP TO


DIVISION OF NATURAL RESOURCES
 NORTH BEND STATE PARK
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 221
 CAIRO, WV 26337 304-643-2931

DATE PRINTED 03/23/2009	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
----------------------------	---------------	----------	--------	---------------

BID OPENING DATE: 04/23/2009 BID OPENING TIME 01:30PM

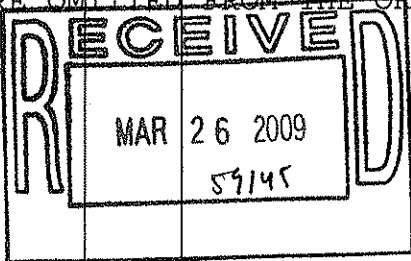LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
***** ADDENDUM NO. 1 *****						
THIS ADDENDUM IS ISSUED TO PROVIDE THE ATTACHED PURCHASING AFFIDAVIT FORM AND THE WV VENDOR PREFERENCE FORM WHICH WERE OMITTED FROM THE ORIGINAL RFQ.						
						
0001	1	LS		650-38		
PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)						
***** THIS IS THE END OF RFQ DNR209113 ***** TOTAL:						\$ 49,972.76

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE  TELEPHONE 800-438-2780 DATE 4-20-09

TITLE Project Manager FEIN 54-0883979 ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

VENDOR OWING A DEBT TO THE STATE:

West Virginia Code §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

If this is a solicitation for a public improvement construction contract, the vendor, by its signature below, affirms that it has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code*. The vendor **must** make said affirmation with its bid submission. Further, public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code* and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the *West Virginia Code* may take place before their work on the public improvement is begun.

ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.


LICENSING:

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.

Under penalty of law for false swearing (*West Virginia Code* §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

Vendor's Name: GameTime C/o Cunningham Associates
Authorized Signature:  Date: 4-20-09

State of West Virginia **VENDOR PREFERENCE CERTIFICATE**

Certification and application* is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1. Application is made for 2.5% resident vendor preference for the reason checked:

- Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; or,
- Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or,
- Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; or,

2. Application is made for 2.5% resident vendor preference for the reason checked:

- Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,

3. Application is made for 2.5% resident vendor preference for the reason checked:

- Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,

4. Application is made for 5% resident vendor preference for the reason checked:

- Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; or,

5. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:

- Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; or,

6. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:

- Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: _____ **Signed:** _____

Date: _____ **Title:** _____

**Check any combination of preference consideration(s) indicated above, which you are entitled to receive.*



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR209113

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
FRANK WHITTAKER 304-558-2316

VENDOR

*709033753 800-438-2780
 CUNNINGHAM ASSOCIATES INC
 PO BOX 240981

 CHARLOTTE NC 28224


SHIP TO

DIVISION OF NATURAL RESOURCES
 NORTH BEND STATE PARK
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 221
 CAIRO, WV
 26337 304-643-2931

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
04/13/2009				

BID OPENING DATE: **04/23/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
ADDENDUM NO. 2						
THIS ADDENDUM IS ISSUED TO:						
1.) ANSWER QUESTIONS DISCUSSED DURING THE MANDATORY PRE-BID MEETING, AND						
2.) PROVIDE A COPY OF THE PRE-BID ATTENDEE LIST						
BID OPENING DATE REMAINS: 04/23/2009						
BID OPENING TIME REMAINS: 1:30 PM						
***** END ADDENDUM NO. 2 *****						
0001	1	LS		650-38		
PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)						

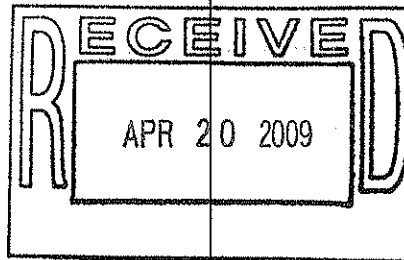

SEE REVERSE SIDE FOR TERMS AND CONDITIONS			
SIGNATURE	TELEPHONE	DATE	
<i>[Signature]</i>	806-438-2780	4-20-09	
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE	
Project Manager	54-0883979		

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



**DIVISION OF NATURAL RESOURCES
NORTH BEND STATE PARK
Route 1, Box 221
Cairo, West Virginia 26337
Telephone (304) 643-2931
Fax (304) 643-2970
Email NorthBend@wvdnr.gov**

Joe Manchin III
Governor

Frank Jezioro
Director

April 8, 2009

Memo To: Angela Negly
Procurement Officer

From: Kathy Metz, Asst. Superintendent
North Bend State Park

Subject: Pre-bid Meeting

A pre-bid meeting for playground equipment was held at North Bend State Park on April 2, 2009 at 10:00. The following is the list of question and response at was discussed at the meeting.

1. Are border included in the bid?
No North Bend Staff will purchase and install the borders.
2. Are ADA ramps included in the bid?
No North Bend will provide the ramps
3. The amount of wood carpet and fabric do not match? We will check in to it and write it in the response.

Item No. 7 on WVDNR209113 change quantity to 2 rolls of geo-textile fabric 2,250 sq. ft. The Geo-textile fabric and engineered wood fibers 8" compacted depth must meet the safety zone requirement for the Playground equipment.

4. The playground equipment is list on both the Equipment sheet and the price sheet is that a duplicate?

No. Please use the equipment sheet to write the specifications of the Manufacture's make and model of the Playground equipment.

Request for Proposal No.

SIGN IN SHEET

PLEASE PRINT

Page _____ of _____

Date: _____

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Playon Sports & Rec/Mirage</u>	<u>836 Echo Road</u>	PHONE <u>304-744-6548</u>
Rep: <u>Tom Nelson</u>		TOLL FREE
Email Address: <u>CNE167@aol.com</u>	<u>So. Charleston WV 25303</u>	PHONE <u>800-286-9693</u>
Company: <u>CUNNINGHAM ASSOC INC/GARDNER</u>	<u>Box 240981 Charlotte NC 28229</u>	FAX <u>304-744-6545</u>
Rep: <u>LARRY FITZGERALD</u>		PHONE <u>800-438-7280</u>
Email Address: <u>LARRY@CUNNINGHAMASSOC.COM</u>		TOLL FREE
Company: <u>VA PLAYGROUND SERVICES/LITTLE TIES</u>	<u>14276 RIVERSIDE RD</u>	FAX <u>704-525-2356</u>
Rep: <u>JIM BENEDICT</u>	<u>BEHOLD, VA 23005</u>	PHONE <u>434-249-2158</u>
Email Address: <u>JIM@VAPLAYGROUNDS.COM</u>		TOLL FREE
Company: <u>Playground Specialists</u>	<u>17052 N. Seton Avenue</u>	FAX <u>434 2963289</u>
Rep: <u>Tammy Wood</u>	<u>Emmitsburg, MD 21727</u>	PHONE <u>(301)271-9236</u>
Email Address: <u>Tammy@playspec.com</u>		TOLL FREE
Company: <u>Blue Edge Outdoor Designs/Playland</u>		FAX <u>(301)271-9239</u>
Rep: <u>Jim Jones</u>	<u>PO Box 123</u>	PHONE <u>540 765 7586</u>
Email Address: <u>brskengound@erizon.net</u>	<u>Blue Edge, Va 24064</u>	TOLL FREE
		FAX

SIGN IN SHEET

PLEASE PRINT

Page of

Date:

Request for Proposal No.

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Davis Architect, LLC</u>	<u>2325 Liberty St.</u>	<u>PHONE 304-428-3000</u>
Rep: <u>John R. Davis</u>	<u>PARKERSBURG, WV</u>	<u>TOLL FREE</u>
Email Address: <u>J.R.DAVIS99@YAHOO.COM</u>	<u>26101</u>	<u>FAX 304-428-3002</u>
Company: <u> </u>	<u> </u>	<u>PHONE</u>
Rep: <u> </u>	<u> </u>	<u>TOLL</u>
Email Address: <u> </u>	<u> </u>	<u>FREE</u>
Company: <u> </u>	<u> </u>	<u>FAX</u>
Rep: <u> </u>	<u> </u>	<u>PHONE</u>
Email Address: <u> </u>	<u> </u>	<u>TOLL</u>
Company: <u> </u>	<u> </u>	<u>FREE</u>
Rep: <u> </u>	<u> </u>	<u>FAX</u>
Email Address: <u> </u>	<u> </u>	<u>PHONE</u>
Company: <u> </u>	<u> </u>	<u>TOLL</u>
Rep: <u> </u>	<u> </u>	<u>FREE</u>
Email Address: <u> </u>	<u> </u>	<u>FAX</u>



CUNNINGHAM ASSOCIATES INC.
Park & Playground Products

North Bend State Park Playground Proposal - BID

West Virginia State Parks
Attn: Kathy Metz
RR 1, Box 221
Cairo, WV 26337-9730
Phone: 304-643-2931
Fax: 304-643-2970

QUOTE

4/20/2009

60876

Ship To Zip: 25305

Quantity	Part #	Description
RECREATION AREA		
1	85214	GameTime - PSPlus Fitness Flair
1	12583	GameTime - Primetime Swing Frame, 3 1/2" Od
1	12584	GameTime - Primetime Swing Add-A-Bay, 3 1/2" Od
2	8696	GameTime - 3 1/2" Enclosed Tot-Galv Chain
2	8910	GameTime - 3 1/2" Belt Seat-Galv Chain
4	28009	GameTime - 6' P/S Bench W/Back Inground
2	161290	GameTime - Geo-Textile 2250 Sq Ft Roll
1	161291	GameTime - Geo-Textile 1125 Sq Ft Roll
4650	EWf	GT-Impax - Engineered Wood Fiber @ 8" Compacted Depth
LODGE AREA		
1	g11823	GameTime - PrimeTime Kid Corral
1	12583	GameTime - Primetime Swing Frame, 3 1/2" Od
1	12584	GameTime - Primetime Swing Add-A-Bay, 3 1/2" Od
2	8910	GameTime - 3 1/2" Belt Seat-Galv Chain
2	8696	GameTime - 3 1/2" Enclosed Tot-Galv Chain
1	28009	GameTime - 6' P/S Bench W/Back Inground
1	161290	GameTime - Geo-Textile 2250 Sq Ft Roll
2516	EWf	GT-Impax - Engineered Wood Fiber @ 8" Compacted Depth
1	INSTALL	MISC - (1) Day of Supervised Installation

Site must be level and free of obstructions.

Total Amount: \$49,972.76





CUNNINGHAM
ASSOCIATES INC.
Park & Playground Products

North Bend State Park Playground Proposal - BID

West Virginia State Parks
Attn: Kathy Metz
RR 1, Box 221
Cairo, WV 26337-9730
Phone: 304-643-2931
Fax: 304-643-2970

QUOTE

4/20/2009

60876

Ship To Zip: 25305

Pricing: Prices are firm for 30 days unless otherwise noted.

Shipment: Order shipped 30-45 day after receipt of order and acceptance of your purchase order, color selections, approved submittals,(if required) unless otherwise noted. It is the responsibility of the owner to offload and inventory equipment, unless other arrangements have been made. Missing or damaged equipment must be reported within 60 days of acceptance of delivery

Payment Terms: Net 30 days subject to approval by Credit Manager. A signed P.O. made out to Gametime C/O Cunningham Associates, Inc. or this signed quotation is required for all orders.

Acceptance of this proposal indicates your agreement to the terms and condition stated herein.



North Bend State Park Lodge Area

GT Events Specifications

General System Specifications:

The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. GT Events are direct bolt products NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable.

Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON POWERLOCK AND HARDWARE

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-07ae1.

Swings

BELT SEAT WITH CLEVIS

Commercial Belt Seat - an extra piece of fluted rubber at the front and back of seat gives it a cushion bumper.

SWING CLEVIS: Shall be 5/16" Dia. with galvanized finish. Bolt shall have tamper resistant head.

CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Finish: Chain shall be hot dipped galvanized. (d) Type of construction: 4/0 welded link coil chain.

COATED CHAIN: Shall be standard 7/32" diameter steel wire chain with a 1/8" (nominal) thickness of color-impregnated polyvinyl coating with U.V. inhibitors.

STAINLESS STEEL CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Type of construction: 4/0 welded link coil chain.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel.

Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320 % longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.



ENCLOSED TOT SEAT WITH CLEVIS

Fully Enclosed Seats shall be fabricated with .025" thick stainless steel inserts covered by a dark green colored EPDM rubber.

SWING CLEVIS: Shall be 5/16" Dia. with galvanized finish. Bolt shall have tamper resistant head.

CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Finish: Chain shall be hot dipped galvanized. (d) Type of construction: 4/0 welded link coil chain.

COATED CHAIN: Shall be standard 7/32" diameter steel wire chain with a 1/8" (nominal) thickness of color-impregnated polyvinyl coating with U.V. inhibitors.

STAINLESS STEEL CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Type of construction: 4/0 welded link coil chain.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel.

Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

PRIMETIME SWING

TOPRAIL AND ARCH: Shall be fabricated of 3-1/2" O.D. (13 Gauge) galvanized steel tubing. Arch includes a welded 3-1/8" O.D. galvanized steel sleeve to which the top rail is fastened.

FINISH: Shall be an electrostatically applied custom formula of TGIC polyester powder with baked finish. Specify color desired.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

PrimeTime Specifications

General System Specifications:

PrimeTime® features 3 1/2" O.D. uprights with a positive bolt-through fastening system utilizing stainless steel tabs. The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. PrimeTime is a direct bolt system NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable. All climbing attachments shall include a 15" wide deck entry archway to control deck access to one child at a time and help prevent inadvertent falls.

Manufacturer shall offer the following warranties on the materials and components of its system:



- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON HARDWARE

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-07ae1.

General Specifications of Materials:

ENTRY ARCHWAY

All entry archways shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with vertical members fabricated of 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing and with 3/16" hot rolled steel formed mounting tabs. The entrance archways shall be an all welded assembly and shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein.

HARDWARE

All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. All primary stainless steel fasteners shall be Button Head Socket Caps.

POWDER COAT FINISH

Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a six stage bath system with an iron phosphate wash, as a rust inhibitor, and a sealer to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 400 degrees Fahrenheit.

ROTATIONALLY MOLDED PRODUCTS

All polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790);Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

Uprights and Upright Accessories:

BOLT-THROUGH CONNECTION

Each PrimeTime/TotTime component is bolted directly into the upright post and designed to eliminate exposed hardware and protrusions. Minimum tensile strength of the connection shall be 45,000 psi, minimum yield strength shall be 22,000 psi. All necessary connectors shall be engineered, manufactured and factory installed as an integral part of the upright post. For added



protection against corrosion, cold galvanizing shall be applied to the edges of each drilled hole.

UPRIGHTS

All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

UPRIGHTS - ALUMINUM

Shall be 3.5" outside diameter tubing, 1/8" wall thickness, extruded from 6005-T5 aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

UPRIGHT CAPS

The standard upright cap shall be an aluminum cap, cast from a 383 alloy, powder coated to match the upright. Every upright cap shall be anodized for maximum protection. All upright caps are permanently installed at the factory using aluminum self-sealing rivets.

Punched Steel & Coated Components:

PUNCHED STEEL DECKS

Punched steel decks shall be fabricated from 12 gauge punched steel with a protective p&o finish and other punched steel products shall be fabricated from 11 gauge punched steel with a protective p&o finish. Coated products shall consist of a welded assembly with an oven cured matte finish polyvinyl chloride (PVC) coating with a minimum coating thickness of .080". The PVC coating shall have a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. The PVC coating shall contain phthalate levels in concentrations of 1/10 of 1% or lower. For ADA Ramp Accessible decks and ramps, the hole shall measure 1/4" diameter after coating. For standard decks and ramps, the hole size shall measure 1-1/4" diameter after coating.

TRANSFER POINT

The Platform and Steps shall each be made from 11 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Platform and Steps shall each be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The steps shall have a minimum of 355 square inches of area per step and shall descend in increments of 8" or less, as specified by the Americans with Disabilities Act (ADA). Handrails and attachment rails shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing, with supports fabricated from 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing and 2" square x 3/16" wall steel tubing. Platform support shall be fabricated from 5" O.D tubing with a 3/16" hot rolled flat steel flange. Handholds, attachment rails and platform supports shall be all-welded assemblies and shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication.

TRANSFER POINT, ACCESS ATTACHMENT

The Platform shall be made from 11 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The platform shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The platform support shall be fabricated from 5" O.D tubing with a 3/16" hot rolled flat steel flange. The platform support shall be an all-welded assembly and shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication.



DECKS - LARGE SQUARE

Shall have a minimum surface area of 2,060 square inches, maintaining a full 45-1/2" center to center spacing on the upright posts. The square deck shall be fabricated from punched steel in conformance with the specifications outlined herein. The deck frame shall be fabricated from 3/16" x 2-1/2" hot rolled steel with corner supports fabricated from 1/4" x 2-1/2" hot rolled steel. Intermediate supports, fabricated from 1/8" x 1" hot rolled steel, shall be notched and welded at the intersections forming a support grid underneath the entire deck surface. The deck shall be a one-piece welded assembly, coated after fabrication with an oven cured matte finish polyvinyl chloride (PVC) coating in accordance with the specifications herein. Each square deck shall be directly bolted to the upright posts with four 3/8" diameter button head cap screws in accordance with the hardware specifications herein.

Roofs and Arches:

SLATE / SHINGE ROOF WITH EAVE

The Roof Eave shall bolt directly to the four uprights and shall be one-piece, double-wall rotationally molded linear low-density polyethylene conforming to the specifications outlined herein. The Slate and Shingle Roofs shall bolt directly to the Roof Base and shall be one-piece, double-wall rotationally molded linear low-density polyethylene conforming to the specifications outlined herein.

Bridges:

MINI-ARCH BRIDGE

Mini-Arch bridge shall have a minimum surface area of 1,081 square inches. The bridge sections shall be fabricated from punched steel in conformance with the specifications outlined herein. Each bridge section shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The bridge frame shall be fabricated from 3/16" x 3" hot rolled steel with the intermediate supports fabricated from 1/8" x 1" hot rolled steel. Arch bridge protective barrier or guardrail shall be an all welded assembly of a formed 1-5/8" O.D. x 14 gauge (.083" thick) galvanized steel tubing and 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing vertical rungs. After fabrication, the protective barrier or guardrail assembly shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

Climbers:

CLOVER LEAF CLIMBER

Clover climber shall be fabricated from 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing, and step rungs of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 3/16" formed steel mounting tab. The Clover climber shall have a handhold of 1.029" x .083" (14 gauge) wall galvanized steel tubing. Clover climber shall be a one-piece welded assembly and shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication. Steel insert shall be fabricated from 11 gauge (.120") hot rolled steel. Decorative designs shall be laser cut to produce accurate, burr-free cut-outs.

VERT WALL CLIMBER

Shall be two, one-piece construction of color impregnated rotationally molded linear low density polyethylene pieces with a 1/4" nominal wall thickness. The Grips are four organic variations injection molded of polyethylene. The Mounting Bracket shall be fabricated from 1-1/16" O.D. x .075" (15 gauge), 1-5/16" O.D. x .083" (14 gauge), and 1 5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing. The Mounting Bracket shall be an all welded construction and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein. The Struts shall be fabricated from 1 7/8" O.D. x .095" (13 gauge) wall galvanized steel tubing and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein. All rotationally molded polyethylene products shall conform to the rotationally molded specifications outlined herein.

Panels:

INTERACTIVE PANELS

The cap and game pieces shall be constructed from color impregnated rotationally molded linear low density polyethylene with the appropriate graphics rotationally molded into the material. The nine game pieces shall include molded-in graphics on both



sides. The rungs shall be fabricated of 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. All rotationally molded polyethylene products shall conform to the rotationally molded specifications outlined herein. Enclosure frame shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 3/16" formed hot rolled steel tabs. Enclosure frame shall be an all welded assembly and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication.

METAL RUNG ENCLOSURES

The rung enclosure shall be fabricated of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The vertical rungs shall be fabricated of 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. The rung enclosure shall be an all welded assembly and shall be coated with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein, after fabrication.

STEERING WHEEL PANELS

The plastic steering wheel shall be molded of a durable proprietary plastic. The steering wheel will withstand an impact of over 250 foot-pounds. The steering wheel is approximately 13-3/4" in diameter.

The steering wheel(s) shall be mounted on a metal rung enclosure in conformance with the specifications outlined herein.

GIZMO PANEL

Gizmo panel shall be 2-1/2" thick, color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. Gizmo's shall conform to the Gizmo specifications outlined herein.

GIZMO'S

The Wheel Housing, Window Housings and Cap shall be injection molded from color impregnated high density polyethylene. The Maze Bubble shall be injection molded from clear ABS plastic. The Echo Chamber, Answer Wheel, Knob, Maze, and Click Wheel shall be injection molded from color impregnated ABS plastic. The Bushing shall be injection molded Acetal. The Bubble Mirror shall be vacuum formed of 3/16" thick polycarbonate with a mirror finish applied to the concave side. The Flat Mirror shall be 1/8" thick Polycarbonate with a mirror finish applied to one side. The Stained Glass shall be 3/16" translucent Polycarbonate.

Slides:

ZIP SLIDES (SINGLE & DOUBLE BEDWAY, AND RUMBLE & ROLL)

Zip Slides and hoods shall be color impregnated linear low-density polyethylene and shall conform to the rotationally molded specifications outlined herein with double wall construction molded to a minimum .25" wall thickness. Single bedway Zip Slides shall have a minimum inside bed width of 17.5" while double bedway Zip Slides shall have a minimum inside bed width of 16.5" on each bedway. Outside rails are at least 7" high when measured from the centerline of the bedway surface. The angle of descent shall be no greater than 50°. Each Zip Slide works in conjunction with a rotationally molded hood that has an integrated cross bar which force users to a seated position. The exit section of the bedway shall have a minimum 40" radius for a smooth transition from the slide chute to the run-out area. The run-out shall be angled at a maximum of 4° with an integrated drain at 5° to reduce pooling of water. Zip Slides bolt directly to the deck and to the slide hood.

North Bend State Park Recreation Area

GT Events Specifications

General System Specifications:

The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. GT Events are direct bolt products NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable.

Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON POWERLOCK AND HARDWARE

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-07ae1.

Climbers

CHALLENGE STATION CLIMBER BASE

Main Climber: Shall be fabricated from 1 7/8" O.D. 13 gauge (.095") galvanized steel tubing, 1 1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing, ¼" thick hot rolled flat steel supports and 3/16" thick hot rolled flat steel mounting tabs. The Main Climber shall be all welded construction.

Center Pole: Shall be fabricated from 1 7/8" O.D. 13 gauge (.095") galvanized steel tubing, the angle cut sockets shall be fabricated from 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The Center Pole shall be all welded construction.

Side Support Pipe: Shall be fabricated from 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing.

Upper Ring: Shall be fabricated from 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 3/16" thick hot rolled flat steel mounting tabs. The Upper Ring shall be all welded construction.

Finish: All components shall be coated with a custom formula of TGIC polyester powder in conformance with the specification outlined herein after fabrication.

CSC BUBBLE CLIMBER



Bubble Climber: Shall be fabricated from 1 5/8" O.D. 14 gauge (.083") galvanized steel tubing, 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The Bubble Climber shall be all welded construction.

Archway w/ Socket: Shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with 3/16" hot rolled steel gussets. The Archway shall be all welded construction.

Finish: All components shall be coated with a custom formula of TGIC polyester powder in conformance with the specification outlined herein after fabrication.

CSC CLOVER CLIMBER

Clover Climber: Shall be fabricated from 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing, and step rungs of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing and 3/16" formed steel mounting tab. The Clover climber shall have a handhold of 1.029" x .083" (14 gauge) wall galvanized steel tubing. The Clover climber shall be a one-piece welded assembly.

Archway w/ Socket: Shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with 3/16" hot rolled steel gussets. The Archway shall be all welded construction.

Finish: All components shall be coated with a custom formula of TGIC polyester powder in conformance with the specification outlined herein after fabrication.

CSC CRAZY EIGHT CLIMBER

Crazy Eight Climber: Shall be fabricated from 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing, and step rungs of 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The Crazy Eight climber shall have a handhold of 1.029" x .083" (14 gauge) wall galvanized steel tubing. The Crazy Eight climber shall be a one-piece welded assembly.

Archway w/ Socket: Shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with 3/16" hot rolled steel gussets. The Archway shall be all welded construction.

Finish: All components shall be coated with a custom formula of TGIC polyester powder in conformance with the specification outlined herein after fabrication.

Swings

BELT SEAT WITH CLEVIS

Commercial Belt Seat - an extra piece of fluted rubber at the front and back of seat gives it a cushion bumper.

SWING CLEVIS: Shall be 5/16" Dia. with galvanized finish. Bolt shall have tamper resistant head.

CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Finish: Chain shall be hot dipped galvanized. (d) Type of construction: 4/0 welded link coil chain.

COATED CHAIN: Shall be standard 7/32" diameter steel wire chain with a 1/8" (nominal) thickness of color-impregnated polyvinyl coating with U.V. inhibitors.

STAINLESS STEEL CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Type of construction: 4/0 welded link coil chain.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel.

Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated



solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320 % longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

ENCLOSED TOT SEAT WITH CLEVIS

Fully Enclosed Seats shall be fabricated with .025" thick stainless steel inserts covered by a dark green colored EPDM rubber.

SWING CLEVIS: Shall be 5/16" Dia. with galvanized finish. Bolt shall have tamper resistant head.

CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Finish: Chain shall be hot dipped galvanized. (d) Type of construction: 4/0 welded link coil chain.

COATED CHAIN: Shall be standard 7/32" diameter steel wire chain with a 1/8" (nominal) thickness of color-impregnated polyvinyl coating with U.V. inhibitors.

STAINLESS STEEL CHAIN: (a) Material: 7/32" diameter steel wire. (b) Dimensions (inside for each link): 3/8" wide, 1-3/8" long. (c) Type of construction: 4/0 welded link coil chain.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel.

Fasteners with yellow dichromate treatment have an electro deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320 % longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

PRIMETIME SWING

TOPRAIL AND ARCH: Shall be fabricated of 3-1/2" O.D. (13 Gauge) galvanized steel tubing. Arch includes a welded 3-1/8" O.D. galvanized steel sleeve to which the top rail is fastened.

FINISH: Shall be an electrostatically applied custom formula of TGIC polyester powder with baked finish. Specify color desired.

HARDWARE: All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment, shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 300 series stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing.

PowerScape Plus Specifications

General System Specifications:

PowerScape® Plus features 5" O.D. uprights with a positive bolt-through PowerLock fastening system. The uprights shall be factory drilled to ensure accurate placement of components and ease of installation. Field drilling and measuring are not required. PowerScape® Plus is a direct bolt system NOT a clamp system. All uprights shall receive factory installed aluminum post caps and shall be shipped with a factory applied label indicating proper surfacing level.

All decks and components shall connect to support posts by means of a through-bolt connection for strong, durable connections. Deck/Collar attachments shall not be acceptable. All climbing attachments shall include a 15" wide deck entry archway to control deck access to one child at a time and help prevent inadvertent falls.



Manufacturer shall offer the following warranties on the materials and components of its system:

- LIFETIME LIMITED WARRANTY ON SUPPORT POSTS (UPRIGHTS)
- 15 YEAR LIMITED WARRANTY ON PUNCHED STEEL DECKS, PIPES, RAILS, LOOPS AND RUNGS
- 15 YEAR LIMITED WARRANTY ON ROTOMOLDED POLYETHYLENE COMPONENTS
- LIFETIME LIMITED WARRANTY ON POWERLOCK AND HARDWARE

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-07ae1.

General Specifications of Materials:

ENTRY ARCHWAY

All entry archways shall be fabricated from 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with vertical members fabricated of 1 1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing. The entrance archways shall be an all welded assembly and shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein.

HARDWARE

All nuts, bolts, screws, inserts, and lockwashers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. PowerScape Plus stainless steel fasteners shall be button pin-in head, hex socket cap screws with a two-part epoxy locking patch added to the threads. The two-part locking patch shall consist of one part resin and one part catalyst which are activated during installation. After curing, the material shall require a minimum of five times the installation torque to remove the fastener. Manufacturer shall provide special installation tools for pinned fasteners.

POWDER COAT FINISH

Shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a six stage bath system with an iron phosphate wash, as a rust inhibitor, and a sealer to prevent flash rusting before coating. In addition, all welds shall be protectively coated with ZRP, a zinc rich primer that forms a rust-resistant barrier layer over each weld prior to application of the powder coating. The powder coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794- 69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D-2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Over-bake Stability 100% at 400 degrees Fahrenheit.

ROTATIONALLY MOLDED PRODUCTS

All polyethylene shall be linear low-density material with UV-stabilized color and an anti-static compound additive. All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790);Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD).

Uprights and Upright Accessories:



POWERLOCK CONNECTION

The Patented assemblies shall incorporate two die cast aluminum parts, in a distinctive purpose mounting system that allows a rung panel to mount to the upright. The Powerlock connector will have a matching counterpart for flat panel connections. Each is bolted directly into the upright post through a factory located and installed connection and designed to eliminate exposed hardware and protrusions. Each shall be die cast of 383 aluminum alloy, to resist corrosion. Minimum tensile strength shall be 45,000 psi, minimum yield strength shall be 22,000 psi. Every Powerlock shall be anodized for maximum protection. Powerlock mounting hardware shall not be exposed, virtually eliminating tampering by vandals. All connectors shall be coated with a custom formula of TGIC polyester powder coating, in conformance with the specifications outlined herein.

UPRIGHTS, ALUMINUM

Shall be 5" outside diameter tubing, 1/8" wall thickness, extruded from 6005-T5 aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

UPRIGHTS, STEEL

Shall be 5" outside diameter, 11 gauge (.120") galvanized round tubing, manufactured to ASTM A-500 Grade B tolerances from cold-formed steel conforming to ASTM A-569 Sheet Spec for steel coil. Minimum yield strength shall be 50,000 psi and minimum tensile strength shall be 55,000 psi.

The exterior surface is hot dip galvanized, chromate conversion coated, and a clear high performance organic polymer is applied. The inside diameter has 81% minimum zinc rich primer capable of providing excellent rust protection and fabrication characteristics. All coatings are applied inside and out after welding for superior corrosion protection throughout. Exterior surface galvanizing zinc purity is 99% as per ASTM B-6 high grade and special high grade. Galvanizing coverage shall demonstrate the ability to exceed 1000 hours salt spray corrosion exposure in accordance with ASTM B-117. Internal surface zinc rich 81% minimum zinc dust content in organic resin, as per ASTM F-1234, Section 5.2.4, Type D. All upright posts shall have a finished grade line marking to indicate the correct playground safety surface level. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

UPRIGHT CAPS

The standard upright cap shall be an aluminum cap, cast from a 383 alloy, powder coated to match the upright. Every upright cap shall receive a primer coat for maximum protection. All upright caps are permanently installed at the factory using aluminum self-sealing rivets.

Punched Steel & Coated Components:

PUNCHED STEEL DECKS AND PVC COATED COMPONENTS

All punched steel products shall be fabricated from 11 gauge punched steel with a protective p&o finish. Coated products shall consist of a welded assembly with an oven cured matte finish polyvinyl chloride (PVC) coating with a minimum coating thickness of .080". All decks shall be exclusively dipped utilizing the DuraWear process with an extra thick coating on the top of the deck. The PVC coating shall have a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. The PVC coating shall contain phthalate levels in concentrations of 1/10 of 1% or lower. For ADA Ramp Accessible decks and ramps, the hole shall measure 1/4" diameter after coating. For standard decks and ramps, the hole size shall measure 1 1/4" diameter after coating.

DECKS, SQUARE

Shall have a minimum surface area of 2,381 square inches, maintaining a full 49" center to center spacing on the upright posts. The 49" square deck shall be fabricated in conformance with the punched steel specifications outlined herein. The deck frame shall be fabricated from 3/16" x 3-1/2" hot rolled steel with corner supports fabricated from 1/4" x 3-1/2" hot rolled steel.



Intermediate supports, fabricated from 1/8" x 2-1/2" hot rolled steel, shall be notched and welded at the intersections forming a rigid 12" support grid underneath the entire deck surface. The deck shall be a one-piece welded assembly, coated after fabrication with an oven cured matte finish polyvinyl chloride (PVC) coating in accordance with the specifications herein. The square deck shall be directly bolted to the upright posts with eight 3/8" diameter button-pin-in-head, hex socket cap screws in accordance with the hardware specifications herein.

DECKS, TRIANGULAR

Shall have a minimum surface area of 1,039 square inches, maintaining a full 49" center to center spacing on the upright posts. The triangular platform shall be fabricated in conformance with the punched steel specifications outlined herein. The deck frame shall be fabricated from 3/16" x 3-1/2" hot rolled steel with corner supports fabricated from 1/4" x 3-1/2" hot rolled steel. Intermediate supports, fabricated from 1/8" x 2-1/2" hot rolled steel, shall be welded at the intersections forming a rigid support grid underneath the deck surface. The deck shall be a one-piece welded assembly, coated after fabrication with an oven cured matte finish polyvinyl chloride (PVC) coating in accordance with the specifications herein. Each triangular deck shall be directly bolted to the upright posts with six 3/8" diameter button-pin-in-head, hex socket cap screws in accordance with the hardware specifications herein.

STEP PLATFORMS

The step platforms shall be made from 11 gauge punched steel with a protective P&O finish in conformance with the specifications outlined herein. The step platforms shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handrails and attachment rails shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing, with supports fabricated from 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing and 2" square x 3/16" wall steel tubing. Handholds, and attachment rails shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

Roofs and Arches:

SLATE / SHINGLE ROOF WITH EAVE

The Roof Eave shall bolt directly to the four uprights and shall be one-piece, double-wall rotationally molded linear low-density polyethylene conforming to the specifications outlined herein. The Slate and Shingle Roofs shall bolt directly to the Roof Base and shall be one-piece, double-wall rotationally molded linear low-density polyethylene conforming to the specifications outlined herein.

Bridges:

ARCH BRIDGE

The bridge sections shall be fabricated from punched steel in conformance with the specifications outlined herein. Each bridge section shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. The bridge frame shall be fabricated from 3/16" x 3-1/2" and 1/4" x 3-1/2" hot rolled steel with the intermediate supports fabricated from 1/8" x 3" hot rolled steel. Arch bridge protective barriers shall be an all welded construction of a formed 1-5/8" O.D. x .083" (14 gauge) wall galvanized steel tubing and 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing vertical rungs. The protective barrier assembly shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein.

Climbers:

CARGO NET WALL

The net assembly shall be constructed from galvanized, 7/32", 4/0 welded link chain. Cross members for the net shall be fabricated from 1-1/16" x .075" (15 gauge) wall galvanized steel tubing. The net shall be a welded assembly. The net assembly shall be coated in conformance with the PVC specifications outlined herein. The net assembly shall attach to the top rail using 3/8" hardware. The anchoring system shall consist of formed 1-1/16" x .075" (15 gauge) wall galvanized steel tubing. The top rail shall be an all welded construction with a custom formula of TGIC polyester powder coating, after fabrication, in conformance with the specifications outlined herein.



WAVY CLIMBER

Wavy climber shall be a one-piece welded assembly with the center rail fabricated from 2-3/8" O.D. x .095" (13 gauge) wall galvanized steel tubing. The climbing rungs shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Mounting bracket shall be fabricated from 3/16" x 3-1/2" hot rolled flat steel with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

ROCK WALL CLIMBER

Frame shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The rock wall climber frame assembly shall be an all-welded construction. The climber frame assembly shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication. The 'wall' part of the climber shall be thermoformed HMWPE with a thickness of .25". The Rock Wall Climber is an amorphyously shaped structure resembling a multi-tiered mountain face with multiple climbing paths to the peak. The Rock Wall Climber shall include an entry archway in accordance with the specifications herein and shall be bolted up singularly to a 5' high platform. The climber shall be secured to the ground by cementing the frame into place.

COSMIX CLIMBER

This one-piece climber shall be color impregnated linear low density polyethylene with UV-stabilized color and an anti-static compound additives. The climber shall have a nominal wall thickness of 1/4" and utilizes "holes" to allow the user to ascend and descend at their level of ability. The Footbucks shall be all welded construction of SCH. 40 1 7/8" O.D. galvanized steel pipe with a 1/8" X 1" X 1 13/16" flat stainless steel tab and shall be coated with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein, after fabrication. The Cosmix Climber shall include an offset entry archway in accordance with the specifications herein and shall be bolted up singularly to a platform.

POLY CLIMBING WALL

The Poly Climbing Wall shall be made from 3/4" thick (solid) high density, UV-stabilized, laminated and color impregnated polyethylene. The PolyWall Support Pipe assembly shall be an all welded one-piece construction from 1-7/8" O.D. by .095" (13 gauge) wall galvanized tubing and 3/16" (.188") hot rolled steel tabs. The Grips are four organic variations injection molded of polyethylene. All the metal parts are powder coated with a custom formula of TGIC polyester in conformance with the specifications outlined herein, after fabrication.

GIANT WAVE CLIMBER LINK

This patent pending one-piece climber shall be color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. The climber utilizes "waves" and "bumps" to allow the user to ascend and descend at their level of ability. The mounting bracket shall be fabricated of 3/16" x 2" hot rolled steel. The mounting brackets and enclosures shall be coated with a custom formula of TGIC polyester powder, after fabrication in conformance with the specifications outlined herein.

Upper Body Development Components:

CRUNCH BAR

Shall be fabricated from 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

TRACK RIDE

The Track Ride shall be an overhead play apparatus consisting of a free-span extruded aluminum track system, a trolley, and 5" diameter support posts. The Track Ride chassis shall be fabricated of 1" square steel, 3/16" and 1/8" hot rolled steel, and parallel twin



handles that are formed from 1-1/16" O.D. x .075" (15 gauge) wall galvanized steel tubing, The chassis shall be coated after fabrication with have a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein. The chassis assembly for the Track Ride trolley shall consist of molded urethane wheels, steel bushings, bearings, rubber bumpers, and axles. The Track Ride trolley shall be factory assembled. The track for the Track Ride system shall be fabricated from extruded 6005 T5 aluminum alloy with a minimum yield strength of 35,000 psi. and a minimum tensile strength of 38,000 psi. and conforms to ASTM-B-221. The beam mounting assembly shall be fabricated from 2 3/8" diameter galvanized steel tubing and 3/16" thick hot rolled steel. The mounting assembly shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

Overhead Ladders:

OVERHEAD TREE CLIMBER

The overhead tree climber assembly shall be fabricated from 2-7/8" O.D. x .134" (10 gauge) wall galvanized steel tubing top rail with rung loops fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. The end rails are fabricated from 2-3/8" O.D. x .095" (13 gauge) wall galvanized steel tubing and 3/16" formed hot rolled steel mounting tabs. The climber assembly shall be an all welded construction which bolts directly into the uprights and shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

Panels:

GIZMO PANEL

Gizmo panel shall be 2-1/2" thick, color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. Gizmo's shall conform to the Gizmo specifications outlined herein.

GIZMO'S

The Wheel Housing, Window Housings and Cap shall be injection molded from color impregnated high density polyethylene. The Maze Bubble shall be injection molded from clear ABS plastic. The Echo Chamber, Answer Wheel, Knob, Maze, and Click Wheel shall be injection molded from color impregnated ABS plastic. The Bushing shall be injection molded Acetal. The Bubble Mirror shall be vacuum formed of 3/16" thick polycarbonate with a mirror finish applied to the concave side. The Flat Mirror shall be 1/8" thick Polycarbonate with a mirror finish applied to one side. The Stained Glass shall be 3/16" translucent Polycarbonate.

Slides:

FLIP SLIDE

The one-piece slide shall be color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. The slide can be "flipped over" to be right or left exiting. The banked off-set shall be approximately 20". The seating and run-out areas shall be a minimum of 12" long to slow the user for proper exit. The mounting bracket shall be fabricated of 3/16" x 2-1/2" hot rolled steel, PVC coated in conformance with the specifications herein. Slide enclosure and foot buck assembly shall be coated after fabrication with a custom formula of TGIC polyester powder, in conformance with the specifications outlined herein.

WILD SLIDE

This multi-sectional rotationally molded open-bedway slide shall be manufactured from color impregnated linear low density polyethylene and shall conform to the rotationally molded product specifications outlined herein. Entry to the slide incorporates a tunnel access. The slide bedway shall have a 20" inside diameter on a 40° maximum slope so that each section will decrease in height by 12". The Double Entrance includes a triangular shaped platform filler that shall be fabricated from 11 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The platform filler shall be a one-piece assembly finished with the matte PVC coating per the specifications herein. The slides will be offered on 4', 5', 6', 7', and 8' deck heights. Entrance, Double Entrance, 1'Exit, 2' Exit, Straight, Spiral, Left, and Right sections shall be molded so that they overlap externally at each junction and all hardware connections are located on the outside of the sections. All sections shall be of double wall construction with a nominal wall thickness of 1/4". The exit sections features a molded-in pedestal. Slides of 5', 6', 7', and 8' deck heights will use 3' or 4' slide supports.

WISHBONE SLIDE

The slides and cross bar shall be color impregnated linear low density polyethylene and shall conform to the rotationally molded specifications outlined herein. The Wishbone Slide shall be manufactured from two (2) FlipSlides, one right exiting and one left exiting slide. The slides shall be connected at the entrance region by a filler piece, manufactured of linear low density polyethylene. The mounting bracket shall be 3/16" x 2-1/2" hot rolled steel, PVC coated in conformance with the specifications herein. The vertical bar shall be a one-piece welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder, in conformance with the specifications outlined herein.

ZIP SLIDES (SINGLE & DOUBLE BEDWAY, AND RUMBLE & ROLL)

Zip Slides and hoods shall be color impregnated linear low-density polyethylene and shall conform to the rotationally molded specifications outlined herein with double wall construction molded to a minimum .25" wall thickness. Single bedway Zip Slides shall have a minimum inside bed width of 17.5" while double bedway Zip Slides shall have a minimum inside bed width of 16.5" on each bedway. Outside rails are at least 7" high when measured from the centerline of the bedway surface. The angle of descent shall be no greater than 50°. Each Zip Slide works in conjunction with a rotationally molded hood that has an integrated cross bar which force users to a seated position. The exit section of the bedway shall have a minimum 40" radius for a smooth transition from the slide chute to the run-out area. The run-out shall be angled at a maximum of 4° with an integrated drain at 5° to reduce pooling of water. Zip Slides bolt directly to the deck and to the slide hood.

MARSH

CERTIFICATE OF INSURANCE

CERTIFICATE NUMBER
ATL-001038993-07

PRODUCER
MARSH
3475 PIEDMONT ROAD NE
SUITE 1200
ATLANTA, GA 30305
Attn: Tami Rouse 404-995-3430

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER OTHER THAN THOSE PROVIDED IN THE POLICY. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES DESCRIBED HEREIN.

457102-GL-pg-02-03

INSURED
Game Time
a division of Playcore Wisconsin, Inc.
150 GameTime Drive
Fort Payne, AL 35967

COMPANIES AFFORDING COVERAGE

- COMPANY
A STEADFAST INSURANCE COMPANY
- COMPANY
B NATIONAL UNION FIRE INSURANCE CO OF PITTSBURGH
- COMPANY
C OHIO CASUALTY INSURANCE CO
- COMPANY
D N/A

COVERAGES This certificate supersedes and replaces any previously issued certificate for the policy period noted below. 2
THIS IS TO CERTIFY THAT POLICIES OF INSURANCE DESCRIBED HEREIN HAVE BEEN ISSUED TO THE INSURED NAMED HEREIN FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THE CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, CONDITIONS AND EXCLUSIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

CO LTR	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
A	GENERAL LIABILITY	SC05344512-01	02/26/06	08/01/07	GENERAL AGGREGATE \$ 5,000,000
	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY				PRODUCTS - COM/POP AGG \$ 2,000,000
	<input type="checkbox"/> CLAIMS MADE <input checked="" type="checkbox"/> OCCUR				PERSONAL & ADV INJURY \$ 1,000,000
	OWNER'S & CONTRACTOR'S PROT				EACH OCCURRENCE \$ 1,000,000
	<input checked="" type="checkbox"/> SIR \$150,000				FIRE DAMAGE (Any one fire) \$ 50,000
					MED EXP (Any one person) \$ EXCLUDED
	AUTOMOBILE LIABILITY				BODILY INJURY (Per person) \$
	ANY AUTO				BODILY INJURY (Per accident) \$
	ALL OWNED AUTOS				PROPERTY DAMAGE \$
	SCHEDULED AUTOS				
	GARAGE LIABILITY				AUTO ONLY - EA ACCIDENT \$
	ANY AUTO				OTHER THAN AUTO ONLY:
					EACH ACCIDENT \$
B	EXCESS LIABILITY	BE 5190218	02/26/06	08/01/07	AGGREGATE \$ 25,000,000
	<input checked="" type="checkbox"/> UMBRELLA FORM				EACH OCCURRENCE \$ 25,000,000
	OTHER THAN UMBRELLA FORM				SIR \$ 10,000
					WC STATUTORY LIMITS
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY				EL EACH ACCIDENT \$
	THE PROPRIETOR/PARTNERS/EXECUTIVE OFFICERS ARE	<input type="checkbox"/> INCL	<input type="checkbox"/> EXCL		EL DISEASE-POLICY LIMIT \$
					EL DISEASE-EACH EMPLOYEE \$
	OTHER				
C	Excess Umbrella	ECO (07) 53059239	02/26/06	08/01/07	25,000,000 Excess 25,000,000

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/SPECIAL ITEMS

CERTIFICATE HOLDER

For Informational Purposes Only

CANCELLATION

SHOULD ANY OF THE POLICIES DESCRIBED HEREIN BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE INSURER AFFORDING COVERAGE WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED HEREIN, BUT FAILURE TO MAIL SUCH NOTICE SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER AFFORDING COVERAGE, ITS AGENTS OR REPRESENTATIVES, OR THE ISSUER OF THIS CERTIFICATE

MARSH USA INC.
BY: Walter Gilstrap
MM1(3/02)

Walt Gilstrap

VALID AS OF: 02/23/06

Industry standards set a minimum level that playground manufacturers must meet. We meet or exceed those standards, because we understand that the ultimate playground offers peace of mind as well as thrills. After all, we're parents too.



American Society for Testing and Materials (ASTM)

We don't just follow the rules; we help create them. Several key people at GameTime, including our Manager of Compliance and Standards, serve on the ASTM committee that sets the standards for the entire playground industry. GameTime products conform to that standard, ASTM F1487-01, the Standard Consumer Safety Performance Specification for Playground Equipment for Public Use.

CPSC

The Consumer Product Safety Commission is an independent agency within the United States Federal Government with the authority to inform the public of current product safety performance information and recommended practices. The CPSC first published their guidelines for public playgrounds in 1981 and have updated their publication since then. The current CPSC Handbook for Public Playground Safety, publication #325, is an excellent guide for owners and operators of public play environments.



IPEMA Equipment Certification

GameTime is one of the founding members of IPEMA, and several of our people serve as board members, committee members and chairpersons of the association. In the interest of public playground safety, IPEMA provides a 3rd party certification, to validate conformance to established standards. Our use of the IPEMA seal is your assurance that GameTime has received written validation from an independent lab that the products associated with the seal conform with the ASTM standard, as well as the Canadian CSA standard CAN Z-614. A list of our validated products may be found on the IPEMA website, www.ipema.org.



IPEMA Surfacing Certification

GameTime's GT Impax product provides you with the assurance that our surfacing has been certified as compliant to the appropriate ASTM standard. In the interest of public playground safety, IPEMA provides a third party certification to validate a manufacturer's conformance to the ASTM F-1292-99 Standard Specification for Impact Attenuation of Surface Systems Under And Around Playground Equipment.

The use of the IPEMA Certification Seal displayed above signifies that the manufacturer has received written validation from the independent laboratory that the product associated with the use of the seal conforms with the requirements of ASTM F1292-99. A complete list of our validated products may be found on the IPEMA website at www.ipema.com.



GameTime is the only manufacturer to have a lab partnership with an Institute for children with special needs, so that we can develop and test our accessible products for superiority before bringing them to market. GameTime is also the only manufacturer to meet accessibility guidelines on all of its pre-designed PowerScape Plus and PrimeTime playground plans. We also recommend accessible surfacing options. For more information, log on to www.access-board.gov



ISO 9001:2000

GameTime is the first (and at this issue, the only) playground manufacturer to obtain the ISO9001:2000 standard. In order to obtain this certification, the company's manuals, policies, objectives and quality procedures are closely examined during a surveillance audit by ISO representatives. Strict attention is paid to policies and procedures in manufacturing, communication channels, system monitoring, customer relations and order processing, which are reviewed for consistency and standards. Companies who meet the standard are awarded the ISO designation.



TUV



An international organization that is a European Union Notified and Competent Body, providing testing and certification. Use of the TUV seal demonstrates that indicate that products have passed a comprehensive testing procedure based upon the European Harmonized Standard for Commercial Playground Equipment, and that the GameTime plant is regularly monitored by TUV.

Certificate Number #: 005400

Registration #: 0689-01



CERTIFICATE OF REGISTRATION

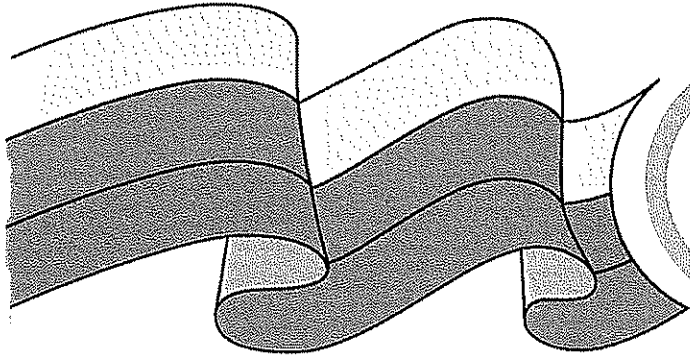

Quality
System
Registrar

Having been audited in accordance with requirements of

ISO 9001:2000 - ANSI/ISO/ASQ Q9001-2000

SRI Quality System Registrar, Wexford, Pennsylvania, USA, hereby grants to:

GameTime Division of Playcore

registration of the quality system at its location:

**150 GameTime Drive
Fort Payne, Alabama, USA**

The conditions for maintaining this certificate of registration are set forth in the SRI registration agreements R20.3 and R20.4. Further clarifications regarding the scope of this certificate and the applicability of ISO 9001:2000 requirements may be obtained by consulting the organization.

Scope of ISO 9001:2000 registration: "Design, manufacture and supply of park and playground equipment, site furnishings and rotational molded plastics."
Exclusions: Control of Service Provision; Customer Property.

Initial registration date: September 18, 1996.
Current registration period: September 18, 2005 through September 17, 2008.

Signed for SRI:

A handwritten signature in cursive script, appearing to read 'Peter B. Lake'.

Peter B. Lake, CEO

Date: September 2, 2005

150 GameTime Drive
Fort Payne, Alabama 35967
Telephone: 256/845-5610
Facsimile: 256/997-9653
Email: service@gametime.com



GAMETIME WARRANTIES

GameTime provides warranties on all materials and workmanship for one year, excluding vandalism. In addition, GameTime offers:

- ✓ Lifetime limited warranty on PowerScope® Plus, PrimeTime™ and TotStuff™ uprights.
- ✓ Lifetime limited warranty on all hardware.
- ✓ Lifetime limited warranty on GameTime PowerScope MegaLocs® and PowerLocks™.
- ✓ Ten-Year limited warranty on PrimeTime and TotTime bolt-through connection.
- ✓ Fifteen-Year limited warranty on rotationally molded KIDtime products.
- ✓ Fifteen-Year limited warranty on metal decks, pipes, rungs, rails and loops.
- ✓ Ten-Year limited warranty on pressure-treated pine and redwood products.
- ✓ Ten-Year limited warranty on Parcourse® fitness equipment.
- ✓ Fifteen-Year limited warranty on rotationally molded products.
- ✓ Five-Year limited warranty on SuperSeats™.
- ✓ Three-Year limited warranty on rubber or "C"-springs used on SaddleMates.
- ✓ One-Year limited warranty on all other GameTime products.

All warranties specifically exclude damage caused by vandalism; negligence, improper installation or improper use; changes in appearance resulting from weathering; scratches, dents or marring as a result of use.

Warranties are valid only if products are installed and maintained in accordance with GameTime instructions and use approved parts.

GTW030320

Page 1

General warranty info

Lifetime Limited Warranty

PowerScope® Plus, PrimeTime™ and TotStuff™ uprights

All hardware

PowerScope PowerLocks™

15 Year Limited Warranty

Rotationally molded products

Rotationally molded KidTime™ products

Metal decks

Pipes

Rungs

Rails

Loops

10 Year Limited Warranty

PrimeTime bolt-through connections

Parcourse® fitness equipment

5 Year Limited Warranty

Super Seats

3 Year Limited Warranty

Rubber or "C" springs used on SaddleMates®

1 Year Limited Warranty

All other GameTime products


GameTime offers you peace of mind with one of the best, most all encompassing warranties in the industry.

We want to assure you that we are part of your community playground long after the sales is made. Our quality is legendary, and we stand behind our products with one of the best warranties in the business. For complete Warranty information, consult your GameTime sales representative.

For the purpose of this warranty, "lifetime" encompasses no specific term of years, but rather that seller warrants to its original customer for as long as the original customer owns the product and uses the product for its intended purpose that the product and all its parts will be free from defects in material and manufacturing workmanship.

GameTime Order Check Sheet

Please include all checked items (✓) with your order.



✓ Signed Proposal

✓ Signed Purchase Order made out to GameTime c/o Cunningham Associates, Inc.

✓ Signed GameTime Color Selection Form

✓ Billing Address: _____

✓ Contact Person: _____

Phone: (_____) _____ Fax: (_____) _____

✓ Shipping Address: _____

✓ Contact Person: _____

Phone: (_____) _____ Fax: (_____) _____

✓ Tax Exempt Number & Certificate (or tax will be added): _____

Please send everything back to the office by fax and/or mail.

⇒ Terms are Net 30 with approved Credit. No retainage allowed.

⇒ Shipment will be 30-45 days after factory receipt of all information checked above.

⇒ It is the responsibility of the owner to offload and inventory equipment, unless otherwise noted.

Missing or damaged equipment must be reported within 60 days from acceptance of delivery.

⇒ It is the responsibility of the owner to provide installation, safety surfacing, borders, site preparation, drainage, or other costs, unless otherwise noted in the proposal.

If you have any questions please call:


Design/Sales Questions Courtney (ext. 128) or Kerri (ext. 120)

Order Entry/Delivery Questions Courtney (ext. 128) or Kerri (ext. 120)

Represented by: Cunningham Associates, Inc.

P.O. Box 240981 • Charlotte, NC 28224 • (800) 438-2780 • Fax (704) 525-7356

GameTime Color Selection Sheet



Equipment Type: Xscape PowerScape PrimeTime (Choose Custom Colors or a Play Palette)

Custom Colors:

Upright Metal Color: _____

Accent Metal Color: _____

Deck TuffClad Color: _____

Slide & Panel Plastic Color: _____

Roof Plastic, Metal, or Timber Color: _____
 (Plastic roof may be one-color or multi-color. Please list colors in order)

Tube Plastic Color: _____
 (Tube may be one-color or multi-color. Please list colors in order)

MegaRock or WallCano Rock Color: _____ Handhold Color: _____

Net Climber: _____

SunBlox Roof & Shade Color: _____

Play Palette: (Choose one from list below) _____

KidTime Play Palette: (circle one) Natural Primary Contemporary

Freestanding Play Events, Fitness, Site Furnishings, Shade:

- | | | | |
|---------------------|--------------------|---|---------------------------------------|
| Metals: | Plastics | 1-Color Poly Panel (HPDE) | Timber Décor: Redwood or Cedar |
| Yellow Butterscotch | Yellow Red | Red Yellow Green | |
| Red Burgundy | Purple Blue | Blue Beige | TuffClad |
| Purple Blue | Teal Green | | Red Brown Blue Dark Green |
| Teal Green | Brown Beige | 2-Color Poly Panel | Net Climbers: Red Blue Green |
| Dark Green Brown | Gray | Outside/Inside Color | Xscape Nets: Red Black |
| Beige Gray | Rock Colors | Red/Yellow Yellow/Red | |
| Metallic Black | Sandstone Granite | Green/Beige Blue/Beige | |
| White | | WallCano Handholds: Red Blue Green Beige | |
- SunBlox Roof & Shade Colors:**
 White Red Royal Blue Laguna Blue Navy Blue Turquoise Rain Forest Terra Cotta Arizona Silver
 Black Sunflower Yellow

- Play Palettes:**
 Blueberry Periwinkle Lemon Sunrise Botanical Tropics Forest Timber Earth Navy Dramatic
 Salute Coast Field Brook Scenic Horizon Vista Celebrate Candy Centennial Sunshine
 Moonlight Crimson