



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 DNR209155

PAGE  
 1

ADDRESS CORRESPONDENCE TO ATTENTION OF  
 FRANK WHITTAKER  
 304-558-2316

VENDOR

\*709022058 800-848-7556  
 SERVICE SUPPLY LTD  
 1524 SOUTH HAMILTON RD  
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES  
 WATTERS SMITH MEM'L STATE PARK  
 ATTN: PARK SUPERINTENDENT  
 POST OFFICE BOX 296  
 LOST CREEK, WV  
 26385 745-3081

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B	FREIGHT TERMS
06/04/2009				

BID OPENING DATE: 06/18/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
***** ADDENDUM NO. 2 *****						
THIS ADDENDUM IS ISSUED TO PROVIDE THE SIGN IN SHEET, AND QUESTIONS & ANSWERS RESULTING FROM THE MANDATORY PRE-BID MEETING HELD ON 06/03/09.						
0001	1	LS		650-38		
PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)						
***** THIS IS THE END OF RFQ DNR209155 ***** TOTAL:						\$59,209.00

RECEIVED

2009 JUN 15 A 9:31

PURCHASING DIVISION  
 STATE OF WV

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Grove* TELEPHONE: 1-800-848-7556 DATE: JUNE 12, 2009

TITLE: VICE PRESIDENT FEIN: ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

## GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the **West Virginia Code** and the **Legislative Rules** of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125 fee.
5. All services performed or goods delivered under State Purchase Order/Contracts are to be continued for the term of the Purchase Order/Contracts, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the **West Virginia Code**.
8. Vendor preference will be granted upon written request in accordance with the **West Virginia Code**.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the **Legislative Rules** of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, the State may deem this contract null and void, and terminate such contract without further order.
14. **HIPAA BUSINESS ASSOCIATE ADDENDUM:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Cover Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.
15. **WEST VIRGINIA ALCOHOL & DRUG-FREE WORKPLACE ACT:** If this Contract constitutes a public improvement construction contract as set forth in Article 1D, Chapter 21 of the West Virginia Code ("The West Virginia Alcohol and Drug-Free Workplace Act"), then the following language shall hereby become part of this Contract: "The contractor and its subcontractors shall implement and maintain a written drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act, as set forth in Article 1D, Chapter 21 of the West Virginia Code. The contractor and its subcontractors shall provide a sworn statement in writing, under the penalties of perjury, that they maintain a valid drug-free work place policy in compliance with the West Virginia and Drug-Free Workplace Act. It is understood and agreed that this Contract shall be cancelled by the awarding authority if the Contractor: 1) Fails to implement its drug-free workplace policy; 2) Fails to provide information regarding implementation of the contractor's drug-free workplace policy at the request of the public authority; or 3) Provides to the public authority false information regarding the contractor's drug-free workplace policy."

---

### INSTRUCTIONS TO BIDDERS

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in case of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications: Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130, Charleston, WV 25305-0130

**DNR209155  
PRE-BID MEETING QUESTIONS  
ADDENDUM #1**

Q: Will DNR accept the standard belt seat for swings or does the vendor have to bid the super seat listed on the specifications?

A: No. DNR wants the super seat or the equivalent to a super seat as stated on the RFQ.

Q: Will the park install the playground equipment or do the vendors install it?

A: The park is installing the playground equipment.

P.02

0001

WITH

13847453631

WATERS SMITHS STATE PK

JUN-03-09 11:31 AM WATERS SMITHS STATE PK

DNR PROCUREMENT OFFICE

06-03-2009 10:01 FAX 304 588 2103

SIGN IN SHEET

Page 1 of 1

Request for Proposal No.

PLEASE PRINT

Date: 6-3-09

PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

TELEPHONE & FAX

FIRM & REPRESENTATIVE NAME		MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: <u>Davis Athletics, LLC</u>	<u>2325 Liberty Street</u>	<u>Parkersburg, WV 26101</u>	PHONE <u>304-428-3000</u> TOLL FREE FAX <u>304-428-3002</u>
Rep: <u>Fred Davis</u>			
Email Address: <u>fdavis3@yahoo.com</u>			
Company: <u>Playground Specialists</u>	<u>17352 N. Seton Avenue</u>	<u>Emmitsburg, MD 21727</u>	PHONE <u>301-271-9236</u> TOLL FREE <u>800-385-0075</u> FAX <u>301-271-9239</u>
Rep: <u>Tammy Wood</u>			
Email Address: <u>tammy@playspec.com</u>			
Company: <u>Service Supply</u>	<u>997 Sunset Terr</u>	<u>Milton WV 25541</u>	PHONE <u>304-743-5260</u> TOLL FREE <u>800-848-7511</u> FAX <u>304-743-3856</u>
Rep: <u>Tom Melton</u>			
Email Address: <u>playgroundpam@yahoo.com</u>			
Company: <u>VIRGINIA PLAYGROUND SERVICES</u>	<u>VIRGINIA PLAYGROUND SERVICES</u>	<u>14276 RIVERSIDE DR</u>	PHONE <u>434-2992158</u> TOLL FREE FAX <u>434-2963289</u>
Rep: <u>JIM BENEDICT</u>			
Email Address: <u>JIM@va playgrounds.com</u>		<u>ASHLAND, VA 23005</u>	
Company: <u>Taylor Sports + Recreation</u>	<u>836 Echo Road</u>	<u>So. CHARLESTON, WV</u>	PHONE <u>304-744-6548</u> TOLL FREE <u>800-226-9693</u> FAX <u>304-744-6545</u>
Rep: <u>Tom Nelson</u>		<u>25303</u>	
Email Address: <u>CNE67@aol.com</u>			



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

**Request for  
 Quotation**

RFQ NUMBER:  
**DNR209155**

PAGE:  
**1**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**FRANK WHITTAKER  
 304-558-2316**

RFQ COPY  
 TYPE NAME/ADDRESS HERE

V  
E  
N  
D  
O  
R

S  
H  
I  
P  
T  
O

DIVISION OF NATURAL RESOURCES  
 WATTERS SMITH MEM'L STATE PARK  
 ATTN: PARK SUPERINTENDENT  
 POST OFFICE BOX 296  
 LOST CREEK, WV  
 26385 745-3081

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
05/28/2009				

BID OPENING DATE: **06/18/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
***** ADDENDUM NO. 1 *****						
THIS ADDENDUM IS ISSUED TO CHANGE THE MANDATORY PRE-BID DATE AND TIME FROM: 06/02/09 AT 10:00 AM TO: 06/03/09 AT 10:00 AM						
0001	1	LS		650-38		
PLAYGROUND EQUIPMENT (NOT OTHERWISE CLASSIFIED)						
***** THIS IS THE END OF RFQ DNR209155 ***** TOTAL:						<u>\$59,209.00</u>

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jimmy Brown* TELEPHONE: 1-800-848-7556 DATE: JUNE 12, 2009

TITLE: VICE PRESIDENT FEIN: ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**DNR209155**

PAGE  
**1**

ADDRESS CORRESPONDENCE TO ATTENTION OF  
**FRANK WHITTAKER  
 304-558-2316**

VENDOR

\*709022058 800-848-7556  
 SERVICE SUPPLY LTD  
 1524 SOUTH HAMILTON RD  
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES  
 WATTERS SMITH MEM'L STATE PARK  
 ATTN: PARK SUPERINTENDENT  
 POST OFFICE BOX 296  
 LOST CREEK, WV  
 26385 745-3081

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B	FREIGHT TERMS
05/20/2009				

BID OPENING DATE: **06/18/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		
<p><b>PLAYGROUND EQUIPMENT</b></p> <p>THE WEST VIRGINIA PURCHASING DIVISION, FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES IS SOLICITING BIDS FOR PLAYGROUND EQUIPMNET FOR WATTERS SMITH MEMORIAL STATE PARK PER THE ATTACHED SPECIFICATIONS.</p> <p>A MANDATORY PRE-BID WILL BE HELD 06/02/09 AT 10:00 AM AT THE PARK HEADQUARTERS. FAILURE TO ATTEND THE MANDATORY PRE-BID MEETING WILL RESULT IN BID DISQUALIFICATION. AN INDIVIDUAL MAY NOT REPRESENT MORE THAN ONE VENDOR AT THE MANDATORY PRE-BID MEETING.</p> <p>TECHNICAL QUESTIONS MUST BE SUBMITTED IN WRITING TO FRANK WHITTAKER IN THE PURCHASING DIVISION VIA FAX AT 304-558-4115 OR VIA EMAIL AT FRANK.M.WHITTAKER@WV.GOV. DEADLINE FOR TECHNICAL QUESTIONS IS 06/04/09 AT 3:00 PM ALL TECHNICAL QUESTIONS WILL BE ADDRESSED BY ADDENDUM AFTER THE DEADLINE.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THE STATE MAY DEEM THE CONTRACT NULL AND VOID, AND TERMINATE SUCH CONTRACT WITHOUT FURTHER ORDER.</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Tracy Mauer</i>	TELEPHONE 800-848-7556	DATE JUNE 12, 2009
TITLE VICE PRESIDENT	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



## Watters Smith Memorial State Park

To supply playground equipment to offer play activities for children ages five (5) to twelve (12) at Watters Smith Memorial State Park, Lost Creek, West Virginia. Playground equipment will be purchased for three separate areas in the park. Park personnel will install all equipment and curbs. The award may be split if it is in the best interest of the West Virginia Division of Natural Resources. All items must be F.O.B. Destination. Freight or delivery charges must be included in the price of the goods. Delivery must be made within sixty (60) days of purchase order award.

### AREA 1 – ACTIVITIES BUILDING AREA

PrimeTime mix it up play structure, Item #G11813, or equal. Uprights must be a minimum of 11 gauge galvanized steel; must have a minimum of 3 mil oven cured powder coating; and must have a minimum diameter of 3 1/2". Structure must include the following components:

- One (1) PrimeTime driver's enclosure panel, Item #18391, or equal.
- One (1) PrimeTime toad stool climber, Item #12239, or equal.
- One (1) PrimeTime triangle transfer platform, Item #18337, or equal.
- One (1) PrimeTime square stepped deck. Deck dimensions must be a minimum of 36" x 36", or equal.
- One (1) PrimeTime gizmo single panel, Item #12964, or equal.
- 
- One (1) PrimeTime nature panel, Item #12429, or equal.
- One (1) PrimeTime rumble and roll zip slide, Item #18389, or equal. Slide must be a minimum height of 3' in height.
- One (1) PrimeTime stepped platform, Item #18259, or equal.
- One (1) PrimeTime giant wave climber, Item #18383, or equal. Climber must be a minimum height of 5'.
- One (1) PrimeTime slate roof, Item #18672, or equal.
- One (1) PrimeTime F5 spiral slide with hood, Item #18316, or equal. Slide must be a minimum of 6' in height.



# WVDNR209155 Watters Smith Memorial State Park

- One (1) PrimeTime rock wall climber, Item #12922, or equal. Climber must be a minimum height of 5' in height.
- One (1) PrimeTime rectangle deck. Deck dimensions must be a minimum of 45 1/2" x 36" and be a minimum of 3' in height.
- One (1) PrimeTime square deck or equal. Deck dimension must be a minimum of 36" x 36" and must be a minimum of 3' in height.

PrimeTime Swing Frame, Item #12583, 3 1/2" OD minimum, or equal. Top rail and arch must have a minimum 3 1/2 inch OD; arch must be a minimum of 11 gauge galvanized steel tubing; must include a minimum of 3 1/2 inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with finished surface; and must accommodate two (2) free standing swings.

PrimeTime Add-A-Bay Swing, Item #12584, 3 1/2 " OD minimum, or equal. Top rail and arch must have a minimum 3 1/2 inch OD; arch must be a minimum of 11 gauge galvanized steel tubing; must include a minimum of 3 1/2 inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with a finished surface; and must accommodate two (2) free standing swings.

PrimeTime tot seat package 3 1/2" OD, Item #8696, or equal. Package must include all hardware necessary to attach seat to a minimum of a 3 1/2 inch top rail.

PrimeTime super seat 3 1/2 OD, Model 8906, or equal. Package must include all hardware necessary to attach seat to a minimum of a 3 1/2 inch top rail.

### AREA 2 – PIONEER PICNIC AREA

PrimeTime playground structure, Model #RDU, PrimeTime modular unit, or equal. The structure must include the following components:

- One (1) PrimeTime tic-tac-toe panel, Item #12004, or equal. Panel must be a minimum 5' in length.
- Three (3) PrimeTime 3 1/2" uprt ass'y galv 8', Item #G12023, or equal.
- Four (4) PrimeTime 3 1/2" uprt ass'y galv 9', Item #G12024, or equal.

## Watters Smith Memorial State Park

- One (1) PrimeTime 3 1/2" uprt ass'y galv 11', Item #G12026, or equal.
- Two (2) PrimeTime 3 1/2" uprt ass'y galv 12', Item #G12027, or equal.
- One (1) PrimeTime chin bar single, Item #12201, or equal.
- One (1) PrimeTime toad stool climber, Item #12239, or equal. Climber must be heavy molded rubber and not more than 18" off the off the ground.
- One (1) PrimeTime rung enclosure barrier, Item #12411, or equal. Barrier must be a minimum of 2' 6" in width.
- One (1) PrimeTime barrier w/steering wheel, Item #12432, or equal. Barrier must be a minimum of 3' in width.
- One (1) PrimeTime Single Seat P/T, Model 12728, or equal.
- One (1) PrimeTime Bubble Climber, Item #12926, or equal. Climber must be fabricated from a minimum of 1 5/8" OD 14 gauge (.083") galvanized steel tubing 1 5/16" OD x .083" (14 gauge) wall galvanized steel tubing, or equal. Must be all welded construction.
- One (1) PrimeTime 36" Sq Punched Deck P/T 1.3125, Model 18200, or equal.
- One (1) PrimeTime Rect Punched Deck P/T, Model 18202, or equal.
- One (1) PrimeTime 2'-0" Step Link 36" Deck , Model 18259, or equal.
- One (1) PrimeTime F5 Spiral Slide, Item #18315, or equal. Slide must be a minimum of 6' in height.
- One (1) Tri Transfer Platform (36" minimum), Item #18337, or equal.
- One (1) PrimeTime Rumble and Roll Zip Slide, Item #18389, or equal. Slide must be a minimum of 3' in height.
- One (1) Primetime Model G12022 , 3 1/2" Uprt Ass'Y Galv 7', Item #12583, or equal.
- One (1) PrimeTime Model G12026, 3 1/2" Uprt Ass'Y Galv 11', Item #12584, or equal.

PrimeTime Swing Frame, Model 12583, 3 1/2" OD minimum, or equal. Top rail and arch must have a minimum 3 ½ inch OD; arch must be a minimum of 11 gauge galvanized steel tubing;

**WVDNR209155**

**Watters Smith Memorial State Park**

must include a minimum of 3 ½ inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with finished surface; and must accommodate two (2) free standing swings.

PrimeTime, Add-A-Bay Swing, Model 12584, 3 1/2 " OD minimum, or equal. Top rail and arch must have a minimum 3 ½ inch OD; arch must be a minimum of 11 gauge galvanized steel tubing; must include a minimum of 3 ½ inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with a finished surface; and must accommodate two (2) free standing swings.

PrimeTime tot seat package 3 ½" OD, Item #8696, or equal. Package must include all hardware necessary to attach seat to a minimum of a 3 ½ inch top rail.

PrimeTime super seat 3 ½" OD, Item #8906, or equal. Package must include all hardware necessary to attach seat to a minimum of a 3 ½ inch top rail.

PrimeTime freestanding mini sky runner, Item #6202, or equal.

**AREA 3 – OAK RIDGE PICNIC AREA**

PrimeTime playground structure Item #11752 PrimeTime Recess Time 2 W/Roof or equal. The structure must include the following components:

- PrimeTime 3 ½ OD Uprights, or equal.
- Four (4) Decks, or equal.
- One (1) PrimeTime Zip Slide, or equal.
- One (1) PrimeTime Wave Zip Slide, or equal.
- One (1) PrimeTime (4' minimum) Arch Bridge with Barriers, or equal.
- PrimeTime Transfer Platform, or equal.
- PrimeTime Access Attachment, or equal.
- One (1) PrimeTime Overhead Tree Climber, or equal.
- One (1) PrimeTime Therapeutic Rings, or equal.

## Watters Smith Memorial State Park

- One (1) Primetime D Ring Package, or equal.
- One (1) PrimeTime Zipper Climber, or equal.
- One (1) PrimeTime Arch Climber, or equal.
- One (1) PrimeTime Tic-Tac-Toe Panel, or equal.
- One (1) PrimeTime 6" minimum barrier, or equal.
- One (1) PrimeTime Barrier Enclosure with Steering Wheel, or equal.

PrimeTime, Swing Frame, Model 12583, 3 1/2" OD minimum, "or equal." Top rail and arch must have a minimum 3 1/2 inch OD; arch must be a minimum of 11 gauge galvanized steel tubing; must include a minimum of 3 1/2 inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with finished surface; and must accommodate two (2) free standing swings.

PrimeTime, Add-A-Bay Swing, Model 12584, 3 1/2 " OD minimum, "or equal." Top rail and arch must have a minimum 3 1/2 inch OD; arch must be a minimum of 11 gauge galvanized steel tubing; must include a minimum of 3 1/2 inch OD galvanized steel sleeve; must be polyester powder coat; must be a minimum of 8 foot high with a finished surface; must have a minimum of a 12 foot top rail; and must accommodate two (2) free standing swings.

PrimeTime tot seat package 3 1/2" OD, Item #8696, or equal. Package must include all hardware necessary to attach seat to a minimum of a 3 1/2 inch top rail.

PrimeTime super seat 3 1/2 OD, Model 8906, "or equal." Package must include all hardware necessary to attach seat to a minimum of a 3 1/2 inch top rail.

### ITEMS FOR ALL THREE PLAYGROUND AREAS

Engineered wood fiber, 2056 square feet, @ 8" compacted depth. Material must be recently harvested and debarked; free of chemical treatments and additives; free of soil, twigs, leaves and other contaminants.

Geo-textile fabric, 2250 square foot rolls, "or equal." Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

**WVDNR209155**  
**Watters Smith Memorial State Park**

All playground equipment and engineered wood fiber must meet the following requirements:

- Compliance with U.S. Consumer Product Safety Commission, Handbook for Public Playground Safety.
- Compliance with ASTM Standard F 1487.
- Compliance with Architectural and Transportation Barriers Compliance Board, Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Play Areas.

Vendors must submit the following attachments:

- Complete manufacturer's parts specifications and warranties.
- Layout drawing to scale of the proposed play structure or equipment.
- ASTM and CPSC Statement of Compliance

Warranties:

- All equipment and engineered wood fiber must be guaranteed to be free of defects in workmanship and material for a minimum of one year from date of acceptance. However, if manufacturer warranty periods are longer than the required minimum one year warranty, those warranties shall apply.

Structural steel members and play surfaces must be treated for rust prevention and painted with a suitable powder coat finish. All molded plastics and vinyl coatings must have UV protection

Vendor must provide complete installation instructions, parts specifications, touch-up paint sufficient for initial installation, and warranties.

Color scheme of equipment must be coordinated with Watters Smith Memorial State Park. Color of items will be selected from manufacturer's standard colors.

**Watters Smith Memorial State Park**

A mandatory pre-bid conference will be held on ?, 2009, at Watters Smith Memorial State Park at park headquarters. A failure to attend the mandatory pre-bid conference will result in bid disqualification. An individual may not represent more than one firm at the pre-bid conference.

WVDNR209155  
Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding, or equal." brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request For Quotation.

Item No	Equipment	Manufacturer	Model
1	<b>AREA 1-ACTIVITIES BUILDING AREA</b> , PrimeTime mix it up play structure, Item #G11813, or equal. Structure must include the following components:	Landscape Structures Inc.	Custom Design #35741-1-1
2	<b>AREA 1- ACTIVITIES BUILDING AREA</b> , One (1) PrimeTime driver's enclosure panel, Item #18391, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
3	<b>AREA 1- ACTIVITIES BUILDING AREA</b> , One (1) PrimeTime toad stool climber, Item #12239, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
4	<b>AREA 1- ACTIVITIES BUILDING AREA</b> , One (1) PrimeTime triangle transfer platform, Item #18337, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
5	<b>Area 1 - ACTIVITIES BUILDING AREA</b> , One (1) PrimeTime square stepped deck, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1

WVDNR209155  
Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
6	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime gizmo single panel, Item #12964, or equal. Panel must include a click wheel gizmo, Item #4839, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
7	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime nature panel, Item #12429, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
8	Area 1 - ACTIVITIES BUILDING AREA One (1) PrimeTime rumble and roll zip slide, Item #18389, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
9	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime stepped platform, Item #18259, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
10	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime giant wave climber, Item #18383, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
11	Area 1 - ACTIVITIES BUILDING AREA One (1) PrimeTime slate roof, Item #18672, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
12	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime F5 spiral slide with hood, Item #18316, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1



Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
13	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime rock wall climber, Item #12922, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
14	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime rectangle deck, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
15	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime square deck, or equal.	Landscape Structures Inc.	Custom Design #35741-1-1
16	Area 1 - ACTIVITIES BUILDING AREA, One (1) PrimeTime Model 12583 Swing Frame, 3 1/2" OD, or equal.	Landscape Structures Inc.	#100050C/#1111579C Swing Unit
17	Area 1- Activities Building Area, One (1) PrimeTime add-a-bay swing, Item #12584, or equal.	Landscape Structures Inc.	Included in #16
18	Area 1- Activities Building Area, Two (2) PrimeTime Model 8696 3 1/2" OD Enclosed Tot Seat with two (2) Galv Chains, or equal.	Landscape Structures Inc.	Included in #16
19	Area 1- Activities Building Area, Two (2) PrimeTime Item #8906 3 1/2" Super Seats with two (2) Galv Chains, or equal.	Landscape Structures Inc.	Included in #16

Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
20	<b>AREA 2-PIONEER PICNIC AREA</b> , PrimeTime playground structure Model #RDU PrimeTime Modular unit, or equal. The structure must include the following components:	Landscape Structures Inc.	Custom Design #35741-2-1
21	<b>Area 2- PIONEER PICNIC AREA</b> , One (1) PrimeTime Item #12004 Tic-Tac-Toe Panel, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
22	<b>Area 2 -PIONEER PICNIC AREA</b> , PrimeTime Model G12023 3 1/2" Uprt Ass'Y Galv 8' ,or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
23	<b>Area 2- PIONEER PICNIC AREA</b> , PrimeTime Model G12024 3 1/2" Uprt Ass'Y Galv 9',or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
24	<b>Area 2 -PIONEER PICNIC AREA</b> , PrimeTime Model G12026 3 1/2" Uprt Ass'Y Galv 11' ,or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
25	<b>Area 2- PIONEER PICNIC AREA</b> , PrimeTime Model G12027 3 1/2" Uprt Ass'Y Galv 12' ,or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
26	<b>Area 2- PIONEER PICNIC AREA</b> , One (1) PrimeTime Model 12201 Single Chin Bar, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
27	<b>Area 2- PIONEER PICNIC AREA</b> , One (1) PrimeTime Model 12239 Toad Stool Climber, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1

## Watters Smith State Park

## PLAYGROUND EQUIPMENT SHEET

Item No	Equipment	Manufacturer	Model
28	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 12411 Rung Enclosure Barrier ,or equal.	Landscape Structures Inc.	Custom Design # 35741-2-1
29	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 12432 Barrier W/Steering Wheel, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
30	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 12728 Single Seat P/T, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
31	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 12926 4'-6"/5' Bubble Climber, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
32	Area 2- PIONEER PICNIC AREA, PrimeTime Model 18200 36" Sq Punched Deck P/T 1.3125, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
33	Area 2- PIONEER PICNIC AREA, PrimeTime Model 18202 Rect Punched Deck P/T, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
34	Area 2- PIONEER PICNIC AREA, PrimeTime Model 18259 2'-0" Step Link 36" Deck, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
35	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 18315 6' F5 Spiral Slide, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
36	Area 2- PIONEER PICNIC AREA, PrimeTime Model 18337 36" Tri Transfer Platform, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1

WVDNR209155  
Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
37	Area 2- PIONEER PICNIC AREA, One (1) PrimeTime Model 18389 3' Rumble & Roll Zip Slide, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
38	Area 2- PIONEER PICNIC AREA, PrimeTime Model G12022 3 1/2" Uprt Ass'Y Galv 7', or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
39	Area 2 PIONEER PICNIC AREA, PrimeTime Model G12026 3 1/2" Uprt Ass'Y Galv 11', or equal.	Landscape Structures Inc.	Custom Design #35741-2-1
40	Area 2- Pioneer Picnic Area, One (1) PrimeTime Model 12583 Prime Time Swing Frame, 3 1/2" OD, or equal.	Landscape Structures Inc.	#100050C/#111579C Swing Unit
41	Area 2- Pioneer Picnic Area, One (1) PrimeTime Model 12584 Swing Add-A-Bay, 3 1/2" OD, or equal.	Landscape Structures Inc.	Included in #40
42	Area 2- Pioneer Picnic Area, Two (2) PrimeTime Model 8696 3 1/2" Enclosed Tot-Galv Chain, or equal.	Landscape Structures Inc.	Included in #40
43	Area 2 - Pioneer Picnic Area, Two (2) PrimeTime Model 8906 3 1/2" Super Seats with two (2) Galv Chains ,or equal.	Landscape Structures Inc.	Included in #40
44	Area 2 - Pioneer Picnic Area, PrimeTime Freestanding Mini Sky Runner, Model 6202, or equal.	Landscape Structures Inc.	Custom Design #35741-2-1

## Watters Smith State Park

## PLAYGROUND EQUIPMENT SHEET

Item No	Equipment	Manufacturer	Model
45	Area 3- OAK RIDGE PICNIC AREA, PrimeTime playground structure Model #11752 PrimeTime Recess Time 2 W/Roof, or equal. The structure must include the following components:	Landscape Structures Inc.	Custom Design #35741-3-1
46	Area 3- OAK RIDGE PICNIC AREA, PrimeTime 3 1/2 OD Uprights, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
47	Area 3- OAK RIDGE PICNIC AREA, Four (4) PrimeTime Decks, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
48	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Zip Slide, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
49	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Wave Zip Slide, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
50	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime 4' Arch Bridge with Barriers, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
51	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Transfer Platform, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
52	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Access Attachment, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
53	Area 3- OAK RIDGE PICNIC AREA- One (1) PrimeTime Overhead Tree Climber, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1

WVDNR209155  
Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
54	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Therapeutic Rings, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
55	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime D Ring Package , or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
56	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Zipper Climber , or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
57	Area 3- OAK RIDGE PICNIC AREA, One (1)PrimeTime Arch Climber , or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
58	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Tic-Tac-Toe Panel , or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
59	Area 3- OAK RIDGE PICNIC AREA, PrimeTime 6" Barrier, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
60	Area 3- OAK RIDGE PICNIC AREA, PrimeTime BarrierEnclosure with Steering Wheel, or equal.	Landscape Structures Inc.	Custom Design #35741-3-1
61	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Model 12583 Swing Frame, 3 1/2" OD, or equal.	Landscape Structures Inc.	#100050C/#111579C Swing Unit
62	Area 3- OAK RIDGE PICNIC AREA, One (1) PrimeTime Model 12584 Add-A-Bay Swing , 3 1/2" OD, or equal.	Landscape Structures Inc.	Included in #61
63	Area 3- OAK RIDGE PICNIC AREA, Two (2) PrimeTime Model 8696 3 1/2" Enclosed Tot-Galv Chain, or equal.	Landscape Structures Inc.	Included in #61
64	Area 3- OAK RIDGE PICNIC AREA, Two (2) PrimeTime Model 8906 3 1/2" Super Seat 2-Galv Chain, or equal.	Landscape Structures Inc.	Included in #61

WVDNR209155  
Watters Smith State Park  
**PLAYGROUND EQUIPMENT SHEET**

Item No	Equipment	Manufacturer	Model
65	2056 Square Feet of Engineered Wood Fiber for all three playgrounds @ 8" compacted depth, or equal	Zeager Bros.	Woodcarpet
66	Geo-textile fabric for all Three Playgrounds, 2,250 sq. ft., roll, or equal.	Zeager Bros.	

## PRICING SHEET


Item No.	Quantity	Description	Unit Price	Amount
1	1	Area 1- Activities Building Area, PrimeTime playground structure and components for Activity Building Area- Model #G11813 PrimeTime Mix It Up modular unit , or equal.	\$ 14,700.00	\$ 14,700.00
2	1	Area 1 - Activities Building Area, PrimeTime swing frame, model 12583, or equal.	\$ 3,200.00	\$ 3,200.00
3	1	Area 1- Activities Building Area, PrimeTime swing add-a-bay, Item #12584, or equal.	Included in Item #2	
4	2	Area 1 - Activities Building Area, PrimeTime tot seat package 3 1/2 inch OD, Item #8696, or equal.	Included in Item #2	
5	2	Area 1- Activities Building Area, PrimeTime super seat 3 ½ OD, Model 8906, or equal.	Included in Item #2	
6	1	Area 2- Pioneer Picnic Area, PrimeTime playground structure and components for Pioneer Picnic Area PrimeTime Modular Unit Model#RDU, or equal.	\$ 14,300.00	\$ 14,300.00
7	1	Area 2 - Pioneer Picnic Area, PrimeTime swing frame, model 12583, or equal.	\$ 3,200.00	\$ 3,200.00
8	1	Area 2- Pioneer Picnic Area, PrimeTime swing add-a-bay, Item #12584, or equal.	Included in Item #7	
9	2	Area 2 - Pioneer Picnic Area, PrimeTime tot seat package 3 1/2 inch OD, Item #8696, or equal.	Included in Item #7	



## PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
10	2	Area 2- Pioneer Picnic Area, PrimeTime super seat 3 ½ OD, Model 8906, or equal.	Included in Item # 7	
11	1	Area 2 - Pioneer Picnic Area,- PrimeTime Freestanding Mini Sky Runner, Model 6202, or	\$ 1,700.00	\$ 1,700.00
12	1	Area 3- Oak Ridge Picnic Area, PrimeTime playground structure and components, Model#11752 PrimeTime Recess Time-2 W/Roof, or equal.	\$ 13,800.00	\$ 13,800.00
13	1	Area 3 - Oak Ridge Picnic Area PrimeTime swing frame, model 12583, or equal.	\$ 3,200.00	\$ 3,200.00
14	1	Area 3- Oak Ridge Picnic Area, PrimeTime add-a-bay swing, Item #12584, or equal.	Included in Item #13	
15	2	Area 3 - Oak Ridge Picnic Area, PrimeTime tot seat package 3 1/2 inch OD, Item #8696, or equal.	Included in Item #13	
16	2	Area 3- Oak Ridge Picnic Area, PrimeTime super seat 3 ½ OD, Model 8906, or equal.	Included in Item #13	
17	3 Rolls	Geo-textile fabric, 2,250 Sq. Ft. roll, or equal.	\$ .20 per sq. ft.	\$ 1,350.00
18	6,447 Square Ft.	Engineered wood fiber or equal @ 8" compacted depth.	\$ 21.00 per cubic yd.	\$ 3,759.00
		<b>TOTAL</b>		\$ 59,209.00

ACTIVITIES BUILDING AREA  
DNR209155

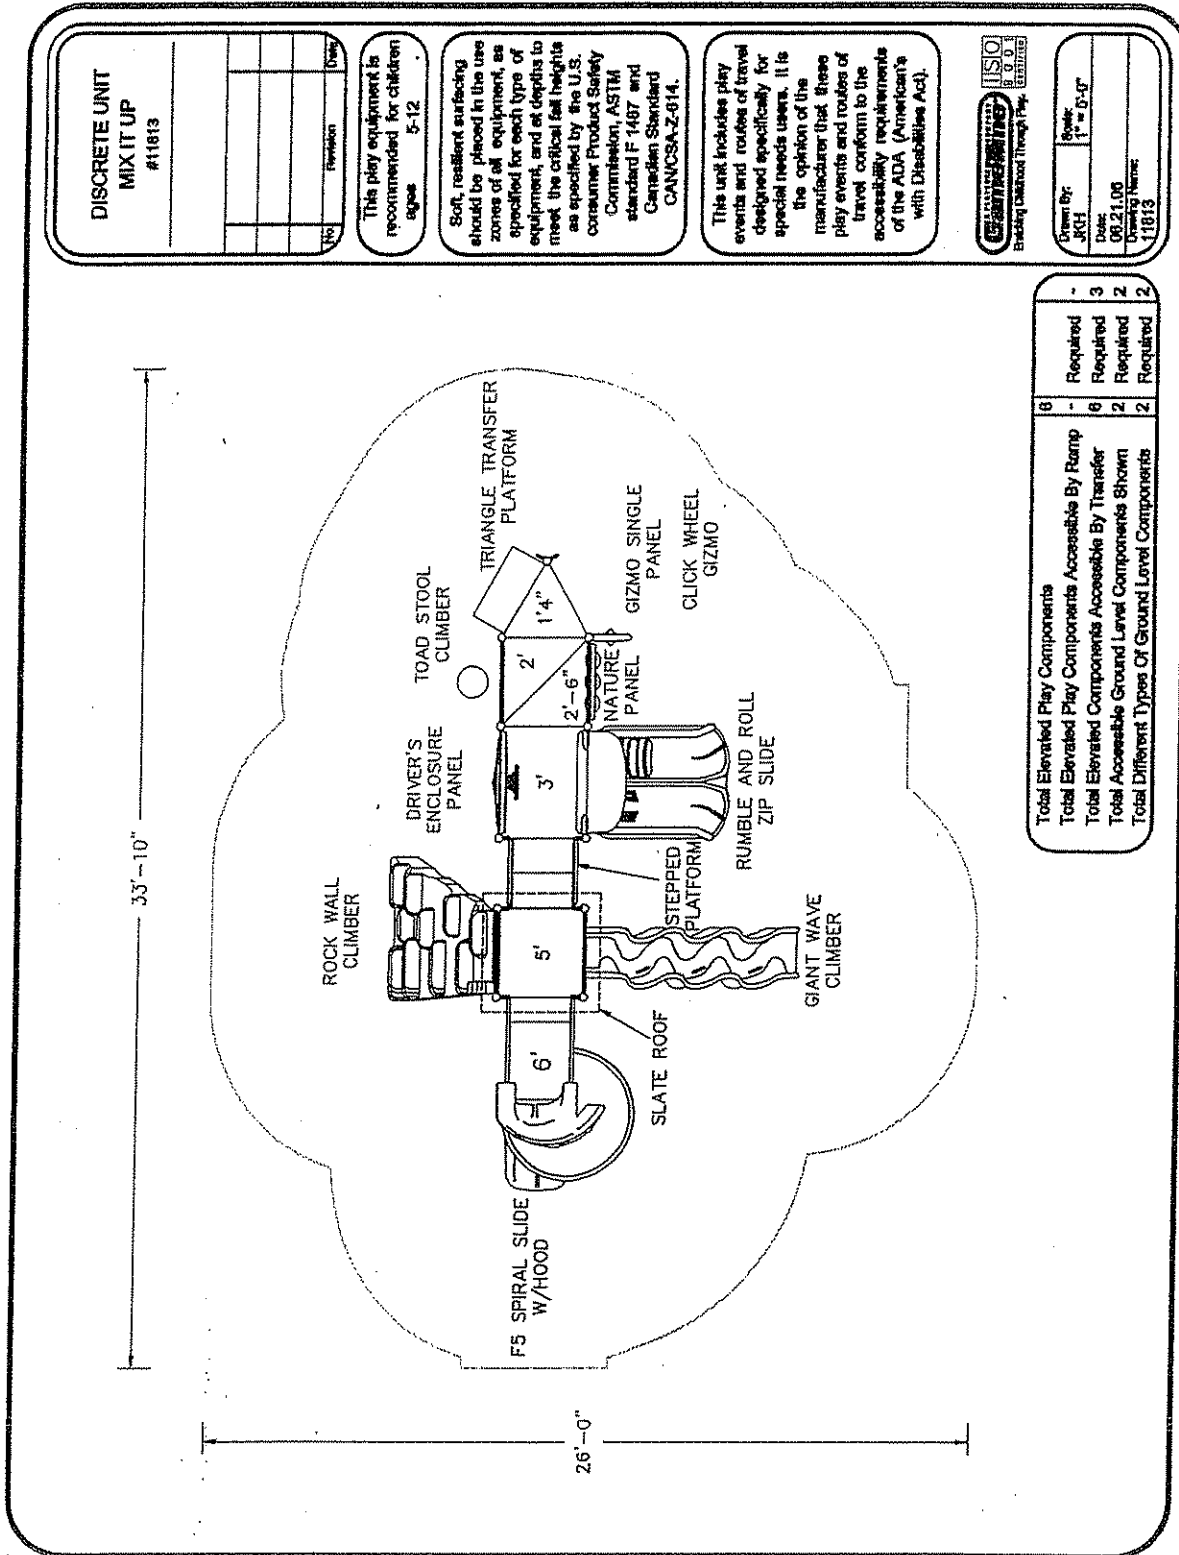

**DISCRETE UNIT**  
**MIX IT UP**  
#11813

No.	Revision	Drawn

This play equipment is recommended for children ages 5-12


Soft, resilient surfacing should be placed in the use zones of all equipment, as specified for each type of equipment, and at depths to meet the critical fall heights as specified by the U.S. Consumer Product Safety Commission, ASTM standard F 1487 and Canadian Standard CANCOSA-Z-614.

This unit includes play events and routes of travel designed specifically for special needs users. It is the opinion of the manufacturer that these play events and routes of travel conform to the accessibility requirements of the ADA (Americans with Disabilities Act).



Drawn By: JKH  
Scale: 1" = 1'-0"  
Date: 06.21.06  
Drawing Name: 11813

PIONEER PICNIC AREA  
DNR209155

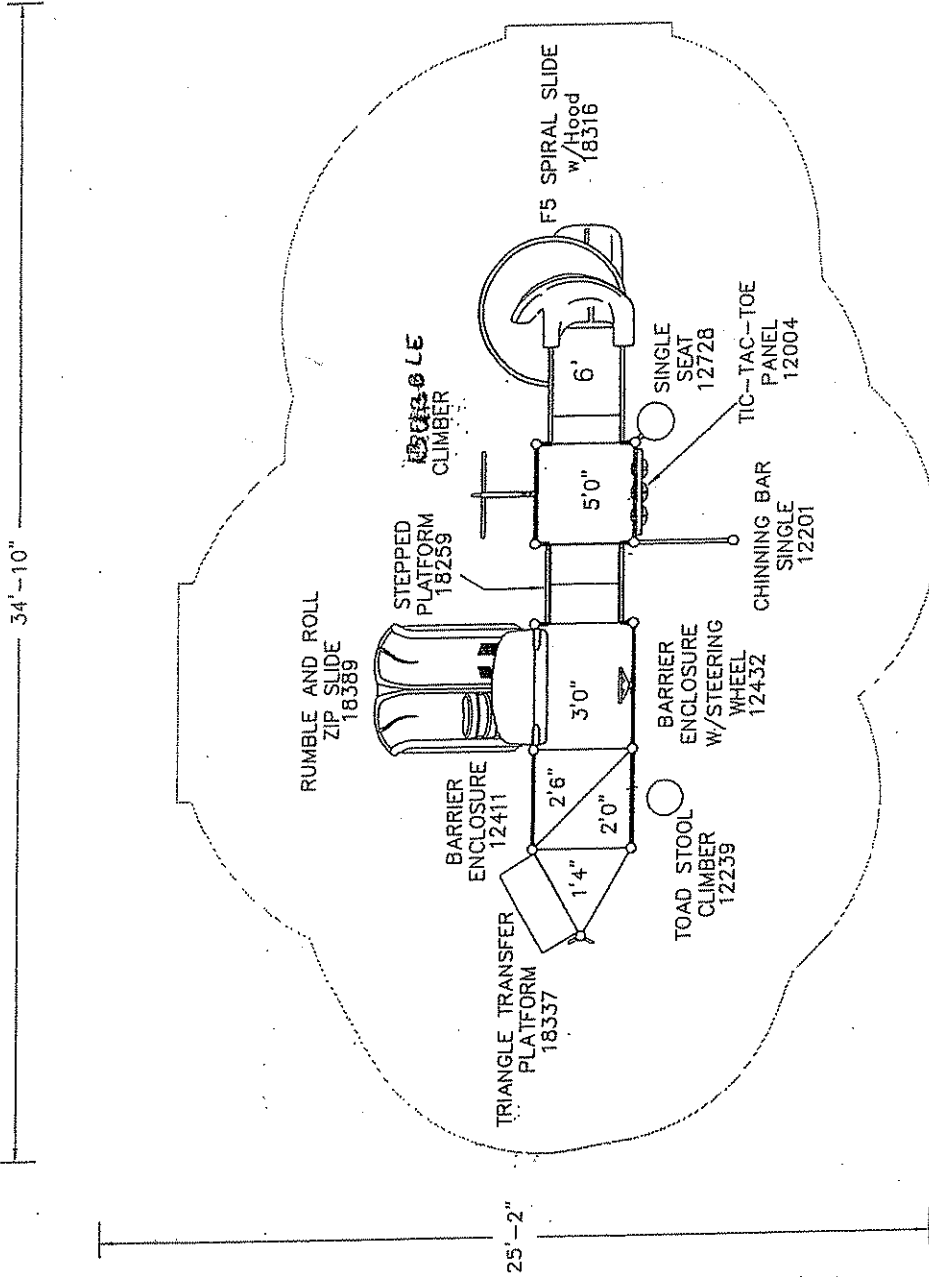

DISCRETE UNIT  
LINEAR LANE  
#11777

No.	Revision	Date

This play equipment is recommended for children ages 5-12

Soft, resilient surfacing should be placed in the use zones of all equipment, as specified for each type of equipment, and at depths to meet the critical fall heights as specified by the U.S. Consumer Product Safety Commission, ASTM standard F 1487 and Canadian Standard CAN/CSA-Z-614.

This unit includes play events and routes of travel designed specifically for special needs users. It is the opinion of the manufacturer that these play events and routes of travel conform to the accessibility requirements of the ADA (American's with Disabilities Act).



Drawn By:	SRD	Scale:	1" = 5'-0"
Date:	7/22/04		
Drawing Name:	11777		

Total Elevated Play Components	5	Required	2
Total Elevated Play Components Accessible By Ramp	5	Required	2
Total Elevated Components Accessible By Transfer	3	Required	2
Total Accessible Ground Level Components Shown	3	Required	2
Total Different Types Of Ground Level Components			


Model View

PIONEER PICNIC AREA

DNR209155

GTEvents

Mini Sky Runr

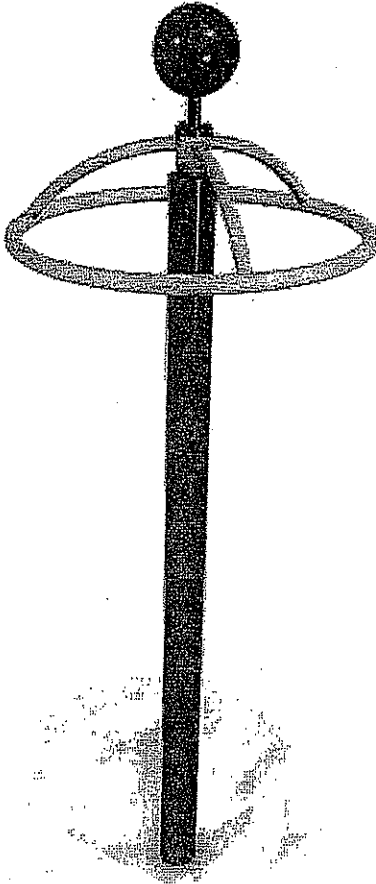


W

GT 100000000

100000000



AREA 1, 2 and 3  
DNR209155

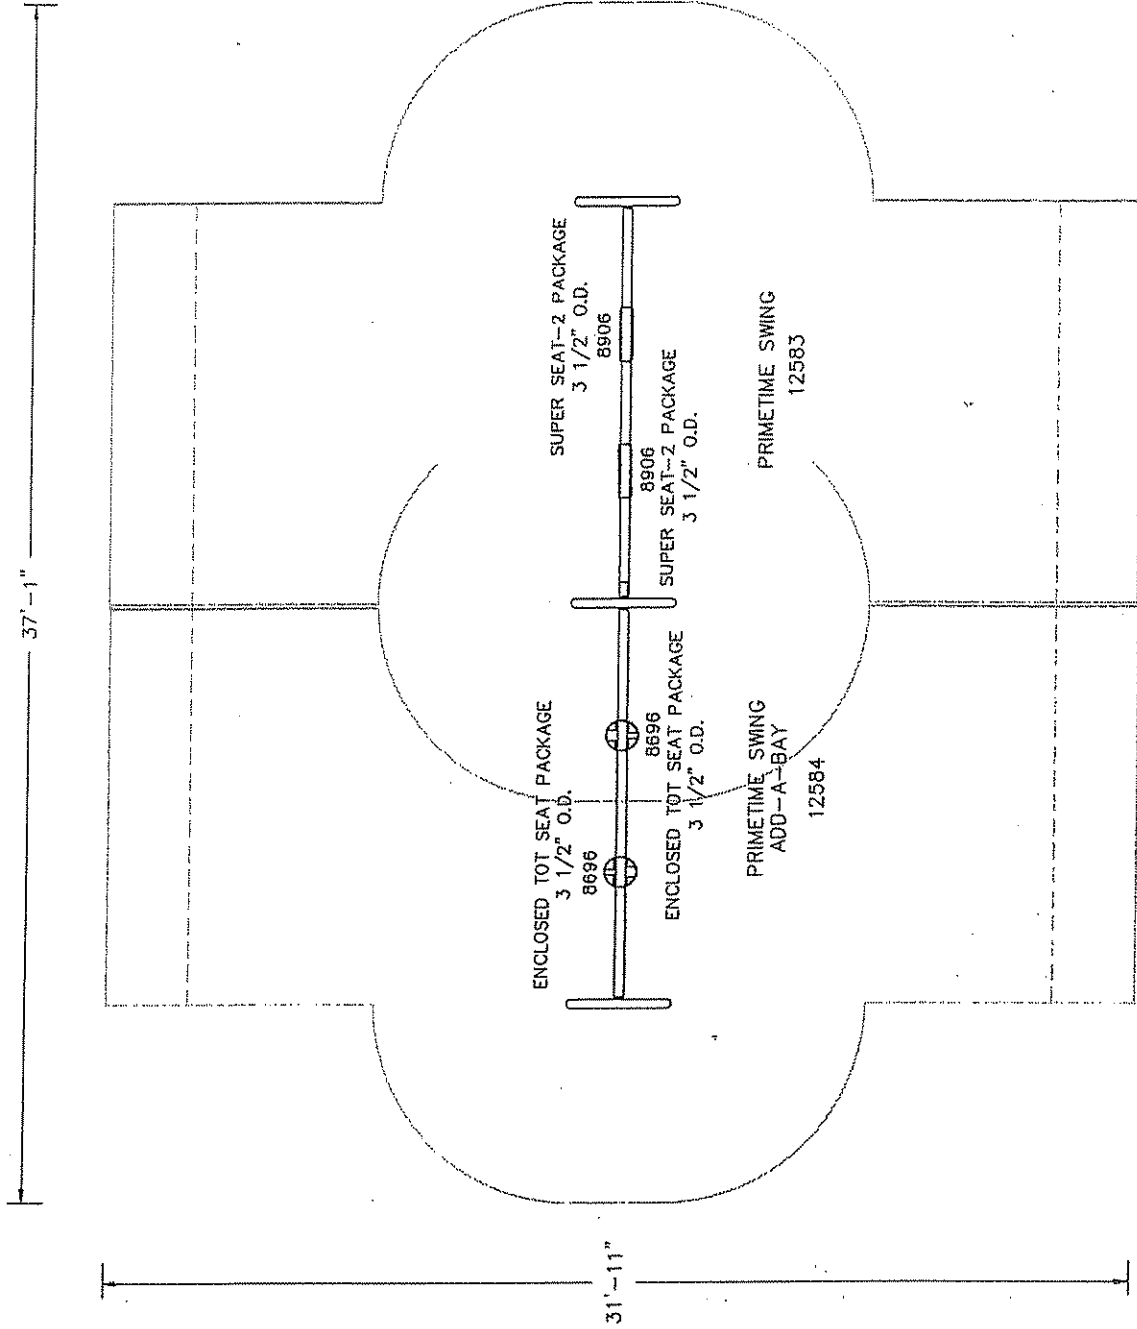

STATE OF WEST VIRGINIA  
Purchasing Division**PURCHASING AFFIDAVIT****VENDOR OWING A DEBT TO THE STATE:**

*West Virginia Code* §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

**PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:**

If this is a solicitation for a public improvement construction contract, the vendor, by its signature below, affirms that it has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code*. The vendor **must** make said affirmation with its bid submission. Further, public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code* and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the *West Virginia Code* may take place before their work on the public improvement is begun.

**ANTITRUST:**

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.


**LICENSING:**

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

**CONFIDENTIALITY:**

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.

Under penalty of law for false swearing (*West Virginia Code* §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

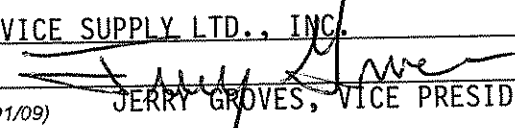Vendor's Name: SERVICE SUPPLY LTD., INC.  
 Authorized Signature:  Date: JUNE 12, 2009  
 Purchasing Affidavit (Revised 01/01/09) JERRY GROVES, VICE PRESIDENT





QUOTE SHEET

Quote No: 35741-1-1

Date: 06-10-09  
 By: GDW

Rep Organization: SERVICE SUPPLY  
 Contact Person: PAM WILLIAMSON

Project Title: WATTER SMITHERS MEMORIAL STATE PARK

Location: LOST CREEK, WV

Phone No:

Style: Playbooster Posts: Aluminum

Bury Type: Direct Bury

Age: 5-12 Unless Otherwise Noted.

QTY	NO.	DESCRIPTION
POSTS		
2	111404D	124 ALUM. POST D.B.
2	111404E	116 ALUM. POST D.B.
1	111404F	108 ALUM. POST D.B.
1	111404G	100 ALUM. POST D.B.
1	111404H	92 ALUM. POST D.B.
1	111404I	84 ALUM. POST D.B.
4	111403A	182 ALUM. POST FOR ROOF
DECKS		
3	121948A	KICK PLATE FOR 8 RISE
1	121949A	KICK PLATE FOR 8 RISE - TRI DK
2	111228A	SQUARE TENDERDECK
1	112471A	TRANSFER STEP
1	111231A	TRIANGULAR TENDERDECK
2	122197A	TRIANGULAR TENDERDECK 90 DEG
ROOFS		
1	118110A	SQUARE POLY ROOF STD LOGO
ENCLOSURES		
1	127953B	PERM. HANDHOLD PANEL
PERMALENE PANELS		
1	115228A	DRIVER PANEL ABOVE DECK
1	127439A	NAVIGATOR PANEL [GROUND LEVEL]
1	159459A	RING A BELL PANEL [ABOVE DECK]
SLIDES		
1	123331B	DOUBLE POLY SLIDE 40 DECK
1	122033B	SPYROSLIDE FOR 72W/ HANGER BRACK
CLIMBERS		
1	122914C	LOOP ARCH 64 DECK
1	128608A	SUMMIT CLIMBER 1 SIDES
MORE FUN		

Page: 2

Date: 06-10-09

Project Title: WATTER SMITHERS MEMORIAL STATE PARKQuote

No: 35741-1-1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

- 
- 1 120901A GRAB BAR
  - 2 111275A HANDLOOP ASSEMBLY
- ATTACHMENTS/CONNECTORS
- 1 152908B DECK LINK W/HANDRAILS (2 STEPS)

Weight & Cost of Playstructure Items  
Concrete: 36.90 cu-ft, Footings: 20  
Labor: 40.50 Man-Hours

INDEPENDENT COMPONENTS

PLAYTHINGS

- 1 158997A DISC CLIMBER 10 D.B.
- INDEPENDENT SWINGS
- 1 100050C ARCH SWING DB ONLY UNCOATED  
Two Full Bucket Seats.
  - 1 111579C ARCH SWING ADD BAY DB ONLY SCT  
Two Belt Seats.

Weight & Cost of Independent Items  
Concrete: 12.75 cu-ft, Footings: 7  
Labor: 12.75 Man-Hours

---

Weight & Cost of Equipment  
Estimated requirements for Equipment.  
Concrete: 49.65 cu-ft, Footings: 27  
Labor: 53.25 Man-Hours

Total Safety Zone Square Footage = 1495 sq ft

Estimated Man-Hours do not include site preparation.

(\*) NOTE:

This Quote has a total weight above 5,000 lbs or product(s) that require a freight quote. Freight tables cannot be used - Please contact LSI for a freight quote.

This quote is valid for 90 days. Purchase orders submitted with an expired quote

Material Specifications  
Quote: 35741-1-1.QSD  
6/11/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI  
Tensile Strength (min): 55,000 PSI  
% Elongation in 2 inches: 25  
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI  
Tensile Strength (min): 38,000 PSI  
% Elongation in 2 inches: 10  
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI  
Yield Strength: 28,000 PSI  
Elongation: 7% in 2 inches  
Shear Strength: 29,000 PSI  
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

-----

111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.

-----

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.

-----

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.

-----

111404G

Posts For Decks 100"/24" Deck

Post: See PlayBooster (PB) General Specifications.

-----

111404H

Posts For Decks 92"/16" Deck

Post: See PlayBooster (PB) General Specifications.

-----

111404I

Posts For Decks 84"/8" Deck

Post: See PlayBooster (PB) General Specifications.

-----  
111403A

Posts For Roofs 182"/72" Deck

Post: See PlayBooster (PB) General Specifications.

-----  
121948A

Kick Plate 8" Rise

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
121949A

Kick Plate 8" Rise, 90\* Tri-Deck

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

112471A

Decks Transfer Step, Brown Only

Step: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111231A

Decks Triangular Tenderdeck, Brown Only

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

122197A

Decks 90\* Triangular Tenderdeck

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

118110A

Square Poly Roof w/Logo Panels\*

Poly Roof: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Roof Logo: Two color roof logo measures 41" wide x 5 1/8" high, color specified.



Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Roof Sleeve: Cast from 319 almag.

-----  
127953B

Handhold Panels 1 Panel

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

-----  
115228A

Driver Panel

Permalene Panel: Two color panel measures 35 5/8" wide x 41" high, color specified.

Hub: Solid color Permalene, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Bracket: Weldment comprised of formed 3/16" plate and 5/8" O.D. shaft. Finish: Powdercoat, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----  
127439A

Reach Panels Navigator

Permalene Panel: Two color panel measures 34" wide x 13" high, color specified.

Hub: Solid color Permalene, color specified.

Angle: Fabricated from formed 11 GA (.120") HRPO sheet steel. Finish: Powdercoat, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Bracket: Weldment comprised of formed 3/16" plate and 5/8" O.D. shaft. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Access Clamp: Weldment comprised of 1/4" flat steel and 1/4" x 1 3/4" wide steel clamp. Finish: Powdercoat, color specified.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

-----  
159459A

Ring-a-Bell Panel

Permalene Panel: Two color panel measures 35 5/8" wide x 41" high, color specified.

Bell Striker: Two color Permalene, color specified.

Bell: Fabricated from 10 GA. (.135") HRPO low carbon steel. Finish: Powdercoat, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
123331B

Double Poly Slide 40"- 48" Deck

Slide: Rotationally molded from U.V. stabilized linear low density

polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail Spacer: Fabricated from 1.3125" O.D. x 16 GA (.065") steel tubing. Finish: Powdercoat, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----  
122033B

SpyroSlides 72" Slide, w/Hanger Bracket, 64" Deck, Brown Bracket Only

Slide, Hood & Barriers: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Entrance Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 31 3/4" wide x 36 27/32" long. Finish: TenderTuff, brown in color.

Center Column: Fabricated from 3.500" O.D. RS-20 (.120" - .130") galvanized steel tubing. Finish: Powdercoat, color specified.

Barrier Plates: Fabricated from 1/4" x 1 1/2" zinc plated HR flat steel. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" thick zinc plated HR flat steel. Finish: Powdercoat, color specified.

Handbar: Formed from 7/8" O.D. x 11 GA (.120") black steel tubing. Finish: TenderTuff, brown in color.

Hanger Bracket: Formed from 11 GA (.120") HRPO low carbon sheet steel. Finish: TenderTuff, brown in color.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

122914C

Loop Arches 64"-72" Deck

Loop Arch: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing, 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing and 1/4" flat steel. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

128608A

Summit Climber 64" and 72" Decks, (64" Available for Direct Bury Only)

Summit Climber: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Support Plate: Fabricated from 7 GA (.179") HRPO flat steel. Finish: Powdercoat, brown in color.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

120901A

Grab Bar, TenderTuff-coated Brown

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Grab Bar: Weldment comprised of formed 7/8" O.D. x 11 GA (.120") and 1/4" x 1 3/4" stainless steel half clamps. Finish: TenderTuff, brown in color.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

-----  
111275A

Handloop Assembly

Handloop: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel inserts, with 5/8" internal thread. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----  
152908B

Deck Links 2-Steps, w/Handrail

Panels: Solid color Permalene, color specified.

Handrail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel welded inserts with 3/8" internal threads. Finish: TenderTuff, color specified.

Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 1/4" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical

information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

QUOTE SHEET

Quote No: 35741-2-1-1

Date: 06-10-09  
 By: GDW

Rep Organization: SERVICE SUPPLY  
 Contact Person: PAM WILLIAMSON

Project Title: WATTER SMITHERS MEMORIAL STATE PARK

Location: LOST CREEK, WV

Phone No:

Style: Playbooster Posts: Aluminum

Bury Type: Direct Bury

Age: 5-12 Unless Otherwise Noted.

QTY	NO.	DESCRIPTION
POSTS		
2	111404A	148 ALUM. POST D.B.
2	111404B	140 ALUM. POST D.B.
2	111404D	124 ALUM. POST D.B.
2	111404E	116 ALUM. POST D.B.
1	111404F	108 ALUM. POST D.B.
1	111404G	100 ALUM. POST D.B.
1	111404H	92 ALUM. POST D.B.
DECKS		
3	121948A	KICK PLATE FOR 8 RISE
1	121949A	KICK PLATE FOR 8 RISE - TRI DK
2	111228A	SQUARE TENDERDECK
1	112471A	TRANSFER STEP
1	111231A	TRIANGULAR TENDERDECK
2	122197A	TRIANGULAR TENDERDECK 90 DEG
ENCLOSURES		
1	127953B	PERM. HANDHOLD PANEL
1	116244A	PIPE BARRIER
1	116244B	PIPE BARRIER W/WHEEL
PERMALENE PANELS		
1	115231A	TIC-TAC-TOE PANEL ABOVE DECK
SLIDES		
1	123331B	DOUBLE POLY SLIDE 40 DECK
1	122033B	SPYROSLIDE FOR 72W/ HANGER BRACK
CLIMBERS		
1	148434B	LOOP POLE W/PERM 64 DECK
MORE FUN		
1	111357A	CHINNING BAR
1	120901A	GRAB BAR
2	111275A	HANDLOOP ASSEMBLY



Page: 2

Date: 06-10-09

Project Title: WATTER SMITHERS MEMORIAL STATE PARKQuote

No: 35741-2-1-1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

---

ATTACHMENTS/CONNECTORS

1 152908B DECK LINK W/HANDRAILS (2 STEPS)

Weight & Cost of Playstructure Items

Concrete: 34.80 cu-ft, Footings: 19

Labor: 37.50 Man-Hours

INDEPENDENT COMPONENTS

KIDS IN MOTION

1 153589A ORBITER-1 IP

PLAYTHINGS

1 158997A DISC CLIMBER 10 D.B.

INDEPENDENT SWINGS

1 100050C ARCH SWING DB ONLY UNCOATED

Two Full Bucket Seats.

1 111579C ARCH SWING ADD BAY DB ONLY SCT

Two Belt Seats.

Weight & Cost of Independent Items

Concrete: 23.75 cu-ft, Footings: 9

Labor: 15.75 Man-Hours

---

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 58.55 cu-ft, Footings: 28

Labor: 53.25 Man-Hours

Total Safety Zone Square Footage = 1666 sq ft

Estimated Man-Hours do not include site preparation.

(\*) NOTE:

This Quote has a total weight above 5,000 lbs or product(s) that require a freight quote. Freight tables cannot be used - Please contact LSI for a freight quote.

This quote is valid for 90 days. Purchase orders submitted with an expired quote

Material Specifications  
Quote: 35741-2-1-1.QSd  
6/11/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI  
Tensile Strength (min): 55,000 PSI  
% Elongation in 2 inches: 25  
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI  
Tensile Strength (min): 38,000 PSI  
% Elongation in 2 inches: 10  
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI  
Yield Strength: 28,000 PSI  
Elongation: 7% in 2 inches  
Shear Strength: 29,000 PSI  
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

-----  
111404A

Posts For Decks 148"/72" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404B

Posts For Decks 140"/64" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404G

Posts For Decks 100"/24" Deck

Post: See PlayBooster (PB) General Specifications.

-----  
111404H

Posts For Decks 92"/16" Deck

Post: See PlayBooster (PB) General Specifications.

-----  
121948A

Kick Plate 8" Rise

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
121949A

Kick Plate 8" Rise, 90\* Tri-Deck

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----  
111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

112471A

Decks Transfer Step, Brown Only

Step: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111231A

Decks Triangular Tenderdeck, Brown Only

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

122197A

Decks 90\* Triangular Tenderdeck

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

127953B

Handhold Panels 1 Panel

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

-----

116244A

Pipe Barrier

Pipe Barrier: Weldment comprised of 5/8" solid steel vertical rails, 1 1/8" O.D. x 11 GA (.120") steel horizontal rails with 203 or 303 stainless steel welded inserts with 5/8" internal threads, 1 1/2" x 1 1/2" x 29 1/2" angle iron. Barrier measures 33 7/8" wide x 39 13/16" high. Finish: TenderTuff, color specified.

90o Bracket: Formed from 1/4" x 1 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

116244B

Pipe Barrier w/Wheel

Pipe Barrier: Weldment comprised of 5/8" solid steel vertical rails, 1 1/8" O.D. x 11 GA (.120") steel horizontal rails with 203 or 303 stainless steel welded inserts with 5/8" internal threads, 1 1/2" x 1 1/2" x 29 1/2" angle iron. Barrier measures 33 7/8" wide x 39 13/16" high. Finish: TenderTuff, color specified.

90o Bracket: Formed from 1/4" x 1 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Clamp: Formed from 3/16" x 2" HRPO zinc-plated. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

115231A

Tic-Tac-Toe Panel, Tan Discs Only



Permalene Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified.

Tic Tac Toe Blocks: Rotationally molded from U.V. stabilized linear low density polyethylene, yellow in color with brown molded-in symbols.

Tic Tac Toe Bracket: Formed from .125" thick 5052 aluminum. Finish: Powdercoat, color specified.

Shafts: Fabricated from 1/2" diameter 203 stainless steel with ends tapped 5/16" 18UNC-2B.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

123331B

Double Poly Slide 40"- 48" Deck

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail Spacer: Fabricated from 1.3125" O.D. x 16 GA (.065") steel tubing. Finish: Powdercoat, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

122033B

SpyroSlides 72" Slide, w/Hanger Bracket, 64" Deck, Brown Bracket Only

Slide, Hood & Barriers: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Entrance Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 31 3/4" wide x 36 27/32" long. Finish: TenderTuff, brown in color.

Center Column: Fabricated from 3.500" O.D. RS-20 (.120" - .130") galvanized steel tubing. Finish: Powdercoat, color specified.

Barrier Plates: Fabricated from 1/4" x 1 1/2" zinc plated HR flat steel. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" thick zinc plated HR flat steel. Finish: Powdercoat, color specified.

Handbar: Formed from 7/8" O.D. x 11 GA (.120") black steel tubing. Finish: TenderTuff, brown in color.

Hanger Bracket: Formed from 11 GA (.120") HRPO low carbon sheet steel. Finish: TenderTuff, brown in color.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

148434B

Loop Poles 56" - 72" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see

specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

111357A

Chinning Bar, (1) Aluminum Post

Rail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel 5/8" threaded inserts. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

120901A

Grab Bar, TenderTuff-coated Brown

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Grab Bar: Weldment comprised of formed 7/8" O.D. x 11 GA (.120") and 1/4" x 1 3/4" stainless steel half clamps. Finish: TenderTuff, brown in color.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

-----

111275A

Handloop Assembly

Handloop: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel inserts, with 5/8" internal thread. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

152908B

Deck Links 2-Steps, w/Handrail

Panels: Solid color Permalene, color specified.

Handrail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel welded inserts with 3/8" internal threads. Finish: TenderTuff, color specified.

Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 1/4" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

153589A

Orbiter Spinner, (Steel Post Required, Available Direct Bury Only)

Spinner Assembled Top: (Upper Assembly) Weldment comprised of 1/4" x 3" HRPO flat steel, 1.900" O.D. RS40 (.120"-.130" wall) galvanized steel tube, 3.500" O.D. RS20 (.125" wall) galvanized steel tube, and 1.125" O.D. steel shaft. Finish: Powdercoat, color specified. (Sleeve/Plate) Weldment comprised of 1/4" sheet HRPO steel and 2.875" O.D. schedule 80 steel tubing. Finish: Powdercoat, color specified.

Standing Post Assy:(Spinner Post) Weldment comprised of 2.875" O.D. RS40 (.160"-.170" wall) galvanized steel tubing, 1.125" O.D. steel shaft, 12 Ga. (.105") HR flat steel and 1141 or 1144 steel collar. Finish: Powdercoat, color specified. (Sleeve/Plate) Weldment comprised of 1/4" sheet HRPO steel and 2.875" O.D. schedule 80 steel tubing. Finish: Powdercoat, color specified.

Rubber Gasket: Made from 50 durometer neoprene.

Spinner Platform: Comprised of 7 GA. (.179") HRPO flat steel and 3/8"-16 x 1" weld studs. Standing surface is perforated with 3/8" diameter holes. Finish: TenderTuff, color specified.

Spinner Wheel: Weldment comprised of 1.029" O.D. RS20 (.070"-.080" wall) galvanized steel tube, 1/4" HRPO flat steel and 3/8" flange weld nuts. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius

climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

QUOTE SHEET

Quote No: 35741-2-1-2

Date: 06-10-09  
By: GDW

Rep Organization: SERVICE SUPPLY  
Contact Person: PAM WILLIAMSON

Project Title: WATTER SMITHERS MEMORIAL STATE PARK  
Location: LOST CREEK, WV Phone No:  
Style: Evos Bury Type: Direct Bury  
Age: 5-12 Unless Otherwise Noted.

QTY NO.	DESCRIPTION
---------	-------------

MORE FUN

1 156454A E-POD

Weight & Cost of Playstructure Items

Labor: 0.25 Man-Hours

-----  
-----  
Weight & Cost of Equipment  
Estimated requirements for Equipment.

Labor: 0.25 Man-Hours

Total Safety Zone Square Footage = 1666 sq ft

Estimated Man-Hours do not include site preparation.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.  
Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed \_\_\_\_\_ Date \_\_\_\_\_

Material Specifications  
Quote: 35741-2-1-2.QSd  
6/11/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed



so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

5" Arches: All steel arches are manufactured from 5" O.D. galvanized tubing with a wall thickness of .120".

Steel Arch Mechanical Properties:

- Yield Strength (min): 50,000 PSI
- Tensile Strength (min): 55,000 PSI
- % Elongation in 2 inches: 25
- Modulus of Elasticity: 29.5 x 106 PSI

5" Clamps: All clamps, unless otherwise noted, shall be sand cast using a 535 aluminum alloy and having the following mechanical properties:

- Ultimate Tensile: 35,000 PSI
- Yield Strength: 18,000 PSI
- Elongation: 8% in 2 inches

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Corocord-cable: Comprised of six-stranded and tempered Corocord-cable with a polypropylene core. The galvanized steel wire cores of the six strands are heated and covered with polyamide, black in color.

Polyester

Powdercoating: All metal components to be powdercoated shall be free of excess weld spatter. Parts shall be thoroughly cleaned in a 5-Stage Pretreatment process. Parts are then thoroughly dried and proceed through a set of automatic sprayers that apply electrostatic powdercoat. Parts are oven cured at 400 degrees F. The average powdercoat thickness is .004". Super Durable TGIC polyester powder shall be specially formulated for optimum Ultra Violet (UV) stability and gloss retention. It shall meet or exceed ASTM Standards for:

- Hardness (D-3363)
- Impact (D-2794)
- Salt Spray resistance (B-117 and D-654)
- UV Exposure (G-54)
- Adhesion (D-3359, Method B)

The Paint Line shall employ a "checkered" adhesion test daily.

Rotationally Molded

Poly Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16").

Material Specifications:

-----

156454A

E-pod

E-Pod Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Pod Casting: Fabricated from sand cast alloy 356 in accordance with ASTM B26.  
Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

QUOTE SHEET

Quote No: 35741-3-1

Date: 06-10-09  
By: GDW

Rep Organization: SERVICE SUPPLY  
Contact Person: PAM WILLIAMSON

Project Title: WATTER SMITHERS MEMORIAL STATE PARK

Location: LOST CREEK, WV

Phone No:

Style: Playbooster Posts: Aluminum

Bury Type: Direct Bury

Age: 5-12 Unless Otherwise Noted.

---

QTY	NO.	DESCRIPTION
-----	-----	-------------

POSTS

- 3 111404D 124 ALUM. POST D.B.
- 1 111404E 116 ALUM. POST D.B.
- 2 111404F 108 ALUM. POST D.B.
- 4 111403E 150 ALUM. POST FOR ROOF

DECKS

- 1 152911A CURVED TRANSFER MOD LEFT
- 2 121948A KICK PLATE FOR 8 RISE
- 1 111228A SQUARE TENDERDECK
- 3 111231A TRIANGULAR TENDERDECK

ROOFS

- 1 118110A SQUARE POLY ROOF STD LOGO

ENCLOSURES

- 1 116244B PIPE BARRIER W/WHEEL

PERMALENE PANELS

- 1 115231B TIC-TAC-TOE PANEL BELOW DECK

SLIDES

- 1 123337A SINGLE POLY SLIDE 48 DECK
- 1 124863A SLIDEWINDER2 32 DECK

BRIDGES

- 1 114665A ARCH BRIDGE (42)

CLIMBERS

- 1 122914A LOOP ARCH 32 DECK
- 1 148434A LOOP POLE W/PERM 40 DECK

OVERHEAD EVENTS

- 1 119805A 2 SINGLE BEAM LOOP HORIZONTAL 84

ATTACHMENTS/CONNECTORS

- 1 111273A END VERTICAL LADDER W/POSTS
- 1 130873A RING PULL

Weight & Cost of Playstructure Items  
Concrete: 37.50 cu-ft, Footings: 23  
Labor: 35.50 Man-Hours

INDEPENDENT COMPONENTS

Page: 2

Date: 06-10-09

Project Title: WATTER SMITHERS MEMORIAL STATE PARKQuote

No: 35741-3-1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

---

INDEPENDENT SWINGS

- 1 100050C ARCH SWING DB ONLY UNCOATED  
Two Full Bucket Seats.
- 1 111579C ARCH SWING ADD BAY DB ONLY SCT  
Two Belt Seats.

Weight & Cost of Independent Items  
Concrete: 11.25 cu-ft, Footings: 6  
Labor: 12.00 Man-Hours

---

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 48.75 cu-ft, Footings: 29  
Labor: 47.50 Man-Hours

Total Safety Zone Square Footage = 1573 sq ft

Estimated Man-Hours do not include site preparation.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.

Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed \_\_\_\_\_ Date \_\_\_\_\_

Material Specifications  
Quote: 35741-3-1.QSd  
6/11/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI  
Tensile Strength (min): 55,000 PSI  
% Elongation in 2 inches: 25  
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI  
Tensile Strength (min): 38,000 PSI  
% Elongation in 2 inches: 10  
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI  
Yield Strength: 28,000 PSI  
Elongation: 7% in 2 inches  
Shear Strength: 29,000 PSI  
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"



aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

-----  
111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

111403E

Posts For Roofs 150"/40" Deck

Post: See PlayBooster (PB) General Specifications.  
-----

152911A

Transfer Modules, Brown Deck Only To 32" Deck, Curved, Right or Left Step

Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 29" per (2) sides. Finish: TenderTuff, brown in color.

Step Sections/Top Step Section: Formed from 12 GA (.105") sheet steel

conforming to ASTM A569. Standing surface is 24 3/8" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Panels: Solid color Permalene, color specified.

Deck Support: Weldment comprised of 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 3/8" O.D. x 5" long CRS rod. Finish: Powdercoat, brown in color.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.080" - .095") and 1 3/4" x 1 3/4" x 1/8" HR angle. Finish: Powdercoat, brown in color.

Railings: Weldment comprised of 1.125" O.D. x 11 GA. (.120") steel tubing with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

-----

121948A

Kick Plate 8" Rise

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111231A

Decks Triangular Tenderdeck, Brown Only

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

118110A

Square Poly Roof w/Logo Panels\*

Poly Roof: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Roof Logo: Two color roof logo measures 41" wide x 5 1/8" high, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Roof Sleeve: Cast from 319 almag.

-----

116244B

Pipe Barrier w/Wheel

Pipe Barrier: Weldment comprised of 5/8" solid steel vertical rails, 1 1/8" O.D. x 11 GA (.120") steel horizontal rails with 203 or 303 stainless steel welded inserts with 5/8" internal threads, 1 1/2" x 1 1/2" x 29 1/2" angle iron. Barrier measures 33 7/8" wide x 39 13/16" high. Finish: TenderTuff, color specified.

90o Bracket: Formed from 1/4" x 1 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Clamp: Formed from 3/16" x 2" HRPO zinc-plated. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

123337A

Single Poly Slide 40" - 48" Deck

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

124863A

SlideWinder2 32" Deck

Slide Sections: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Mid-Support: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing and 3/16" x 1 1/4" zinc plated steel strap. Finish: Powdercoat, color specified.

Support Base (SM): Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 3" x 8" mounting plate. Finish: Powdercoat, color specified.

Exit Footer: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" x 7 1/2" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

114665A

Arch Bridge, 42" Module, Permalene Barrier

Arch Bridge: Fabricated from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

122914A

Loop Arches 40"-48" Deck

Loop Arch: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing, 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing and 1/4" flat steel. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

148434A

Loop Poles 32" - 48" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish:

Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

119805A

Single Beam Loop Horizontal Ladder, 84" Module, Max. 32" Decks

Ladder: Weldment comprised of 2.375" O.D. RS-40 (.130" - .140") galvanized steel tubing, 1.125" O.D. x 11 GA (.120") zinc plated steel and 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

-----

111273A

End Vertical Ladders 116" Aluminum Posts

Vertical Ladder: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing, 1.029" O.D. RS-20 (.070" - .080") and 3/16" x 2" wide steel flat plates. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

-----

130873A

Ring Pull, Brown Rings Only, Intended For Wheelchair Users -

"D" Ring: Cast from 333 aluminum alloy with a cast in place 360 brass alloy bushing. Finish: TenderTuff, brown in color.

Chain Assembly: 5/16" Low carbon steel straight link galvanized chain, with bolt link made from grade 316 stainless steel. Finish: TenderTuff-coated, brown in color.

Double Clevis: Stainless Steel

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Ring Pull Beam: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 1 3/4" HRS clamps. Housings for double clevis are 1 1/4" O.D. x .312" wall steel tubing. SAE 841 dry bronze bushings are pressed into housings at factory. Finish: Powdercoat, color specified.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

-----

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

-----

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including

TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.





February 2, 2009

To Whom It May Concern:

Landscape Structures Inc. has been actively involved in the development of safety standards for public playground equipment for more than 15 years. We are also a charter member of the International Play Equipment Manufacturers Association (IPEMA).

All products covered under the scope of the Standard in our 2009 Park and Playground Equipment catalog have been tested/certified and validated by an independent third party to be in compliance with the requirements of the ASTM (American Society for Testing and Materials) F1487 Safety Standard according to procedures set forth by the IPEMA, except where listed. A listing of all certified products can be seen at [www.ipema.org](http://www.ipema.org). This listing will also show that all products except where noted, are certified to the CAN/CSA Z614-07 Children's Playspaces and Equipment published in March 2007 by the Canadian Standards Association (CSA).

To the best of our knowledge, we also conform to the U.S. Consumer Products Safety Commission's (CPSC) Handbook for Public Playground Safety published in 1998.

The company achieved ISO 9001:2000 certification in March 2003 and the ISO 14001 environmental standard in September 1998. The pursuit of ISO certification helped Landscape Structures establish its quality management systems and establish the infrastructure for continued growth.

If you have any questions, please contact the undersigned.

Sincerely,

Landscape Structures Inc.

Randy Watermill  
Director of Product Development

Subscribed and sworn before me on this 2nd day of February, 2009.

  
Notary Public

2/2/09  
Date



(Notary Stamp)



# 2009 Play Equipment Warranty

You have our word.

**100-Year Limited Warranty** for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

**15-Year Limited Warranty** for all plastic and steel components, including TuffTimbers™ against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff™-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurf® against material or manufacturing defects when properly installed. Corocord® cable on Spacenet™ climbers against breakage.

**10-Year Limited Warranty** for all CoolToppers™ structural steel frames and Mobius climbers™ against structural failure due to natural deterioration or manufacturing defects.

**5-Year Limited Warranty** for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

**3-Year Limited Warranty** for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat™ hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion, natural deterioration or manufacturing defects.

**This warranty does not include any cosmetic issues or wear and tear from normal use.**

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgment of Order and will be free of defects in manufacturing and material. Seller further warrants:

All the warranties commence on date of Seller's invoice. Should any failure to conform to the above express warranties appear within the applicable warranty period, Seller shall, upon being notified in writing promptly after discovery of the defect and within the applicable warranty period, correct such nonconformity either by repairing any defective part or parts, or by making available a replacement part within 60 days of written notification. Seller shall deliver the repaired or replacement part or parts to the site free of charge, but will not be responsible for providing labor or the cost of labor for the removal of the defective part or parts and the installation of any replacement part or parts. Replacement parts will be warranted for the balance of the original warranty.

**THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE.**

The remedies hereby provided shall be the exclusive and sole remedies of the purchaser. Seller shall not be liable for any direct, indirect, special, incidental or consequential damages.

Seller neither assumes nor authorizes any employee, representative or any other person to assume for Seller any other liability in connection with the sale or use of the structures sold, and there are no oral agreements or warranties collateral to or affecting this agreement. The warranty stated above is valid only if the structures and or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc.; have been subjected to normal use for the purpose for which the goods were designed; have not been subject to misuse, negligence, vandalism, or accident; have not been subjected to addition or substitution of parts; and have not been modified, altered, or repaired by persons other than Seller or Seller's designees in any respect which, in the judgement of Seller, affects the condition or operation of the structures. To make a claim, send your written statement of claim, along with the original job number or invoice number to: Landscape Structures Inc. 601 7th Street South, Delano, Minnesota, 55328-8605

Signed:

Chairman

Date: 01/01/09



## 2009 Terms of Sale

**PRICING:** Prices in the Landscape Structures price list do not include delivery and handling charges. Prices are subject to change without notice.

**TERMS:** To tax-supported institutions and those with established credit: Net 30 days from the date of the invoice. 1.5% per month thereafter, freight charges are prepaid and applied to the invoice. Taxes: Prices listed in the Landscape Structures price list do not include applicable taxes, if any.

**WEIGHTS:** Weights shown in the catalog and price list are approximate, and may vary. Delivery: If delivery of the equipment is by common carrier, should there be damage or a shortage, notify the carrier at once and sign delivery documents provided by the carrier noting the damage or shortage. Most products are delivered on large pallets and will require a forklift or similar equipment to unload as a unit on the site. If this is not possible, the units can be unpacked in the truck.

**INSTALLATION:** All Playstructures and/or equipment are delivered unassembled and packaged with recyclable materials. For a list of Factory Certified Installers in your area, please contact your Landscape Structures Representative.

**SERVICE:** We have knowledgeable, qualified sales consultants throughout the world. Our Representatives are available to help you before, during and after the sale. Landscape Structures Inc. has exclusive design software that features all of our parts and

pieces in pull-down menus. With this, your Sales Representative can design a playground layout that meets not only your needs, but ASTM and CPSC standards. In addition, we have a full staff of NPSI-certified designers along with 2D and 3D drawing capabilities to assist you with your playground plans. Please contact us at 601 Seventh Street South, Delano, Minnesota 55328 or call 1-800-328-0035 inside the USA or 1-763-972-3391 outside the USA, for your sales representative or visit our web site at [playlsi.com](http://playlsi.com)

**RETURN POLICY:** As an indication of our commitment to our customers, Landscape Structures will accept returns of new structures and/or new equipment purchased within 60 days of the original invoice date. Advance notification is necessary to assure proper credit. Parts not included in this return policy are custom parts, (including PlayShaper® posts) as well as used or damaged parts. A 20% restock fee plus all freight charges will apply to all product returns. Note: All parts are subject to inspection upon return. Parts returned damaged may not receive a full credit. For this reason, it is important that all returned parts are properly packaged to prevent damages while in transit.

**PRODUCT CHANGES:** Because of our commitment to safety, innovation, and value, we reserve the right to change specifications at any time.

# CONTRACTOR LICENSE

Authorized by the  
West Virginia Contractor Licensing Board

Number:

WV013333

Classification:

SPECIALTY


SERVICE SUPPLY LTD INC  
DBA SERVICE SUPPLY LTD INC  
1524 S HAMILTON RD  
COLUMBUS, OH 43227-2493

Date Issued

JANUARY 24, 2009

Expiration Date

JANUARY 24, 2010

  
Authorized Company Signature

  
Chair, West Virginia Contractor  
Licensing Board

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



WEST VIRGINIA  
CONTRACTOR  
LICENSING  
BOARD



**WORKERS COMPENSATION  
AND  
EMPLOYERS LIABILITY POLICY**

**INFORMATION PAGE WC 00 00 01 (A)**

**RENEWAL OF POLICY NUMBER:** WC10102907-04  
**POLICY NUMBER:** WC10102907-05

**INSURER:** BRICKSTREET MUTUAL INSURANCE COMPANY

1. **INSURED:**  
SERVICE SUPPLY LTD INC  
1524 SOUTH HAMILTON ROAD  
COLUMBUS, OH 43227

**PRODUCER:**  
BRICKSTREET MUTUAL INSURANCE  
COMPANY  
400 QUARRIER STREET  
CHARLESTON, WV 25301-2010

Insured is a(n) CORPORATION

Other work places and identification numbers are shown in the schedule(s) attached.

2. The policy period is from 11/30/2008 to 11/30/2009 12:01 A.M. at the insured's mailing address.

3. A. **WORKERS COMPENSATION INSURANCE:** Part One of the policy applies to the Workers Compensation Law of the state(s) listed here:  
  
WEST VIRGINIA

B. **EMPLOYERS LIABILITY INSURANCE:** Part Two of the policy applies to work in each state listed in item 3.A. The limits of our liability under Part Two are:

Bodily Injury by Accident:	\$100,000	Each Accident
Bodily Injury by Disease:	\$500,000	Policy Limit
Bodily Injury by Disease:	\$100,000	Each Employee

C. **OTHER STATES INSURANCE:** Part Three of the policy applies to the states, if any, listed here:

See West Virginia Limited Other States Insurance Endorsement WC 99 03 05

D. This policy includes these endorsements and schedules:

SEE LIST OF ENDORSEMENTS - EXTENSION OF INFORMATION PAGE

4. The premium for this policy will be determined by our Manuals of Rules, Classifications, Rates and Rating Plans. All required information is subject to verification and change by audit to be made in accordance with Part Five of the Policy.

**DATE OF ISSUE:** 12/29/2008  
**ISSUING OFFICE:** Charleston, WV  
**PRODUCER:** BRICKSTREET MUTUAL INSURANCE COMPANY

**Ohio****Bureau of Workers'  
Compensation**30 W. Spring St.  
Columbus, OH 43215**Certificate of Premium Payment**

This certifies the employer listed below has paid into the Ohio State Insurance Fund as required by law. Therefore, the employer is entitled to the rights and benefits of the fund for the period specified. For more information, call 1-800-OHIOBWC.

This certificate must be conspicuously posted.

Policy No. and Employer

Period Specified Below

406937

01/01/2009 Thru 08/31/2009

SERVICE SUPPLY LTD., INC.  
1524 S HAMILTON RD  
COLUMBUS, OH 43227-2429



ohiobwc.com

*Maisha P. Ryan*  
Administrator

You can reproduce this certificate as needed.

**Ohio Bureau of Workers' Compensation****Required Posting**

Effective Oct. 13, 2004, Section 4123.54 of the Ohio Revised Code requires notice of rebuttable presumption. Rebuttable presumption means an employee may dispute or prove untrue the presumption (or belief) that alcohol or a controlled substance not prescribed by the employee's physician is the proximate cause (main reason) of the work-related injury.

The burden of proof is on the employee to prove the presence of alcohol or a controlled substance was not the proximate cause of the work-related injury. An employee who tests positive or refuses to submit to chemical testing may be disqualified for compensation and benefits under the Workers' Compensation Act.

**Ohio****Bureau of Workers'  
Compensation**

You must post this language with the certificate of premium payment.



# Ohio Bureau of Workers' Compensation

Governor, Ted Strickland  
Administrator/CEO Marsha P. Ryan

Focus on  
Ohio Employers

log on

? help print search glossary cc

- Accident/Injury Info »
- Claim Info »
- Claim Payment »
- Claim Reference Info »
- Coverage look-up
- Employer Services »
- Quick Pay
- Safety Services »
- Self-Insured »
- Forms
- Section Map

Live support available  
Monday through Friday  
7:30 a.m. - 5:30 p.m.  
[Click here to get help!](#)

Service: State construction contractor search results

Policy number: 406937-0  
Company name: SERVICE SUPPLY LTD., INC.  
Construction contractor status: APPROVED  
Construction contractor status date: 5/4/2007 12:00:00 AM

[search again](#)

**Note:** BWC has designed this database for those responsible for ensuring that a construction contractor or subcontractor has a drug-free program that complies with the governor's executive order requiring a drug-free workplace. A contractor or subcontractor in an APPROVED status has agreed to implement a drug-free workplace program which makes the company compliant with the governor's executive order. Therefore, you can print this page for your records.

Click the Help tab in the upper-right hand corner for more status definitions.



# ACORD™ CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
12/10/2008


PRODUCER Phone: 6168783351  
The Campbell Group  
PO Box 1788  
Grand Rapids MI 49501

Fax: 8008473129

SERVICE SUPPLY LTD.

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURED  
Service Supply Ltd Inc  
1524 S Hamilton Road  
Columbus OH 43227



IN BUSINESS FOR FUN AND SAFETY

INSURERS AFFORDING COVERAGE	NAIC #
INSURER A: Continental Casualty Co	
INSURER B: American Casualty Co of Read	
INSURER C:	
INSURER D:	
INSURER E:	

## COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR ADD'L LTR INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
B	<b>GENERAL LIABILITY</b> <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input checked="" type="checkbox"/> OCCUR  GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	2088184534	12/10/2008	12/10/2009	EACH OCCURRENCE \$1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$100,000 MED EXP (Any one person) \$5,000 PERSONAL & ADV INJURY \$1,000,000 GENERAL AGGREGATE \$2,000,000 PRODUCTS - COMP/OP AGG \$2,000,000
A	<b>AUTOMOBILE LIABILITY</b> <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS	2088184498	12/10/2008	12/10/2009	COMBINED SINGLE LIMIT (Ea accident) \$1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ AUTO ONLY - EA ACCIDENT \$ OTHER THAN AUTO ONLY: EA ACC \$ AGG \$
	<b>GARAGE LIABILITY</b> <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT \$ OTHER THAN AUTO ONLY: EA ACC \$ AGG \$
A	<b>EXCESS/UMBRELLA LIABILITY</b> <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE  <input type="checkbox"/> DEDUCTIBLE <input checked="" type="checkbox"/> RETENTION \$10,000	2088184453	12/10/2008	12/10/2009	EACH OCCURRENCE \$2,000,000 AGGREGATE \$2,000,000 \$ \$ \$
	<b>WORKERS COMPENSATION AND EMPLOYERS' LIABILITY</b> ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				WC STATU-TORY LIMITS <input type="checkbox"/> OTH-ER <input type="checkbox"/> E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$
3	<b>OTHER</b> Installation Floater	2088184534	12/10/2008	12/10/2009	\$120,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS

## CERTIFICATE HOLDER

Service Supply Ltd Inc  
1524 South Hamilton Road  
Columbus OH 43227

## CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE  
*Wm W Fitzpatrick*



## **IMPORTANT**

If the certificate holder is an **ADDITIONAL INSURED**, the policy(ies) must be endorsed. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

If **SUBROGATION IS WAIVED**, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

## **DISCLAIMER**

The Certificate of Insurance on the reverse side of this form does not constitute a contract between the issuing insurer(s), authorized representative or producer, and the certificate holder, nor does it affirmatively or negatively amend, extend or alter the coverage afforded by the policies listed thereon.

**PRODUCER**  
Aon Risk Services Central, Inc.  
fka Aon Risk Services, Inc. of Minnesota  
8300 Norman Center Drive  
Suite 1000  
Minneapolis MN 55437 USA

PHONE (952) 656-8000 FAX (312) 381-0536

**THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.**

**INSURED**  
Landscape Structures, Inc.,  
Basics, Inc., SkateWave, a  
Division of Landscape Structures, Inc.  
601 7th Street South  
Delano MN 55328 USA

INSURERS AFFORDING COVERAGE		NAIC #
INSURER A:	ACE American Insurance Company	22667
INSURER B:	American International Specialty Lines	26883
INSURER C:		
INSURER D:		
INSURER E:		

**COVERAGES**  
THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	ADD'L INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YYYY)	POLICY EXPIRATION DATE (MM/DD/YYYY)	LIMITS SHOWN ARE AS REQUESTED	
						LIMITS	
A		<b>GENERAL LIABILITY</b> <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> BFPD Incl. <input checked="" type="checkbox"/> Bkt Contractual Incl. GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	PMIG23860971 GL & Products Liability	06/01/08	06/01/09	EACH OCCURRENCE	\$2,000,000
		DAMAGE TO RENTED PREMISES (Ea occurrence)				\$50,000	
		MED EXP (Any one person)				Excluded	
						PERSONAL & ADV INJURY	\$2,000,000
						GENERAL AGGREGATE	\$4,000,000
						PRODUCTS - COMP/OP AGG	\$4,000,000
		<b>AUTOMOBILE LIABILITY</b> <input type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS <input type="checkbox"/> NON OWNED AUTOS				COMBINED SINGLE LIMIT (Ea accident)	
						BODILY INJURY (Per person)	
						BODILY INJURY (Per accident)	
						PROPERTY DAMAGE (Per accident)	
		<b>GARAGE LIABILITY</b> <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT	
						OTHER THAN AUTO ONLY: EA ACC AGG	
B		<b>EXCESS UMBRELLA LIABILITY</b> <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE <input type="checkbox"/> DEDUCTIBLE <input type="checkbox"/> RETENTION \$10,000	BE1030126	06/01/08	06/01/09	EACH OCCURRENCE	\$5,000,000
		AGGREGATE				\$5,000,000	
		<b>WORKERS COMPENSATION AND EMPLOYERS' LIABILITY</b> ANY PROPRIETOR / PARTNER / EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				WC STATUTORY LIMITS	OTHER
						E.L. EACH ACCIDENT	
						E.L. DISEASE-EA EMPLOYEE	
						E.L. DISEASE-POLICY LIMIT	
		<b>OTHER</b>					

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/EXCLUSIONS ADDED BY ENDORSEMENT/SPECIAL PROVISIONS  
Broad Form Vendors Endorsement

**CERTIFICATE HOLDER**  
Service Supply Ltd., Inc.  
1524 South Hamilton Road  
Columbus OH 43227 USA

**AGREEMENT**  
SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT. BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE  
*Aon Risk Services Central Inc.*

Holder Identifier: 570028850357 Certificate No: 570028850357

# SERVICE SUPPLY LTD., INC.



1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681  
FAX 614/863-0113

June 1, 2005

**Service Supply Ltd., Inc. - founded in 1959 in Columbus, Ohio. We originally had offices in the Bryson Building in Columbus, Ohio, and have been in our present facilities, 1524 South Hamilton Road, Columbus, Ohio since 1967.**

**Ralph Groves, my brother, founded Service Supply Ltd., Inc. and was president until his death in 1973.**

**Our employees at this time are:**

**Mary G. Groves (wife) President (1960)**  
**Jerry Groves (son) Vice President (1969)**  
**Janet Kletecka (daughter) Board of Directors (1974)**  
**Alan Kletecka (son-in law) Sales Manager (1973)**  
**Ben Groves (husband) Secretary-Treasurer (1961)**  
**Donna Hetzner - Secretary (1999)**  
**Linda Groves (daughter-in-law) Secretary (1977)**  
**Linda Kroonemeyer - Secretary (1986)**  
**Medrith Mollenkamp - Secretary (1988)**  
**Connie Triplett - Secretary (2003)**

**We have five (5) sales persons located in various areas of Ohio, Indiana and West Virginia that are on straight commission basis. Some of these sales persons also offer other lines that are related to the same market that we service. This gives us a total of seven (7) sales persons on the road.**

**Service Supply Ltd., Inc. originally sold items pertaining to Traffic and Highway Safety such as paint stripers, traffic paint, signs, and sign posts. We expanded into the park and recreation market and then into the school market which includes all grade 1-12 and colleges. We also call on the private sector where our site amenities, signs, and play structures are popular. Our early childcare play equipment is designed for institutional and corporate facilities that have become involved in day care centers.**

A partial list of our suppliers and their principals, addresses, phone numbers, and products to follow:

- Landscape Structures, Inc., Barb and Steve King, Route #3, 601 7<sup>th</sup> Street, South, Delano, MN 55328  
612-479-2546 PLAYGROUND EQUIPMENT
- Wabash Valley Manufacturing, Inc., Jerry Shilling, P. O. Box 5, Silver Lake, IN 46982  
219-352-2102 SITE AMENITIES (expanded metal)
- DuMor, Inc., Steve Richard, P. O. Box 142, Mifflintown, PA 17059  
717-436-2106 SITE AMENITIES (wood)
- American Aluminum Seating, Inc., Bob Palmer, P. O. Box 1468, Marshalltown, IA 50158  
515-753-5366 PORTABLE BLEACHERS, STADIUM GRANDSTANDS
- Interkal LLC, Richard Patterson, P. O. Box 2107, Kalamazoo, MI 49003  
616-349-1521 TELESCOPIC GYM BLEACHERS

We are listed in D&B; any late payments that may be listed on these reports are the result of problems in delivery of total order, which in turn holds up payment to the manufacturer. This would only appear if it were a very large order, which would involve telescopic bleachers.

Our bank, which we have been with since 1959, is National City Bank, Bexley Office, 2594 East Main Street, Bexley, OH 43209- phone 614-238-7100.

Our accountant is Schwartz, Adleman, Kellerman & Marks, (Mr. Sam Schwartz) 145 North Reynoldsburg-New Albany Road, Blacklick, OH 43004-9701. Phone number is 614-866-1600.

Our legal counsel is the firm of Kahn, Kleinman, Yanowitz & Arnson (contact for Service Supply is Mr. Neil Kurit, The Tower at Erieview, Suite 2600, 1301 East Ninth Street, Cleveland, OH 44114-1824. Neil Kurit's phone number is 216-736-3452.

**Should you have any questions, please feel free to call me Toll Free -  
in Ohio call 800-282-1900 - Indiana and West Virginia call 800-848-7556.**

Very truly yours,

**SERVICE SUPPLY LTD., INC.**

*Jerry Groves*

**Jerry Groves  
Vice President**

**JG/dlh**

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT OF THE BOARD OF DIRECTORS

December 12, 1988

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following actions by this unanimous written consent:

RESOLVED: That the following persons be, and they hereby are, elected to the offices of the Corporation set opposite their respective names, each to serve in such capacity until his or her successor is duly elected and qualified:

Mary G. Groves	President
Jerry L. Groves	Vice President
Oscar B. Groves	Secretary/Treasurer
Alan Kletecka	Sales Manager

RESOLVED: That the officers of the Corporation select a bank to be the official depository of the Corporation and that the corporate resolutions required by such institution be, and they same hereby are, adopted by the Corporation as part of this resolution and that any one of the officers be, and they hereby are, authorized to execute, acknowledge, and deliver in the name and on behalf of the Corporation, any and all agreements, documents and certificates, and to do and perform all such acts and things as may be deemed by them necessary or appropriate to effectuate the purpose of this resolution;

RESOLVED  
FURTHER: That said bank be, and it hereby is, authorized to pay out the funds of the Corporation on deposit with it from time to time upon checks, drafts or other withdrawal orders drawn upon it and signed in the name of the Corporation by any one of the following persons:

Oscar B. Groves  
Mary G. Groves

whether the checks, drafts or other withdrawal orders are payable to cash, bearer, the orders of any third party, the order of the signing officers or employees of the Corporation, or to the order

of any other officer or employee of the Corporation in either his or her individual or official capacity; and

RESOLVED FURTHER: That the Secretary of the Corporation be, and hereby is, authorized to furnish to said institution a certified copy of this resolution and that this resolution remain in full force and effect until a certified copy of a resolution amending, modifying, replacing, or rescinding this resolution has been furnished to the bank; and


RESOLVED FURTHER: That any one of the officers be, and they hereby are, authorized to execute and deliver any and all notes, agreements, documents or papers of any type or nature whatsoever to consummate the purpose of the foregoing resolution.


RESOLVED: That any one of the officers be, and they hereby are, authorized to pay all fees and expenses incident to and necessary for the organization of the Corporation.

RESOLVED: That any of the officers of the Corporation be, and they hereby are, authorized, directed and empowered to file or cause to be filed a Notification of Exemption on Form 3-O with the Ohio Division of Securities within sixty (60) days from the date of the original subscription to the shares of the Corporation.

  
\_\_\_\_\_  
Oscar B. Groves

  
\_\_\_\_\_  
Mary G. Groves

  
\_\_\_\_\_  
Jerry Groves

  
\_\_\_\_\_  
Janet Kletecka

"Directors"

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT  
OF THE BOARD OF DIRECTORS

January 2, 1989

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following action by this unanimous written consent:

RESOLVED: That the following persons are authorized to sign any bids on behalf of the Corporation:

Oscar B. Groves  
Mary G. Groves  
Alan Kletecka  
Jerry L. Groves  
Janet Kletecka

Oscar B. Groves  
Oscar B. Groves  
Mary G. Groves  
Mary G. Groves  
Janet Kletecka  
Janet Kletecka  
Jerry L. Groves  
Jerry L. Groves  
"Directors"



# SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681  
FAX 614/863-0113

## **NOTICE TO ALL COMPANY SUPERVISORY AND ADMINISTRATIVE PERSONNEL**

Attached hereto and a part hereof is our Written Statement of Company Policy of Service Supply Ltd., Inc. with respect to equal employment opportunity.

It now becomes part of your responsibility with Service Supply Ltd., Inc. to implement this policy in every way, especially with respect to taking affirmative action as stated in the policy. Accordingly, you are hereby directed to:

- A. Post such notices as are prescribed by the Federal or State laws, City Ordinances and resolutions, and the rules and regulations adopted thereunder together with the applicable orders of the governmental agencies or officers established thereunder.
- B. Encourage employment of minority group employees for work in trades where they are not frequently represented. This will be done generally by our main office in hiring but the same shall apply to all job sites. Any applicant for any job should be referred to Mrs. Mary Groves at the main office to assure proper processing of his or her application.
- C. Encourage minority group candidates for apprenticeship classes.



Secretary-Treasurer

Signature of Company Official

# SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681  
FAX 614/863-0113

## WRITTEN STATEMENT OF COMPANY POLICY

It is the policy of Service Supply Ltd., Inc. that equal employment opportunity be afforded to all qualified persons without regard to race, religion, color, sex or national origin.

In support of this policy Service Supply Ltd., Inc. will not discriminate against any employee or applicant for employment because of race, religion, color, sex or national origin.

The Service Supply Ltd., Inc. will take affirmative action to insure that applicants are employed, and that employees are treated during employment without regard to race, religion, color, sex or national origin. Such action will include but not be limited to:

**RECRUITMENT, ADVERTISING OR SOLICITATION FOR  
EMPLOYMENT, HIRING, PLACEMENT, UPGRADING, TRANSFER  
OR DEMOTION. SELECTION FOR TRAINING INCLUDING  
APPRENTICESHIP, TREATMENT DURING EMPLOYMENT, RATES  
OF PAY OR OTHER FORMS OF COMPENSATION, LAYOFF OR  
TERMINATION.**

SERVICE SUPPLY LTD., INC.

*Ben Groves*

Secretary -Treasurer

Signature of Company Official

# SERVICE SUPPLY LTD., INC.

LTD

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681  
FAX 614/863-0113

## WRITTEN STATEMENT OF COMPANY POLICY

Please be advised that our policy also includes ancestry.

Service Supply Ltd., Inc. is a family oriented business. We have a total of nine employees, all but three employees are related. We do not recruit, if necessary to recruit, sources and all applicants will be advised that we are an equal opportunity employer.

There is no training program at the present, if it becomes necessary, we will make training available.

If an employee feel that he or she has been discriminated against, they should contact Ben Groves, Secretary/Treasurer of Service Supply Ltd., Inc., he will inform them of any other areas of redress. We will not retaliate against any employee or applicant who files an internal grievance.



Signature of Company  
Official

# SERVICE SUPPLY LTD., INC.

1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681  
FAX 614/863-0113

January 1, 1990

## NOTICE TO EMPLOYEES

### RE: DRUG FREE WORKPLACE POLICY

Please be advised that as of this date, all employees of Service Supply Ltd., Inc. are hereby notified that we consider Service Supply Ltd., Inc. to be a Drug Free Workplace.


Without exception, the unlawful manufacture, distribution, dispensing, possession, or use of a controlled substance while in the workplace is strictly prohibited.

Service Supply Ltd., Inc. requires that as a condition of employment, any employee convicted of a drug violation occurring in the workplace must notify his or her employer within five (5) days after conviction.

Any employee found in violation of this policy is subject to appropriate personnel action, up to and including termination of employment. Continued employment may be conditioned upon successful completion of an acceptable drug rehabilitation program.

Any employee seeking information on drug or alcohol abuse awareness, the availability of counseling and referral services should contact Ben Groves, Secretary-Treasurer at (614) 861-3681.

SERVICE SUPPLY LTD., INC.

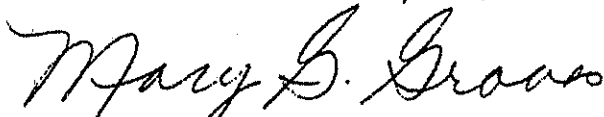

Mary G. Groves  
President

MG/bh