



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
KRISTA FERRELL 304-558-2596

VENDOR

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE:

08/27/2009

BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		\$43,515.00
<p>LABOR AND MATERIAL FOR PLAYGROUND EQUIPMENT</p> <p>REQUEST FOR QUOTATION (RFQ)</p> <p>THE WEST VIRGINIA STATE PURCHASING DIVISION FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES, IS SOLICITING BIDS TO PROVIDE ALL LABOR AND MATERIALS FOR THE INSTALLATION OF PLAYGROUND EQUIPMENT AT COOPER'S ROCK STATE PARK LOCATED IN BRUCETON MILLS, WEST VIRGINIA PER THE ATTACHED SPECIFICATIONS.</p> <p>A MANDATORY PRE-BID WILL BE HELD ON AUGUST 11, 2009 AT 10:00 AM AT THE COOPERS ROCK STATE PARK HEADQUARTERS IN BRUCETON MILLS, WEST VIRGINIA. ALL INTERESTED PARTIES ARE REQUIRED TO ATTEND THIS MEETING. FAILURE TO ATTEND THE MANDATORY PRE-BID SHALL RESULT IN DISQUALIFICATION OF THE BID. NO ONE PERSON MAY REPRESENT MORE THAN ONE BIDDER.</p> <p>AN ATTENDANCE SHEET WILL BE MADE AVAILABLE FOR ALL POTENTIAL BIDDERS TO COMPLETE. THIS WILL SERVE AS THE OFFICIAL DOCUMENT VERIFYING ATTENDANCE AT THE MANDATORY PRE-BID. FAILURE TO PROVIDE YOUR COMPANY AND REPRESENTATIVE NAME ON THE ATTENDANCE SHEET WILL RESULT IN DISQUALIFICATION OF THE BID. THE STATE WILL NOT ACCEPT ANY OTHER DOCUMENTATION TO VERIFY ATTENDANCE. THE BIDDER IS RESPONSIBLE FOR ENSURING THEY HAVE COMPLETED THE INFORMATION REQUIRED ON THE ATTENDANCE</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
<i>Jerry Groves</i>	800-848-7556	AUGUST 25, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262459	ADDRESS CHANGES TO BE NOTED ABOVE

**GENERAL TERMS & CONDITIONS
REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)**

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the *West Virginia Code* and the *Legislative Rules* of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125 fee.
5. All services performed or goods delivered under State Purchase Order/Contracts are to be continued for the term of the Purchase Order/Contracts, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the *West Virginia Code*.
8. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, the State may deem this contract null and void, and terminate such contract without further order.
14. **HIPAA BUSINESS ASSOCIATE ADDENDUM:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Cover Entity (45 CFR §160 103) and will be disclosing Protected Health Information (45 CFR §160 103) to the vendor.
15. **WEST VIRGINIA ALCOHOL & DRUG-FREE WORKPLACE ACT:** If this Contract constitutes a public improvement construction contract as set forth in Article 1D, Chapter 21 of the West Virginia Code ("The West Virginia Alcohol and Drug-Free Workplace Act"), then the following language shall hereby become part of this Contract: "The contractor and its subcontractors shall implement and maintain a written drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act, as set forth in Article 1D, Chapter 21 of the West Virginia Code. The contractor and its subcontractors shall provide a sworn statement in writing, under the penalties of perjury, that they maintain a valid drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act. It is understood and agreed that this Contract shall be cancelled by the awarding authority if the Contractor: 1) Fails to implement its drug-free workplace policy; 2) Fails to provide information regarding implementation of the contractor's drug-free workplace policy at the request of the public authority; or 3) Provides to the public authority false information regarding the contractor's drug-free workplace policy."

INSTRUCTIONS TO BIDDERS

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in case of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications: Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130, Charleston, WV 25305-0130.



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF:
KRISTA FERRELL 304-558-2596

VENDOR FOR

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE:

08/27/2009

BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>SHEET. THE PURCHASING DIVISION AND THE STATE AGENCY WILL NOT ASSUME ANY RESPONSIBILITY FOR A BIDDER-S FAILURE TO COMPLETE THE PRE-BID ATTENDANCE SHEET. IN ADDITION, WE REQUEST THAT ALL POTENTIAL BIDDERS INCLUDE THEIR E-MAIL ADDRESS AND FAX NUMBER.</p> <p>ALL POTENTIAL BIDDERS ARE REQUESTED TO ARRIVE PRIOR TO THE STARTING TIME FOR THE PRE-BID. BIDDERS WHO ARRIVE LATE, BUT PRIOR TO THE DISMISSAL OF THE TECHNICAL PORTION OF THE PRE-BID WILL BE PERMITTED TO SIGN IN. BIDDERS WHO ARRIVE AFTER CONCLUSION OF THE TECHNICAL PORTION OF THE PRE-BID, BUT DURING ANY SUBSEQUENT PART OF THE PRE-BID WILL NOT BE PERMITTED TO SIGN THE ATTENDANCE SHEET.</p> <p>TECHNICAL QUESTIONS CONCERNING THIS SOLICITATION MUST BE SUBMITTED IN WRITING TO KRISTA FERRELL IN THE WEST VIRGINIA STATE PURCHASING DIVISION VIA MAIL AT THE ADDRESS SHOWN IN THE BOD OF THIS RFQ, VIA FAX AT 304-558-4115, OR VIA EMAIL AT KRISTA.S.FERRELL@WV.GOV. DEADLINE FOR ALL TECHNICAL QUESTIONS IS 08/14/2009 AT THE CLOSE OF BUSINESS. ALL TECHNICAL QUESTIONS RECEIVED, IF ANY, WILL BE ANSWERED BY ADDENDUM AFTER THE DEADLINE HAS LAPSED.</p> <p>QUESTIONS CONCERNING THE PROCESS BY WHICH A VENDOR MAY SUBMIT A BID TO THE STATE OF WEST VIRGINIA ARE NOT CONSIDERED TO BE TECHNICAL QUESTIONS AND MAY BE SUBMITTED AT ANY TIME PRIOR TO THE BID OPENING AND IN ANY FORMAT.</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
	800-848-7556	AUGUST 25, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262450	ADDRESS CHANGES TO BE NOTED ABOVE



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR210007

PAGE
 3

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 304-558-2596

V
E
N
D
O
R

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

S
H
I
P
T
O

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 08/27/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE INFORMATION FOR ANY ALTERNATES MAY BE GROUNDS FOR REJECTION OF THE BID. THE STATE RESERVES THE RIGHT TO WAIVE MINOR IRREGULARITIES IN BIDS OR SPECIFICATIONS IN ACCORDANCE WITH SECTION 148-1-4(F) OF THE WEST VIRGINIA LEGISLATIVE RULES AND REGULATIONS.</p> <p>EXHIBIT 5</p> <p>WEST VIRGINIA CODE 21-1D-5 PROVIDES THAT: ANY SOLICITATION FOR A PUBLIC IMPROVEMENT CONSTRUCTION CONTRACT REQUIRES EACH VENDOR THAT SUBMITS A BID FOR THE WORK T SUBMIT AT THE SAME TIME AN AFFIDAVIT OF COMPLIANCE WITH THE BID. THE ENCLOSED DRUG-FREE WORKPLACE AFFIDAVIT MUST BE SIGNED AND SUBMITTED WITH THE BID AS EVIDENCE OF THE VENDOR'S COMPLIANCE WITH THE PROVISIONS OF ARTICLE 1D, CHAPTER 21 OF THE WEST VIRGINIA CODE. FAILURE TO SUBMIT THE SIGNED DRUG-FREE WORKPLACE AFFIDAVIT WIT THE BID SHALL RESULT IN DISQUALIFICATION OF SUCH BID.</p> <p>NOTICE TO PROCEED: THIS CONTRACT IS TO BE PERFORMED WITHIN 30 CALENDAR DAYS AFTER THE NOTICE TO PROCEED IS RECEIVED. UNLESS OTHERWISE SPECIFIED, THE FULLY EXECUTED PURCHASE ORDER WILL BE CONSIDERED NOTICE TO PROCEED.</p> <p>CANCELLATION: THE DIRECTOR OF PURCHASING RESERVES THE RIGHT TO CANCEL THIS CONTRACT IMMEDIATELY UPON WRITTEN NOTICE TO THE VENDOR IF THE MATERIALS OR WORKMANSHIP SUPPLIED ARE OF AN INFERIOR QUALITY OR DO NOT CONFORM WITH THE SPECIFICATIONS OF THE BID AND CONTRACT HERE IN.</p> <p>WAGE RATES: THE CONTRACTOR OR SUBCONTRACTOR SHALL PAY THE HIGHER OF THE U.S. DEPARTMENT OF LABOR MINIMUM WAGE RATES AS ESTABLISHED FOR PRESTON COUNTY, PURSUANT</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Jerry Groves</i>	TELEPHONE 800-848-7556	DATE AUGUST 25, 2009
TITLE JERRY GROVES VICE DIRECTOR	FEIN 31-1262450	ADDRESS CHANGES TO BE NOTED ABOVE



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFO NUMBER
DNR210007

PAGE
4

ADDRESS CORRESPONDENCE TO ATTENTION OF:
KRISTA FERRELL 804-558-2596

VENDOR

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 08/27/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>TO WEST VIRGINIA CODE 21-5A, ET, SEQ. (PREVAILING WAGE RATES APPLY TO THIS PROJECT)</p> <p>ARBITRATION: ANY REFERENCES MADE TO ARBITRATION OR INTEREST FOR PAYMENTS DUE (EXCEPT FOR ANY INTEREST REQUIRED BY STATE LAW) CONTAINED IN THIS CONTRACT OR IN ANY AMERICAN INSTITUTE OF ARCHITECTS DOCUMENTS PERTAINING TO THIS CONTRACT ARE HEREBY DELETED.</p> <p>WORKERS' COMPENSATION: VENDOR IS REQUIRED TO PROVIDE A CERTIFICATE FROM WORKERS' COMPENSATION IF SUCCESSFUL.</p> <p>ALL OF THE ITEMS CHECKED BELOW WILL BE A REQUIREMENT OF THIS CONTRACT:</p> <p>(XX) INSURANCE: SUCCESSFUL VENDOR SHALL FURNISH PROOF OF COMMERCIAL GENERAL LIABILITY INSURANCE PRIOR TO ISSUANCE OF CONTRACT. UNLESS OTHERWISE SPECIFIED IN THE BID DOCUMENTS, THE MINIMUM AMOUNT OF INSURANCE COVERAGE REQUIRED IS \$250,000.</p> <p>() BUILDERS RISK INSURANCE: SUCCESSFUL VENDOR SHALL FURNISH PROOF OF BUILDERS RISK - ALL RISK INSURANCE IN AN AMOUNT EQUAL TO 100% OF THE AMOUNT OF THE CONTRACT.</p> <p>(XX) BONDS: FIVE PERCENT (5%) OF THE TOTAL AMOUNT OF THE BID PAYABLE TO THE STATE OF WEST VIRGINIA, SHALL BE SUBMITTED WITH EACH BID AS A BID BOND. THE SUCCESSFUL BIDDER SHALL ALSO FURNISH A PERFORMANCE BOND AND LABOR/MATERIAL BOND FOR 100% OF THE AMOUNT OF THE CONTRACT. BONDS MAY BE PROVIDED IN THE FORM OF A CERTIFIED CHECK, IRREVOCABLE LETTER OF CREDIT, OR BOND FURNISHED BY A SOLVENT SURETY COMPANY AUTHORIZED TO DO BUSINESS IN THE STATE OF WEST VIRGINIA. A LETTER OF CREDIT SUBMITTED IN LIEU OF A BOND WILL ONLY BE ALLOWED FOR PROJECTS UNDER \$100,000. PERSONAL OR BUSINESS CHECKS ARE NOT</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
<i>Jerry Groves</i>	800-848-7556	AUGUST 25, 2009

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
JERRY GROVES VICE PRESIDENT	31-1262459	

NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
5

ADDRESS CORRESPONDENCE TO ATTENTION OF:
**KRISTA FERRELL
 304-558-2596**

VENDOR

*709022058 800-848-7556
SERVICE SUPPLY LTD
1524 SOUTH HAMILTON RD
COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
COOPERS ROCK STATE FOREST
ATTN: PARK SUPERINTENDENT
ROUTE 1, BOX 270
BRUCETON MILLS, WV
26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: **08/27/2009** BID OPENING TIME: **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>ACCEPABLE IN LIEU OF THE 5% BID BOND, PERFORMANCE BOND, OR LABOR AND MATERIAL BOND.</p> <p>() MAINTENANCE BOND: A TWO (2) YEAR MAINTENANCE BOND COVERING THE ROOFING SYSTEM WILL BE A REQUIREMENT OF THE SUCCESSFUL VENDOR.</p> <p>REV. 11/00</p> <p>EXHIBIT 7</p> <p>DOMESTIC ALUMINUM, GLASS & STEEL IN PUBLIC WORKS PROJECTS</p> <p>IN ACCORDANCE WITH WEST VIRGINIA CODE 5-19-1 ET., SEQ., EVERY CONTRACT FOR CONSTRUCTION, RECONSTRUCTION, ALTERATION, REPAIR, IMPROVEMENT OR MAINTENANCE OF PUBLIC WORKS, WHERE THE COST IS MORE THAN \$50,000 AND, IN THE CASE OF STEEL ONLY, WHERE THE COST OF STEEL IS MORE THAN \$50,000 OR WHERE MORE THAN 10,000 POUNDS OF STEEL ARE REQUIRED, THE STATE WILL ACCEPT ONLY ALUMINUM, GLASS, OR STEEL PRODUCTS PRODUCED IN THE UNITED STATES. IN ADDITION, ITEMS OF MACHINERY OR EQUIPMENT PURCHASED FOR USE AT THE SITE OF PUBLIC WORKS SHALL BE MADE OF DOMESTIC ALUMINUM, GLASS OR STEEL, UNLESS THE COST OF THE PRODUCT IS LESS THAN \$50,000 OR LESS THAN 10,000 POUNDS OF STEEL ARE USED IN PUBLIC WORKS PROJECTS.</p> <p>FOREIGN MADE ALUMINUM, GLASS OR STEEL PRODUCTS MAY BE ACCEPTED ONLY IF THE COST OF DOMESTIC PRODUCTS IS FOUND TO BE UNREASONABLE. SUCH COST IS UNREASONABLE IF IT IS 20% OR MORE HIGHER THAN THE BID PRICE FOR FOREIGN MADE PRODUCTS. IF THE DOMESTIC ALUMINUM, GLASS OR STEEL PRODUCTS TO BE SUPPLIED OR PRODUCED IN A "SUBSTANTIAL LABOR SURPLUS AREA", AS DEFINED BY THE UNITED STATES</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *[Signature]* TELEPHONE: **800-848-7556** DATE: **AUGUST 25, 2009**

TITLE: **JERRY GROVES VICE PRESIDENT** FEIN: **31-1262459** ADDRESS CHANGES TO BE NOTED ABOVE

TITLE AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
6

ADDRESS CORRESPONDENCE TO ATTENTION OF
KRISTA FERRELL
304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

VENDOR

SHIP TO

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				
BID OPENING DATE:	08/27/2009	BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>DEPARTMENT OF LABOR, FOREIGN PRODUCTS MAY BE SUPPLIED ONLY IF DOMESTIC PRODUCTS ARE 30% OR MORE HIGHER IN PRICE THAN THE FOREIGN MADE PRODUCTS.</p> <p>IF, PRIOR TO THE AWARD OF A CONTRACT UNDER THE ABOVE PROVISIONS, THE SPENDING OFFICER OF THE SPENDING UNIT DETERMINES THAT THERE EXISTS A BID FOR LIKE FOREIGN ALUMINUM, GLASS OR STEEL THAT IS REASONABLE AND LOWER THAN THE LOWEST BID DOMESTIC PRODUCTS, THE SPENDING OFFICE MAY REQUEST, IN WRITING, A REEVALUATION AND REDUCTION IN THE LOWEST BID FOR SUCH DOMESTIC PRODUCTS. ALL VENDORS MUST INDICATE IN THEIR BID IF THEY ARE SUPPLYING FOREIGN ALUMINUM, GLASS OR STEEL.</p> <p>REV. 3/88</p> <p>EXHIBIT 9</p> <p>NOTICE FOR ISSUANCE & ACKNOWLEDGEMENT OF CONSTRUCTION PROJECT ADDENDA</p> <p>THE ARCHITECT/ENGINEER AND/OR AGENCY SHALL BE REQUIRED TO ABIDE BY THE FOLLOWING SCHEDULE IN ISSUING CONSTRUCTION PROJECT ADDENDA FOR STATE AGENCIES:</p> <p>(1) THE ARCHITECT/ENGINEER SHALL PREPARE THE ADDENDUM AND A LIST OF ALL PARTIES THAT HAVE PROCURED DRAWINGS AND SPECIFICATIONS FOR THE PROJECT. THE ADDENDUM AND LIST SHALL BE FORWARDED TO THE BUYER IN THE STATE PURCHASING DIVISION. THE ARCHITECT/ENGINEER SHALL ALSO SEND A COPY OF THE ADDENDUM TO THE STATE AGENCY FOR WHICH THE CONTRACT IS ISSUED.</p> <p>(2) THE BUYER SHALL SEND THE ADDENDUM TO ALL INTERESTED PARTIES AND IF NECESSARY, EXTEND THE BID</p>						

SIGNATURE	TELEPHONE	DATE
	800-848-7556	AUGUST 25, 2009
TITLE	ADDRESS CHANGES TO BE NOTED ABOVE	
JERRY GROVES VICE PRESIDENT		
FEIN	SEE REVERSE SIDE FOR TERMS AND CONDITIONS	
31-1262459		

PLEASE INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR210007

PAGE
 7

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT																				
<p>BID OPENING DATE: 08/27/2009</p> <p>BID OPENING TIME: 01:30PM</p> <p>OPENING DATE. ANY ADDENDUM SHOULD BE RECEIVED BY THE BUYER WITHIN FOURTEEN (14) DAYS PRIOR TO THE BID OPENING DATE.</p> <p>(3) ALL ADDENDA SHOULD BE FORMALLY ACKNOWLEDGED BY ALL BIDDERS AND SUBMITTED TO THE STATE PURCHASING DIVISION. THE SAME RULES AND REGULATIONS THAT APPLY TO THE ORIGINAL BIDDING DOCUMENT SHALL ALSO APPLY TO AN ADDENDUM DOCUMENT. THE ONLY EXCEPTION MAY BE FOR AN ADDENDUM THAT IS ISSUED FOR THE SOLE PURPOSE OF CHANGING A BID OPENING TIME AND/OR DATE.</p> <p>REV. 11/96</p> <p>EXHIBIT 10</p> <p>ADDENDUM ACKNOWLEDGEMENT</p> <p>I HEREBY ACKNOWLEDGE RECEIPT OF THE FOLLOWING CHECKED ADDENDUM(S) AND HAVE MADE THE NECESSARY REVISIONS TO MY PROPOSAL, PLANS AND/OR SPECIFICATION, ETC.</p> <p>ADDENDUM NOS.:</p> <table border="0"> <tr> <td>NO. 1</td> <td>..</td> <td>XX</td> <td>.....</td> </tr> <tr> <td>NO. 2</td> <td>..</td> <td>XX</td> <td>.....</td> </tr> <tr> <td>NO. 3</td> <td>..</td> <td></td> <td>.....</td> </tr> <tr> <td>NO. 4</td> <td>..</td> <td></td> <td>.....</td> </tr> <tr> <td>NO. 5</td> <td>..</td> <td></td> <td>.....</td> </tr> </table>							NO. 1	..	XX	NO. 2	..	XX	NO. 3	NO. 4	NO. 5
NO. 1	..	XX																							
NO. 2	..	XX																							
NO. 3																							
NO. 4																							
NO. 5																							

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Groves* TELEPHONE: 800-848-7556 DATE: AUGUST 25, 2009

TITLE: JERRY GROVES VICE PRESIDENT FEIN: 31-1262459

ADDRESS CHANGES TO BE NOTED ABOVE

INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFO NUMBER
DNR210007

PAGE
8

ADDRESS CORRESPONDENCE TO ATTENTION OF:
KRISTA FERRELL 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE	BID OPENING TIME
08/27/2009	01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>I UNDERSTAND THAT FAILURE TO CONFIRM THE RECEIPT OF THE ADDENDUM(S) MAY BE CAUSE FOR REJECTION OF THE BIDS.</p> <p>VENDOR MUST CLEARLY UNDERSTAND THAT ANY VERBAL REPRESENTATION MADE OR ASSUMED TO BE MADE DURING ANY ORAL DISCUSSION HELD BETWEEN VENDOR'S REPRESENTATIVES AND ANY STATE PERSONNEL IS NOT BINDING. ONLY THE INFORMATION ISSUED IN WRITING AND ADDED TO THE SPECIFICATIONS BY AN OFFICIAL ADDENDUM IS BINDING.</p> <p>..... SIGNATURE JERRY GROVES, VICE PRESIDENT SERVICE SUPPLY LTD., INC. COMPANY AUGUST 25, 2009 DATE</p> <p>REV. 11/96</p> <p>CONTRACTORS LICENSE</p> <p>WEST VIRGINIA STATE CODE 21-11-2 REQUIRES THAT ALL PERSONS DESIRING TO PERFORM CONTRACTING WORK IN THIS STATE MUST BE LICENSED. THE WEST VIRGINIA CONTRACTORS LICENSING BOARD IS EMPOWERED TO ISSUE THE CONTRACTORS LICENSE. APPLICATIONS FOR A CONTRACTORS LICENSE MAY BE MADE BY CONTACTING THE WEST VIRGINIA DIVISION OF LABOR CAPITOL COMPLEX, BUILDING 3, ROOM 319, CHARLESTON, WV 25305. TELEPHONE: (304) 558-7890.</p> <p>WEST VIRGINIA STATE CODE 21-11-11 REQUIRES ANY PROSPECTIVE BIDDER TO INCLUDE THE CONTRACTORS LICENSE NUMBER ON THEIR BID.</p>						

BIDDER TO COMPLETE: SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
<i>Jerry Groves</i>	800-848-7556	AUGUST 25, 2009

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
JERRY GROVES VICE PRESIDENT	31-1262459	ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR210007

PAGE
 9

ADDRESS CORRESPONDENCE TO ATTENTION OF:
 KRISTA FERRELL
 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				
BID OPENING DATE			BID OPENING TIME 01:30PM	

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
CONTRACTORS NAME: SERVICE SUPPLY LTD., INC. CONTRACTORS LICENSE NO.: WV013333 THE SUCCESSFUL BIDDER WILL BE REQUIRED TO FURNISH A COPY OF THEIR CONTRACTORS LICENSE PRIOR TO ISSUANCE OF A PURCHASE ORDER/CONTRACT APPLICABLE LAW THE WEST VIRGINIA STATE CODE, PURCHASING DIVISION RULE AND REGULATIONS, AND THE INFORMATION PROVIDED IN THE "REQUEST FOR QUOTATION" ISSUED BY THE PURCHASING DIVISION IS THE SOLE AUTHORITY GOVERNING THIS PROCUREMENT. ANY INFORMATION PROVIDED IN SPECIFICATION MANUALS, OR ANY OTHER SOURCE, VERBAL OR WRITTEN, WHICH CONTRADICTS OR ALTERS THE INFORMATION PROVIDED FROM THE SOURCES AS DESCRIBED IN THE ABOVE PARAGRAPH IS VOID AND OF NO EFFECT. BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THE STATE MAY DEEM THE CONTRACT NULL AND VOID, AND TERMINATE SUCH CONTRACT WITHOUT FURTHER ORDER. REV. 5/2009 NOTICE A SIGNED BID MUST BE SUBMITTED TO: DEPARTMENT OF ADMINISTRATION						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Groves* TELEPHONE: 800-848-7556 DATE: AUGUST 25, 2009

TITLE: JERRY GROVES VICE PRESIDENT FEIN: 31-1262459 ADDRESS CHANGES TO BE NOTED ABOVE

NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR210007

PAGE
 10

ADDRESS CORRESPONDENCE TO ATTENTION OF:
 KRISTA FERRELL
 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

V
E
N
D
O
R

S
H
I
P
T
O

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
PURCHASING DIVISION BUILDING 15 2019 WASHINGTON STREET, EAST CHARLESTON, WV 25305-0130						
THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:						
SEALED BID BUYER: KRISTA FERRELL-FILE 21 REQ. NO.: DNR210007 BID OPENING DATE: 08/27/2009 BID OPENING TIME: 1:30 PM						
PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID: 614-863-0113						
PLEASE PRINT OR TYPE NAME OF PERSON TO CONTACT CONCERNING THIS QUOTE: PAM MELTON						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *[Signature]* TELEPHONE: 800-848-7556 DATE: AUGUST 25, 2009
 TITLE: JERRY GROVES VICE PRESIDENT FEIN: 31-1262459
 ADDRESS CHANGES TO BE NOTED ABOVE
 RETURNING TO REQ. INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
11

ADDRESS CORRESPONDENCE TO ATTENTION OF:
KRISTA FERRELL
304-558-2596

VENDOR

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO

DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: **08/27/2009** BID OPENING TIME: **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
***** THIS IS THE END OF RFQ DNR210007 ***** TOTAL:						\$43,515.00

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Groves* TELEPHONE: 800-848-7556 DATE: AUGUST 25, 2009

TITLE: JERRY GROVES VICE PRESIDENT FEIN: 31-1262459 ADDRESS CHANGES TO BE NOTED ABOVE

RESPONDING TO REQ. INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

To supply and install playground equipment to offer play activities for children ages five (5) to twelve (12) at Cooper's Rock State Forest, Bruceton Mills, West Virginia. Playground equipment will be purchased for two separate areas in the park. The award may be split if it is in the best interest of the West Virginia Division of Natural Resources.

CAMPGROUND AREA PLAYGROUND

Henderson play structure, Model #L02175R0, or equal. Structure components must include all hardware necessary for assembly. Structure must include the following components:

- One (1) Henderson free standing playsteel heavy duty tire swing with a minimum of 3' top bar with powder coated finish. Item #SW101, or equal. Swing must include a swing chain that is a minimum of 4' in length' and made of galvanized steel, zinc plated swing bearing, and a tire. The tire must be new, steel-belted with a mechanical assembly of seat brackets and quick links.
- One (1) Henderson free standing double spring dino see saw motion toy, Item #MT214, or equal. See saw motion toy must include two oversized springs made of galvanized steel and must be designed for two (2) users. All paint must be a powder coated finish or the equivalent.
- One (1) Henderson bucking bronco motion toy, Item #MT003, or equal. Motion toy must consist of a cast aluminum animal with a powder-coat finish and coil spring base assembly. The coil spring must be constructed of cast aluminum construction.
- One (1) Henderson free standing plastic wave slide and ladder, Item #TS031, or equal. Slide must be a minimum of 5' in height and constructed with HDPE quality plastic, or equal.
- One (1) Henderson triple cliffhanger, Item #TE029, or equal. Cliffhanger must consist of climbing wall which must be rotationally-moulded with medium-density polyethylene and welded ground legs which consist of galvanized steel tube and a satin-coated steel sheet.

OVERLOOK AREA PLAYGROUND

Henderson custom play structure, Model #PF09504R0, or equal. Structure components must include all hardware necessary for assembly. Structure must include the following components:

- One (1) Henderson spiral slide complete with hood and safety railings, or equal. Slide must be a minimum of 6' in height and a minimum of 16" wide. Slide must be zinc-plated hot rolled mild flat steel or the equivalent. Deck must consist of welded 10 gauge steel and Plastisol-coated after fabrication or the equivalent. Safety railing must be powder-coat painted or the equivalent.
- One (1) Henderson single cliffhanger, or equal. Cliffhanger must be a minimum of 6' in height and consist of a roto-molded HDPE quality plastic, or equal.
- One (1) Henderson accessible step deck, or equal. Step must be a minimum of 24" in height and include step deck, handrails, and infills. Handrails must be constructed with galvanized steel tube and must be powder-coat painted or the equivalent.
- One (1) Henderson double scoop slide complete with hood, or equal. Slide must be a minimum of 4' in height and the slide must consist of a minimum of a 10 gauge satin-coated steel sheet and ground legs that must be powder-coat painted or the equivalent.
- One (1) left transfer station, or equal. Station must be a minimum of 4' in length.
- Two (2) sets Henderson safety station railings, or equal. Station must be a minimum of 4' in length. Railings must be powder-coat painted or the equivalent.
- One (1) Henderson tower climber, or equal. Climber must consist of a climber, safety railing, and pole frame. Climber must be made of galvanized steel and the entire assembly must be powder-coat painted, or the equivalent. Climber must be a minimum of 5' in height.
- One (1) Henderson maze wheel, or equal.
- One (1) Henderson custom panel, or equal.
- One (1) Henderson crooked net link, or equal.
- One (1) Henderson drum panel, or equal. Drum panel must consist of panel brackets, panels, and drums. Panel must be ground mounted.
- One (1) Henderson accessible trapeze beam, or equal. Trapeze beam must consist of ring beam and rings. The ring beam must be zinc-plated and consist of hot -rolled mild flat steel. Ring beam and rings must be powder-coat painted or the equivalent.

- One (1) Henderson paddle power, or equal. Paddle power must be a mechanical assembly of bar and plastic. Bar must be constructed of galvanized steel tube, HDPE quality plastic and the bar must be powder-coated or the equivalent.
- One (1) Henderson log roll, or equal. Log Roll must consist of a grab bar, turning bar, and log roll. Log roll must consist of galvanized steel and powder-coat painted or the equivalent.
- One (1) Henderson triple overhead rotator, or equal. Rotator must be a minimum of 12' in length and consist of an assembly beam, wheel, and end bar. Triple overhead rotator must be constructed of galvanized steel and must be powder-coat painted or the equivalent.
- One (1) Henderson twin track ride, or equal. Twin track ride must consist of tracks, support bars, trolleys, and handles. All components must be constructed with galvanized steel and must be powder-coat painted or the equivalent.

Henderson 1-bay arch swing, Model #SW340, or equal. Swing must be a minimum of eight feet (8') and must include belt seats and swing chains. Belt seats must be a minimum of 6"x 24" and consist of EPDM rubber and polymer and vandal-proof, or the equivalent. Swing chain must consist of a minimum of 6mm galvanized swing chain and must be the industry standard length for belt swings. All hardware must be rust-proof.

Henderson arch swing, Model #SW341, or equal. Swing must be a minimum of eight feet (8') in height and extend a half bay complete with two (2) baby seats and swing chains, or equal. Baby seats must be fully enclosed and consist of EPDM rubber and polymer blend and must be vandal-proof. Swing chain must be the industry standard length for baby swings. All hardware must be rust-proof.

ITEMS FOR ALL PLAYGROUNDS

All playground equipment must meet the following requirements:

- Compliance with U.S. Consumer Product Safety Commission, Handbook for Public Playground Safety.
- Compliance with ASTM Standard F 1487.

- Compliance with Architectural and Transportation Barriers Compliance Board, Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Play Areas

Vendors must submit the following attachments:

- Complete manufacturer's parts specifications and warranties.
- Layout drawing to scale of the proposed play structure or equipment.
- ASTM and CPSC Statement of Compliance

Warranties:

- All equipment must be guaranteed to be free of defects in workmanship and material for a minimum of one year from date of acceptance. However, if manufacturer warranty periods are longer than the required minimum one year warranty, those warranties shall apply.

All playground equipment must include tamper proof fasteners to prevent theft and destruction.

Color scheme of equipment must be coordinated with Cooper's Rock State Forest. Color of items will be selected from manufacturer's standard colors.

A mandatory pre-bid conference will be held on August 11, 2009, at Cooper's Rock State Forest at 10:00.am. A failure to attend the mandatory pre-bid conference will result in bid disqualification. An individual may not represent more than one firm at the pre-bid conference.

Pricing Sheet:

Vendors must provide unit pricing for all line items. Failure to provide unit pricing will result in the disqualification of the vendor's bid.

WVDNR210007
Cooper's Rock State Forest Playground Equipment
PRICING SHEET

Item No.	Quantity	Description	Unit Price	Amount
1	1	Henderson Play Structure: Model #L02175R0, or equal.	17,175.00	17,175.00
2	1	Henderson free standing heavy duty tire swing with top bar, Item #SW101, or equal.	2,299.00	2,299.00
3	1	Henderson free standing double spring dino see saw motion toy, Item #MT214, or equal.	1,921.00	1,921.00
4	1	Henderson free standing bucking bronco motion toy, Item #MT003, or equal.	799.00	799.00
5	1	Henderson free standing plastic wave slide and ladder, Item #TS031, or equal.	3,234.00	3,234.00
6	1	Henderson free standing triple cliffhanger, Item #TE029, or equal.	2,903.00	2,903.00
7	1	Henderson Play Structure: Model #PF09504R0, or equal.	11,758.00	11,758.00
8	1	Henderson 1-bay arch swing. Swing must be a minimum of eight feet (8') and complete with four (4) belts, Model #SW340, or equal.	1,883.00	1,883.00
9	1	Henderson arch swing. Swing must be a minimum of eight feet (8') and extend a half bay complete with two (2) baby seats, Model #SW341, or equal.	1,534.00	1,534.00
TOTAL				\$43,515.00

**

**

****CLARIFICATION -**

THE HENDERSON PLAY STRUCTURES STRUCTURE MODEL NUMBERS ON LAYOUT PF09504R0 DID NOT DISTINGUISH THE MODEL NUMBERS OF THE TWO STRUCTURES. SERVICE SUPPLY LTD., INC.'S QUOTE PROVIDED PRICING AS FOLLOWS:

HENDERSON PLAY STRUCTURE MODEL #L02175R0 - LARGER PLAY STRUCTURE FEATURING 72" HIGH DECK WITH SPYROSLIDE, CLIFFHANGER, AND DOUBLE SCOOP SLIDE.

HENDERSON PLAY STRUCTURE MODEL #PF09504R0 - SMALLER INDEPENDENT CLUSTER FEATURING TRIPLE OVERHEAD ROTATOR AND DOUBLE TRACK RIDES.

SHOULD THESE MODEL NUMBERS BE REVERSED, THE EQUIPMENT MAY NOT BE PURCHASED SEPARATED AT THE INCORRECTLY LISTED DISCOUNTED PRICE.

Cooper's Rock State Forest PLAYGROUND EQUIPMENT SHEET

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding "or equal" brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request For Quotation.

em No.	Equipment	Manufacturer	Model
1	Campground Area Playground. Henderson Play Structure, Model# L02175R0, or equal.	LANDSCAPE STRUCTURES, INC.	37231-1-1-1
2	Campground Area Playground. Henderson free standing playsteel heavy duty tire swing with top bar, Item #SW101, or equal.	LANDSCAPE STRUCTURES, INC.	120891A
3	Campground Area Playground. Henderson free standing double spring dino see saw motion toy, Item #MT214, or equal.	LANDSCAPE STRUCTURES, INC.	148637A
4	Campground Area Playground. Henderson bucking bronco motion toy, Item #MT003, or equal.	LANDSCAPE STRUCTURES, INC.	135535B
5	Campground Area Playground. Henderson free standing plastic wave slide and ladder, Item #TS031, or equal.	LANDSCAPE STRUCTURES, INC.	100046C
6	Campground Area Playground. Henderson triple cliffhanger, Item #TE029, or equal.	LANDSCAPE STRUCTURES, INC.	150976A
7	Overlook Area Playground. Henderson custom play structure, Model #PF09504Ro, or equal.	LANDSCAPE STRUCTURES, INC.	37231-1-1-2
8	Overlook Area Playground. Henderson spiral slide complete with hood, or equal.	LANDSCAPE STRUCTURES, INC.	122033A

Cooper's Rock State Forest PLAYGROUND EQUIPMENT SHEET




em No.	Equipment	Manufacturer	Model
9	Overlook Area Playground. Henderson single cliffhanger, or equal.	LANDSCAPE STRUCTURES, INC.	143199A
10	Overlook Area Playground. Henderson accessible step, or equal.	LANDSCAPE STRUCTURES, INC.	152908B
11	Overlook Area Playground. Henderson double scoop slide complete with hood, or equal.	LANDSCAPE STRUCTURES, INC.	123336A
12	Overlook Area Playground. Henderson left transfer station, or equal.	LANDSCAPE STRUCTURES, INC.	152911C
13	Overlook Area Playground. Henderson safety station railings, or equal.	LANDSCAPE STRUCTURES, INC.	152443A
14	Overlook Area Playground. Henderson tower climber, or equal.	LANDSCAPE STRUCTURES, INC.	148434B
15	Overlook Area Playground. Henderson maze wheel, or equal.	LANDSCAPE STRUCTURES, INC.	127439A
16	Overlook Area Playground. Henderson custom panel, or equal.	LANDSCAPE STRUCTURES, INC.	115231A
17	Overlook Area Playground. Henderson crooked net link, or equal.	LANDSCAPE STRUCTURES, INC.	152443A
18	Overlook Area Playground. Henderson drum panel, or equal.	NOT SHOWN ON DRAWINGS	NOT SHOWN ON DRAWINGS
19	Overlook Area Playground. Henderson accessible trapeze beam, or equal.	LANDSCAPE STRUCTURES, INC.	111357B
20	Overlook Area Playground. Henderson paddle power, or equal.	LANDSCAPE STRUCTURES, INC.	160054D
21	Overlook Area Playground. Henderson log roll, or equal.	LANDSCAPE STRUCTURES, INC.	111356A

Cooper's Rock State Forest
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Model
22	Overlook Area Playground. Henderson triple overhead rotator, or equal.	LANDSCAPE STRUCTURES, INC.	123824A
23	Overlook Area Playground. Henderson twin track ride, or equal.	LANDSCAPE STRUCTURES, INC.	111353A
24	Overlook Area Playground. Henderson 1-bay arch swing 8' complete with belt seats, Model #SW340, or equal.	LANDSCAPE STRUCTURES, INC.	100050C
25	Overlook Area Playground. Henderson arch swing 8' extend a half bay complete with two baby seats, Model #SW341, or equal.	LANDSCAPE STRUCTURES, INC.	111579C

Coopers Rock State Forest Campground

Model No. L02175r0

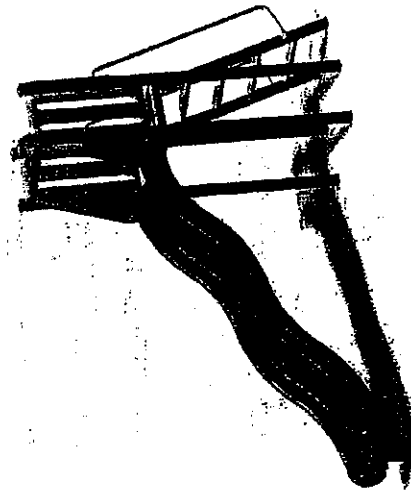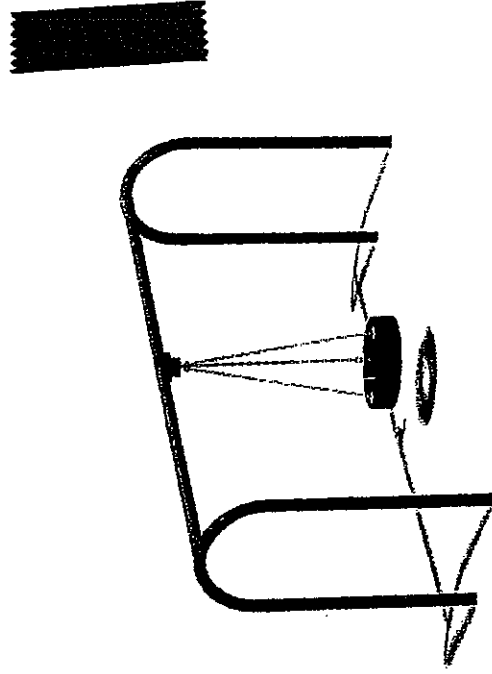

Rotowelded Plastic Colours



HDPE Colours



All colours shown to the appearance



Powder-Coated Metal Colours



WARNING
 Installation Over A Hard Surface Such
 As Concrete, Asphalt, Heavy Oil, Beach
 Sand, etc.

Best User Age: 5 to 11

Accessibility:

Colour:

- Posts: Green
- Tan
- Accents: Green
- Tan/Green
- Top Plastic: Tan/Green
- See Swing
- Other:

Surfacing Type: Wood 1

Border Area: 2081

Border Perimeter: 184

Installation Style:

Inground 36"

Footing Quantity: 0

Compliance:

ASTM F 1487, CPSC

Sales Repr: F.D.

Note:
 All border dimensions are
 inside border measurements.
 All play structure dimensions or
 play area-to-centre of the pt
 unless otherwise specified.
 The locations of all teleph
 hydro, cable, water, gas, an
 drainage lines must be clear
 marked by the customer prior
 the playground installation.
 All playgrounds must be res
 installed with appropriate res
 surfacing and safety zones.
 meet the requirements of the
 the latest CAN/CSA-Z614 (C
 or ASTM F 1487 (USA) relea
 The playground installer
 must be properly prepared t
 Henderson Recreation
 specifications prior to instal
 Henderson Recreation as
 the playground installation s
 has normal soil and digging
 conditions. Please notify us
 any unusual soil conditions.
 Henderson Recreation
 Equipment Limited has a
 commitment to continuous
 product development and
 improvement and therefore
 reserves the right to modify
 offer or discontinue products
 specifications without notice.


*Attention:
 No-encroachment zones
 are adjacent to but outside
 the safety surface area. This
 free of any obstacles that
 impede or block safe play
 traffic flow around the safety
 surface area. No-encroach
 zones that are within the s
 surface area must be free
 obstacles.

Drawn By: R.H.
 Date Drawn: July 18, 2008
 Revised By:
 Revision Date:
 Scale: See Key



Model # L02175R0

Coopers Rock State Forest Campground

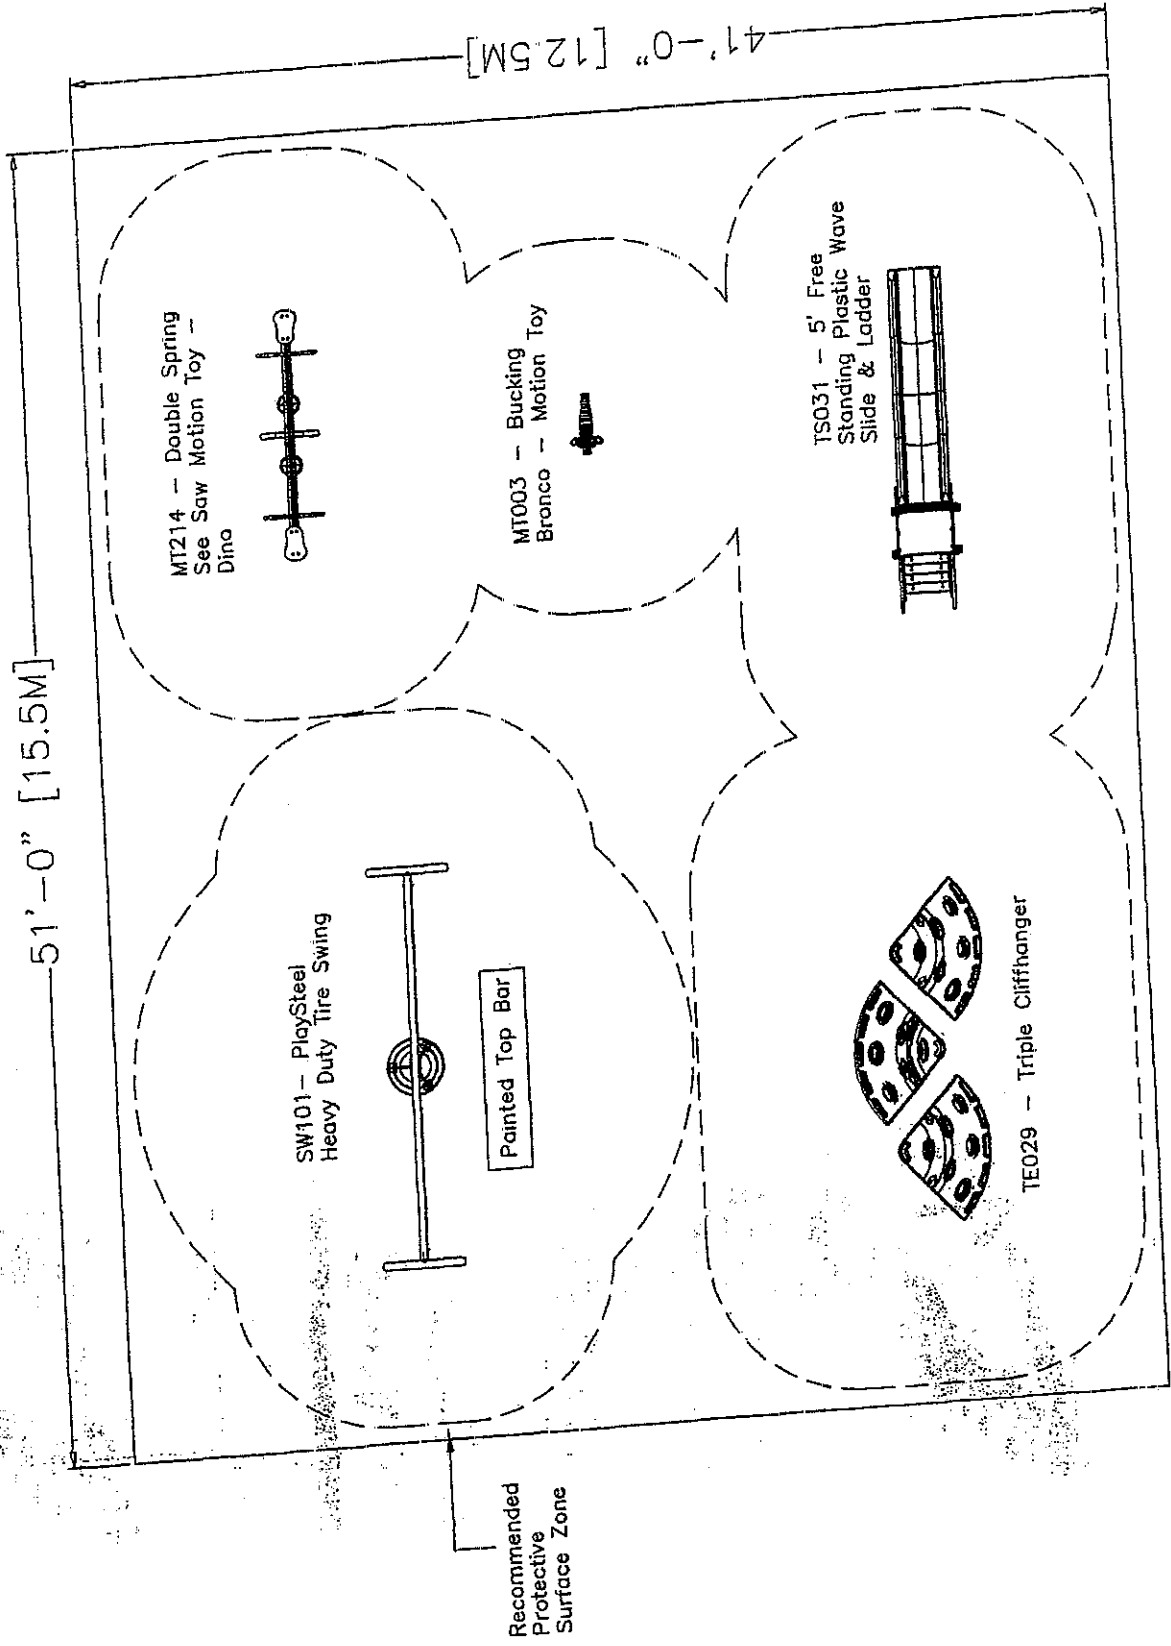

Play Structure General Specifications

Playground Equipment Designs

It is the opinion of the manufacturer that playground equipment designs are developed in compliance with the most recent published edition of the following safety standards:

- CAN/CSA-Z614 Children's PlaySpaces and Equipment
- ASTM F 1487 Standard Consumer Safety Performance Specification for Playground Equipment for Public Use
- U.S. Consumer Product Safety Commission (CPSC) Handbook for Public Playground Safety
- Americans with Disabilities Act (ADA) accessibility standards

Steel Components

Steel tube components are Allied Flo-Coat® galvanized steel tube with 0.6 mil (0.015mm) zinc coating and 0.5 mil (0.013mm) internal corrosion coating. Steel tube components comply with ASTM standards A-500 or A-513. All other steel is zinc-coated, hot-dipped galvanized, Plastisol-coated, or powder-coat painted as specified. Steel tube components contain between 30% and 100% recycled content. Steel tube components are 95-98% recyclable.

Uprights

PlaySteel vertical uprights are 4" (102mm) square x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Outer surfaces are zinc-plated and inner surfaces are treated to resist corrosion. All posts are powder-coat painted. PlaySteel post caps are alloy 319 cast aluminum with 0.1875" (5mm) top thickness, 0.125" (3mm) side thickness, and 0.34375" (9mm) corner thickness. Post caps are secured to posts with 10 gauge (3mm) salin-coated steel sheet brackets and mechanical fasteners. Post caps are powder-coat painted to match posts unless otherwise requested.

Decks

PlaySteel 4 decks are a welded assembly of angle, expanded metal, and structural reinforcements. Angle is 2.5" x 2.5" x 0.1875" (64mm x 64mm x 5mm) hot-rolled steel angle. Expanded metal is style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal. Structural reinforcements are 0.125" x 1.5" (3mm x 38mm) zinc-plated hot-rolled mild flat steel. Entire assembly is Plastisol-coated to a depth of 0.15" (4mm) after fabrication. Decks are pre-punched to receive components.

Metal Preparation for Powder Coat Paint Finish

Metal preparation for powder coat paint finish

consists of either a multiple bath system including a rust-prohibitive iron phosphate wash or sandblasting. Parts are free of excess weld splatter.

Powder-Coat Paint Finish

Polyester dry powder-coating is electrostatically applied and oven cured at 400°F (200°C). Finished membrane is 3-5 mil (0.076-0.127mm) and includes additives for resistance to ultraviolet (U.V.) degradation. Finished membrane complies with the following performance standards:

- ASTM D 522 (Mandrel Bending)
- ASTM D 2794-90 (Impact)
- ASTM B 117-90 (Salt Spray Resistance)
- ASTM D 3359B (Cross Hatch Adhesion)
- ASTM D 2247-87 (Humidity Resistance)
- ASTM D 3363 (Pencil Hardness)
- ASTM D 822 (Weatherability)
- ASTM D 2454 (Overbake Resistance)

Welded Components

Welded components are Canadian Welding Bureau (CWB) certified under CSA standards W47.1 Div. 2.1 and W47.2 Div. 2.1

Plastisol Coating

Plastisol coating is Denflex PX-12412 poly-vinyl-chloride with an average thickness of 0.15" (4mm) unless otherwise specified. Prior to coating, parts are chemically washed with phosphate coat 4013A, treated with a spray-on primer at room temperature, and allowed to dry completely. Parts are heated to 350°F (176°C) internal temperature for 3.5 minutes in an 800°F (427°C) oven and submerged in Plastisol. Coated parts are cured in a liquid salt bath at 395°F (202°C). Coating contains flame-retardant additive, ultraviolet (U.V.) ray stabilizer to maintain colour, and fungastat to improve resistance to fungal growth. Tensile strength is 2300 lb/in² (15858.5 kPa), tear strength is 419 lb/in (74.8 kg/cm), ultimate elongation is 250%, and shore "A" durometer is 95 +/- 2. Materials comply with the following performance standards:

- ASTM D 624 (Tear Strength)
- ASTM D 412 (Tensile Strength)

Hardware and Fasteners

All hardware and fasteners are treated to resist corrosion. Hardware and fasteners are temper resistant unless otherwise specified. All necessary hardware and fasteners are provided.

Rotationally-Moulded Plastic Parts

Rotationally-moulded plastic parts are moulded from linear medium-density polyethylene resin with ultraviolet (U.V.) light stabilizers and colour moulded in. Rotationally-moulded plastic parts have an average wall thickness ranging from 0.125" (3mm) to 0.375" (10mm), as specified. Rotationally-moulded plastic parts comply with the following performance standards:

- ASTM D 790 (Flex Modulus)
- ASTM D 638 (Tensile Strength)
- ASTM D 648 (Heat Distortion Temperature)
- ARM-STD (Low Temperature Impact)

0.75" (19mm) Sheet Polyethylene Parts

0.75" (19mm) sheet polyethylene parts are stress-relieved high-density polyethylene with ultraviolet (U.V.) light stabilizers and anti-static guard. Sheet polyethylene parts contain maximum 67% recycled content and are 100% recyclable. Materials comply with:

- ASTM D 790 (Flex Modulus)
- ASTM D 638 (Tensile Strength)
- ASTM D 648 (Heat Distortion Temperature)

Recycled Plastic

Recycled plastic is injection moulded 100% solid blended recycled plastic consisting of 96% polyolefins (HDPE/LDPE/PP), 2% PET, 1% PS and 1% other. Recycled plastic is ultraviolet (U.V.) light resistant, skid resistant when wet, resistant to infestation by borers, and will not leach. Recycled plastic contains no preservatives. Specific gravity is 0.96. Expansion and contraction with 122°F (50°C) temperature variation is 0.3%. Melting point is 374°F (190°C). Compression strength is 1200 to 2400 lb/in² (8274 to 16548 kPa) depending on profile. No absorption, solubility, or evaporation.

Motion Toys

Bucking Bronco - Motion Toy

Bucking Bronco is a mechanical assembly of aluminum animal and coil spring base assembly. Aluminum animal is a welded assembly of bucking bronco, handle, and footrest. Bucking bronco is alloy 319 cast aluminum with an average wall thickness of 0.25" (6mm). Handle is 1" (25mm) O.D. 6063-T52 aluminum rod. Footrest is 1" (25mm) O.D. 6063-T52 aluminum rod. Coil spring base assembly is a mechanical assembly of spring, upper spring base, and lower spring base. Spring is 5.625" (143mm) O.D. x 0.75" (19mm) type 5160 steel wire. Upper spring base is a welded assembly of 5" (127mm) O.D. x 0.188" (5mm) hollow structural steel tube, 3.5" (89mm) schedule 40 black steel pipe, 0.375" (10mm) O.D. hot-rolled steel bar, 0.5" (13mm) square hot-rolled steel bar, 0.375" (10mm) hot-rolled mild flat steel, and 0.25" x 3.5" (6mm x 38mm) hot-rolled mild flat steel. Lower spring base is a welded assembly of 3.5" (89mm) O.D. x 0.188" (5mm) hollow structural steel tube, 5" (127mm) schedule 40 black steel pipe, 0.375" (10mm) O.D. hot-rolled steel bar, 0.25" x 1.25" (6mm x 32mm) hot-rolled mild flat steel, 0.375" (10mm) hot-rolled mild flat steel, 0.5" (13mm) square hot-rolled steel bar, and 0.375" (10mm) O.D. hot-rolled steel bar. Entire assembly is powder-coat painted.

Double Spring See Saw Motion Toy - Dino

Double-Spring See Saw is a mechanical assembly of upper assembly, lower base, springs, clamps, and anchors. Upper assembly is a mechanical assembly of plastic components, side beams, base plate, and handles. Plastic components are 0.75" (19mm) sheet polyethylene. Side beams are 1.5" x 3" (38mm x 76mm) rectangular x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Base plate is a welded assembly of 0.25" x 3.5" (6mm x 19mm) hot-rolled mild flat steel and 0.1875" x 3" (5mm x 76mm) hot-rolled mild flat steel. Handles are a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube and 0.25" x 1.5" (6mm x 38mm) hot-rolled mild flat steel. Side beams, base plate, and handles are powder-coat painted. Lower base is a welded assembly of 2.375" (60mm) O.D. x 10 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 0.1875" x 1.75" x 6" (5mm x 44mm x 152mm) hot-rolled flat steel channel, 0.25" x 3" (6mm x 76mm) hot-rolled mild flat steel, and 0.25" x 0.75" (6mm x 19mm) hot-rolled mild flat steel. Springs are a mechanical assembly of 8" (203mm) O.D. x 0.75" (19mm) type 5160 steel wire, 0.25" (6mm) hot-rolled mild flat steel, and 0.5" (13mm) sheet polyethylene. Springs are powder-coat painted. Clamps are a welded assembly of 0.25" x 2" (6mm x 51mm) hot-rolled mild flat steel and minimum 0.25" (6mm) O.D. hot-rolled steel bar. Anchors are a mechanical assembly of 4" (102mm) square x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 0.25" x 6" (6mm x 152mm) hot-rolled mild flat steel, and minimum 0.1875" x 1.5" (5mm x 38mm) hot-rolled mild flat steel. Anchors are powder-coat painted.


Swings

PlaySteel Heavy Duty Tire Swing

Heavy Duty Tire Swing is a mechanical assembly of top bar, tire swivel bearing, end frames, and tire swing assembly. Top bar is a welded assembly of 3" (76mm) schedule 40 galvanized steel pipe and 0.25" x 8" (6mm x 203mm) hot-rolled mild flat steel. Tire swivel bearing is a mechanical assembly of housing and bearing. Housing is 4" (102mm) square x 0.188" (5mm) hollow structural steel tube, 0.75" (19mm) O.D. x hollow structural steel tube, 1.5" x 1.5" x 0.1875" (38mm x 38mm x 5mm) hot-rolled steel angle, and 10 gauge (3mm) hot-rolled steel sheet. Bearing is a mechanical assembly of lightly greased Nylatron® ball and socket, 0.5" (13mm) O.D. hot-rolled round steel bar, and 0.375" (10mm) O.D. cold-rolled steel bar. Tire swivel bearing is zinc-plated. End frames are a welded assembly of 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube, 3" (76mm) O.D. x 0.120" (3mm) hollow structural steel tube, and 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube. End frames are powder-coat painted. Tire swing assembly is a mechanical assembly of seat, brackets, quick links, and chain. Seat is a mechanical assembly of tire, tube, and fasteners. Tire is new steel-belted, passive tread tire with a combination of natural and synthetic rubber. Tube is 1" (25mm) schedule 40 galvanized steel pipe. Fasteners are 0.5" (13mm) machine bolts. Brackets are 10 gauge (3mm) satin-coated steel sheet. Quick links are 0.3125" (8mm) zinc-plated electrogalvanized. Chain is 4/0 hot-dipped galvanized straight-link coil chain.

Cooper Rock State Forest Overlook Area

Model No. PF09504r0

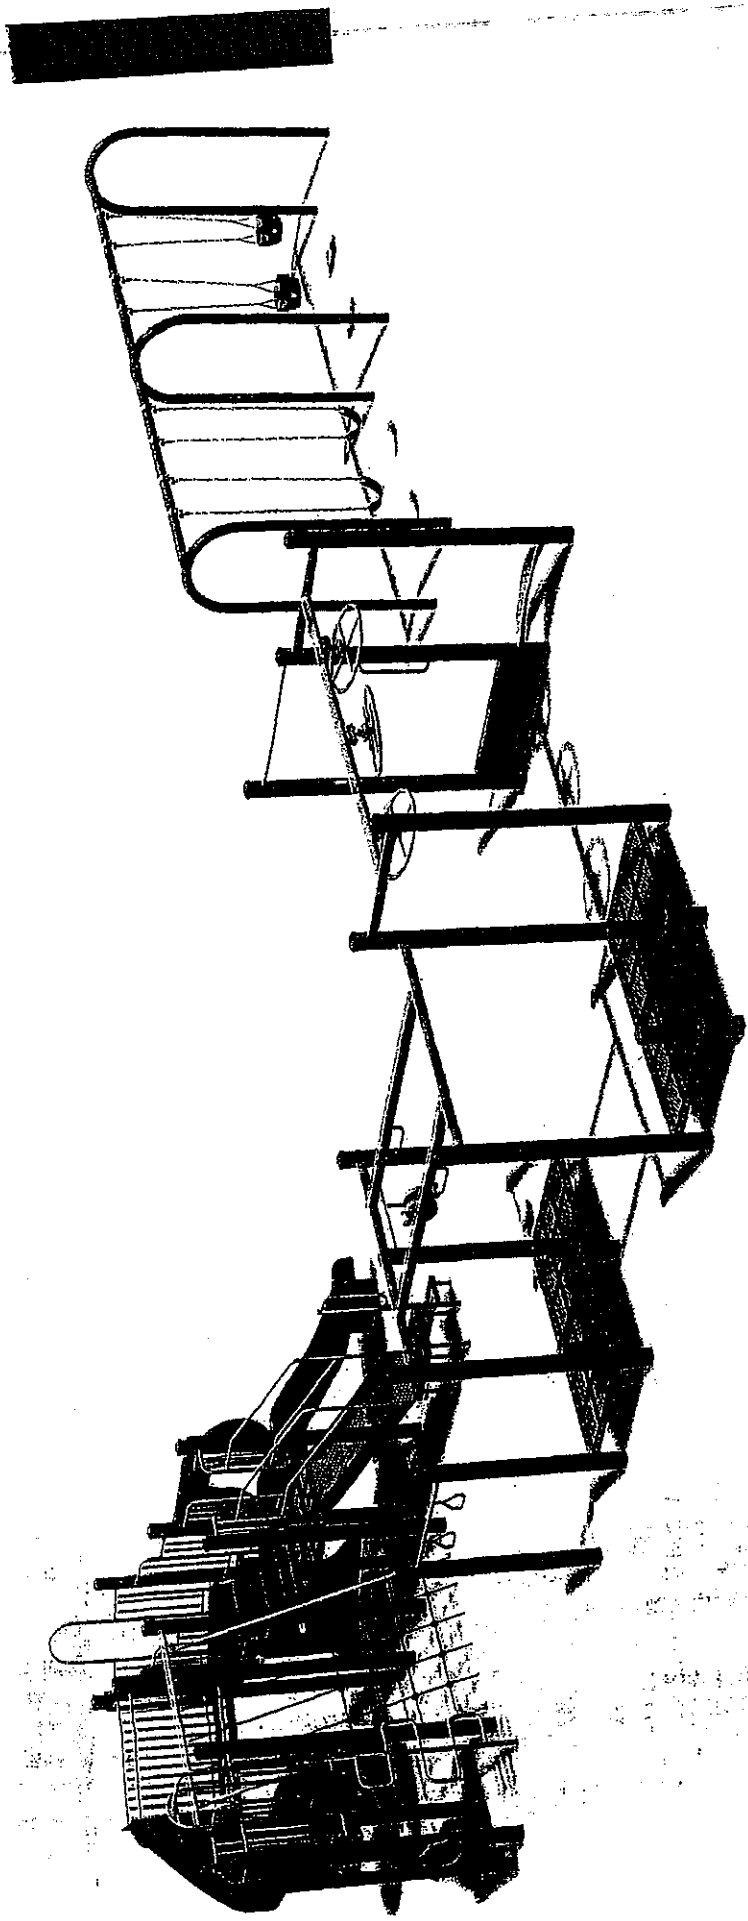

Rotomolded Plastic Colours



HOPE Colours



All colors shown here are approximate

Powder-Coated Metal Colours



Play Structure General Specifications

Playground Equipment Designs

It is the opinion of the manufacturer that playground equipment designs are developed in compliance with the most recent published edition of the following safety standards:

- CAN/CSA-Z614 Children's PlaySpaces and Equipment
- ASTM F 1487 Standard Consumer Safety Performance Specification for Playground Equipment for Public Use
- U.S. Consumer Product Safety Commission (CPS) Handbook for Public Playground Safety
- Americans with Disabilities Act (ADA) accessibility standards

Steel Components

Steel tube components are Allied Flo-Coat® galvanized steel tube with 0.6 mil (0.015mm) zinc coating and 0.5 mil (0.013mm) internal corrosion coating. Steel tube components comply with ASTM standards A-500 or A-513. All other steel is zinc-coated, hot-dipped galvanized, Plastisol-coated, or powder-coat painted, as specified. Steel tube components contain between 30% and 100% recycled content. Steel tube components are 95-98% recyclable.

Uprights

PlaySteel vertical uprights are 4" (102mm) square x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Outer surfaces are zinc-plated and inner surfaces are treated to resist corrosion. All posts are powder-coat painted. PlaySteel post caps are alloy 319 cast aluminum with 0.1875" (5mm) top thickness, 0.125" (3mm) side thickness, and 0.34375" (9mm) corner thickness. Post caps are secured to posts with 10 gauge (3mm) satin-coated steel sheet brackets and mechanical fasteners. Post caps are powder-coat painted to match posts unless otherwise requested.

Decks

PlaySteel 4 decks are a welded assembly of angle, expanded metal, and structural reinforcements. Angle is 2.5" x 2.5" x 0.1875" (64mm x 64mm x 5mm) hot-rolled steel angle. Expanded metal is style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal. Structural reinforcements are 0.125" x 1.5" (3mm x 38mm) zinc-plated hot-rolled mild flat steel. Entire assembly is Plastisol-coated to a depth of 0.15" (4mm) after fabrication. Decks are pre-punched to receive components.

Metal Preparation for Powder Coat Paint Finish

Metal preparation for powder coat paint finish

consists of either a multiple bath system including a rust-prohibitive iron phosphate wash or sandblasting. Parts are free of excess weld splatter:

Powder-Coat Paint Finish

Polyester dry powder-coating is electrostatically applied and oven cured at 400°F (200°C). Finished membrane is 3-5 mil (0.076-0.127mm) and includes additives for resistance to ultraviolet (U.V.) degradation. Finished membrane complies with the following performance standards:

- ASTM D 522 (Mandrel Bending)
- ASTM D 2794-90 (Impact)
- ASTM B 117-90 (Salt Spray Resistance)
- ASTM D 3359B (Cross Hatch Adhesion)
- ASTM D 2247-87 (Humidity Resistance)
- ASTM D 3363 (Pencil Hardness)
- ASTM D 822 (Weatherability)
- ASTM D 2454 (Overbake Resistance)

Welded Components

Welded components are Canadian Welding Bureau (CWB) certified under CSA standards W47 1 Div. 2.1 and W47 2 Div. 2.1.

Plastisol Coating

Plastisol coating is Denflex PX-12412 poly-vinyl-chloride with an average thickness of 0.15" (4mm) unless otherwise specified. Prior to coating, parts are chemically washed with phosphate coat 4013A, treated with a spray-on primer at room temperature, and allowed to dry completely. Parts are heated to 350°F (176°C) internal temperature for 3.5 minutes in an 800°F (427°C) oven and submerged in Plastisol. Coated parts are cured in a liquid salt bath at 395°F (202°C). Coating contains flame-retardant additive, ultraviolet (U.V.) ray stabilizer to maintain colour, and fungastat to improve resistance to fungal growth. Tensile strength is 2300 lb/in² (15858.5 kPa), tear strength is 419 lb/in (74.8 kg/cm), ultimate elongation is 250%, and shore "A" durometer is 95 +/- 2. Materials comply with the following performance standards:

- ASTM D 624 (Tear Strength)
- ASTM D 412 (Tensile Strength)

Hardware and Fasteners

All hardware and fasteners are treated to resist corrosion. Hardware and fasteners are tamper resistant unless otherwise specified. All necessary hardware and fasteners are provided.

Rotationally-Moulded Plastic Parts

Rotationally-moulded plastic parts are moulded from linear medium-density polyethylene resin with ultraviolet (U.V.) light stabilizers and colour moulded in. Rotationally-moulded plastic parts have an average wall thickness ranging from 0.125" (3mm) to 0.375" (10mm), as specified. Rotationally-moulded plastic parts comply with the following performance standards:

- ASTM D 790 (Flex Modulus)
- ASTM D 638 (Tensile Strength)
- ASTM D 648 (Heat Distortion Temperature)
- ARM-STD (Low Temperature Impact)

0.75" (19mm) Sheet Polyethylene Parts

0.75" (19mm) sheet polyethylene parts are stress-relieved high-density polyethylene with ultraviolet (U.V.) light stabilizers and anti-static guard. Sheet polyethylene parts contain maximum 67% recycled content and are 100% recyclable.

Materials comply with:

- ASTM D 790 (Flex Modulus)
- ASTM D 638 (Tensile Strength)
- ASTM D 648 (Heat Distortion Temperature)

Recycled Plastic

Recycled plastic is injection moulded 100% solid blended recycled plastic consisting of 96% polyolefins (HDPE/LDPE/PP), 2% PET, 1% PS, and 1% other. Recycled plastic is ultraviolet (U.V.) light resistant, skid resistant when wet, resistant to infestation by borers, and will not leach. Recycled plastic contains no preservatives. Specific gravity is 0.96. Expansion and contraction with 122°F (50°C) temperature variation is 0.3%. Melting point is 374°F (190°C). Compression strength is 1200 to 2400 lb/in² (8274 to 16548 kPa) depending on profile. No absorption, solubility, or evaporation.

Activity Panels

Drum Panel (Ground Mounted)

Drum Panel is a mechanical assembly of panel brackets, panel, and drums. Panel brackets are a welded assembly of 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Panel brackets are powder-coat painted. Panel is 0.75" (19mm) sheet polyethylene. Drums are rotationally-moulded medium-density polyethylene with an average wall thickness of 0.25" (6mm).

Adapters

PF Hex Post Adapter Left 46"

Hex Post Adapter is a welded assembly of 14 gauge (2mm) satin-coated steel sheet and 10 gauge (3mm) satin-coated steel sheet. Entire assembly is powder-coat painted.

PF Hex Post Adapter Right 46"

Hex Post Adapter is a welded assembly of 14 gauge (2mm) satin-coated steel sheet and 10 gauge (3mm) satin-coated steel sheet. Entire assembly is powder-coat painted.

Balancing Activities

Log Roll

Log Roll is a mechanical assembly of grab bar, turning bar and log roll. Grab bar is 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Grab bar is powder-coat painted. Turning bar is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Turning bar is powder-coat painted. Log roll is rotationally-moulded medium-density polyethylene with an average wall thickness of 0.25" (6mm)

Climbing Activities

Tower Climber 5'

Tower Climber is a mechanical assembly of climber, safety railing, and pole frame. Climber is a welded assembly of 1.66" (42mm) O.D. x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube and 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube. Safety railing is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Pole frame is a welded assembly of 1.9" (48mm) O.D. x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube and 1.66" (42mm) O.D. x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Entire assembly is powder-coat painted

Decks

Launch Pad

Launch Pad is a mechanical assembly of frame and plastic. Frame is a welded assembly of 1.5" (38mm) square x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Frame is powder-coat painted. Plastic is 0.75" (19mm) anti-skid marine-grade polymer.

P4 Change-of-Direction Deck - Punched

Change-of-Direction Deck is a welded assembly of deck and railing. Deck is a welded assembly of style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal, 10 gauge (3mm) hot-rolled steel sheet, 0.1875" x 1.5" (5mm x 38mm) hot-rolled mild flat steel structural reinforcements, and 0.1875" x 3.5" (5mm x 89mm) hot-rolled mild flat steel corner brackets. Deck is Platisol-coated. Railing is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 1.029" (26mm) O.D. x 14

gauge (2mm) Allied Flo-Coat® galvanized steel tube, 0.1875" x 2" (5mm x 51mm) zinc-plated hot-rolled mild flat steel connecting lugs, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel connecting lugs. Railing is powder-coat painted. Surface area is 1695 in² (1.09m²)

P4 Square Deck - Punched

Square Deck is a welded assembly of style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal, 10 gauge (3mm) hot-rolled steel sheet, 0.1875" x 1.5" (5mm x 38mm) hot-rolled mild flat steel structural reinforcements, and 0.1875" x 3.5" (5mm x 89mm) hot-rolled mild flat steel corner brackets. Deck is Platisol-coated. Surface area is 2146 in² (1.38m²)

P4 Triangle Deck - Punched

Triangle Deck is a welded assembly of style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal, 10 gauge (3mm) hot-rolled steel sheet, 0.1875" x 1.5" (5mm x 38mm) hot-rolled mild flat steel structural reinforcements, and 0.1875" x 3.5" (5mm x 89mm) hot-rolled mild flat steel corner brackets. Deck is Platisol-coated. Surface area is 1197 in² (0.77m²)

Links

Crooked Net Link

Crooked Net Link is a mechanical assembly of net, support bar and side support bar. Net is 0.625" (16mm) O.D. vandal-resistant polypropylene-covered galvanized steel strand fibre-core cable. Support bar is a welded assembly of 2.875" (73mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube, 0.25" x 3.5" (6mm x 89mm) zinc-plated hot-rolled mild flat steel, and 0.25" x 2" (6mm x 51mm) zinc-plated hot-rolled mild flat steel. Side support bar is 1.66" (42mm) x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube. Support bar and side support bar are powder-coat painted.

Overhead Activities

Accessible Trapeze Beam

Accessible Trapeze Beam is a mechanical assembly of ring beam and rings. Ring beam is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Rings are a welded assembly of 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube. Rings are suspended from a lubricated bearing with mechanical hardware. Ring beam and rings are powder-coat painted.

Paddle Power

Paddle Power is a mechanical assembly of bar and plastic. Bar is a welded assembly of 1.66" (42mm) O.D. x 11 gauge (3mm) Allied Flo-Coat®

galvanized steel tube, 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Bar is powder-coat painted. Plastic is 0.75" (19mm) sheet polyethylene.

Triple Overhead Rotator 12'

Triple Overhead Rotator is a mechanical assembly of beam, wheel, and end bar. Beam is a welded assembly of 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube and 10 gauge (3mm) satin-coated steel sheet. Wheel is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 3" (76mm) O.D. x 0.120" (3mm) hollow structural steel tube, 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube, and 0.25" (6mm) hot-rolled steel flat. End bar is a welded assembly of 1.5" x 3" (38mm x 76mm) rectangular x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Entire assembly is powder-coat painted

Twin Track Ride

Twin Track Ride is a mechanical assembly of tracks, support bars, trolleys, and handles. Tracks are a mechanical assembly of 11 gauge (3mm) mild steel, 22 gauge (1mm) electroplated chrome mild steel, and 22 gauge (1mm) electroplated chrome mild steel. Tracks are galvanized or phenolic coated. Support bars are a welded assembly of 1.66" (42mm) O.D. x 11 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 0.1875" x 2.5" (5mm x 64mm) zinc-plated hot-rolled mild flat steel, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Support bars are powder-coat painted. Trolleys are formed zinc-plated mild steel with sealed steel ball bearing plastic wheels. Handles are a welded assembly of 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube, 0.3125" x 3" (8mm x 76mm) zinc-plated hot-rolled mild flat steel, and 0.25" x 1.5" (6mm x 38mm) zinc-plated hot-rolled mild flat steel. Handles are powder-coat painted.

Slide Hoods

New Style Double Slide Plastic Hood (SPI)

Double Poly Slide Plastic Hood is rotationally-moulded medium-density polyethylene with an average wall thickness of 0.25" (6mm)

PF09504r0 Specifications

Slides**Double Scoop Slide 4' (SPI)**

Double Poly Slide is a mechanical assembly of slide angle, ground leg mount, ground legs, string guards, and slide. Slide angle is 10 gauge (3mm) satin-coated steel sheet. Ground leg mount is a welded assembly of 1" x 1" x 0.125" (25mm x 25mm x 3mm) hot-rolled steel angle and 0.1875" x 2" (5mm x 51mm) zinc-plated hot-rolled mild flat steel. Ground legs are 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube. String guards are 0.75" (19mm) high-density polyethylene. Slide is one-piece, double-wall, rotationally-moulded medium-density polyethylene with an average wall thickness of 0.3125" (8mm). Slide has no seams, joints, or exposed hardware. Slide bed is minimum 16" (406mm) wide. Slide angle, ground leg mount, and ground legs are powder-coat painted.

Spiral Slide 6' (SPI)

Poly Spiral Slide is a mechanical assembly of slide, deck, safety railing, and support post. Slide is one-piece, double-wall, rotationally-moulded medium-density polyethylene with an average wall thickness of 0.3125" (8mm). Slide has no seams, joints, or exposed hardware. Slide bed is minimum 16" (406mm) wide. Deck is a welded assembly of 10 gauge (3mm) hot-rolled steel sheet, style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal, and 0.125" x 1.5" (3mm x 38mm) hot-rolled mild flat steel structural reinforcements. Deck is Plastisol-coated after fabrication. Safety railing is a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube, 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube, 0.25" x 2" (6mm x 51mm) zinc-plated hot-rolled mild flat steel, and 0.1875" x 1.75" (5mm x 44mm) zinc-plated hot-rolled mild flat steel. Support post is 5" (76mm) O.D. x 0.125" (3mm) hollow structural steel tube. Safety railing is powder-coat painted.

Stairs & Access Points**Accessible Step Deck 24"**

Accessible Step Deck is a mechanical assembly of step deck, handrails, and infills. Step deck is a welded assembly of style 0.75" (19mm) - #9 x 10 gauge (3mm) expanded metal, 10 gauge (3mm) hot-rolled steel sheet, 0.1875" x 1.5" (5mm x 38mm) hot-rolled mild flat steel structural reinforcements, and 0.1875" x 3.5" (5mm x 89mm) hot-rolled mild flat steel corner brackets. Step deck is Plastisol-coated. Handrails are a welded assembly of 1.315" (33mm) O.D. x 12 gauge (3mm) Allied Flo-Coat® galvanized steel tube and 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube. Handrails are powder-coat painted. Infills are 0.75" (19mm) sheet polyethylene.

Swings**1-Bay Arch Swing 8'**

Arch Swing is a mechanical assembly of top bar, swing bearings, and end frames. Top bar is 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube. Swing bearings are a mechanical assembly of upper and lower bracket. Upper bracket is 0.1875" x 2" (5mm x 51mm) hot-rolled mild flat steel. Lower bracket is a mechanical assembly of hanger and swivel bearing. Hanger is a welded assembly of 0.1875" x 2" (5mm x 51mm) hot-rolled mild flat steel and 0.1875" x 1.75" (5mm x 44mm) hot-rolled mild flat steel. Swivel bearing is a welded assembly of 1" (25mm) schedule 40 black steel pipe, 0.375" (10mm) O.D. hot-rolled steel bar, 1.03" (26mm) O.D. x 0.51" (13mm) I.D. Nylatron® bushing, 0.5" (13mm) machine bolt, and 0.5" (13mm) lock nut. Swing bearings are hot-dipped galvanized. End frames are a welded assembly of 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube, 3" (76mm) O.D. x 0.120" (3mm) hollow structural steel tube, and 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube.

Arch Swing 8' Extend a Bay

Arch Swing is a mechanical assembly of top bar, swing bearings, and end frames. Top bar is 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube. Swing bearings are a mechanical assembly of upper and lower bracket. Upper bracket is 0.1875" x 2" (5mm x 51mm) hot-rolled mild flat steel. Lower bracket is a mechanical assembly of hanger and swivel bearing. Hanger is a welded assembly of 0.1875" x 2" (5mm x 51mm) hot-rolled mild flat steel and 0.1875" x 1.75" (5mm x 44mm) hot-rolled mild flat steel. Swivel bearing is a welded assembly of 1" (25mm) schedule 40 black steel pipe, 0.375" (10mm) O.D. hot-rolled steel bar, 1.03" (26mm) O.D. x 0.51" (13mm) I.D. Nylatron® bushing, 0.5" (13mm) machine bolt, and 0.5" (13mm) lock nut.

Swing bearings are hot-dipped galvanized. End frames are a welded assembly of 3.5" (89mm) O.D. x 8 gauge (4mm) Allied Flo-Coat® galvanized steel tube, 3" (76mm) O.D. x 0.120" (3mm) hollow structural steel tube, and 1.029" (26mm) O.D. x 14 gauge (2mm) Allied Flo-Coat® galvanized steel tube.

Agency _____
REQ P. O# _____

BID BOND

KNOW ALL MEN BY THESE PRESENTS, That we, the undersigned, _____
of _____, _____, as Principal, and _____
of _____, _____, a corporation organized and existing under the laws of the State of _____
with its principal office in the City of _____, as Surety, are held and firmly bound unto the State
of West Virginia, as Obligee, in the penal sum of _____ (\$ _____) for the payment of which,
well and truly to be made, we jointly and severally bind ourselves, our heirs, administrators, executors, successors and assigns

The Condition of the above obligation is such that whereas the Principal has submitted to the Purchasing Section of the
Department of Administration a certain bid or proposal, attached hereto and made a part hereof, to enter into a contract in writing for

NOW THEREFORE,

- (a) If said bid shall be rejected, or
- (b) If said bid shall be accepted and the Principal shall enter into a contract in accordance with the bid or proposal attached
hereto and shall furnish any other bonds and insurance required by the bid or proposal, and shall in all other respects perform the
agreement created by the acceptance of said bid, then this obligation shall be null and void, otherwise this obligation shall remain in full
force and effect. It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event,
exceed the penal amount of this obligation as herein stated.

The Surety, for the value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no
way impaired or affected by any extension of the time within which the Obligee may accept such bid, and said Surety does hereby
waive notice of any such extension.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hands and seals, and such of them as are corporations
have caused their corporate seals to be affixed hereunto and these presents to be signed by their proper officers, this
_____ day of _____, 20____.

Principal Corporate Seal

(Name of Principal)

By _____
(Must be President or
Vice President)

(Title)

Surety Corporate Seal

(Name of Surety)

Attorney-in-Fact

**IMPORTANT – Surety executing bonds must be licensed in West Virginia to transact surety insurance. Raised corporate seals
must be affixed, a power of attorney must be attached.**

BID BOND PREPARATION INSTRUCTIONS

AGENCY (A)
RFQ/RFP# (B)

Bid Bond

- (A) WV State Agency (Stated on Page 1 "Spending Unit") Request for Quotation Number (upper right corner of page #1)
(C) Your Company Name
(D) City, Location of your Company
(E) State, Location of your Company
(F) Surety Corporate Name
(G) City, Location of Surety
(H) State, Location of Surety
(I) State of Surety Incorporation
(J) City of Surety Incorporation
(K) Minimum amount of acceptable bid bond is 5% of total bid. You may state "5% of bid" or a specific amount on this line in words.
(L) Amount of bond in figures
(M) Brief Description of scope of work
(N) Day of the month
(O) Month
(P) Year
(Q) Name of Corporation
(R) Raised Corporate Seal of Principal
(S) Signature of President or Vice President
(T) Title of person signing
(U) Raised Corporate Seal of Surety
(V) Corporate Name of Surety
(W) Signature of Attorney in Fact of the Surety
NOTE: Dated, Power of Attorney with Raised Surety Seal must accompany this bid bond

KNOW ALL MEN BY THESE PRESENTS, That we, the undersigned, (C) of (D), (E) as Principal, and (F) of (G), (H), a corporation organized and existing under the laws of the State of (I) with its principal office in the City of (J), as Surety, are held and firmly bound unto The State of West Virginia, as Obligee, in the penal sum of (K) (\$ (L)) for the payment of which, well and truly to be made, we jointly and severally bind ourselves, our heirs, administrators, executors, successors and assigns
The Condition of the above obligation is such that whereas the Principal has submitted to the Purchasing Section of the Department of Administration a certain bid or proposal, attached hereto and made a part hereof to enter into a contract in writing for (M)

NOW THEREFORE

(a) If said bid shall be rejected, or
(b) If said bid shall be accepted and the Principal shall enter into a contract in accordance with the bid or proposal attached hereto and shall furnish any other bonds and insurance required by the bid or proposal, and shall in all other respects perform the agreement created by the acceptance of said bid then this obligation shall be null and void, otherwise this obligation shall remain in full force and effect. It is expressly understood and agreed that the liability of the Surety for any and all claims hereunder shall, in no event, exceed the penal amount of this obligation as herein stated

The Surety for value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no way impaired or affected by any extension of time within which the Obligee may accept such bid: and said Surety does hereby waive notice of any such extension.

IN WITNESS WHEREOF, Principal and Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be affixed hereto and these presents to be signed by their proper officers, this (N) day of (O), 20 (P).

Principal Corporate Seal (R)

(Q) (Name of Principal)
By (S) (Must be President or Vice President)
(T) Title

Surety Corporate Seal (U)

(V) (Name of Surety)

(W) Attorney-in-Fact

IMPORTANT! - Surety executing bonds must be licensed in West Virginia to transact surety insurance. Raised Corporate Seals must be affixed and a Power of Attorney must be attached.

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

VENDOR OWING A DEBT TO THE STATE:

West Virginia Code §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

If this is a solicitation for a public improvement construction contract, the vendor, by its signature below, affirms that it has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code*. The vendor **must** make said affirmation with its bid submission. Further, public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code* and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the *West Virginia Code* may take place before their work on the public improvement is begun.

ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.


LICENSING:

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.

Under penalty of law for false swearing (*West Virginia Code* §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

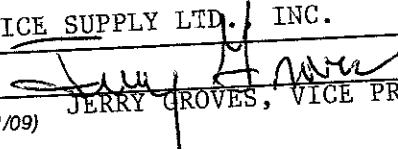Vendor's Name: SERVICE SUPPLY LTD. INC.
Authorized Signature:  Date: AUGUST 25, 2009
JERRY GROVES, VICE PRESIDENT



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR210007

PAGE
 1

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 304-558-2596

VENDOR
 *709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO
 DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
08/12/2009				

BID OPENING DATE: 08/27/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				ADDENDUM NO. 1		
				THIS ADDENDUM IS ISSUED TO:		
				1.) REMOVE ALL REFERENCE TO INSTALLATION FROM THE BID. PARK PERSONNEL WILL INSTALL THE PLAYGROUND EQUIPMENT AT COOPER'S ROCK STATE FOREST AND		
				2.) AND PROVIDE A COPY OF THE MANDATORY PRE-BID ATTENDEE LIST.		
				BID OPENING DATE REMAINS: 08/27/2009		
				BID OPENING TIME REMAINS: 1:30 PM		
				***** END ADDENDUM NO. 1 *****		
0001	1	LS		650-38		\$43,515.00
				LABOR AND MATERIAL FOR PLAYGROUND EQUIPMENT		

SERVICE SUPPLY LTD.
 AUG 17 2009
 IN E... AND
 ETY

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Groves* TELEPHONE: 800-848-7556 DATE: AUGUST 25, 2009

TITLE: JERRY GROVES VICE PRESIDENT FEIN: 31-1262459 ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

**Cooper's Rock State Forest
61 County Line Drive
Bruceeton Mills, WV 26525**

Page 1 of 3
Date: August 11, 2009

SIGN IN SHEET
PLEASE PRINT

Request for Proposal No. _____

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	TELEPHONE & FAX NUMBERS
Company: VIRGINIA PLAYGROUND SERVICE Rep: JIM BENEDICT Email Address: JIM@VAPLAYGROUNDS.COM	14276 RIVERSIDE DR ASHLAND, VA 23005	PHONE 434-2492158 TOLL FREE FAX 434-2963289
Company: Altizer Contracting Ltd. Co. Rep: Roger Altizer Email Address: raltizer@frontier.net	HC 37 Box 80K Frankford, WV 24938	PHONE 304-497-3304 TOLL FREE FAX 304-497-3304
Company: Green River Group LLC Rep: Steve Calveet Email Address: SCalveet@GREGAOL.COM	PO Box 18039, Pgh, WV 26507 Fork 532 Ashebeente Sq, Pgh, WV 26108	PHONE 304-288-1817 TOLL FREE FAX 304-544-3992
Company: TAYLOR SPORTS & REC Rep: Tom NELSON Email Address: CNE67@AOL.COM	836 Echo Lane South Charleston, WV 25303	PHONE 304-744-6548 TOLL FREE FAX 304-744-6548
Company: _____ Rep: _____ Email Address: _____	_____	PHONE _____ TOLL FREE FAX _____

RECEIVED

AUG 12 2009

DNR Procurement Office

8/11/09

**Cooper's Rock State Forest
61 County Line Drive
Bruceton Mills, WV 26525**

Page 2 of 3
Date: August 11, 2009

SIGN IN SHEET

Request for Proposal No. _____

PLEASE PRINT

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

TELEPHONE & FAX
NUMBERS

FIRM & REPRESENTATIVE NAME	MAILING ADDRESS	PHONE TOLL FREE	FAX
Company: <u>Playground Specialist</u>	<u>17352 N. Seton Ave</u>	<u>(301) 271-9236</u>	
Rep: <u>Tammy Wood</u>	<u>Emmitsburg, MD 21727</u>	<u>800-385-0075</u>	
Email Address: <u>Tammy@playspec.com</u>			<u>(301) 271-9239</u>
Company: <u>SOUTHERN PLAYGROUND FNC</u>	<u>PO Box 4505</u>	<u>757 431 0057</u>	
Rep: <u>Scott Durbin</u>	<u>VA Beach VA 23454</u>	<u>800 257 1314</u>	
Email Address: <u>SDurbin@SOUTHERNPLAYGROUND.COM</u>			<u>757 431 0036</u>
Company: <u>Cunningham Assoc.</u>	<u>7 South Main Street</u>	<u>724-880-5568</u>	
Rep: <u>Don Forksutch</u>	<u>Fairhance Pa 15436</u>	<u>FREE 1-800-438-2780</u>	
Email Address: <u>dscontracting@verizon.net</u>			<u>724-564-7645</u>
Company: _____		PHONE TOLL FREE	FAX
Rep: _____			
Email Address: _____			
Company: _____		PHONE TOLL FREE	FAX
Rep: _____			
Email Address: _____			

RECEIVED

AUG 12 2009

DNR Procurement Office

Cooper's Rock State Forest
61 County Line Drive
Bruceton Mills, WV 26525

Page 3 of 3

Date: August 11, 2009

SIGN IN SHEET

PLEASE PRINT

Request for Proposal No. _____

* PLEASE BE SURE TO PRINT LEGIBLY - IF POSSIBLE, LEAVE A BUSINESS CARD

TELEPHONE & FAX NUMBERS

MAILING ADDRESS

FIRM & REPRESENTATIVE NAME

Company: <u>Service Supply Ltd. Inc.</u>	<u>997 Sunset Terr.</u>	PHONE <u>304-743-5860</u>
Rep: <u>Pam Melton</u>	<u>Milton, WV 25541</u>	TOLL FREE <u>800-848-7556</u>
Email Address: <u>playgroundpam@yahoo.com</u>		FAX <u>304-743-3850</u>
Company: <u>DAVIS ATHLETICS, LLC</u>	<u>2325 LIBERTY ST</u>	PHONE <u>304-428-3000</u>
Rep: <u>JOHN R DAVIS</u>	<u>PARKERSBURG, WV</u>	TOLL FREE _____
Email Address: <u>JRDAVIS99@YAHOO.COM</u>	<u>26101</u>	FAX <u>304-428-3002</u>
Company: _____		PHONE _____
Rep: _____		TOLL FREE _____
Email Address: _____		FAX _____
Company: _____		PHONE _____
Rep: _____		TOLL FREE _____
Email Address: _____		FAX _____
Company: _____		PHONE _____
Rep: _____		TOLL FREE _____
Email Address: _____		FAX _____

RECEIVED

AUG 12 2009

DNR Procurement Office



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR210007

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF:
KRISTA FERRELL
304-558-2596

*709022058 800-848-7556
SERVICE SUPPLY LTD
1524 SOUTH HAMILTON RD
COLUMBUS OH 43227

S H I P T O
 DIVISION OF NATURAL RESOURCES
 COOPERS ROCK STATE FOREST
 ATTN: PARK SUPERINTENDENT
 ROUTE 1, BOX 270
 BRUCETON MILLS, WV
 26525 594-1561

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
08/19/2009				

BID OPENING DATE: **08/27/2009** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
ADDENDUM NO. 2						
THIS ADDENDUM IS ISSUED TO:						
1.) ANSWER ALL TECHNICAL QUESTIONS SUBMITTED PRIOR TO THE DEADLINE FOR TECHNICAL QUESTIONS AND						
2.) TO DELETE THE FOLLOWING SECTIONS FROM THE ORIGINAL RFQ:						
EXHIBIT 5						
NOTICE TO PROCEED						
CANCELLATION						
WAGE RATES						
ARBITRATION						
WORKER'S COMPENSATION						
INSURANCE REQUIREMENTS						
BOND REQUIREMENTS						
EXHIBIT 7						
EXHIBIT 9						
CONTRACTOR'S LICENSE						
3.) TO ADD THE FOLLOWING LANGUAGE:						
VENDORS MUST PROVIDE ALL UNIT PRICING IN THE UNIT OF MEASURE REQUESTED BY THE AGENCY. FAILURE TO PROVIDE UNIT PRICING IN THE GIVEN UNIT OF MEASURE WILL RESULT IN THE DISQUALIFICATION OF THE VENDOR'S BID.						
VENDOR'S MUST SUBMIT PRICING ON THE GIVEN PRICING SHEET. FAILURE TO SUBMIT A COMPLETED PRICING SHEET WILL RESULT IN THE DISQUALIFICATION OF THE VENDOR'S BID.						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE: *Jerry Groves*
 TITLE: **JERRY GROVES**
VICE PRESIDENT
 FEIN: **31-1262459**
 TELEPHONE: **800-848-7556**
 DATE: **AUGUST 25, 2009**
 ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABEL FOR VENDOR

RFQ#: DNR210007
Addendum No. 2
Technical Questions and Answers

- 1.) Are we to include the statement of compliance from the manufacturer that verifies that they are compliant with the Consumer Product Safety Improvement Act (CPSIA 2008) as we do with other CPSC Public Playground requirements?

Answer: All playground equipment must meet CPSIA 2008 requirements including Section 101 lead limits. Vendor must include or provide upon request a statement of compliance from the manufacturer.

- 2.) Is supervision of park personnel required as a part of this RFQ?

Answer: No.

CONTRACTOR LICENSE

Authorized by the
West Virginia Contractor Licensing Board

Number:

WVC13333

Classification:

SPECIALTY


SERVICE SUPPLY LTD INC
DBA SERVICE SUPPLY LTD INC
1524 S HAMILTON RD
COLUMBUS, OH 43227-2493


Date Issued

JANUARY 24, 2009

Expiration Date

JANUARY 24, 2010


Authorized Company Signature


Chair, West Virginia Contractor
Licensing Board



WEST VIRGINIA
CONTRACTOR
LICENSING
BOARD

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



**WORKERS COMPENSATION
AND
EMPLOYERS LIABILITY POLICY**

INFORMATION PAGE WC 00 00 01 (A)

RENEWAL OF POLICY NUMBER: WC10102907-04
POLICY NUMBER: WC10102907-05

INSURER: BRICKSTREET MUTUAL INSURANCE COMPANY

- 1. **INSURED:**
SERVICE SUPPLY LTD INC
1524 SOUTH HAMILTON ROAD
COLUMBUS, OH 43227
- PRODUCER:**
BRICKSTREET MUTUAL INSURANCE
COMPANY
400 QUARRIER STREET
CHARLESTON, WV 25301-2010

Insured is a(n) CORPORATION

Other work places and identification numbers are shown in the schedule(s) attached.

- 2. The policy period is from 11/30/2008 to 11/30/2009 12:01 A.M. at the insured's mailing address.
- 3. **A. WORKERS COMPENSATION INSURANCE:** Part One of the policy applies to the Workers Compensation Law of the state(s) listed here:

WEST VIRGINIA
- B. EMPLOYERS LIABILITY INSURANCE:** Part Two of the policy applies to work in each state listed in item 3.A. The limits of our liability under Part Two are:

Bodily Injury by Accident:	\$100,000	Each Accident
Bodily Injury by Disease:	\$500,000	Policy Limit
Bodily Injury by Disease:	\$100,000	Each Employee
- C. OTHER STATES INSURANCE:** Part Three of the policy applies to the states, if any, listed here:

See West Virginia Limited Other States Insurance Endorsement WC 99 03 05
- D.** This policy includes these endorsements and schedules:

SEE LIST OF ENDORSEMENTS - EXTENSION OF INFORMATION PAGE
- 4. The premium for this policy will be determined by our Manuals of Rules, Classifications, Rates and Rating Plans. All required information is subject to verification and change by audit to be made in accordance with Part Five of the Policy

DATE OF ISSUE: 12/29/2008
ISSUING OFFICE: Charleston, WV
PRODUCER: BRICKSTREET MUTUAL INSURANCE COMPANY

Certificate of Premium Payment

This certifies the employer listed below has paid into the Ohio State Insurance Fund as required by law. Therefore, the employer is entitled to the rights and benefits of the fund for the period specified. For more information, call 1-800-OHIOBWC.

This certificate must be conspicuously posted.

Policy No and Employer

Period Specified Below

406937

01/01/2009 Thru 08/31/2009

SERVICE SUPPLY LTD., INC.
1524 S HAMILTON RD
COLUMBUS, OH 43227-2429

ohiobwc.com


Administrator

You can reproduce this certificate as needed

Ohio Bureau of Workers' Compensation

Required Posting

Effective Oct. 13, 2004, Section 4123.54 of the Ohio Revised Code requires notice of rebuttable presumption. Rebuttable presumption means an employee may dispute or prove untrue the presumption (or belief) that alcohol or a controlled substance not prescribed by the employee's physician is the proximate cause (main reason) ~~of the work-related injury.~~

The burden of proof is on the employee to prove the presence of alcohol or a controlled substance was not the proximate cause of the work-related injury. An employee who tests positive or refuses to submit to chemical testing may be disqualified for compensation and benefits under the Workers' Compensation Act.

Ohio | Bureau of Workers'
Compensation

You must post this language with the certificate of premium payment.

Focus on
Ohio Employers

log on

? help print search glossary

Accident/Injury Info »
Claim Info »
Claim Payment »
Claim Reference Info »
Coverage look-up
Employer Services »
Quick Pay
Safety Services »
Self-Insured »
Forms
Section Map

Live support available
Monday through Friday
7:30 a.m. - 5:30 p.m.
[Click here to get help!](#)

Service: State construction contractor search results

Policy number: 406937-0
Company name: SERVICE SUPPLY LTD., INC.
Construction contractor status: APPROVED
Construction contractor status date: 5/4/2007 12:00:00 AM

[search again](#)

Note: BWC has designed this database for those responsible for ensuring that a construction contractor or subcontractor has a drug-free program that complies with the governor's executive order requiring a drug-free workplace. A contractor or subcontractor in an APPROVED status has agreed to implement a drug-free workplace program which makes the company compliant with the governor's executive order. Therefore, you can print this page for your records.

Click the Help tab in the upper-right hand corner for more status definitions.

Ohio.gov
So much to Discover

[Help](#) | [Contact Us](#) | [Site Map](#) | [Search](#) | [Your Privacy](#) | [PI](#)

ACORD CERTIFICATE OF LIABILITY INSURANCE

PRODUCER Phone: 6168783351
 The Campbell Group
 PO Box 1788
 Grand Rapids MI 49501

Fax: 8008473229

SERVICE SUPPLY LTD

DATE (MM/DD/YYYY)
 12/10/2008

INSURED
 Service Supply Ltd Inc
 1524 S Hamilton Road
 Columbus OH 43227

IN BUSINESS FOR FUN AND SAFETY

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURERS AFFORDING COVERAGE

INSURER A: Continental Casualty Co NAIC #
 INSURER B: American Casualty Co of Read
 INSURER C:
 INSURER D:
 INSURER E:

COVERAGES


THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR ADD'L LTR INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
B	GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	2088184534	12/10/2008	12/10/2009	EACH OCCURRENCE \$1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$100,000 MED EXP (Any one person) \$5,000 PERSONAL & ADV INJURY \$1,000,000 GENERAL AGGREGATE \$2,000,000 PRODUCTS - COMP/OP AGG \$2,000,000
A	AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS	2088184498	12/10/2008	12/10/2009	COMBINED SINGLE LIMIT (Ea accident) \$1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ AUTO ONLY - EA ACCIDENT \$ OTHER THAN AUTO ONLY: EA ACC \$ AGG \$
A	EXCESS/UMBRELLA LIABILITY <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE DEDUCTIBLE <input checked="" type="checkbox"/> RETENTION \$10,000	2088184453	12/10/2008	12/10/2009	EACH OCCURRENCE \$2,000,000 AGGREGATE \$2,000,000 \$ \$ WC STATU-TORY LIMITS OTH-ER E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below OTHER Installation Floater	2088184534	12/10/2008	12/10/2009	\$120,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS

CERTIFICATE HOLDER
 Service Supply Ltd Inc
 1524 South Hamilton Road
 Columbus OH 43227

CANCELLATION
 SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES

AUTHORIZED REPRESENTATIVE

 © ACORD CORPORATION

IMPORTANT

If the certificate holder is an **ADDITIONAL INSURED**, the policy(ies) must be endorsed. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

If **SUBROGATION IS WAIVED**, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

DISCLAIMER

The Certificate of insurance on the reverse side of this form does not constitute a contract between the issuing insurer(s), authorized representative or producer, and the certificate holder, nor does it affirmatively or negatively amend, extend or alter the coverage afforded by the policies listed thereon.



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
06/02/2009

PRODUCER
Aon Risk Services Central, Inc.
Minneapolis MN Office
8300 Norman Center Drive
Suite 1000
Minneapolis MN 55437 USA

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

PHONE - (952) 656-8000 FAX - (312) 381-0536

INSURERS AFFORDING COVERAGE

INSURED
Landscape Structures, Inc.,
Basics, Inc., Skatewave, a
Division of Landscape Structures, Inc.
601 7th Street South
DeLano MN 55328 USA

INSURER A:	ACE American Insurance Company	22667
INSURER B:	National Union Fire Ins Co of Pittsburgh	19445
INSURER C:		
INSURER D:		
INSURER E:		

Holder Identifier :

COVERAGES SIR applies per terms and conditions of the policy

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS. LIMITS SHOWN ARE AS REQUESTED

INSR LTR	ADD'L INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YYYY)	POLICY EXPIRATION DATE (MM/DD/YYYY)	LIMITS	
A		GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY CLAIMS MADE <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> BFPD Incl. <input checked="" type="checkbox"/> Bkt Contractual Incl GENL AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PROJECT <input type="checkbox"/> LOC	PMIG23860971002 GL & Products Liability	06/01/2009	06/01/2010	EACH OCCURRENCE	\$2,000,000
						DAMAGE TO RENTED PREMISES (Ea occurrence)	\$50,000
						MED EXP (Any one person)	Excluded
						PERSONAL & ADV INJURY	\$2,000,000
						GENERAL AGGREGATE	\$4,000,000
						PRODUCTS - COMP/OP AGG	\$4,000,000
		AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS <input type="checkbox"/> NON OWNED AUTOS				COMBINED SINGLE LIMIT (Ea accident)	
						BODILY INJURY (Per person)	
						BODILY INJURY (Per accident)	
						PROPERTY DAMAGE (Per accident)	
		GARAGE LIABILITY <input type="checkbox"/> ANY AUTO				AUTO ONLY - EA ACCIDENT	
						OTHER THAN AUTO ONLY: EA ACC AGG	
B		EXCESS / UMBRELLA LIABILITY <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE <input type="checkbox"/> DEDUCTIBLE <input type="checkbox"/> RETENTION \$10,000	BE1058477	06/01/2009	06/01/2010	EACH OCCURRENCE	\$5,000,000
						AGGREGATE	\$5,000,000
		WORKERS COMPENSATION AND EMPLOYERS' LIABILITY Y/N ANY PROPRIETOR / PARTNER / EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) <input type="checkbox"/> If yes, describe under SPECIAL PROVISIONS below				WC STATUTORY LIMITS	OTHER
						E.L. EACH ACCIDENT	
						E.L. DISEASE-EA EMPLOYEE	
						E.L. DISEASE-POLICY LIMIT	
		OTHER					

Certificate No : 570034779361

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/EXCLUSIONS ADDED BY ENDORSEMENT/SPECIAL PROVISIONS
Broad Form Vendors Endorsement

CERTIFICATE HOLDER**CANCELLATION**

Service Supply Ltd., Inc.
1524 South Hamilton Road
Columbus OH 43227 USA

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT. BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE *Aon Risk Services Central, Inc.*

SERVICE SUPPLY LTD., INC.



1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

June 1, 2005

Service Supply Ltd., Inc. - founded in 1959 in Columbus, Ohio. We originally had offices in the Bryson Building in Columbus, Ohio, and have been in our present facilities, 1524 South Hamilton Road, Columbus, Ohio since 1967.

Ralph Groves, my brother, founded Service Supply Ltd., Inc. and was president until his death in 1973.

Our employees at this time are:

Mary G. Groves (wife) President (1960)
Jerry Groves (son) Vice President (1969)
Janet Kletecka (daughter) Board of Directors (1974)
Alan Kletecka (son-in law) Sales Manager (1973)
Ben Groves (husband) Secretary-Treasurer (1961)
Donna Hetzner - Secretary (1999)
Linda Groves (daughter-in-law) Secretary (1977)
Linda Kroonemeyer - Secretary (1986)
Medrith Mollenkamp - Secretary (1988)
Connie Triplett - Secretary (2003)

We have five (5) sales persons located in various areas of Ohio, Indiana and West Virginia that are on straight commission basis. Some of these sales persons also offer other lines that are related to the same market that we service. This gives us a total of seven (7) sales persons on the road.

Service Supply Ltd., Inc. originally sold items pertaining to Traffic and Highway Safety such as paint stripers, traffic paint, signs, and sign posts We expanded into the park and recreation market and then into the school market which includes all grade 1-12 and colleges. We also call on the private sector where our site amenities, signs, and play structures are popular. Our early childcare play equipment is designed for institutional and corporate facilities that have become involved in day care centers.

A partial list of our suppliers and their principals, addresses, phone numbers, and products to follow:

- Landscape Structures, Inc., Barb and Steve King, Route #3, 601 7th Street, South, Delano, MN 55328
612-479-2546 PLAYGROUND EQUIPMENT
- Wabash Valley Manufacturing, Inc., Jerry Shilling, P. O. Box 5, Silver Lake, IN 46982
219-352-2102 SITE AMENITIES (expanded metal)
- DuMor, Inc., Steve Richard, P. O. Box 142, Mifflintown, PA 17059
717-436-2106 SITE AMENITIES (wood)
- American Aluminum Seating, Inc., Bob Palmer, P. O. Box 1468, Marshalltown, IA 50158
515-753-5366 PORTABLE BLEACHERS, STADIUM GRANDSTANDS
- Interkal LLC, Richard Patterson, P. O. Box 2107, Kalamazoo, MI 49003
616-349-1521 TELESCOPIC GYM BLEACHERS

We are listed in D&B; any late payments that may be listed on these reports are the result of problems in delivery of total order, which in turn holds up payment to the manufacturer. This would only appear if it were a very large order, which would involve telescopic bleachers.

Our bank, which we have been with since 1959, is National City Bank, Bexley Office, 2594 East Main Street, Bexley, OH 43209- phone 614-238-7100.

Our accountant is Schwartz, Adleman, Kellerman & Marks, (Mr. Sam Schwartz) 145 North Reynoldsburg-New Albany Road, Blacklick, OH 43004-9701. Phone number is 614-866-1600.

Our legal counsel is the firm of Kahn, Kleinman, Yanowitz & Arnson (contact for Service Supply is Mr. Neil Kurit, The Tower at Erievue, Suite 2600, 1301 East Ninth Street, Cleveland, OH 44114-1824. Neil Kurit's phone number is 216-736-3452.

Should you have any questions, please feel free to call me Toll Free -
in Ohio call 800-282-1900 - Indiana and West Virginia call 800-848-7556.

Very truly yours,

SERVICE SUPPLY LTD., INC.

Jerry Groves

**Jerry Groves
Vice President**

JG/dlh

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT OF THE BOARD OF DIRECTORS

December 12, 1988

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following actions by this unanimous written consent:

RESOLVED: That the following persons be, and they hereby are, elected to the offices of the Corporation set opposite their respective names, each to serve in such capacity until his or her successor is duly elected and qualified:

Mary G. Groves	President
Jerry L. Groves	Vice President
Oscar B. Groves	Secretary/Treasurer
Alan Kletecka	Sales Manager

RESOLVED: That the officers of the Corporation select a bank to be the official depository of the Corporation and that the corporate resolutions required by such institution be, and they same hereby are, adopted by the Corporation as part of this resolution and that any one of the officers be, and they hereby are, authorized to execute, acknowledge, and deliver in the name and on behalf of the Corporation, any and all agreements, documents and certificates, and to do and perform all such acts and things as may be deemed by them necessary or appropriate to effectuate the purpose of this resolution;

RESOLVED FURTHER: That said bank be, and it hereby is, authorized to pay out the funds of the Corporation on deposit with it from time to time upon checks, drafts or other withdrawal orders drawn upon it and signed in the name of the Corporation by any one of the following persons:

Oscar B. Groves
Mary G. Groves

whether the checks, drafts or other withdrawal orders are payable to cash, bearer, the orders of any third party, the order of the signing officers or employees of the Corporation, or to the order

of any other officer or employee of the Corporation in either his or her individual or official capacity; and

RESOLVED That the Secretary of the Corporation be, and
FURTHER: hereby is, authorized to furnish to said
institution a certified copy of this resolution
and that this resolution remain in full force and
effect until a certified copy of a resolution
amending, modifying, replacing, or rescinding this
resolution has been furnished to the bank; and


RESOLVED That any one of the officers be, and they hereby
FURTHER: are, authorized to execute and deliver any and all
notes, agreements, documents or papers of any type
or nature whatsoever to consummate the purpose of
the foregoing resolution.

RESOLVED: That any one of the officers be, and they hereby
are, authorized to pay all fees and expenses inci-
dent to and necessary for the organization of the
Corporation.


RESOLVED: That any of the officers of the Corporation be,
and they hereby are, authorized, directed and
empowered to file or cause to be filed a Notifi-
cation of Exemption on Form 3-0 with the Ohio
Division of Securities within sixty (60) days from
the date of the original subscription to the
shares of the Corporation.




Oscar B. Groves



Mary G. Groves



Jerry Groves



Janet Kletecka

"Directors"

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT
OF THE BOARD OF DIRECTORS

January 2, 1989

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following action by this unanimous written consent:

RESOLVED: That the following persons are authorized to sign any bids on behalf of the Corporation:

Oscar B. Groves
Mary G. Groves
Alan Kletecka
Jerry L. Groves
Janet Kletecka

Oscar B. Groves
Oscar B. Groves

Mary G. Groves
Mary G. Groves

Janet Kletecka
Janet Kletecka

Jerry L. Groves
Jerry L. Groves

"Directors"

QUOTE SHEET

Quote No: 37231-1-1-1

Date: 08-15-09
 By: MDC

Rep Organization: SERVICE SUPPLY
 Contact Person: PAM MELTON

Project Title: COOPERS ROCK STATE FOREST
 Location: BRUCETON MILLS, WV
 Style: Playbooster Posts: Aluminum
 Age: 5-12 Unless Otherwise Noted.

Phone No:
 Bury Type: Direct Bury

QTY NO. DESCRIPTION

POSTS

- 3 111404A 148 ALUM. POST D.B.
- 3 111404B 140 ALUM. POST D.B.
- 2 111404C 132 ALUM. POST D.B.
- 2 111404D 124 ALUM. POST D.B.

DECKS

- 1 152911C CURVED TRANSFER MOD RIGHT
- 1 111228A SQUARE TENDERDECK
- 2 111231A TRIANGULAR TENDERDECK

PERMALENE PANELS

- 1 127439A NAVIGATOR PANEL [GROUND LEVEL]
- 1 115231A TIC-TAC-TOE PANEL ABOVE DECK

SLIDES

- 1 123336A DOUBLE WAVE POLY SLIDE 48 DECK
- 1 122033A SPYROSLIDE 72 DECK

BRIDGES

- 1 152443A PEEK & CREEP W/BARRIERS

CLIMBERS

- 1 143199A CONICAL CLIMBER 72 DECK
- 1 148434B LOOP POLE W/PERM 64 DECK

ATTACHMENTS/CONNECTORS

- 1 152908B DECK LINK W/HANDRAILS (2 STEPS)

Weight & Cost of Playstructure Items
 Concrete: 38.90 cu-ft, Footings: 22
 Labor: 39.50 Man-Hours

Weight & Cost of Equipment
 Estimated requirements for Equipment.
 Concrete: 38.90 cu-ft, Footings: 22

Labor: 39.50 Man-Hours

Total Safety Zone Square Footage = 0 sq ft

Page: 2

Date: 08-15-09

Project Title: COOPERS ROCK STATE FOREST Quote No: 37231-1-

1-1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

Estimated Man-Hours do not include site preparation.

(*) NOTE:

This Quote has a total weight above 5,000 lbs or product(s) that require a freight quote. Freight tables cannot be used - Please contact LSI for a freight quote.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.

Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed _____ Date _____

QUOTE SHEET

Quote No: 37231-1-1-2

Date: 08-15-09
By: MDC

Rep Organization: SERVICE SUPPLY
Contact Person: PAM MELTON

Project Title: COOPERS ROCK STATE FOREST
Location: BRUCETON MILLS, WV
Style: Playbooster Posts: Aluminum
Age: 5-12 Unless Otherwise Noted.

Phone No:
Bury Type: Direct Bury

QTY NO. DESCRIPTION

POSTS

8 111404C 132 ALUM. POST D.B.
2 111404E 116 ALUM. POST D.B.
2 111404F 108 ALUM. POST D.B.
1 111404G 100 ALUM. POST D.B.
3 111404H 92 ALUM. POST D.B.

DECKS

1 121948A KICK PLATE FOR 8 RISE
2 111228A SQUARE TENDERDECK
2 111229A SQUARE DECK EXTENSION
1 122197A TRIANGULAR TENDERDECK 90 DEG

MORE FUN

1 111356A LOG ROLL
1 160054D STATIONARY CYCLER HANDLES ACCES
1 111357B TURNING BAR

OVERHEAD EVENTS

2 111353A TRACK RIDE
1 123824A TRIPLE RING FLING

NON STANDARD PRODUCT CHARGES

5 141702 UNCOATED CHAIN PER FOOT

Weight & Cost of Playstructure Items
Concrete: 33.60 cu-ft, Footings: 18
Labor: 31.75 Man-Hours

INDEPENDENT COMPONENTS

SPRING RIDERS

1 135535B WHIMSY RIDER SEA HORSE D.B.

KIDS IN MOTION

1 148637A SEESAW 4-SEATS D.B.

PLAYTHINGS



2009 Play Equipment Warranty

You have our word.

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™ against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff™-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurf™ against material or manufacturing defects when properly installed. Corocord® cable on Spacenet™ climbers against breakage.

10-Year Limited Warranty for all CoolToppers™ structural steel frames and Mobius climbers™ against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™; PVC belting material, HealthBeat™ hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion, natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgment of Order and will be free of defects in manufacturing and material. Seller further warrants:

All the warranties commence on date of Seller's invoice. Should any failure to conform to the above express warranties appear within the applicable warranty period, Seller shall, upon being notified in writing promptly after discovery of the defect and within the applicable warranty period, correct such nonconformity either by repairing any defective part or parts, or by making available a replacement part within 60 days of written notification. Seller shall deliver the repaired or replacement part or parts to the site free of charge, but will not be responsible for providing labor or the cost of labor for the removal of the defective part or parts and the installation of any replacement part or parts. Replacement parts will be warranted for the balance of the original warranty.

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE.

The remedies hereby provided shall be the exclusive and sole remedies of the purchaser. Seller shall not be liable for any direct, indirect, special, incidental or consequential damages.

Seller neither assumes nor authorizes any employee, representative or any other person to assume for Seller any other liability in connection with the sale or use of the structures sold, and there are no oral agreements or warranties collateral to or affecting this agreement. The warranty stated above is valid only if the structures and or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc.; have been subjected to normal use for the purpose for which the goods were designed; have not been subject to misuse, negligence, vandalism, or accident; have not been subjected to addition or substitution of parts; and have not been modified, altered, or repaired by persons other than Seller or Seller's designees in any respect which, in the judgement of Seller, affects the condition or operation of the structures. To make a claim, send your written statement of claim, along with the original job number or invoice number to: Landscape Structures Inc. 601 7th Street South, Delano, Minnesota, 55328-8605

Signed:

Chairman

Date: 01/01/09

Material Specifications
Quote: 37231-1-1-1.QSd
8/19/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts.
Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available.
Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI
Tensile Strength (min): 55,000 PSI
% Elongation in 2 inches: 25
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI
Tensile Strength (min): 38,000 PSI
% Elongation in 2 inches: 10
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI
Yield Strength: 28,000 PSI
Elongation: 7% in 2 inches
Shear Strength: 29,000 PSI
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

111404A

Posts For Decks 148"/72" Deck

Post: See PlayBooster (PB) General Specifications.

111404B

Posts For Decks 140"/64" Deck

Post: See PlayBooster (PB) General Specifications.

111404C

Posts For Decks 132"/56" Deck

Post: See PlayBooster (PB) General Specifications.

111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.

152911C

Transfer Modules, Brown Deck Only To 48" Deck, Curved, Right or Left Step

Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 29" per (2) sides. Finish: TenderTuff, brown in color.

Step Sections/Top Step Section: Formed from 12 GA (.105") sheet steel

conforming to ASTM A569. Standing surface is 24 3/8" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Panels: Solid color Permalene, color specified.

Deck Support: Weldment comprised of 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 3/8" O.D. x 5" long CRS rod. Finish: Powdercoat, brown in color.

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.080" - .095") and 1 3/4" x 1 3/4" x 1/8" HR angle. Finish: Powdercoat, brown in color.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Railings: Weldment comprised of 1.125" O.D. x 11 GA. (.120") steel tubing with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111231A

Decks Triangular Tenderdeck, Brown Only

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

127439A

Reach Panels Navigator

Permalene Panel: Two color panel measures 34" wide x 13" high, color specified.

Hub: Solid color Permalene, color specified.

Angle: Fabricated from formed 11 GA (.120") HRPO sheet steel. Finish: Powdercoat, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Bracket: Weldment comprised of formed 3/16" plate and 5/8" O.D. shaft. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Access Clamp: Weldment comprised of 1/4" flat steel and 1/4" x 1 3/4" wide steel clamp. Finish: Powdercoat, color specified.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

115231A

Tic-Tac-Toe Panel, Tan Discs Only

Permalene Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified.

Tic Tac Toe Blocks: Rotationally molded from U.V. stabilized linear low density polyethylene, yellow in color with brown molded-in symbols.

Tic Tac Toe Bracket: Formed from .125" thick 5052 aluminum. Finish: Powdercoat, color specified.

Shafts: Fabricated from 1/2" diameter 203 stainless steel with ends tapped 5/16" 18UNC-2B.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

123336A

Double Wave Poly Slide 48" - 56" Deck

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Rail Spacer: Fabricated from 1.3125" O.D. x 16 GA (.065") steel tubing. Finish: Powdercoat, color specified.

Mid-Support: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 3" zinc plated flat steel. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Spacer: Solid color Permalene, color specified.

122033A

SpyroSlides 72" Deck

Slide, Hood & Barriers: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Entrance Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 31 3/4" wide x 36 27/32" long. Finish: TenderTuff, brown in color.

Center Column: Fabricated from 3.500" O.D. RS-20 (.120" - .130") galvanized steel tubing. Finish: Powdercoat, color specified.

Barrier Plates: Fabricated from 1/4" x 1 1/2" zinc plated HR flat steel.
Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105")
galvanized steel tubing and 1/4" thick zinc plated HR flat steel. Finish:
Powdercoat, color specified.

Handbar: Formed from 7/8" O.D. x 11 GA (.120") black steel tubing. Finish:
TenderTuff, brown in color.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish:
Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in
design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see
specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color
specified.

152443A

Peek and Creep 16" Deck Height Difference, Brown Wire Plank Only, w/Barriers

Plank: Weldment comprised of 1/4" x 2 1/2" x 30" steel plates, 1.660" O.D.
schedule 40 black steel tubing, and 1/4" diameter wire. Finish: TenderTuff,
brown in color.

Barrier: Weldment comprised of 1.315" O.D. RS20 (.080" - .090") galvanized
steel tubing, .625" O.D. CF steel bar and 1/4" x 1 3/4" steel half clamps.
Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in
design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see
specific product installation/specifications).

143199A

Conical Climbers 72" Deck

Center Loop: Weldment comprised of 1.315" O.D. RS-20 (.080" - .090") galvanized
steel tubing, 1/4" x 1 1/4" HR flat steel and 1/4" x 2 3/4" HR flat steel.
Finish: Powdercoat, color specified.

Rails: Weldment comprised of 1.315" O.D. RS-20 (.080" - .090") galvanized steel
tubing, and 1/4" x 1 1/4" HR flat steel. Finish: Powdercoat, color specified.

Footer: Fabricated from 1.125" O.D. x 11 GA (.120") galvanized steel tubing.
Finish: Powdercoat, color specified.

Mounting Plate: Fabricated from 1/8" HR flat steel. Finish: Powdercoat, green in color.

Hand Grip: Made from Polyester Resin. Hand Grips measure 5 3/4" long x 2 1/2" wide x 1 3/4" high.

Handhold Panel: Solid color Permalene, color specified.

Belt: PVC belting, 5/16" thick, 300 PIW tension rating.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

148434B

Loop Poles 56" - 72" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

152908B

Deck Links 2-Steps, w/Handrail

Panels: Solid color Permalene, color specified.

Handrail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel welded inserts with 3/8" internal threads. Finish: TenderTuff, color specified.

Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 1/4" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by

Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

Material Specifications
Quote: 37231-1-1-2.QSd
8/19/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts.
Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available.
Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI
Tensile Strength (min): 55,000 PSI
% Elongation in 2 inches: 25
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI
Tensile Strength (min): 38,000 PSI
% Elongation in 2 inches: 10
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI
Yield Strength: 28,000 PSI
Elongation: 7% in 2 inches
Shear Strength: 29,000 PSI
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

111404C

Posts For Decks 132"/56" Deck

Post: See PlayBooster (PB) General Specifications.

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.

111404G

Posts For Decks 100"/24" Deck

Post: See PlayBooster (PB) General Specifications.

111404H

Posts For Decks 92"/16" Deck

Post: See PlayBooster (PB) General Specifications.

121948A

Kick Plate 8" Rise

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111229A

Decks Square Tenderdeck, Extension, Brown Only

Square Deck Extension: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 42" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

122197A

Decks 90* Triangular Tenderdeck

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111356A

Log Roll, (1) Aluminum Post, Tan Log Only

Log Roll: Rotationally molded from U.V. stabilized linear low density polyethylene, tan in color.

Bushing: Oil impregnated bronze.

Handloop: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel inserts, with 5/8" internal thread. Finish: TenderTuff, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111357B

Turning Bar, (1) Aluminum Post

Rail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel 5/8" threaded inserts. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111353A

Track Ride, 10' Module, No Supports w/ (2) Crossovers, Max. 16" Decks

Trolley Assembly: Steel body with a 7/8" O.D. x .120" W steel tubing handle assembly. Four urethane roller skate wheels and tivar guide block. Completely

assembled. Steel Body Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

Beam: Extruded from 6005-T5 aluminum alloy. Finish: Powdercoat, color specified.

123824A

Triple Ring Fling 24" or 32" Deck to Ground

Ring Swing Out: Fabricated and formed from 1.125" O.D. x 11 GA (.120") black tubing. Finish: TenderTuff, color specified.

Beam: Weldment comprised of 2.875" O.D. RS-40 (.160" - .170") galvanized steel tubing, 1.250" diameter grade 304 stainless steel shaft and 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

135535B

Whimsy Riders* Sea Horse, Direct Bury

Spring: Fabricated from 5 5/8" diameter 13/16" tempered alloy steel coil, with cast aluminum wedges A356 alloy placed in each end of spring. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Whimsy Rider: Cast Aluminum. Finish: Base color powdercoat, then hand painted with polyurethane enamel.

Footer: Weldment comprised of 1/4" x 10" diameter flat steel and 3.500" O.D. RS20 (.125" wall) galvanized steel tube. Finish: Powdercoat, brown in color.

148637A

Seesaws 4-Seat Seesaw, Direct Bury, no Color Options On Permalene

Seesaw Beam Assembly: (Seesaw) Weldment comprised of 3.500" O.D. RS20 (.125" wall) galvanized steel tube, 1.029" O.D. RS20 (.070"-.080" wall) galvanized

steel tube, 1/8" HRPO flat steel, 12 Ga. (.105") sheet HRPO steel and 1/4" sheet HRPO steel. Finish: Powdercoat, color specified. (Base Assembly) Weldment comprised of 1/4" sheet HRPO steel and 2" square steel bar. Finish: Powdercoat, color specified. (Torsion Half Clamp) Fabricated from 1/4" sheet HRPO steel. Finish: Powdercoat, color specified. (Rubber Rod) 80 Durometer natural rubber. (Bolt Covers) ABS Polymer Thermoplastic, Tan in color. (Bushings) Plastic (UHMW), Black in color.

Footer: Weldment comprised of 5.000" O.D. x 11 Ga. (.120" wall) galvanized steel tube, 1/4" sheet HRPO steel and 3/16" sheet HRPO steel. Finish: Powdercoat, color specified.

Seat: Solid color Permalene, Tan in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

150976A

Cascade Climbers 6-Panels, (Available for Direct Bury Only)

Panels: Solid color Permalene, color specified.

Support Pipe: Weldment comprised of 2.375" O.D. RS40 (.130"-.140" wall) galvanized steel tube, 1/4" x 1 1/4" HR flat steel and 12 Ga. (.105") sheet HRPO steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100046C

Poly Slides Wave, 72'' Deck

Deck: Fabricated from 14 GA (.075") diamond plate. Finish: TenderTuff, brown in color.

Frames: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing, 5/8" diameter solid steel zinc plated vertical pickets and 3/8" x 2" flat steel. Finish: Powdercoat, color specified.

Handrails: Fabricated from formed 1.125" O.D. 11 GA. (.120") steel tubing. Finish: TenderTuff, color specified.

Safety Bar: Weldment comprised of 1" x 2" x 21 1/8" 14 GA (.075") rectangular tubing, 1/8" x 4" steel hanger bracket and 3/8" standard hex nuts. Finish: Powdercoat, color specified.

Step Ladder: Fabricated and formed from 14 GA (.075") HRPO sheet steel with 5/16" perforated holes for steps and welded 12 GA (.105") HRPO sheet steel for sides. Finish: TenderTuff, brown in color.

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 2" zinc plated steel strap. Finish: Powdercoat, brown in color.

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Mid-Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" zinc plated flat steel. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

120891A

Tire Swings Arch Tire Swing, TenderTuff-coated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Beam: Weldment comprised of 5" O.D. x 11 GA (.120") galvanized steel tubing, 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 7 GA (.179") flat steel gussets. Tee clamps and tire swing clamps are mechanically attached at factory with stainless steel fasteners. Finish: Powdercoat, color specified.

Hanger Assembly: Machined from 303 stainless steel, with oil impregnated bronze bearings.

Insert: Made from 303 stainless steel.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: TenderTuff, color specified.

Tire: Rotationally molded from U.V. stabilized, E.V.A. (ethyl vinyl acetate) and high density polyethylene, blended to retain flexibility at below freezing temperatures, black in color. Tire measures 28" O.D. x 14" I.D. x 6" high.

Tire Ring: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100055A

Tire Swings Full Bucket Seat, Order Chain Separately

Full Bucket Seat: Made of U.V. stabilized high-quality black rubber encapsulating a 24 GA (.024") stainless steel reinforcement plate. Handles cast from 356-T6 aluminum alloy with a 60 durometer black neoprene grip placed over handles. Handles attach to seat with (3) 1/4" x 1 5/16" long stainless steel rivets. The full bucket measures 9" deep x 10 1/2" wide.

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when

properly installed. CorocordR cable on Spacenet climbers against breakage.


10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural ElementsTM climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCoreTM products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway FunTM, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

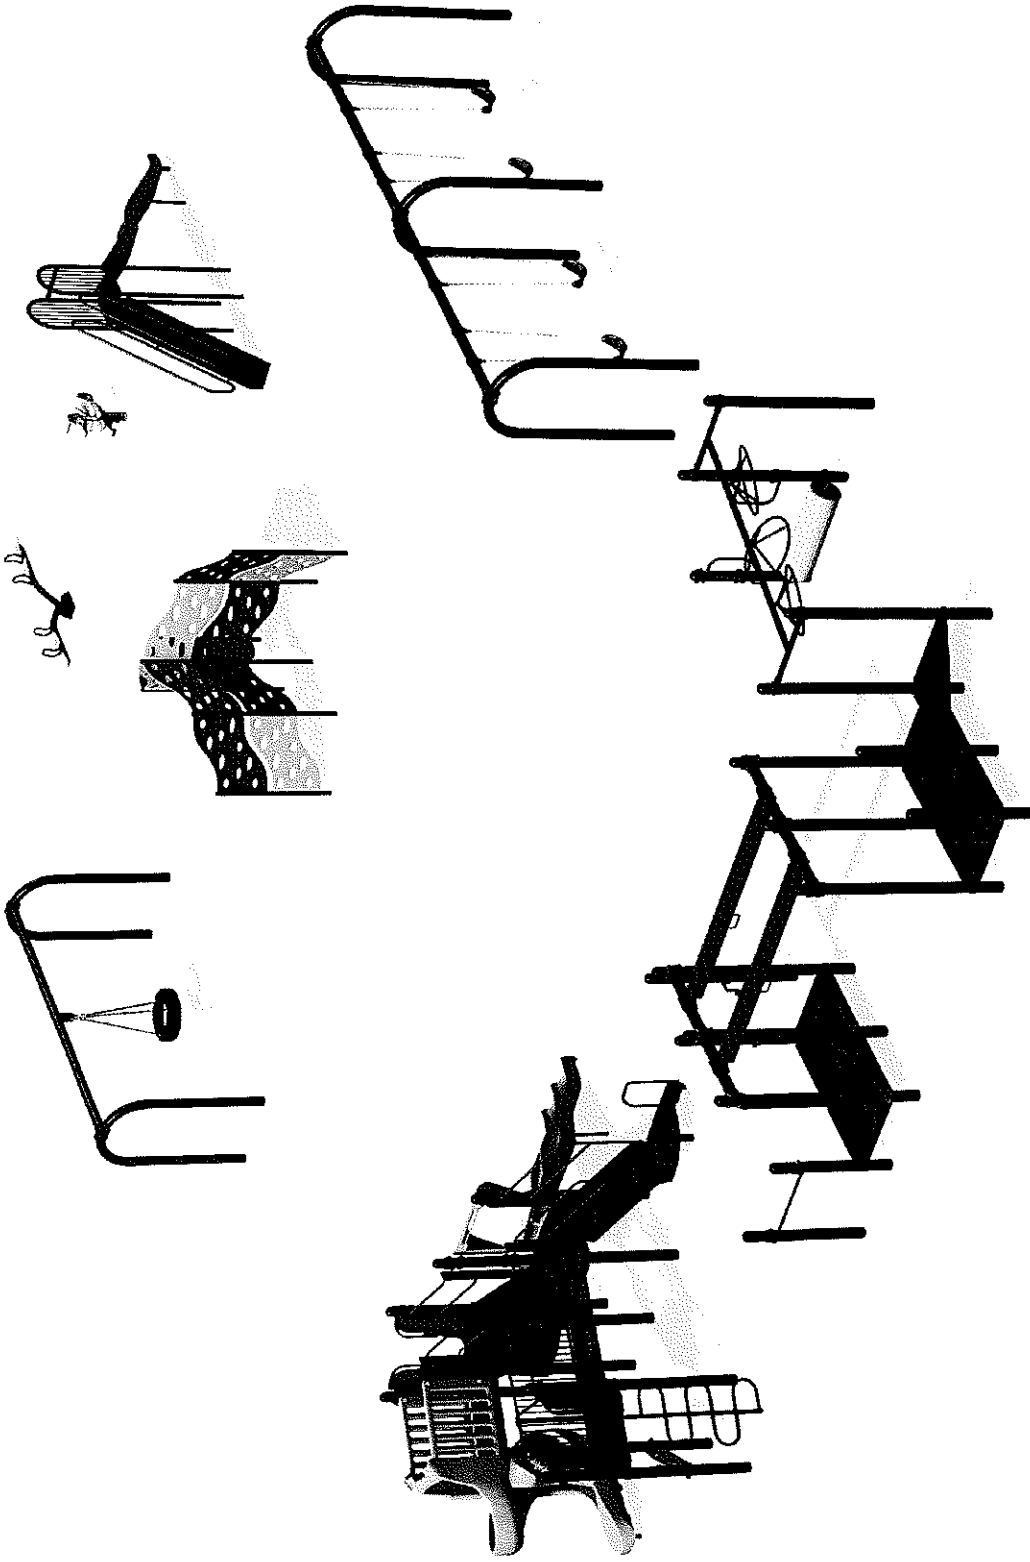

SLR
landscape
structures



SERVICE / SUPPLY / I.D. / INC.

COOPERS ROCK STATE FOREST

BRUCETON MILLS, WV 17437231-1-1

8/15/2009

landscapes
structures



The play components identified on this plan are ISPCA certified. The use and layout of these components are subject to the requirements of ASTM F 1487.

THIS PLAY AREA EQUIPMENT IS DESIGNED FOR AGES 5-12 YEARS UNLESS OTHERWISE NOTED ON PLAN.

IF IN THE MANUFACTURER'S OPINION THAT IT IS NOT FEASIBLE TO CONFORM TO THE REQUIREMENTS OF ASTM F 1487, THE MANUFACTURER SHALL PROVIDE AN ACCESSIBLE PROTECTIVE SURFACING IS PROVIDED AS INDICATED ON THIS PLAN.


THIS CONCEPTUAL PLAN WAS BASED ON THE MANUFACTURER'S INFORMATION AND ASSUMPTIONS. THE MANUFACTURER'S INFORMATION AND ASSUMPTIONS SHALL BE REVIEWED AND APPROVED BY THE USER. THE USER SHALL BE RESPONSIBLE FOR ALL DECISIONS OF PLAY AREA, EQUIPMENT, AND LOCATION OF EQUIPMENT. THE USER SHALL BE RESPONSIBLE FOR THE PROTECTIVE SURFACING TO BE PROVIDED.

PLEASE AVOID PROTECTIVE SURFACING MATERIALS THAT ARE A CRITICAL WEIGHT VALUE OF 100 LBS PER SQ. FT. ACCESSIBLE PROTECTIVE SURFACING SHALL BE PROVIDED TO THE PLAY AREA. ACCESSIBLE PROTECTIVE SURFACING SHALL BE PROVIDED TO THE PLAY AREA. ACCESSIBLE PROTECTIVE SURFACING SHALL BE PROVIDED TO THE PLAY AREA. ACCESSIBLE PROTECTIVE SURFACING SHALL BE PROVIDED TO THE PLAY AREA.

DESIGNED BY:
MJC

COMPOSED BY:
LANDSCAPE STRUCTURES, INC.
401 THE STREET NORTH - PA. 15116
PH: 1-800-368-3225 FAX: 1-717-871-8811

Date: Previous Drawing #: Price:

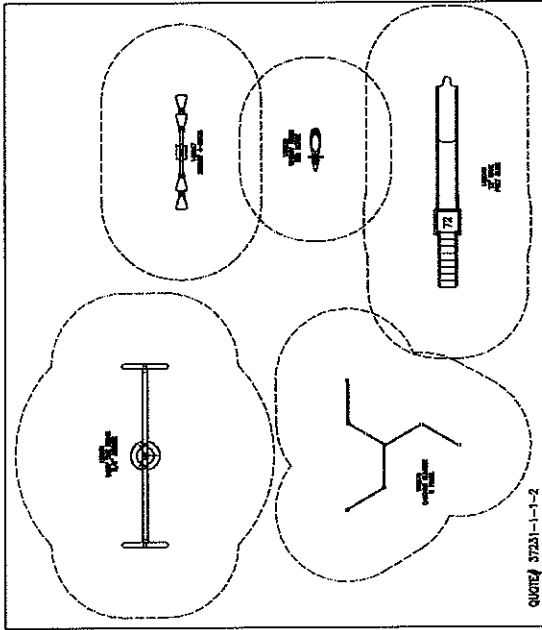


QUOTE# 37231-1-1-2

SUGGESTED BORDER BY OTHERS

ACCESSIBLE/PROTECTIVE
LOOSE FILL MATERIAL
(ENGINEERED WOOD FIBER SUGGESTED)
2"X4" S4PT.

ACCESSIBLE/PROTECTIVE
LOOSE FILL MATERIAL
(ENGINEERED WOOD FIBER SUGGESTED)

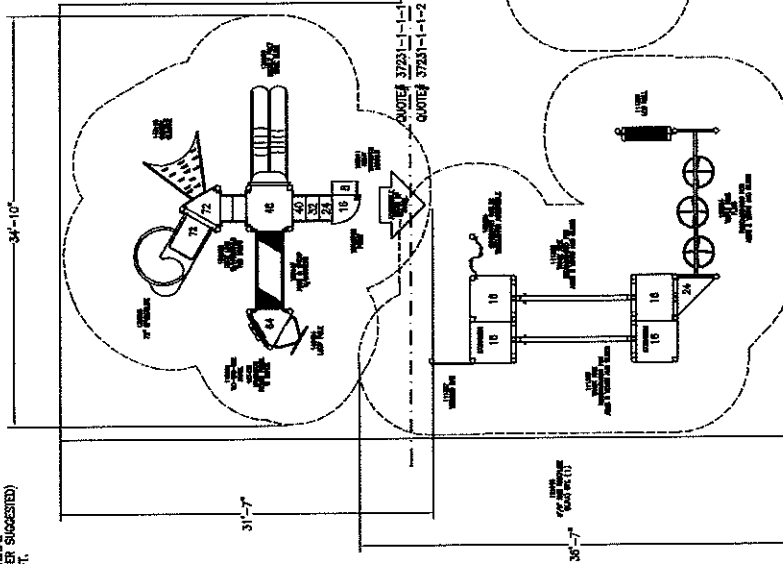

QUOTE# 37231-1-1-1
QUOTE# 37231-1-1-2

SUGGESTED BORDER BY OTHERS

QUOTE# 37231-1-1-1

TOTAL ELEVATED PLAY COMPONENTS - 9
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY RAMP - 0
TOTAL ELEVATED COMPONENTS ACCESSIBLE BY TRANSFER - 6
TOTAL ACCESSIBLE GROUND LEVEL COMPONENTS SHOWN - 13
TOTAL DIFFERENT TYPES OF GROUND LEVEL COMPONENTS - 10

SCALE IN FEET:



SYSTEM TYPE
PLAYBOOSTER

DRAWING #:
37231-1-1

SERVICE SUPPLY

PAM MELTON

COOPERS ROCK STATE FOREST

BRUCETON MILLS, WY

ISPCA

