



Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

State of West Virginia  
Request for Quotation

Proc Folder: 59515

Doc Description: 2014 KUBOTA RTV 1100-E3-UV or equal

Proc Type: Central Purchase Order

Date Issued	Solicitation Closes	Solicitation No	Version
2015-01-02	2015-01-29 13:30:00	CRFQ 0506 HOP1500000003	1

**BID RECEIVING LOCATION**

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV 25305

US

**VENDOR**

Vendor Name, Address and Telephone Number:

FAIRPLAIN TRACTOR SALES, INC

1169 RIPLEY ROAD

RIPLEY, WV 25271

304-372-9875

01/26/15 15:50:46  
WV Purchasing Division

**FOR INFORMATION CONTACT THE BUYER**

Gregory Clay

(304) 558-2566

gregory.c.clay@wv.gov

Signature X

FEIN #

55-0540441

DATE

01/23/2015

All offers subject to all terms and conditions contained in this solicitation

INVOICE TO	SHIP TO
PROCUREMENT OFFICER - 304-789-2411 HEALTH AND HUMAN RESOURCES HOPEMONT HOSPITAL ACCOUNTS PAYABLE 150 HOPEMONT DR TERRA ALTA WV26764-7728 US	PROCUREMENT OFFICER - 304-789-2411 HEALTH AND HUMAN RESOURCES HOPEMONT HOSPITAL CENTRAL RECEIVING 150 HOPEMONT DR TERRA ALTA WV 26764-7728 US

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	2014 KUBOTA RTV 1100-E3-UV or equal	1.00000	EA		\$27,675.00

Comm Code	Manufacturer	Specification	Model #
25101905	KUBOTA		RTVX1100CW-A

**Extended Description :**

2014 KUBOTA RTV 1100-E3-UV or equal, detailed specification in documents and commodity section.

RTVX1100CW-A --- \$17,300

STROBE LIGHT --- VC5058 -- \$150  
 REAR WORK LIGHT -- V5283 -- \$100  
 BACKUP ALARM -- V5236 -- \$125  
 TURN SIGNAL -- V5257 -- \$250  
 V BLADE -- V5291 -- \$2500  
 QUICK HITCH -- V5289 -- \$650  
 BOX SPREADER -- V4405 -- \$3900  
 HYDRAULIC KIT -- V5232 -- \$2000  
 HYDRAULIC KIT -- V5233 -- \$300  
 PUMP -- V5272 -- \$400

TOTAL -- \$27,675.00



HOP1500000003	<b>Document Phase</b> Final	<b>Document Description</b> 2014 KUBOTA RTV 1100-E3-UV or equal	<b>Page 3</b> of 3
---------------	--------------------------------	--	-----------------------

#### ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions

### INSTRUCTIONS TO VENDORS SUBMITTING BIDS

1. **REVIEW DOCUMENTS THOROUGHLY:** The attached documents contain a solicitation for bids. Please read these instructions and all documents attached in their entirety. These instructions provide critical information about requirements that if overlooked could lead to disqualification of a Vendor's bid. All bids must be submitted in accordance with the provisions contained in these instructions and the Solicitation. Failure to do so may result in disqualification of Vendor's bid.
2. **MANDATORY TERMS:** The Solicitation may contain mandatory provisions identified by the use of the words "must," "will," and "shall." Failure to comply with a mandatory term in the Solicitation will result in bid disqualification.
3. **PREBID MEETING:** The item identified below shall apply to this Solicitation.

☒ A pre-bid meeting will not be held prior to bid opening.

☐ A NON-MANDATORY PRE-BID meeting will be held at the following place and time:

☐ A MANDATORY PRE-BID meeting will be held at the following place and time:

All Vendors submitting a bid must attend the mandatory pre-bid meeting. Failure to attend the mandatory pre-bid meeting shall result in disqualification of the Vendor's bid. No one person attending the pre-bid meeting may represent more than one Vendor.

An attendance sheet provided at the pre-bid meeting shall serve as the official document verifying attendance. The State will not accept any other form of proof or documentation to verify attendance. Any person attending the pre-bid meeting on behalf of a Vendor must list on the attendance sheet his or her name and the name of the Vendor he or she is representing. Additionally, the person attending the pre-bid meeting should include the Vendor's E-Mail address, phone number, and Fax number on the attendance sheet. It is the Vendor's responsibility to locate the attendance sheet and provide the required information. Failure to complete the attendance sheet as required may result in disqualification of Vendor's bid.

All Vendors should arrive prior to the starting time for the pre-bid. Vendors who arrive after the starting time but prior to the end of the pre-bid will be permitted to sign in, but are charged with knowing all matters discussed at the pre-bid.

Questions submitted at least five business days prior to a scheduled pre-bid will be discussed at the pre-bid meeting if possible. Any discussions or answers to questions at the pre-bid meeting are preliminary in nature and are non-binding. Official and binding answers to questions will be published in a written addendum to the Solicitation prior to bid opening.

4. **VENDOR QUESTION DEADLINE:** Vendors may submit questions relating to this Solicitation to the Purchasing Division. Questions must be submitted in writing. All questions must be submitted on or before the date listed below and to the address listed below in order to be considered. A written response will be published in a Solicitation addendum if a response is possible and appropriate. Non-written discussions, conversations, or questions and answers regarding this Solicitation are preliminary in nature and are non-binding. Submitted e-mails should have solicitation number in the subject line.

Question Submission Deadline: January 19, 2015 at 5:00 PM

Submit Questions to: Greg Clay  
2019 Washington Street, East  
Charleston, WV 25305  
Fax: (304) 558-4115 (Vendors should not use this fax number for bid submission)  
Email: Gregory.C.Clay@wv.gov

5. **VERBAL COMMUNICATION:** Any verbal communication between the Vendor and any State personnel is not binding, including verbal communication at the mandatory pre-bid conference. Only information issued in writing and added to the Solicitation by an official written addendum by the Purchasing Division is binding.
6. **BID SUBMISSION:** All bids must be submitted electronically through wvOASIS or signed and delivered by the Vendor to the Purchasing Division at the address listed below on or before the date and time of the bid opening. Any bid received by the Purchasing Division staff is considered to be in the possession of the Purchasing Division and will not be returned for any reason. The Purchasing Division will not accept bids, modification of bids, or addendum acknowledgment forms via e-mail. Acceptable delivery methods include electronic submission via wvOASIS, hand delivery, delivery by courier, or facsimile. The bid delivery address is:

Department of Administration, Purchasing Division  
2019 Washington Street East  
Charleston, WV 25305-0130

A bid that is not submitted electronically through wvOASIS should contain the information listed below on the face of the envelope or the bid may be rejected by the Purchasing Division.:

SEALED BID: Hopemont Hospital RTV  
BUYER: Greg Clay  
SOLICITATION NO.: CRFQ 0506 HOP1500000003  
BID OPENING DATE: January 29, 2015  
BID OPENING TIME: 13:30  
FAX NUMBER: (304)-558-3970

In the event that Vendor is responding to a request for proposal, and choses to respond in a manner other than by electronic submission through wvOASIS, the Vendor shall submit one original technical and one original cost proposal plus convenience copies of each to the Purchasing Division at the address shown above. Additionally, if Vendor does not submit its bid through wvOASIS, the Vendor should identify the bid type as either a technical or cost proposal on the face of each bid envelope submitted in response to a request for proposal as follows:

BID TYPE: (This only applies to CRFP)

☐ Technical

☐ Cost

7. **BID OPENING:** Bids submitted in response to this Solicitation will be opened at the location identified below on the date and time listed below. Delivery of a bid after the bid opening date and time will result in bid disqualification. For purposes of this Solicitation, a bid is considered delivered when confirmation of delivery is provided by wvOASIS (in the case of electronic submission) or when the bid is time stamped by the official Purchasing Division time clock (in the case of hand delivery).

Bid Opening Date and Time: January 29, 2015 at 1:30 PM  
Bid Opening Location: Department of Administration, Purchasing Division  
2019 Washington Street East  
Charleston, WV 25305-0130

8. **ADDENDUM ACKNOWLEDGEMENT:** Changes or revisions to this Solicitation will be made by an official written addendum issued by the Purchasing Division. Vendor should acknowledge receipt of all addenda issued with this Solicitation by completing an Addendum Acknowledgment Form, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

9. **BID FORMATTING:** Vendor should type or electronically enter the information onto its bid to prevent errors in the evaluation. Failure to type or electronically enter the information may result in bid disqualification.
10. **ALTERNATES:** Any model, brand, or specification listed in this Solicitation establishes the acceptable level of quality only and is not intended to reflect a preference for, or in any way favor, a particular brand or vendor. Vendors may bid alternates to a listed model or brand provided that the alternate is at least equal to the model or brand and complies with the required specifications. The equality of any alternate being bid shall be determined by the State at its sole discretion. Any Vendor bidding an alternate model or brand should clearly identify the alternate items in its bid and should include manufacturer's specifications, industry literature, and/or any other relevant documentation demonstrating the equality of the alternate items. Failure to provide information for alternate items may be grounds for rejection of a Vendor's bid.
11. **EXCEPTIONS AND CLARIFICATIONS:** The Solicitation contains the specifications that shall form the basis of a contractual agreement. Vendor shall clearly mark any exceptions, clarifications, or other proposed modifications in its bid. Exceptions to, clarifications of, or modifications of a requirement or term and condition of the Solicitation may result in bid disqualification.
12. **COMMUNICATION LIMITATIONS:** In accordance with West Virginia Code of State Rules §148-1-6.6, communication with the State of West Virginia or any of its employees regarding this Solicitation during the solicitation, bid, evaluation or award periods, except through the Purchasing Division, is strictly prohibited without prior Purchasing Division approval. Purchasing Division approval for such communication is implied for all agency delegated and exempt purchases.
13. **REGISTRATION:** Prior to Contract award, the apparent successful Vendor must be properly registered with the West Virginia Purchasing Division and must have paid the \$125 fee, if applicable.
14. **UNIT PRICE:** Unit prices shall prevail in cases of a discrepancy in the Vendor's bid.
15. **PREFERENCE:** Vendor Preference may only be granted upon written request and only in accordance with the West Virginia Code § 5A-3-37 and the West Virginia Code of State Rules. A Vendor Preference Certificate form has been attached hereto to allow Vendor to apply for the preference. Vendor's failure to submit the Vendor Preference Certificate form with its bid will result in denial of Vendor Preference. Vendor Preference does not apply to construction projects.
16. **SMALL, WOMEN-OWNED, OR MINORITY-OWNED BUSINESSES:** For any solicitations publicly advertised for bid, in accordance with West Virginia Code §5A-3-37(a)(7) and W. Va. CSR § 148-22-9, any non-resident vendor certified as a small, women-owned, or minority-owned business under W. Va. CSR § 148-22-9 shall be provided the

same preference made available to any resident vendor. Any non-resident small, women-owned, or minority-owned business must identify itself as such in writing, must submit that writing to the Purchasing Division with its bid, and must be properly certified under W. Va. CSR § 148-22-9 prior to contract award to receive the preferences made available to resident vendors. Preference for a non-resident small, women-owned, or minority owned business shall be applied in accordance with W. Va. CSR § 148-22-9.

- 17. WAIVER OF MINOR IRREGULARITIES:** The Director reserves the right to waive minor irregularities in bids or specifications in accordance with West Virginia Code of State Rules § 148-1-4.6.

### **GENERAL TERMS AND CONDITIONS:**

1. **CONTRACTUAL AGREEMENT:** Issuance of a Award Document signed by the Purchasing Division Director, or his designee, and approved as to form by the Attorney General's office constitutes acceptance of this Contract made by and between the State of West Virginia and the Vendor. Vendor's signature on its bid signifies Vendor's agreement to be bound by and accept the terms and conditions contained in this Contract.
2. **DEFINITIONS:** As used in this Solicitation/Contract, the following terms shall have the meanings attributed to them below. Additional definitions may be found in the specifications included with this Solicitation/Contract.
  - 2.1. **"Agency" or "Agencies"** means the agency, board, commission, or other entity of the State of West Virginia that is identified on the first page of the Solicitation or any other public entity seeking to procure goods or services under this Contract.
  - 2.2. **"Contract"** means the binding agreement that is entered into between the State and the Vendor to provide the goods or services requested in the Solicitation.
  - 2.3. **"Director"** means the Director of the West Virginia Department of Administration, Purchasing Division.
  - 2.4. **"Purchasing Division"** means the West Virginia Department of Administration, Purchasing Division.
  - 2.5. **"Award Document"** means the document signed by the Agency and the Purchasing Division, and approved as to form by the Attorney General, that identifies the Vendor as the contract holder.
  - 2.6. **"Solicitation"** means the official notice of an opportunity to supply the State with goods or services that is published by the Purchasing Division.
  - 2.7. **"State"** means the State of West Virginia and/or any of its agencies, commissions, boards, etc. as context requires.
  - 2.8. **"Vendor" or "Vendors"** means any entity submitting a bid in response to the Solicitation, the entity that has been selected as the lowest responsible bidder, or the entity that has been awarded the Contract as context requires.

3. **CONTRACT TERM; RENEWAL; EXTENSION:** The term of this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below:

☐ **Term Contract**

**Initial Contract Term:** This Contract becomes effective on \_\_\_\_\_ and extends for a period of \_\_\_\_\_ year(s).

**Renewal Term:** This Contract may be renewed upon the mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). Any request for renewal should be submitted to the Purchasing Division thirty (30) days prior to the expiration date of the initial contract term or appropriate renewal term. A Contract renewal shall be in accordance with the terms and conditions of the original contract. Renewal of this Contract is limited to \_\_\_\_\_ successive one (1) year periods or multiple renewal periods of less than one year, provided that the multiple renewal periods do not exceed \_\_\_\_\_ months in total. Automatic renewal of this Contract is prohibited. Notwithstanding the foregoing, Purchasing Division approval is not required on agency delegated or exempt purchases. Attorney General approval may be required for vendor terms and conditions.

**Delivery Order Limitations:** In the event that this contract permits delivery orders, a delivery order may only be issued during the time this Contract is in effect. Any delivery order issued within one year of the expiration of this Contract shall be effective for one year from the date the delivery order is issued. No delivery order may be extended beyond one year after this Contract has expired.

- ☐ **Fixed Period Contract:** This Contract becomes effective upon Vendor's receipt of the notice to proceed and must be completed within \_\_\_\_\_ days.

- ☐ **Fixed Period Contract with Renewals:** This Contract becomes effective upon Vendor's receipt of the notice to proceed and part of the Contract more fully described in the attached specifications must be completed within \_\_\_\_\_ days. Upon completion, the vendor agrees that maintenance, monitoring, or warranty services will be provided for one year thereafter with an additional \_\_\_\_\_ successive one year renewal periods or multiple renewal periods of less than one year provided that the multiple renewal periods do not exceed \_\_\_\_\_ months in total. Automatic renewal of this Contract is prohibited.

- ☒ **One Time Purchase:** The term of this Contract shall run from the issuance of the Award Document until all of the goods contracted for have been delivered, but in no event will this Contract extend for more than one fiscal year.

- ☐ **Other:** See attached.



4. **NOTICE TO PROCEED:** Vendor shall begin performance of this Contract immediately upon receiving notice to proceed unless otherwise instructed by the Agency. Unless otherwise specified, the fully executed Award Document will be considered notice to proceed.
5. **QUANTITIES:** The quantities required under this Contract shall be determined in accordance with the category that has been identified as applicable to this Contract below.
- ☐ **Open End Contract:** Quantities listed in this Solicitation are approximations only, based on estimates supplied by the Agency. It is understood and agreed that the Contract shall cover the quantities actually ordered for delivery during the term of the Contract, whether more or less than the quantities shown.
- ☐ **Service:** The scope of the service to be provided will be more clearly defined in the specifications included herewith.
- ☐ **Combined Service and Goods:** The scope of the service and deliverable goods to be provided will be more clearly defined in the specifications included herewith.
- ☒ **One Time Purchase:** This Contract is for the purchase of a set quantity of goods that are identified in the specifications included herewith. Once those items have been delivered, no additional goods may be procured under this Contract without an appropriate change order approved by the Vendor, Agency, Purchasing Division, and Attorney General's office.
6. **PRICING:** The pricing set forth herein is firm for the life of the Contract, unless specified elsewhere within this Solicitation/Contract by the State. A Vendor's inclusion of price adjustment provisions in its bid, without an express authorization from the State in the Solicitation to do so, may result in bid disqualification.
7. **EMERGENCY PURCHASES:** The Purchasing Division Director may authorize the Agency to purchase goods or services in the open market that Vendor would otherwise provide under this Contract if those goods or services are for immediate or expedited delivery in an emergency. Emergencies shall include, but are not limited to, delays in transportation or an unanticipated increase in the volume of work. An emergency purchase in the open market, approved by the Purchasing Division Director, shall not constitute of breach of this Contract and shall not entitle the Vendor to any form of compensation or damages. This provision does not excuse the State from fulfilling its obligations under a One Time Purchase contract.
8. **REQUIRED DOCUMENTS:** All of the items checked below must be provided to the Purchasing Division by the Vendor as specified below.

☐ **BID BOND:** All Vendors shall furnish a bid bond in the amount of five percent (5%) of the total amount of the bid protecting the State of West Virginia. The bid bond must be submitted with the bid.

☐ **PERFORMANCE BOND:** The apparent successful Vendor shall provide a performance bond in the amount of \_\_\_\_\_. The performance bond must be received by the Purchasing Division prior to Contract award. On construction contracts, the performance bond must be 100% of the Contract value.

☐ **LABOR/MATERIAL PAYMENT BOND:** The apparent successful Vendor shall provide a labor/material payment bond in the amount of 100% of the Contract value. The labor/material payment bond must be delivered to the Purchasing Division prior to Contract award.

In lieu of the Bid Bond, Performance Bond, and Labor/Material Payment Bond, the Vendor may provide certified checks, cashier's checks, or irrevocable letters of credit. Any certified check, cashier's check, or irrevocable letter of credit provided in lieu of a bond must be of the same amount and delivered on the same schedule as the bond it replaces. A letter of credit submitted in lieu of a performance and labor/material payment bond will only be allowed for projects under \$100,000. Personal or business checks are not acceptable.

☐ **MAINTENANCE BOND:** The apparent successful Vendor shall provide a two (2) year maintenance bond covering the roofing system. The maintenance bond must be issued and delivered to the Purchasing Division prior to Contract award.

☐ **INSURANCE:** The apparent successful Vendor shall furnish proof of the following insurance prior to Contract award and shall list the state as a certificate holder:

☐ **Commercial General Liability Insurance:** In the amount of \_\_\_\_\_ or more.

☐ **Builders Risk Insurance:** In an amount equal to 100% of the amount of the Contract.

☐☐☐☐☐

The apparent successful Vendor shall also furnish proof of any additional insurance requirements contained in the specifications prior to Contract award regardless of whether or not that insurance requirement is listed above.

- ☐ **LICENSE(S) / CERTIFICATIONS / PERMITS:** In addition to anything required under the Section entitled Licensing, of the General Terms and Conditions, the apparent successful Vendor shall furnish proof of the following licenses, certifications, and/or permits prior to Contract award, in a form acceptable to the Purchasing Division.

☐☐☐☐

The apparent successful Vendor shall also furnish proof of any additional licenses or certifications contained in the specifications prior to Contract award regardless of whether or not that requirement is listed above.

9. **WORKERS' COMPENSATION INSURANCE:** The apparent successful Vendor shall comply with laws relating to workers compensation, shall maintain workers' compensation insurance when required, and shall furnish proof of workers' compensation insurance upon request.
10. **LITIGATION BOND:** The Director reserves the right to require any Vendor that files a protest of an award to submit a litigation bond in the amount equal to one percent of the lowest bid submitted or \$5,000, whichever is greater. The entire amount of the bond shall be forfeited if the hearing officer determines that the protest was filed for frivolous or improper purpose, including but not limited to, the purpose of harassing, causing unnecessary delay, or needless expense for the Agency. All litigation bonds shall be made payable to the Purchasing Division. In lieu of a bond, the protester may submit a cashier's check or certified check payable to the Purchasing Division. Cashier's or certified checks will be deposited with and held by the State Treasurer's office. If it is determined that the protest has not been filed for frivolous or improper purpose, the bond or deposit shall be returned in its entirety.
11. **LIQUIDATED DAMAGES:** Vendor shall pay liquidated damages in the amount of \_\_\_\_\_  
for \_\_\_\_\_.  
This clause shall in no way be considered exclusive and shall not limit the State or Agency's right to pursue any other available remedy.

- 12. ACCEPTANCE/REJECTION:** The State may accept or reject any bid in whole, or in part. Vendor's signature on its bid signifies acceptance of the terms and conditions contained in the Solicitation and Vendor agrees to be bound by the terms of the Contract, as reflected in the Award Document, upon receipt.
- 13. FUNDING:** This Contract shall continue for the term stated herein, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise made available, this Contract becomes void and of no effect beginning on July 1 of the fiscal year for which funding has not been appropriated or otherwise made available.
- 14. PAYMENT:** Payment in advance is prohibited under this Contract. Payment may only be made after the delivery and acceptance of goods or services. The Vendor shall submit invoices, in arrears.
- 15. TAXES:** The Vendor shall pay any applicable sales, use, personal property or any other taxes arising out of this Contract and the transactions contemplated thereby. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
- 16. CANCELLATION:** The Purchasing Division Director reserves the right to cancel this Contract immediately upon written notice to the vendor if the materials or workmanship supplied do not conform to the specifications contained in the Contract. The Purchasing Division Director may also cancel any purchase or Contract upon 30 days written notice to the Vendor in accordance with West Virginia Code of State Rules § 148-1-7.16.2.
- 17. TIME:** Time is of the essence with regard to all matters of time and performance in this Contract.
- 18. APPLICABLE LAW:** This Contract is governed by and interpreted under West Virginia law without giving effect to its choice of law principles. Any information provided in specification manuals, or any other source, verbal or written, which contradicts or violates the West Virginia Constitution, West Virginia Code or West Virginia Code of State Rules is void and of no effect.
- 19. COMPLIANCE:** Vendor shall comply with all applicable federal, state, and local laws, regulations and ordinances. By submitting a bid, Vendor acknowledges that it has reviewed, understands, and will comply with all applicable law.
- 20. PREVAILING WAGE:** On any contract for the construction of a public improvement, Vendor and any subcontractors utilized by Vendor shall pay a rate or rates of wages which shall not be less than the fair minimum rate or rates of wages (prevailing wage), as established by the West Virginia Division of Labor under West Virginia Code §§ 21-5A-1 et seq. and available at <http://www.sos.wv.gov/administrative-law/wagerates/Pages/default.aspx>. Vendor shall be responsible for ensuring compliance with

prevailing wage requirements and determining when prevailing wage requirements are applicable. The required contract provisions contained in West Virginia Code of State Rules § 42-7-3 are specifically incorporated herein by reference.

21. **ARBITRATION:** Any references made to arbitration contained in this Contract, Vendor's bid, or in any American Institute of Architects documents pertaining to this Contract are hereby deleted, void, and of no effect.
22. **MODIFICATIONS:** This writing is the parties' final expression of intent. Notwithstanding anything contained in this Contract to the contrary, no modification of this Contract shall be binding without mutual written consent of the Agency, and the Vendor, with approval of the Purchasing Division and the Attorney General's office (Attorney General approval is as to form only). No Change shall be implemented by the Vendor until such time as the Vendor receives an approved written change order from the Purchasing Division.
23. **WAIVER:** The failure of either party to insist upon a strict performance of any of the terms or provision of this Contract, or to exercise any option, right, or remedy herein contained, shall not be construed as a waiver or a relinquishment for the future of such term, provision, option, right, or remedy, but the same shall continue in full force and effect. Any waiver must be expressly stated in writing and signed by the waiving party.
24. **SUBSEQUENT FORMS:** The terms and conditions contained in this Contract shall supersede any and all subsequent terms and conditions which may appear on any form documents submitted by Vendor to the Agency or Purchasing Division such as price lists, order forms, invoices, sales agreements, or maintenance agreements, and includes internet websites or other electronic documents. Acceptance or use of Vendor's forms does not constitute acceptance of the terms and conditions contained thereon.
25. **ASSIGNMENT:** Neither this Contract nor any monies due, or to become due hereunder, may be assigned by the Vendor without the express written consent of the Agency, the Purchasing Division, the Attorney General's office (as to form only), and any other government agency or office that may be required to approve such assignments. Notwithstanding the foregoing, Purchasing Division approval may or may not be required on certain agency delegated or exempt purchases.
26. **WARRANTY:** The Vendor expressly warrants that the goods and/or services covered by this Contract will: (a) conform to the specifications, drawings, samples, or other description furnished or specified by the Agency; (b) be merchantable and fit for the purpose intended; and (c) be free from defect in material and workmanship.
27. **STATE EMPLOYEES:** State employees are not permitted to utilize this Contract for personal use and the Vendor is prohibited from permitting or facilitating the same.
28. **BANKRUPTCY:** In the event the Vendor files for bankruptcy protection, the State of West Virginia may deem this Contract null and void, and terminate this Contract without notice.

**29. CONFIDENTIALITY:** The Vendor agrees that it will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the Agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the Agency's policies, procedures, and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/default.html>.

**30. DISCLOSURE:** Vendor's response to the Solicitation and the resulting Contract are considered public documents and will be disclosed to the public in accordance with the laws, rules, and policies governing the West Virginia Purchasing Division. Those laws include, but are not limited to, the Freedom of Information Act found in West Virginia Code §§ 29B-1-1 et seq. and the competitive bidding laws found West Virginia Code §§ 5A-3-1 et seq., 5-22-1 et seq., and 5G-1-1 et seq.

If a Vendor considers any part of its bid to be exempt from public disclosure, Vendor must so indicate by specifically identifying the exempt information, identifying the exemption that applies, providing a detailed justification for the exemption, segregating the exempt information from the general bid information, and submitting the exempt information as part of its bid but in a segregated and clearly identifiable format. Failure to comply with the foregoing requirements will result in public disclosure of the Vendor's bid without further notice. A Vendor's act of marking all or nearly all of its bid as exempt is not sufficient to avoid disclosure and WILL NOT BE HONORED. Vendor's act of marking a bid or any part thereof as "confidential" or "proprietary" is not sufficient to avoid disclosure and WILL NOT BE HONORED. A legend or other statement indicating that all or substantially all of the bid is exempt from disclosure is not sufficient to avoid disclosure and WILL NOT BE HONORED. Additionally, pricing or cost information will not be considered exempt from disclosure and requests to withhold publication of pricing or cost information WILL NOT BE HONORED.

Vendor will be required to defend any claimed exemption for nondisclosure in the event of an administrative or judicial challenge to the State's nondisclosure. Vendor must indemnify the State for any costs incurred related to any exemptions claimed by Vendor. Any questions regarding the applicability of the various public records laws should be addressed to your own legal counsel prior to bid submission.

**31. LICENSING:** In accordance with West Virginia Code of State Rules §148-1-6.1.7, Vendor must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agency or political subdivision. Upon request, the Vendor must provide all necessary releases to obtain information to enable the Purchasing Division Director or the Agency to verify that the Vendor is licensed and in good standing with the above entities.



**32. ANTITRUST:** In submitting a bid to, signing a contract with, or accepting a Award Document from any agency of the State of West Virginia, the Vendor agrees to convey, sell, assign, or transfer to the State of West Virginia all rights, title, and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the State of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to Vendor.

**33. VENDOR CERTIFICATIONS:** By signing its bid or entering into this Contract, Vendor certifies (1) that its bid or offer was made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership, person or entity submitting a bid or offer for the same material, supplies, equipment or services; (2) that its bid or offer is in all respects fair and without collusion or fraud; (3) that this Contract is accepted or entered into without any prior understanding, agreement, or connection to any other entity that could be considered a violation of law; and (4) that it has reviewed this Solicitation in its entirety; understands the requirements, terms and conditions, and other information contained herein. Vendor's signature on its bid or offer also affirms that neither it nor its representatives have any interest, nor shall acquire any interest, direct or indirect, which would compromise the performance of its services hereunder. Any such interests shall be promptly presented in detail to the Agency. The individual signing this bid or offer on behalf of Vendor certifies that he or she is authorized by the Vendor to execute this bid or offer or any documents related thereto on Vendor's behalf; that he or she is authorized to bind the Vendor in a contractual relationship; and that, to the best of his or her knowledge, the Vendor has properly registered with any State agency that may require registration.

**34. PURCHASING CARD ACCEPTANCE:** The State of West Virginia currently utilizes a Purchasing Card program, administered under contract by a banking institution, to process payment for goods and services. The Vendor must accept the State of West Virginia's Purchasing Card for payment of all orders under this Contract unless the box below is checked.

☐ Vendor is not required to accept the State of West Virginia's Purchasing Card as payment for all goods and services.

**35. VENDOR RELATIONSHIP:** The relationship of the Vendor to the State shall be that of an independent contractor and no principal-agent relationship or employer-employee relationship is contemplated or created by this Contract. The Vendor as an independent contractor is solely liable for the acts and omissions of its employees and agents. Vendor shall be responsible for selecting, supervising, and compensating any and all individuals employed pursuant to the terms of this Solicitation and resulting contract. Neither the Vendor, nor any employees or subcontractors of the Vendor, shall be deemed to be employees of the State for any purpose whatsoever. Vendor shall be exclusively responsible for payment of employees and contractors for all wages and salaries, taxes, withholding payments, penalties, fees, fringe benefits, professional liability insurance premiums, contributions to insurance and pension, or other deferred compensation plans, including but

not limited to, Workers' Compensation and Social Security obligations, licensing fees, etc. and the filing of all necessary documents, forms, and returns pertinent to all of the foregoing. Vendor shall hold harmless the State, and shall provide the State and Agency with a defense against any and all claims including, but not limited to, the foregoing payments, withholdings, contributions, taxes, Social Security taxes, and employer income tax returns.

- 36. INDEMNIFICATION:** The Vendor agrees to indemnify, defend, and hold harmless the State and the Agency, their officers, and employees from and against: (1) Any claims or losses for services rendered by any subcontractor, person, or firm performing or supplying services, materials, or supplies in connection with the performance of the Contract; (2) Any claims or losses resulting to any person or entity injured or damaged by the Vendor, its officers, employees, or subcontractors by the publication, translation, reproduction, delivery, performance, use, or disposition of any data used under the Contract in a manner not authorized by the Contract, or by Federal or State statutes or regulations; and (3) Any failure of the Vendor, its officers, employees, or subcontractors to observe State and Federal laws including, but not limited to, labor and wage and hour laws.
- 37. PURCHASING AFFIDAVIT:** In accordance with West Virginia Code § 5A-3-10a, all Vendors are required to sign, notarize, and submit the Purchasing Affidavit stating that neither the Vendor nor a related party owe a debt to the State in excess of \$1,000. The affidavit must be submitted prior to award, but should be submitted with the Vendor's bid. A copy of the Purchasing Affidavit is included herewith.
- 38. ADDITIONAL AGENCY AND LOCAL GOVERNMENT USE:** This Contract may be utilized by and extends to other agencies, spending units, and political subdivisions of the State of West Virginia; county, municipal, and other local government bodies; and school districts ("Other Government Entities"). This Contract shall be extended to the aforementioned Other Government Entities on the same prices, terms, and conditions as those offered and agreed to in this Contract. If the Vendor does not wish to extend the prices, terms, and conditions of its bid and subsequent contract to the Other Government Entities, the Vendor must clearly indicate such refusal in its bid. A refusal to extend this Contract to the Other Government Entities shall not impact or influence the award of this Contract in any manner.
- 39. CONFLICT OF INTEREST:** Vendor, its officers or members or employees, shall not presently have or acquire an interest, direct or indirect, which would conflict with or compromise the performance of its obligations hereunder. Vendor shall periodically inquire of its officers, members and employees to ensure that a conflict of interest does not arise. Any conflict of interest discovered shall be promptly presented in detail to the Agency.
- 40. REPORTS:** Vendor shall provide the Agency and/or the Purchasing Division with the following reports identified by a checked box below:
- ☒ Such reports as the Agency and/or the Purchasing Division may request. Requested reports may include, but are not limited to, quantities purchased, agencies utilizing the contract, total contract expenditures by agency, etc.



- ☐ Quarterly reports detailing the total quantity of purchases in units and dollars, along with a listing of purchases by agency. Quarterly reports should be delivered to the Purchasing Division via email at [purchasing.requisitions@wv.gov](mailto:purchasing.requisitions@wv.gov).

**41. BACKGROUND CHECK:** In accordance with W. Va. Code § 15-2D-3, the Director of the Division of Protective Services shall require any service provider whose employees are regularly employed on the grounds or in the buildings of the Capitol complex or who have access to sensitive or critical information to submit to a fingerprint-based state and federal background inquiry through the state repository. The service provider is responsible for any costs associated with the fingerprint-based state and federal background inquiry.

After the contract for such services has been approved, but before any such employees are permitted to be on the grounds or in the buildings of the Capitol complex or have access to sensitive or critical information, the service provider shall submit a list of all persons who will be physically present and working at the Capitol complex to the Director of the Division of Protective Services for purposes of verifying compliance with this provision.

The State reserves the right to prohibit a service provider's employees from accessing sensitive or critical information or to be present at the Capitol complex based upon results addressed from a criminal background check.

Service providers should contact the West Virginia Division of Protective Services by phone at (304) 558-9911 for more information.

**42. PREFERENCE FOR USE OF DOMESTIC STEEL PRODUCTS:** Except when authorized by the Director of the Purchasing Division pursuant to W. Va. Code § 5A-3-56, no contractor may use or supply steel products for a State Contract Project other than those steel products made in the United States. A contractor who uses steel products in violation of this section may be subject to civil penalties pursuant to W. Va. Code § 5A-3-56. As used in this section:

- a. "State Contract Project" means any erection or construction of, or any addition to, alteration of or other improvement to any building or structure, including, but not limited to, roads or highways, or the installation of any heating or cooling or ventilating plants or other equipment, or the supply of and materials for such projects, pursuant to a contract with the State of West Virginia for which bids were solicited on or after June 6, 2001.
- b. "Steel Products" means products rolled, formed, shaped, drawn, extruded, forged, cast, fabricated or otherwise similarly processed, or processed by a combination of two or more or such operations, from steel made by the open hearth, basic oxygen, electric furnace, Bessemer or other steel making process. The Purchasing Division Director may, in writing, authorize the use of foreign steel products if:
- c. The cost for each contract item used does not exceed one tenth of one percent (.1%) of the total contract cost or two thousand five hundred dollars (\$2,500.00), whichever is greater.

For the purposes of this section, the cost is the value of the steel product as delivered to the project; or

- d. The Director of the Purchasing Division determines that specified steel materials are not produced in the United States in sufficient quantity or otherwise are not reasonably available to meet contract requirements.

**43. PREFERENCE FOR USE OF DOMESTIC ALUMINUM, GLASS, AND STEEL:** In Accordance with W. Va. Code § 5-19-1 et seq., and W. Va. CSR § 148-10-1 et seq., for every contract or subcontract, subject to the limitations contained herein, for the construction, reconstruction, alteration, repair, improvement or maintenance of public works or for the purchase of any item of machinery or equipment to be used at sites of public works, only domestic aluminum, glass or steel products shall be supplied unless the spending officer determines, in writing, after the receipt of offers or bids, (1) that the cost of domestic aluminum, glass or steel products is unreasonable or inconsistent with the public interest of the State of West Virginia, (2) that domestic aluminum, glass or steel products are not produced in sufficient quantities to meet the contract requirements, or (3) the available domestic aluminum, glass, or steel do not meet the contract specifications. This provision only applies to public works contracts awarded in an amount more than fifty thousand dollars (\$50,000) or public works contracts that require more than ten thousand pounds of steel products.

The cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than twenty percent (20%) of the bid or offered price for foreign made aluminum, glass, or steel products. If the domestic aluminum, glass or steel products to be supplied or produced in a "substantial labor surplus area", as defined by the United States Department of Labor, the cost of domestic aluminum, glass, or steel products may be unreasonable if the cost is more than thirty percent (30%) of the bid or offered price for foreign made aluminum, glass, or steel products.

This preference shall be applied to an item of machinery or equipment, as indicated above, when the item is a single unit of equipment or machinery manufactured primarily of aluminum, glass or steel, is part of a public works contract and has the sole purpose or of being a permanent part of a single public works project. This provision does not apply to equipment or machinery purchased by a spending unit for use by that spending unit and not as part of a single public works project.

All bids and offers including domestic aluminum, glass or steel products that exceed bid or offer prices including foreign aluminum, glass or steel products after application of the preferences provided in this provision may be reduced to a price equal to or lower than the lowest bid or offer price for foreign aluminum, glass or steel products plus the applicable preference. If the reduced bid or offer prices are made in writing and supersede the prior bid or offer prices, all bids or offers, including the reduced bid or offer prices, will be reevaluated in accordance with this rule.

### CERTIFICATION AND SIGNATURE PAGE

By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; understand the requirements, terms and conditions, and other information contained herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

FAIRPLAIN TRACTOR SALES, INC  
(Company)

Carroll G Fisher CARROLL G FISHER, PRESIDENT  
(Authorized Signature) (Representative Name, Title)

304-372-9875 304-372-2713 01/23/2015  
(Phone Number) (Fax Number) (Date)

REQUEST FOR QUOTATION  
[ CRQS HOP1500000003 UTILITY VEHICLE]

---

**SPECIFICATIONS**

1. **PURPOSE AND SCOPE:** The West Virginia Purchasing Division is soliciting bids on behalf of WVDHHR/BHHR/Hopemont Hospital to establish a contract for the one time purchase of 2014 KUBOTA RTV 1100-E3-UV or equal.
2. **DEFINITIONS:** The terms listed below shall have the meanings assigned to them below. Additional definitions can be found in section 2 of the General Terms and Conditions.

2.1 **“Contract Item”** means Utility Vehicle as more fully described by these specifications.

2.2 **“Pricing Page”** means the pages, contained in wvOASIS or attached, upon which Vendor should list its proposed price for the Contract Items.

2.3 **“Solicitation”** means the official notice of an opportunity to supply the State with goods or services that is published by the Purchasing Division.

3. **GENERAL REQUIREMENTS:**

3.1 **Mandatory Contract Item Requirements:** Contract Item must meet or exceed the mandatory requirements listed below.

3.1.1 2014 KUBOTA RTV 1100-E3-UV or equal.

3.1.1.1 Utility vehicle must have 3 cylinders, 4 cycle diesel, 24.8 horsepower engine @ 3000 RPM or equal.

3.1.1.2 Utility vehicle must have commercial V-blade part#V4291 or equal.

3.1.1.3 Utility vehicle must have quick hitch and hydraulic control kit part#V4405 or equal.

3.1.1.4 Utility vehicle must have backup beeper part#V4232 or equal.

3.1.1.5 Utility vehicle must have strobe light part#V4218a or equal.

3.1.1.6 Utility vehicle must have rear work light part#V4283 or equal.

REQUEST FOR QUOTATION  
[ CRQS HOP1500000003 UTILITY VEHICLE]

---

3.1.1.7 Utility vehicle must have turn signal-hazard kit part#V4257 or equal

3.1.1.8 Utility vehicle must include tailgate delivery.

**4. CONTRACT AWARD:**

**4.1 Contract Award:** The Contract is intended to provide Agencies with a purchase price for the Contract Items. The Contract shall be awarded to the Vendor that provides the Contract Items meeting the required specifications for the lowest overall total cost.

**4.2 Pricing Page:** Vendor should complete their bid by providing a Unit Price for the Commodity or Service Lines on the Request for Quotation. If responding to the Request for Quotation on paper, vendors should also provide a Total Price for each Commodity line by multiplying their bid Unit Price by the listed Quantity for each line. Vendors may also submit bids using the VSS/WV Oasis website and insert pricing on the commodity lines.

<https://prod-fin-vss.wvoasis.gov/webapp/prdvss11/AltSelfService> to submit online bids.

**5. PAYMENT:**

**5.1 Payment:** Vendor shall accept payment in accordance with the payment procedures of the State of West Virginia.

REQUEST FOR QUOTATION  
[ CRQS HOP1500000003 UTILITY VEHICLE]

---

**6. DELIVERY AND RETURN:**

**6.1 Shipment and Delivery:** Vendor shall ship the Contract Items immediately after being awarded this Contract and receiving a purchase order or notice to proceed. Vendor shall deliver the Contract Items within 45 working days after receiving a purchase order or notice to proceed. Contract Items must be delivered to Agency at Hopemont Hospital, Central Receiving, 150 Hopemont Drive, Terra Alta WV 26764.

**6.2 Late Delivery:** The Agency placing the order under this Contract must be notified in writing if the shipment of the Contract Items will be delayed for any reason. Any delay in delivery that could cause harm to an Agency will be grounds for cancellation of the Contract, and/or obtaining the Contract Items from a third party.

Any Agency seeking to obtain the Contract Items from a third party under this provision must first obtain approval of the Purchasing Division.

**6.3 Delivery Payment/Risk of Loss:** Vendor shall deliver the Contract Items F.O.B. destination to the Agency's location.

**6.4 Return of Unacceptable Items:** If the Agency deems the Contract Items to be unacceptable, the Contract Items shall be returned to Vendor at Vendor's expense and with no restocking charge. Vendor shall either make arrangements for the return within five (5) days of being notified that items are unacceptable, or permit the Agency to arrange for the return and reimburse Agency for delivery expenses. If the original packaging cannot be utilized for the return, Vendor will supply the Agency with appropriate return packaging upon request. All returns of unacceptable items shall be F.O.B. the Agency's location. The returned product shall either be replaced, or the Agency shall receive a full credit or refund for the purchase price, at the Agency's discretion.

**6.5 Return Due to Agency Error:** Items ordered in error by the Agency will be returned for credit within 30 days of receipt, F.O.B. Vendor's location. Vendor shall not charge a restocking fee if returned products are in a resalable condition. Items shall be deemed to be in a resalable condition if they are unused and in the original packaging. Any restocking fee for items not in a resalable condition shall be the lower of the Vendor's customary restocking fee or 5% of the total invoiced value of the returned items.

**7 VENDOR DEFAULT:**

REQUEST FOR QUOTATION  
[ CRQS HOP1500000003 UTILITY VEHICLE]

---

7.1 The following shall be considered a vendor default under this Contract.

- 7.1.1 Failure to provide Contract Items in accordance with the requirements contained herein.
- 7.1.2 Failure to comply with other specifications and requirements contained herein.
- 7.1.3 Failure to comply with any laws, rules, and ordinances applicable to the Contract Services provided under this Contract.
- 7.1.4 Failure to remedy deficient performance upon request.

7.2 The following remedies shall be available to Agency upon default.

- 7.2.1 Immediate cancellation of the Contract.
- 7.2.2 Immediate cancellation of one or more release orders issued under this Contract.
- 7.2.3 Any other remedies available in law or equity.



# State of West Virginia

## VENDOR PREFERENCE CERTIFICATE

Certification and application\* is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Vendor Preference, if applicable.

**1. Application is made for 2.5% vendor preference for the reason checked:**

- ☐ Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
- ☒ Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
- ☐ Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or**,

**2. Application is made for 2.5% vendor preference for the reason checked:**

- ☒ Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,

**3. Application is made for 2.5% vendor preference for the reason checked:**

- ☐ Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,

**4. Application is made for 5% vendor preference for the reason checked:**

- ☒ Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or**,

**5. Application is made for 3.5% vendor preference who is a veteran for the reason checked:**

- ☒ Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or**,

**6. Application is made for 3.5% vendor preference who is a veteran for the reason checked:**

- ☐ Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

**7. Application is made for preference as a non-resident small, women- and minority-owned business, in accordance with West Virginia Code §5A-3-59 and West Virginia Code of State Rules.**

- ☐ Bidder has been or expects to be approved prior to contract award by the Purchasing Division as a certified small, women- and minority-owned business.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

**Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.**

Bidder: FAIRPLAIN TRACTOR SALES, INC

Signed: Carroll A. Fisher

Date: 01/23/2015

Title: PRESIDENT



STATE OF WEST VIRGINIA  
Purchasing Division**PURCHASING AFFIDAVIT**

**MANDATE:** Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

**EXCEPTION:** The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**DEFINITIONS:**

**"Debt"** means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

**"Employer default"** means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

**"Related party"** means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

**AFFIRMATION:** By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

**WITNESS THE FOLLOWING SIGNATURE:**Vendor's Name: FAIRPLAIN TRACTOR SALES, INCAuthorized Signature: *Carroll G. Fisher* Date: 01/23/2015State of WEST VIRGINIACounty of JACKSON, to-wit:Taken, subscribed, and sworn to before me this 23 day of January, 2015.My Commission expires Sept 26, 2021.

AFFIX SEAL HERE



NOTARY PUBLIC

*Terri Lee Hackney*  
Purchasing Affidavit (Revised 07/01/2012)



Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

State of West Virginia  
Request for Quotation

Proc Folder: 59515

Doc Description: ADDENDUM NO. 1 2014 KUBOTA RTV 1100-E3-UV or equal

Proc Type: Central Purchase Order

Date Issued	Solicitation Closes	Solicitation No	Version
2015-01-20	2015-01-29 13:30:00	CRFQ 0506 HOP1500000003	2

**BID RECEIVING LOCATION**

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV

25305

US

**VENDOR**

Vendor Name, Address and Telephone Number:

**FAIRPLAIN TRACTOR SALES**

**1169 RIPLEY RD**

**RIPLEY, WV 25271**

**304-372-9875**

**FOR INFORMATION CONTACT THE BUYER**

Gregory Clay

(304) 558-2566

gregory.c.clay@wv.gov

Signature X

FEIN #

DATE

1/23/15

All offers subject to all terms and conditions contained in this solicitation

INVOICE TO	SHIP TO
PROCUREMENT OFFICER - 304-789-2411 HEALTH AND HUMAN RESOURCES HOPEMONT HOSPITAL ACCOUNTS PAYABLE 150 HOPEMONT DR TERRA ALTA WV26764-7728 US	PROCUREMENT OFFICER - 304-789-2411 HEALTH AND HUMAN RESOURCES HOPEMONT HOSPITAL CENTRAL RECEIVING 150 HOPEMONT DR TERRA ALTA WV 26764-7728 US

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	2014 KUBOTA RTV 1100-E3-UV or equal	1.00000	EA		\$27,675.00

Comm Code	Manufacturer	Specification	Model #
25101905	KUBOTA		RTV1100CW-A

**Extended Description :**

2014 KUBOTA RTV 1100-E3-UV or equal, detailed specification in documents and commodity section.

HOP1500000003	<b>Document Phase</b> <b>Final</b>	<b>Document Description</b> ADDENDUM NO. 1 2014 KUBOTA R TV 1100-E3-UV or equal	<b>Page 3</b> <b>of 3</b>
---------------	---------------------------------------	---	------------------------------

#### ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions

**ADDENDUM ACKNOWLEDGEMENT FORM**  
**SOLICITATION NO.: HOP1500000003**

**Instructions:** Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

**Acknowledgment:** I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

**Addendum Numbers Received:**

(Check the box next to each addendum received)

<input checked="" type="checkbox"/> Addendum No. 1	<input type="checkbox"/> Addendum No. 6
<input type="checkbox"/> Addendum No. 2	<input type="checkbox"/> Addendum No. 7
<input type="checkbox"/> Addendum No. 3	<input type="checkbox"/> Addendum No. 8
<input type="checkbox"/> Addendum No. 4	<input type="checkbox"/> Addendum No. 9
<input type="checkbox"/> Addendum No. 5	<input type="checkbox"/> Addendum No. 10

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

FAIRPLAIN TRACTOR SALES, INC

Company

Carroll M. Fisher

Authorized Signature

01/23/2015

Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.  
Revised 6/8/2012

SOLICITATION NUMBER: HOP1500000003

**Addendum Number: 1**

---

The purpose of this addendum is to modify the solicitation identified as ("Solicitation") to reflect the change(s) identified and described below.

**Applicable Addendum Category:**

- ☐ Modify bid opening date and time
- ☒ Modify specifications of product or service being sought
- ☒ Attachment of vendor questions and responses
- ☐ Attachment of pre-bid sign-in sheet
- ☐ Correction of error
- ☐ Other

**Description of Modification to Solicitation:**

ADDENDUM NO. 1

1) TO PROVIDE CLARIFICATION OF TECHNICAL QUESTIONS SUBMITTED, SUMMARY PAGE IS ATTACHED.

2) TO MODIFY SPECIFICATIONS TO INCLUDE 3.1.1.9.

NO OTHER CHANGES.

**Additional Documentation:** Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

**Terms and Conditions:**

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

**CRFQ 0506 HOP 1500000003-ADDENDUM#1**  
**UTILITY VEHICLE**

**Question #1:** In reviewing the bid specs for above bid request. I have noticed that you are requesting bids on a Kubota 2014 RTV 1100 and attachments. The current model for 2014 would be an RTV X1100 and attachments that you have listed will not fit on this new model. We will be quoting the new model and current attachments. However, I would like to know if the above machine should be quoted with a bed liner and what tires are to be installed? Tire options ATV or Worksite.


**Answer:** We are not asking for a bed liner and the tires are to be ATV tires.

**Question #2:** I have also noticed that you have listed a V4405 Quick hitch. The model V4405 is a Cargo box salt spreader. I just want to make sure that this is just a typographical error on the model number for the quick hitch which should be a V4289, or do you want a quote on a Salt Spreader?

**Answer:** 3.1.1.3 Utility vehicle must have quick hitch and hydraulic control kit part#V4405 or equal should read: 3.1.1.3 Utility vehicle must have quick hitch and hydraulic control kit part #V4289 or equal.

We do want the salt box spreader, that's where #V4405 comes in; there will be an additional required item added.

3.1.1.9 Utility vehicle must have Cargo Box Spreader part#V4405 or equal.

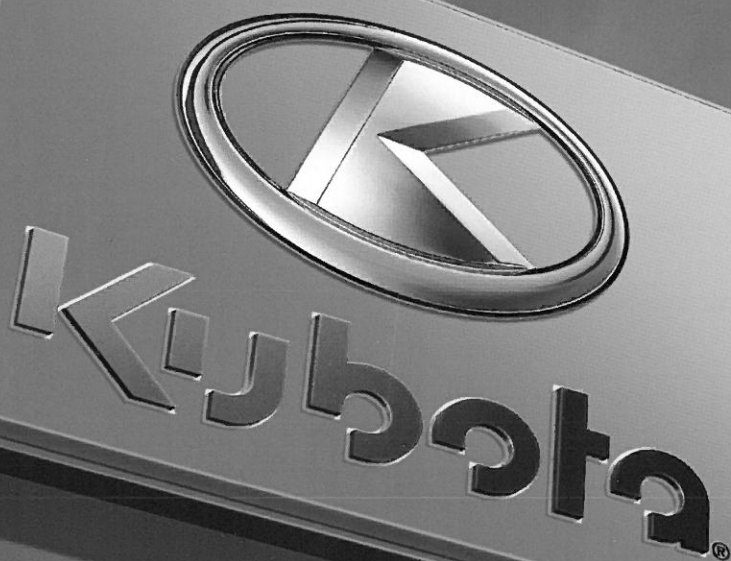





Kubota Tractor Corporation is an independent U.S. corporation affiliated with Kubota Corporation, Japan, specializing in high-performance and durable heavy machinery. Kubota-branded equipment offered in the U.S. includes a complete line of tractors up to 118 PTO horsepower, performance-matched implements, compact and power utility construction equipment, consumer lawn and garden equipment, commercial turf products and utility vehicles.

Kubota equipment is serviced and sold through a nationwide network of more than 1,100 authorized dealers supported by the company's corporate headquarters in Torrance, California, as well as four division offices and warehouses in California, Texas, Ohio and Georgia.

For over 40 years, Kubota has been committed to providing durable and reliable machinery to residential, commercial and industrial operators throughout the United States. Building on this tradition, we are pleased to introduce this year's cutting-edge products and innovations.

In 2014, Kubota is introducing the RTV-X900 and RTV-X1120 next generation utility vehicles and the brand new RTV-X1120D. This series of powerful RTVs provides the performance and comfort to tackle the toughest jobs.

Superior cutting performance, easy operability and maximum comfort make the new Z700 Zero-Turn Mower Series the choice for lawn care professionals. The new F-Series combines greater power, efficiency and cleaner emissions to set a new standard for professional front-mount mowers.

The new Standard L-Series and MX-Series tractors feature more power and cleaner emissions. These rugged workhorses come equipped with a bold new look and an economical price.

An entire new line of Hay Tools is ready to work, including the tough and reliable new Disc Mower Series built for maximum cutting performance. The new Rotary Tedder and Rake Series provides all the strength and dependability you have come to expect from a Kubota. And the new VS Spreader Series offers a unique pendulum design for ultimate accuracy in a variety of applications.

While this brochure will give you an overview of our entire product line, including recent innovations and additions, we encourage you to visit our website at [www.kubota.com](http://www.kubota.com) and find your nearest Kubota dealer to see firsthand why Kubota stands for quality, innovation and value.





## TABLE OF CONTENTS

### UTILITY VEHICLES

RTV400Ci	2
RTV500	4
RTV-X900	6
RTV-X1100C	8
RTV-X1120D	10
RTV-1140CPX	12

### RESIDENTIAL MOWERS

T Series	16
GR Series	18
Z100 Series	20

### COMMERCIAL MOWERS

Z700 Series	22
Z200 Series	24
Z300 Series	26
F Series	30

### SUB-COMPACT TRACTORS

BX70 Series	32
BX25D	34

### COMPACT TRACTORS

B Series	36
L Series	42
Grand L60 Series	44

### LOADER/LANDSCAPER TRACTORS

Loaders/Landscapers	48
---------------------	----

### STANDARD UTILITY AG

MX4800, MX5200, MX5640, M7040	50
M6060, M7060	52
M8560, M9960	54

### UTILITY/SPECIALTY AG

Narrow Models	56
M9960, M108S-Low Profile Models	58
M96SHDM Mudder	60
M8540 Power Krawler-Narrow Cab	62

### MID-SIZE AG TRACTORS

M108S	64
M100GX, M110GX, M126GX, M135GX/S	66

### HAY TOOLS

Disc Mowers	68
Rotary Tedder and Rake	70

### SPREADERS

VS Series	72
-----------	----

### CONSTRUCTION EQUIPMENT

SVL Compact Track Loaders	74
Standard Tail Swing Excavators	76
Zero and Tight Tail Swing Excavators	80
Wheel Loaders	82
Kubota Services	84



## RTV Series

RTV400Ci

The new gas-powered, 4WD RTV400Ci provides the response and reliability you need to get the job done.

- Features a robust, heavy-duty platform, electronic fuel injection (EFI) and an advanced Continuously Variable Transmission with inertial clutch (CVT Plus) for excellent response and reliability
- The CVT Plus provides dynamic braking to help maintain control during descents with engine-assisted deceleration
- Incorporates a high-revving 16 horsepower air-cooled, single-cylinder gasoline engine developed to meet Kubota's stringent performance specifications and durability requirements
- Ergonomic, well-placed controls, contoured bench seat and obstacle-free leg room provides operator comfort
- Standard ROPS meets or exceeds applicable SAE and OSHA requirements
- Standard metal cargo box with 9.0 cu. ft., 441 lbs. load capacity
- Standard front and rear 2" hitch receiver
- Available in Kubota orange or camouflage
- 4WD with 2WD selection

## RTV Series

## RTV400Ci Orange

## RTV400Ci Camouflage\*

Engine Type (Kubota)	1-cylinder OHC, air-cooled, EFI gas	1-cylinder OHC, air-cooled, EFI gas
Horsepower (gross)	16	16
Transmission	CVT Plus	CVT Plus
Brakes (front/rear)	Dry disc brake	Dry disc brake
Fuel Capacity (gal.)	5.2	5.2
Op. Weight (lbs.)	1257 with HDWS tire 1246 with ATV tire	1257 with HDWS tire 1246 with ATV tire
Towing Capacity (lbs.)	1102	1102
Cargo Bed Capacity (lbs.)	441	441
Overall Height	72"	72"
Ground Clearance (front/rear axle)	8.1"/6.9"	8.1"/6.9"
Width	54.7"	54.7"
Color	Orange	Camouflage

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

## RTV400Ci Orange

## RTV400Ci Camouflage

Speedometer	Optional	Optional
Steel Front Guard	Optional	Optional
Headrest	Optional	Optional
Cab Systems	Optional	Optional

\* Realtree® Hardwoods Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.







## RTV Series

RTV500

Whether you're camping, hunting or just working around your property, the RTV500 gets you where you want to go and fits into a full-size pickup bed truck for convenient hauling.

- Equipped with a reliable, quiet and efficient Kubota 2-cylinder, liquid-cooled, 15.8 horsepower gasoline EFI engine
- Exclusive and innovative Variable Hydro Transmission (VHT Plus) delivers outstanding traction and power with a top speed of 25 mph, 1102 lbs. towing capacity with standard front and rear 2" hitch receiver
- 4WD with 2WD selection
- Ergonomic controls, a comfortable seat and low operator platform increase operator comfort
- Designed to fit into a full-size, long bed pickup truck for easy loading and transporting
- Standard OSHA+SAE Rollover Protection System
- Standard metal cargo box with 9.0 cu. ft., 441 lbs. load capacity

## RTV Series

	RTV500 Orange	RTV500 Camouflage*
<b>Engine Type (Kubota)</b>	2-cylinder, gasoline, liquid-cooled	2-cylinder, gasoline, liquid-cooled
<b>Horsepower (gross)</b>	15.8	15.8
<b>Transmission</b>	Variable Hydro Transmission (VHT Plus)	Variable Hydro Transmission (VHT Plus)
<b>Brakes (front/rear)</b>	Dry disc brake	Dry disc brake
<b>Fuel Capacity (gal.)</b>	5.3	5.3
<b>Op. Weight (lbs.)</b>	1278	1278
<b>Overall Height</b>	72"	72"
<b>Ground Clearance (front/rear axle)</b>	8.1"/6.8"	8.1"/6.8"
<b>Width</b>	54.7"	54.7"
<b>Color</b>	Orange	Camouflage

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	RTV500 Orange	RTV500 Camouflage
<b>Speedometer</b>	Optional	Optional
<b>Steel Front Guard</b>	Optional	Optional
<b>Headrest</b>	Optional	Optional

\* Realtree® Hardwoods Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.





## RTV Series

RTV-X900

The rough and tough RTV-X900 raises the bar on comfort, convenience and performance.

- 3-cylinder, liquid-cooled, 21.6 HP Kubota diesel engine has a well-earned reputation for dependable performance even in the harshest terrains
- VHT-X (Variable Hydraulic Transmission) offers a wide torque band and a large oil cooler that boost performance and durability
- Two-speed in-line shift allows you to shift less often and maintain better control
- High-rigidity frame provides the structural strength to take years of punishment from heavy loads and rough terrain
- Front and rear independent suspension ensures an exceptional ride and Extra Duty IRS (Independent Rear Suspension) sets a new standard for durability
- VHT-X transmission's dynamic braking feature provides greater control when stopping or when traveling down long inclines


## RTV Series

	RTV-X900 General Purpose Kubota Orange	RTV-X900 Worksite Kubota Orange	RTV-X900 Worksite Realtree® AP Camo*
Engine Type (Kubota)	3-cylinder, diesel	3-cylinder, diesel	3-cylinder, diesel
Horsepower (gross)	21.6	21.6	21.6
Transmission VHT Plus 2	Variable Hydro Transmission	Variable Hydro Transmission	Variable Hydro Transmission
Power Steering	Hydrostatic Power	Hydrostatic Power	Hydrostatic Power
Brakes (front/rear)	Wet disc brake	Wet disc brake	Wet disc brake
Fuel Capacity (gal.)	7.9	7.9	7.9
Op. Weight (lbs.)	1907	1973	1973
Overall Height	79.5"	79.5"	79.5"
Ground Clearance	10.4"	10.4"	10.4"
Width	63.2"	63.2"	63.2"
Body Color	Orange	Orange	Camouflage

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	RTV-X900 General Purpose Kubota Orange	RTV-X900 Worksite Kubota Orange	RTV-X900 Worksite Realtree® AP Camo*
Hand Throttle	Optional	Optional	Optional
Hydraulic Bed Lift	Optional	Standard	Standard
Front Guard	Simple, center only	Center and bumper	Center and bumper

\* Realtree® AP Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.

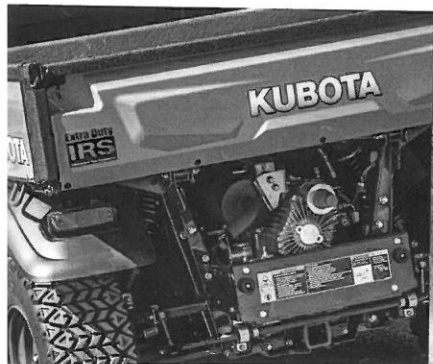





## RTV Series

### RTV-X1100C

The RTV-X1100C is the best all-weather, all-comfort, all-the-time driving experience on the trail.

- 24.8 HP Kubota diesel engine with a top speed of 25 mph provides plenty of power and acceleration for jobs that require extra power
- Premium Grand Cab built around a unibody chassis frame that's virtually airtight, soundproof and rattle-free for a smooth, quiet, comfortable ride
- Powerful and efficient air conditioner, heater and defroster ensure the inside temperature is just right no matter what Mother Nature dishes out
- VHT-X (Variable Hydraulic Transmission) offers a wide torque band and a large oil cooler that boost performance and durability
- Front and rear independent suspension ensures an exceptional ride and Extra Duty IRS (Independent Rear Suspension) sets a new standard for durability
- VHT-X transmission's dynamic braking feature provides greater control when stopping or when traveling down long inclines

## RTV Series


	RTV-X1100C Kubota Orange	RTV-X1100C Realtree® AP Camo*
Engine Type (Kubota)	3-cylinder, diesel	3-cylinder, diesel
Horsepower (gross)	24.8	24.8
Transmission	Variable Hydro Transmission	Variable Hydro Transmission
Power Steering	Hydrostatic Power	Hydrostatic Power
Brakes (front/rear)	Wet disc brake	Wet disc brake
Fuel Capacity (gal.)	7.9	7.9
Op. Weight (lbs.)	2370	2370
Overall Height	82.3"	82.3"
Ground Clearance (rear axle)	10.4"	10.4"
Width	65.4"	65.4"
Color	Orange	Camouflage*
Interior Noise @ Max RPM	83	83

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	RTV-X1100C Kubota Orange	RTV-X1100C Realtree® AP Camo*
Hand Throttle	Standard	Standard
Hydraulic Bed Lift	Standard	Standard
Front Guard	Center, bumper and lens	Center, bumper and lens

\* Realtree® AP Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.



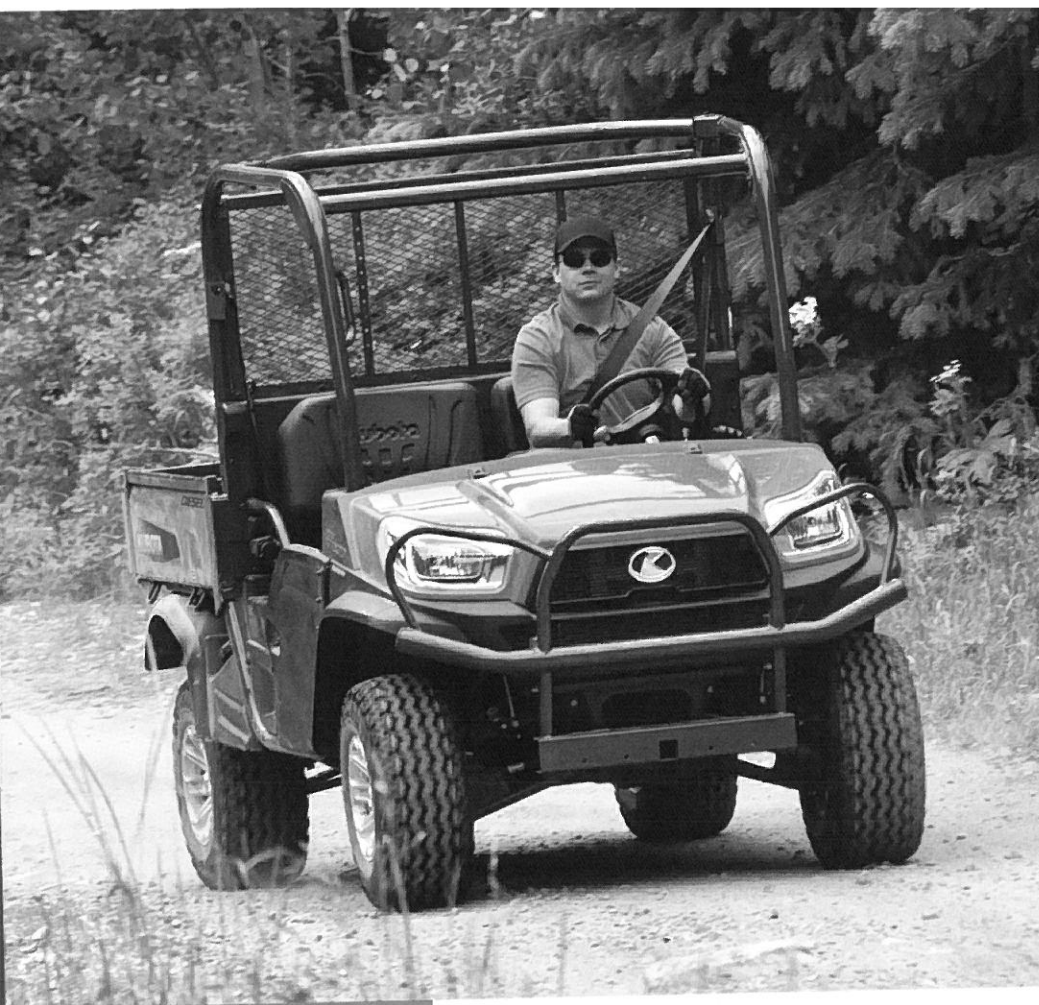

## RTV Series

RTV-X1120D

The RTV-X1120D offers more power, more comfort, more style, more everything – for a whole new level of performance

- 24.8 HP Kubota diesel engine with a top speed of 29 mph provides plenty of power and acceleration for jobs that require extra power
- VHT-X (Variable Hydraulic Transmission) offers a wide torque band and a large oil cooler that boost performance and durability
- High-rigidity frame provides the structural strength to take years of punishment from heavy loads and rough terrain
- Front and rear independent suspension ensures an exceptional ride and Extra Duty IRS (Independent Rear Suspension) sets a new standard for durability
- VHT-X transmission's dynamic braking feature provides greater control when stopping or when traveling down long inclines
- Half doors on the driver and passenger sides help keep out the dirt, brush, and other external objects, while letting you enter and exit with ease
- The distinctive styling of sculpted, blue-tinted, halogen headlights offer plenty of light in dim driving conditions

## RTV Series

## RTV-X1120D Kubota Orange

## RTV-X1120D Realtree® AP Camo\*

Engine Type (Kubota)	3-cylinder, diesel	3-cylinder, diesel
Horsepower (gross)	24.8	24.8
Transmission	Variable Hydro Transmission	Variable Hydro Transmission
Power Steering	Hydrostatic Power	Hydrostatic Power
Brakes (front/rear)	Wet disc brake	Wet disc brake
Fuel Capacity (gal.)	7.9	7.9
Op. Weight (lbs.)	2061	2061
Overall Height	79.5"	79.5"
Ground Clearance (rear axle)	10.4"	10.4"
Width	63.2"	63.2"
Color	Orange	Camouflage*

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

## RTV-X1120D Kubota Orange

## RTV-X1120D Realtree® AP Camo\*

Hand Throttle	Optional	Optional
Hydraulic Bed Lift	Standard	Standard
Front Guard	Center, bumper and lens	Center, bumper and lens

\* Realtree® AP Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.







## RTV Series

RTV-1140CPX

The RTV1140CPX's unique design allows you to change easily from hauling cargo in the hydraulic dumping bed to carrying friends and family with a second row of seating.

- Powerful Kubota 3-cylinder, liquid-cooled, 4-cycle, 24.8 horsepower diesel engines
- Exclusive Kubota 3-range VHT Plus (Variable Hydro Transmission) with top speed of 25 mph and 1300 lbs. towing capacity. Standard 4WD.
- Standard steel front guard to protect engine and vital parts
- Quick, responsive hydrostatic power steering
- OSHA+SAE Rollover Protection System for both front and back rows
- Longer wheelbase ensures a smooth ride and stability without sacrificing maneuverability
- Wet disc brakes for smooth, consistent braking and excellent durability
- Independent front and semi-independent rear suspensions and a long wheelbase deliver a smooth, stable ride
- Standard 18.4 cu. ft./11.7 cu. ft. (two-seat/four-seat configurations) cargo bed with hydraulic lift capability in either configuration (up to 1102 lbs. capacity)
- Available in Kubota orange or Realtree® Hardwoods Camouflage\*

## RTV Series

	RTV-1140CPX Kubota Orange	RTV-1140CPX Camouflage*
Engine Type (Kubota)	3-cylinder, diesel	3-cylinder, diesel
Horsepower (gross)	24.8	24.8
Transmission	Variable Hydro Transmission (VHT Plus)	Variable Hydro Transmission (VHT Plus)
Power Steering	Standard	Standard
Brakes (front/rear)	Wet disc brake	Wet disc brake
Fuel Capacity (gal.)	7.9	7.9
Op. Weight (lbs.)	2360	2360
Overall Height	79.5"	79.5"
Ground Clearance (rear axle)	7.5"	7.5"
Width	60.8"	60.8"
Color	Orange	Camouflage*

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	RTV-1140CPX Kubota Orange	RTV-1140CPX Camouflage*
Hydraulic Bed Lift	Standard	Standard
Steel Front Guard	Standard	Standard
Speedometer	Standard	Standard

\* Realtree® Hardwoods Camo is a registered trademark of Jordan Outdoor Enterprises, Ltd.













## T Series

T1880 | T2080 | T2380

With powerful 18, 20 and 23 horsepower engines and Kubota's Infinity Deck, the T-Series makes even big jobs more enjoyable.

- Equipped with powerful 18, 20 and 23 horsepower gasoline engines
- All models are equipped with hydrostatic transmissions (HST) for precise control
- Kubota's 3-in-1 "Infinity Deck" with counter rotating figure-eight grass flow allows the operator to easily change between side-discharge, mulching and grass catching modes
- 42" or 48" suspended mower decks deliver the highest quality cut
- Mower height adjusts from 1" to 4" right from the operator's seat with simple dial-type setting
- Kubota's "Cushion Ride" Suspension System\* provides a smooth ride
- Full-flat operator platform, high-back seat\* and cruise control\* help make any job more enjoyable
- Easy steering and low noise levels for operator comfort
- Compatible with a full line of performance-matched, quick-attach front implements
- Equipped with Kubota's Reverse Awareness System (KRA) for additional safety when mowing in reverse
- Premium lawn tractors, competitively priced

\*Standard on the T2080 and T2380

## T Series

	T1880	T2080	T2380
<b>Engine Type (Kubota)</b>	OHV, air-cooled, gasoline, 1-cylinder	OHV, air-cooled, gasoline, 2-cylinder, V-twin	OHV, air-cooled, gasoline, 2-cylinder, V-twin
<b>Horsepower (gross)</b>	18	20	23
<b>Transmission</b>	Hydrostatic	Hydrostatic	Hydrostatic
<b>Fuel Capacity (gal.)</b>	4	4	4
<b>Speeds (mph) (forward)</b>	0–5.6	0–5.6	0–5.6
<b>Length</b>	72.8"	72.8"	72.8"
<b>Deck Size</b>	42"	42"	48"
<b>Width (w/mower)</b>	54.8"	54.8"	60.8"
<b>Weight (lbs.)</b>	617 w/42"	617 w/42"	628 w/48"
<b>Interior Noise @ Max RPM</b>	85	85	85

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	T1880	T2080	T2380
<b>Grass Catcher (blower not necessary)</b>	2 bag, 7 bushel Total Capacity	2 bag, 7 bushel Total Capacity	2 bag, 7 bushel Total Capacity
<b>Front Push Blade (48")</b>	T2722	T2722	T2722
<b>Two-stage Snowblower (46")</b>	T2724	T2724	T2724

## MID-MOUNT MOWER SPECIFICATIONS

	RCK42-LT20	RCK42-LT20	RCK48-LT23
<b>Number of Blades</b>	2	2	2
<b>Cutting Width</b>	42"	42"	48"
<b>Cutting Height</b>	1–4"	1–4"	1–4"
<b>Height Adj. Increments</b>	1/4"	1/4"	1/4"
<b>Lift System</b>	Manual w/Gas Assist	Manual w/Gas Assist	Manual w/Gas Assist





## GR Series

GR2020 | GR2120

With Kubota's revolutionary Glide Steer, All Wheel Drive plus tight turning, even difficult mowing conditions are now effortless.

- Your choice of a 3-cylinder, 21 horsepower Kubota diesel engine or a 2-cylinder, 20 horsepower gasoline engine
- Glide Steer provides excellent turning maneuverability with front wheels that turn up to 70 degrees while preventing turf damage
- All Wheel Drive (AWD) characteristics provide outstanding traction needed for mowing on rolling terrain
- Versatile HST transmission is controlled by a single foot pedal for a smooth and comfortable ride
- Shaft driven mower, transmission and PTO offer smooth, virtually trouble-free operations
- Cruise control, full-flat operator platform and a comfortable high-back, adjustable suspension seat increase operator comfort
- 5" deep, 48-inch and 54-inch contoured design mower decks produce professional results every time
- Equipped with Kubota's Reverse Awareness System (KRA) for additional safety when mowing in reverse
- Variety of implements available for year-round versatility, including a grass catcher, two-stage snowblower, front blade and mulching kit

## GR Series

## GR2020

## GR2120

<b>Engine Type (Kubota)</b>	Air-cooled, gasoline, 2-cylinder	Liquid-cooled, diesel, 3-cylinder
<b>Horsepower (gross)</b>	20	21
<b>Transmission</b>	Hydrostatic	Hydrostatic
<b>Steering System</b>	Glide Steer, hydrostatic power steering	Glide Steer, hydrostatic power steering
<b>Deck Size</b>	48"	48"/54"
<b>Overall Length</b>	77.2"	77.2"
<b>Overall Width (w/mower)</b>	61" (w/48")	66.9" (w/54")
<b>Weight (lbs.) (w/mower)</b>	871 (w/48")	970 (w/54")

## MOWER SPECIFICATIONS

## RCK48-GR

## RCK54-GR

<b>Number of Blades</b>	3	3
<b>Cutting Width</b>	48"	54"
<b>Cutting Height</b>	1-4"	1-4"
<b>Height Adj. Increments</b>	1/4"	1/4"
<b>Lift System</b>	Hydraulic	Hydraulic

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

## GR2020

## GR2120

<b>Front Blade</b>	48"	48"
<b>Grass Catcher</b>	3 bag, 10 bushel capacity	3 bag, 10 bushel capacity
<b>Mulching Kit</b>	Optional	Optional
<b>Snowblower</b>	2-stage 46"	2-stage 46"
<b>Rear Weight Bracket</b>	Optional	Optional
<b>Suitcase Weights</b>	Optional	Optional







## Z100 Series

Z122E | Z121S | Z125E | Z125S

The ultimate residential zero turn mower combining style, comfort and performance.

- Standard on the S-model and optional on the E-model, bright LED headlights allow mowing to continue in low light conditions
- The K-Lift (mechanical one push deck lift pedal) makes adjusting the cutting height simple
- Kommander Z100 series is covered by a comprehensive 4 year/300 hour factory warranty
- S-models are equipped with full seat suspension
- Zero-turn steering for superior navigation
- A 10 gauge steel, welded mower deck provides professional-level cutting performance for homeowners
- Wide-tread tires provide better traction and weight distribution to help protect lawns

**Z100 Series**

	<b>Z122E-48</b>	<b>Z121S-48</b>	<b>Z125E-54</b>	<b>Z125S-54</b>
<b>Engine Type</b>	Gasoline, air-cooled V-Twin	Gasoline, air-cooled V-Twin	Gasoline, air-cooled V-Twin	Gasoline, air-cooled V-Twin
<b>Engine Model</b>	Briggs & Stratton Professional Series	KOHLER Courage Professional Series	Briggs & Stratton Cyclonic Commercial Turf	KOHLER Courage Professional Series
<b>Max Power @ 3600RPM hp (kW)</b>	22	21	25	25
<b>Displacement (cc)</b>	724	725	724	725
<b>Transmission</b>	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle
<b>Fuel Capacity (gal.)</b>	4.3	4.3	4.3	4.3
<b>Speeds (mph) (forward/reverse)</b>	0-8/0-4	0-8/0-4	0-8/0-4	0-8/0-4
<b>Overall Length</b>	76.4"	76.4"	76.4"	76.4"
<b>Overall Width (w/mower chute)</b>	52"	52"	57"	57"
<b>Overall Height</b>	65"	65"	65"	65"
<b>Wheel Base</b>	45.5"	45.5"	45.5"	45.5"
<b>Weight (lbs.)</b>	726	749	749	771

**MOWER SPECIFICATIONS**

	<b>Z122E-48</b>	<b>Z121S-48</b>	<b>Z125E-54</b>	<b>Z125S-54</b>
<b>Mower Deck Type</b>	Welded, side discharge	Welded, side discharge	Welded, side discharge	Welded, side discharge
<b>Mower Deck Width / Lift System</b>	48" / Mechanical, Foot Pedal	48" / Mechanical, Foot Pedal	54" / Mechanical, Foot Pedal	54" / Mechanical, Foot Pedal
<b>Cutting Height</b>	1-4.5"	1-4.5"	1-4.5"	1-4.5"
<b>Height Adj. Increments</b>	1/4"	1/4"	1/4"	1/4"
<b>Mower Deck Depth</b>	5"	5"	5"	5"
<b>Mower Deck Width</b>	48"	48"	54"	54"

**ADDITIONAL IMPLEMENTS AND ACCESSORIES**

	<b>Z100 Series</b>
<b>Grass Catcher 6 Bushel Capacity</b>	Optional
<b>Mulching Kit</b>	Optional
<b>Seat Suspension Kit</b>	Optional
<b>LED Working Light Kit</b>	Optional



## Z700 Series

Z723KH | Z724KH | Z725KH

The Z700 Zero-Turn Mower Series provides superior cutting performance, easy operability, and maximum comfort you can count on, day in and day out.

- 6-inch deep mower deck and anti-scalp rollers provide fast, clean, superior grass-cutting performance
- Fuel tank located under the seat and large-diameter, wide tread rear tires create a low center of gravity for outstanding stability
- Dual Parker® transmission with an integrated pump and motor designed for increased efficiency and simplified maintenance
- Ergonomically positioned instrument panel for easy operation of the controls, hour meter and other indicators
- Operator's seat offers a thick cushion, 19.6" high seatback, adjustable armrests and slide adjustment for ideal seating position and maximum comfort
- Easy two-step quick dial cutting height adjustment system with a turn of a dial and press of the pedal

## Z700 Series

	Z723KH-48	Z724KH-54	Z725KH-60
<b>Engine Type</b>	Pro 4-cycle, gasoline, OHV, cast iron cylinder liners, aluminum block	Pro 4-cycle, gasoline, OHV, cast iron cylinder liners, aluminum block	Pro 4-cycle, gasoline, OHV, cast iron cylinder liners, aluminum block
<b>Engine Model</b>	KOHLER Command PRO® GH680V	KOHLER Command PRO® GH730V	KOHLER Command PRO® GH740V
<b>Horsepower (gross)</b>	22.5	23.5	25
<b>Displacement (cc)</b>	694	747	747
<b>Transmission</b>	Parker Torqpack™ GT14 Integrated Hydrostatic	Parker Torqpack™ GT14 Integrated Hydrostatic	Parker Torqpack™ GT14 Integrated Hydrostatic
<b>Fuel Capacity (gal.)</b>	11.6	11.6	11.6
<b>Speeds (mph) (forward/reverse)</b>	0–11.2/0–5.6	0–11.2/0–5.6	0–11.2/0–5.6
<b>Overall Length</b>	83.9"	83.9"	83.9"
<b>Overall Width (w/mower chute)</b>	61.3"	67.3"	73.8"
<b>Overall Height (w/ROPS Upright)</b>	70.8"	70.8"	70.8"
<b>Wheel Base</b>	50.9"	50.9"	50.9"
<b>Weight (lbs.) (w/mower)</b>	1168	1182	1213

## MOWER SPECIFICATIONS

	RCK48P-723Z	RCK54P-724Z	RCK60P-725Z
<b>Mower Deck Type</b>	Welded, side discharge	Welded, side discharge	Welded, side discharge
<b>Mower Deck Width / Lift System</b>	48" / Mechanical, Foot Pedal	54" / Mechanical, Foot Pedal	60" / Mechanical, Foot Pedal
<b>Cutting Height</b>	1–5"	1–5"	1–5"
<b>Height Adj. Increments</b>	1/4"	1/4"	1/4"
<b>Mower Deck Depth</b>	6"	6"	6"

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	Z723KH-48	Z724KH-54	Z725KH-60
<b>Grass Catcher</b>	Optional, 10 Bushels	Optional, 10 Bushels	Optional, 11 Bushels
<b>Mulching Kit</b>	Optional	Optional	Optional
<b>Seat Suspension Kit</b>	Optional	Optional	Optional
<b>Operator Controlled Discharge Chute</b>	Optional	Optional	Optional
<b>Towing Hitch</b>	Optional	Optional	Optional
<b>LED Working Light Kit</b>	Optional	Optional	Optional
<b>Maintenance Lift Kit</b>	Optional	Optional	Optional





## Z200 Series

ZG222-48/S | ZG227 | ZD221

The professional-quality performance, exceptional comfort and outstanding reliability of the Z200-Series make it the ultimate mowing machine for both professionals and homeowners.

- Powered by durable 22 and 27 horsepower air-cooled Kubota gasoline engines and 21 horsepower liquid-cooled Kubota diesel engines
- Zero-Turn steering for superior navigation
- Reliable, ultra-smooth, hydrostatic transmission offers superior durability and performance
- Heavy-duty Pro Commercial Mower Deck features a unique baffling system that improves airflow to discharge grass clippings and an anti-overflow system for professional looking results (not available on the ZG222-48S)
- Optional Mulching System provides a beautiful finish, even in thick grass
- Foot-operated hydraulic deck lift system for easy adjustment
- Spacious platform, comfortable and supportive seating and an easy-to-reach cup holder for operator comfort
- Operator-friendly instrument panel puts everything within close reach
- Convenient mower, HST and engine access for hassle-free maintenance
- Foldable ROPS standard

## Z200 Series

	ZG222-48S/48	ZG227-54/60	ZD221-48/54
<b>Engine Type</b>	Kubota Air-Cooled, Gasoline, 2-cylinder	Kubota Air-Cooled, Gasoline, 2-cylinder	Kubota Liquid-Cooled, Gasoline, 3-cylinder
<b>Engine Model</b>	Kubota KGZ770-M3	Kubota KGZ770-M2	Kubota D782
<b>Horsepower (gross)</b>	22 @ 3600RPM	27 @ 3600RPM	21 @ 3200RPM
<b>Displacement (cc)</b>	768	768	778
<b>Transmission</b>	2-HST w/gear reduction	2-HST w/gear reduction	2-HST w/gear reduction
<b>Fuel Capacity (gal.)</b>	7.1	7.1	6.1
<b>Speeds (mph) (forward/reverse)</b>	0-9/0-5	0-9/0-5	0-9/0-5
<b>Overall Length</b>	82.5"	82.5"/83.7"	83.9"
<b>Overall Width (w/mower chute)</b>	61"	67.3"/75.2"	61.1"/67.3"
<b>Overall Height (w/ROPS Upright)</b>	69.9"	69.9"	69.9"
<b>Overall Height (w/ROPS folded)</b>	52.8"	52.8"	52.8"
<b>Weight (lbs.) (w/mower)</b>	1102/1168	1190/1235	1224/1245

## MOWER SPECIFICATIONS

	ZG222-48S/48	ZG227-54/60	ZD221-48/54
<b>Mower Deck Type</b>	Stamped (48S)/Welded (48), side discharge	Welded, side discharge	Welded, side discharge
<b>Mower Deck Width / Lift System</b>	48" / Hydraulic	54 or 60" / Hydraulic	48 or 54" / Hydraulic
<b>Cutting Height</b>	1-5"	1-5"	1-5"
<b>Height Adj. Increments</b>	1/4"	1/4"	1/4"
<b>Mower Deck Depth</b>	5" (48S), 6" (48)	6"	6"

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	Z200 Series
<b>Canopy Sunshade</b>	Optional
<b>Grass Catcher</b>	Optional
<b>Mulching Kit</b>	Optional
<b>Working Light Kit</b>	Optional



## Z300 Series

Built for power, durability and performance, the Z300-Series features deep mower decks for exceptional cutting performance.

- Z300 mowers are available with durable Kubota air-cooled or liquid cooled gasoline, liquid-cooled diesel, or liquid propane gas (LPG) engines ranging from 21-32 gross horsepower
- Durable HST Transmission optimizes performance to achieve maximum results
- Pro Commercial Deck is a superior deep mower deck that ensures excellent cutting performance
- Anti-scalp swivel rollers can rotate a full 360 degrees preventing unsightly turf damage (60" & 72" ZD300 deck models)
- Large capacity, dual fuel tanks on Z300-Series models
- Foot-controlled, hydraulic deck lift and PTO wet disc clutch make tough jobs easy
- Unique maintenance lift system allows easy mower deck access (optional on ZG300 models)
- Radiator screen is integrated into hood for better sealing performance and reduced likelihood of grass clippings finding their way into the radiator (diesel models)
- Oscillating or fixed front axle option with integral maintenance lift system available on ZD300-Series models
- Tie down for securing and loading onto flatbed truck or trailer for convenient transportation
- "Flat-free" front caster tires are standard with Z300 and enable mowing operation without worrisome flat-tire downtime

## Z300 Series

ZG327P/RP | ZG332P | ZP330P

ZG327P-60  
ZG327RP-60R

## ZG332P-60/72

## ZP330P-60/72

<b>Engine Type</b>	Kubota Air-Cooled, Gasoline, 2-cylinder	Kubota Air-Cooled, Gasoline, 2-cylinder	Kubota Liquid-Cooled, Propane, 3-cylinder
<b>Engine Model</b>	Kubota KGZ770	Kubota WG972	Kubota WG972
<b>Horsepower (gross)</b>	27 @ 3600RPM	32.5 @ 3600RPM	31 @ 3600RPM
<b>Displacement (cc)</b>	768	962	962
<b>Transmission</b>	2-HST w/gear reduction	2-HST w/gear reduction	2-HST w/gear reduction
<b>Fuel Capacity (gal.)</b>	12.7	12.7	Dual 33.5 lbs. LPG
<b>Speeds (mph) (forward/reverse)</b>	0-10.6/0-5.3	0-10.6/0-5.3	0-10.6/0-5.3
<b>Overall Length</b>	87.8"	87.4"	91.7"/95"
<b>Overall Width (w/mower)</b>	75.2"	75.2"/87.6"	75.2"/87.6"
<b>Overall Height</b>	75.4"	75.4"	75.4"
<b>Weight (lbs.)</b>	1565	1651/1763	1876/1940

## MOWER SPECIFICATIONS

<b>Mower Deck Type</b>	Welded; Side or Rear discharge	Welded; Side discharge	Welded; Side discharge
<b>Mower Deck Width / Lift System</b>	60" / Hydraulic	60" or 72" / Hydraulic	60" or 72" / Hydraulic
<b>Mower Height/Increment</b>	1-5" / 1/4"	1-5" / 1/4"	1-5" / 1/4"
<b>Mower Deck Depth</b>	6.5"	6.5"	6.5"

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

## Z300 Series

<b>Canopy Sunshade</b>	Optional
<b>Front Utility Blade</b>	Optional
<b>Grass Catcher*</b>	Optional
<b>Mulching Kit</b>	Optional
<b>Spark Arrester</b>	Optional
<b>Striping Kit</b>	Optional
<b>Working Light Kit</b>	Optional

\*Side discharge decks only. Not available for ZD326H.







## Z300 Series

ZD323 | ZD326S/P/RP

	ZD323-60	ZD326S-60 ZD326P-60 ZD326RP-60R
<b>Engine Type</b>	Kubota Liquid-Cooled, Diesel, 3-cylinder	Kubota Liquid-Cooled, Diesel, 3-cylinder
<b>Engine Model</b>	Kubota D902	Kubota D1005
<b>Horsepower (gross)</b>	23 @ 3200RPM	26 @ 3200RPM
<b>Displacement (cc)</b>	898	1001
<b>Transmission</b>	2-HST w/gear reduction	2-HST w/gear reduction
<b>Fuel Capacity (gal.)</b>	12.7	12.9
<b>Speeds (mph) (forward/reverse)</b>	0-9.3/0-5.2	0-9.3/0-5.2 (S) 0-10.6/0-5.2 (P/RP)
<b>Overall Length</b>	87.4"	87.4"
<b>Overall Width (w/mower)</b>	72.8"	75.2"
<b>Overall Height</b>	75.4"	75.4"
<b>Weight (lbs.)</b>	1645	1658
<b>MOWER SPECIFICATIONS</b>		
<b>Mower Deck Type</b>	Welded; Side discharge	Welded; Side or rear discharge
<b>Mower Deck Width / Lift System</b>	60" / Hydraulic	60" / Hydraulic
<b>Mower Height/Increment</b>	1-5" / 1/4"	1-5" / 1/4"
<b>Mower Deck Depth</b>	6.5"	6.5"



## Z300 Series

ZD326HL | ZD331LP

### ZD326HL-72

Kubota Liquid-Cooled,  
Diesel, 3-cylinder

Kubota D1105

26 @ 3000RPM

1123

2-HST w/gear reduction

12.9

0-10.6/0-5.3

91.9"

87.6"

75.4"

1711

### ZD331LP-72

Kubota Liquid-Cooled,  
Diesel, 3-cylinder

Kubota D1305

31 @ 3000RPM

1261

2-HST w/gear reduction

12.9

0-10.6/0-5.3

91.9"

87.6"

75.4"

1770

### MOWER SPECIFICATIONS

Mower Deck Type

Welded; Side discharge

Welded; Side discharge

Mower Deck Width / Lift System

72" / Hydraulic

72" / Hydraulic

Mower Height/Increment

1-5" / 1/4"

1-5" / 1/4"

Mower Deck Depth

6"

6.5"



## F Series

F2690E | F2690 | F3990

The F-Series sets a new standard for professional front-mount mowers with greater power, precision, efficiency and cleaner emissions.

- Kubota diesel engines provide faster, more efficient job performance with high torque rise that allows you to power through tall or wet grass
- The F3990 offers the highest-ever horsepower among all Kubota front-mount mowers
- 6.0" deep side discharge deck design lets tall grass stand up so it can be cut more efficiently with a cleaner appearance
- Large operator's platform, deluxe high-back seat with four separate adjustments and operator levers for maximum driving comfort and convenience
- Hydrostatic power steering reduces operator fatigue and makes it easier to mow around trees and other obstacles
- EPA compliance with Tier 4 emissions regulations, enhanced combustion efficiency, low vibration and noise levels and reduced fuel costs



## F Series

	F2690E	F2690	F3990
<b>Engine Type</b>	Kubota Liquid-Cooled, Diesel, 3-cylinder	Kubota Liquid-Cooled, Diesel, 3-cylinder	Kubota Liquid-Cooled, Diesel, 4-cylinder
<b>Engine Model</b>	Kubota D1105	Kubota D1105	Kubota V1505T-IDI+DPF
<b>Horsepower (gross)</b>	25.5	25.5	39
<b>Displacement (cc)</b>	1123	1123	1498
<b>Transmission</b>	Hydrostatic, 2-range	Hydrostatic, 2-range	Hydrostatic, 2-range
<b>Fuel Capacity (gal.)</b>	16.1	16.1	16.1
<b>Speeds (mph) (forward/reverse)</b>	0-12/0-6.2	0-12.5/0-6.8	0-12.5/0-6.8
<b>Overall Length</b>	96.5"	96.5"	98.9"
<b>Overall Width</b>	48.8"	53.9"	53.9"
<b>Overall Height</b>	77.8"	78.1"	78.1"
<b>Min. Ground Clearance</b>	6.9"	7.3"	7.3"
<b>Weight (lbs.)</b>	1594	1606	1716

## MOWER SPECIFICATIONS

	RCK60P-F39	RCK72P-F39	RCK60R-F36	RCK72R-F36
<b>Mower Deck Type</b>	Welded, side discharge	Welded, side discharge	Welded, rear discharge	Welded, rear discharge
<b>Cutting Width</b>	60"	72"	60"	72"
<b>Cutting Height</b>	1-5"	1-5"	1-5"	1-5"
<b>Mower Deck Depth</b>	6"	6"	5.5"	5.5"

## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	F2690E	F2690	F3990
<b>Hard Cab Enclosure</b>	Optional	Optional	Optional
<b>Cab Heater</b>	Optional	Optional	Optional
<b>Grass Catcher</b>	Optional	Optional	Optional
<b>12 Bushel, Low-dump Style</b>			
<b>Debris Blower</b>	Optional	Optional	Optional
<b>60" Front Blade</b>	Optional	Optional	Optional
<b>60" Rotary Sweeper</b>	Optional	Optional	Optional
<b>Snow Blower</b>	Optional	Optional	Optional
<b>Mulching Kit</b>	Optional	Optional	Optional
<b>100" Flex Finishing Mower Deck</b>	N/A	N/A	Optional





## BX70 Series

BX1870-1 | BX2370-1 | BX2670-1

The BX Series sub-compact tractors combine the power, versatility and comfort to tackle the toughest jobs on your property.

- Equipped with Kubota's powerful 3-cylinder, 18, 23 and 25.5 horsepower, liquid-cooled diesel engines
- Unique 4WD offers greater traction during demanding jobs
- Available front 4-position control valve allows easy control of front loader and other front-mounted implements on selected models
- Simple one-lever loader operation
- Best-in-class selection of mid-mount mowers in 48", 54", and 60" sizes.
- Mower and front loader can be attached at the same time, allowing for easy switching between mowing and lifting
- Deluxe, reclining high-back seat model on BX2370-1 and BX2670-1, spacious operator deck, cruise control\*, hydrostatic power steering and easy-to-reach controls for maximum comfort
- Compatible with a comprehensive line of performance-matched implements
- BX70-Series features a versatile Category I, 3-point hitch with at least 670 lbs. lift capacity to tackle the toughest jobs
- Foldable ROPS standard on all models for safety
- Durable metal hood and fenders

\* Optional on the BX1870

## BX70 Series

	BX1870-1	BX2370-1	BX2670-1
<b>Engine Type</b>	Kubota, liquid-cooled, diesel, 3-cylinder	Kubota, liquid-cooled, diesel, 3-cylinder	Kubota, liquid-cooled, diesel, 3-cylinder
<b>Horsepower (gross)</b>	18	23	25.5
<b>Horsepower (PTO)</b>	13.7	17.7	19.5
<b>Displacement (cu. in.)</b>	43.9	54.8	61.1
<b>Length (w/3-point)</b>	92.1"	95.5"	95.5"
<b>Width (min. tread)</b>	44.5"	44.5"	44.5"
<b>Height (with ROPS)</b>	86.2"	87.2"	87.2"
<b>Wheelbase</b>	52.8"	55.1"	55.1"
<b>Ground Clearance (front axle)</b>	9"	8.7"	8.7"
<b>Speeds (mph) (front/reverse)</b>	0-7.8/0-5.9	0-8.4/0-6.5	0-8.4/0-6.5
<b>Transmission</b>	HST, High-Low Gear Shift (2 forward/reverse)	HST, High-Low Gear Shift (2 forward/reverse)	HST, High-Low Gear Shift (2 forward/reverse)
<b>Tractor Weight (lbs.)</b>	1345	1410	1466

### COMPATIBLE IMPLEMENTS

<b>Front Loader</b>	LA203A	LA243A	LA243A
<b>Mid-Mount Mower</b>	RCK48-18BX RCK48P18BX RCK54-23BX	RCK54-23BX RCK54P23BX RCK60B23BX	RCK54-23BX RCK54P23BX RCK60B23BX

### ADDITIONAL IMPLEMENTS

<b>Front Blade (width)</b>	54", 60"	54", 60"	54", 60"
<b>Snowblower (front)</b>	50" 2-stage	50" 2-stage	50" 2-stage
<b>Snowblower (rear)</b>	51" 2-stage	51" 2-stage	51" 2-stage
<b>Sweeper (max. width)</b>	47"	47"	47"
<b>Grass Catcher</b>	9.5 Bushel	9.5 Bushel	9.5 Bushel
<b>Front Quick-Attach System</b>	Optional	Optional	Optional
<b>Pallet Forks/Front Blade</b>	Optional	Optional	Optional
<b>Ballast Box</b>	Optional	Optional	Optional

### FRONT LOADER SPECIFICATIONS

	LA203A	LA243A
<b>Minimum Lift Height</b>	71"	71.3"
<b>Lift Capacity (lbs.) (pivot pin)</b>	613	745
<b>Bucket Width</b>	48"	48"
<b>Bucket Capacity (cu. ft.)</b>	4.2	4.9

### MID-MOUNT MOWER SPECIFICATIONS

	RCK48-18BX	RCK48P18BX*	RCK54-23BX	RCK54P23BX*	RCK60B23BX
<b>Discharge</b>	Side	Side	Side	Side	Side
<b>Number of Blades</b>	3	3	3	3	3
<b>Cutting Width</b>	48"	48"	54"	54"	60"
<b>Cutting Height</b>	1-4"	1-4"	1-4"	1-4"	1-4"

\*Deep Deck



## BX25D

The amazingly versatile BX25D Series delivers exceptional performance in a tough, compact tractor that is built to work as hard you do.

- Equipped with a powerful 23 horsepower Kubota diesel engine
- Intelligently integrated backhoe and loader come standard
- Easy loader and backhoe attach/detach system for added convenience
- Reversible deluxe, reclining seat allows for versatile operation
- Backhoe features improved digging power (bucket 1936 lbs./dipper 1171 lbs.) and 6-foot digging depth
- Sturdy and distinctive front grill guard protects the front end
- Backhoe offers a curved boom, more legroom, protected hoses and a 20 degree angle of departure, creating a high-performance excavation tool
- Foldable ROPS for safety and convenience
- Durable metal hood and fenders
- Category I, 3-point hitch (optional)

**BX25D-1**

<b>BX25D-1</b>	
<b>Engine Type</b>	Kubota, liquid-cooled, diesel, 3-cylinder
<b>Horsepower (gross)</b>	23
<b>Horsepower (PTO)</b>	17.7
<b>Displacement (cu. in.)</b>	54.8
<b>Length (w/3-point)</b>	95.5"
<b>Width (min. tread)</b>	44.5"
<b>Height (with ROPS)</b>	87.2"
<b>Wheelbase</b>	55.1"
<b>Ground Clearance (front axle)</b>	8.7"
<b>Speeds (mph) (front/reverse)</b>	0-8.4/0-6.5
<b>Transmission</b>	HST, High-Low Gear Shift (2 forward/reverse)
<b>Tractor Weight (lbs.)</b>	1587

**ADDITIONAL IMPLEMENTS**

<b>Front Blade</b>	54", 60"
<b>Snowblower (front)</b>	50"
<b>Snowblower (rear)</b>	51"
<b>Sweeper (max. width)</b>	47"
<b>Grass Catcher</b>	9.5 Bushel
<b>Front Quick-Attach System</b>	
<b>Pallet Forks</b>	32"
<b>Front Quick-Attach System</b>	60"
<b>Loader Blade</b>	

**MID-MOUNT MOWER SPECIFICATIONS**

\*Deep Deck

	<b>RCK54-23BX</b>	<b>RCK54P23BX*</b>	<b>RCK60B23BX</b>
<b>Discharge</b>	Side	Side	Side
<b>Number of Blades</b>	3	3	3
<b>Cutting Width</b>	54"	54"	60"
<b>Cutting Height</b>	1-4"	1-4"	1-4"

**BACKHOE SPECIFICATIONS**

	<b>BT602</b>
<b>Digging Depth</b>	6' 1"
<b>Loading Height</b>	5'
<b>Bucket Size</b>	8", 12"
<b>Cutting Height</b>	1-4"

**FRONT LOADER SPECIFICATIONS**

	<b>LA240A</b>
<b>Maximum Lift Height</b>	71.3"
<b>Lift Capacity (lbs.) pivot pin</b>	745
<b>Bucket Width</b>	48"
<b>Bucket Capacity Struck (cu. ft.)</b>	4.9





## B Series

B2320DT/HSD | B2620HSD | B2650HSD  
B3350HSD | B3350SUHSD

The B-Series Standard Compact Utility Tractors continue to deliver on their worldwide reputation for ruggedness, dependability, maneuverability and versatility.

- All B-Series models feature Indirect Injected 3- or 4-cylinder E-TVCS diesel engines for smooth running, high-torque and increased power, ranging from 17 to 27 PTO horsepower
- All B-Series tractors feature a semi-flat deck, which is longer and wider than previous models
- (B2320 and B2620) Slanted hood offers a clear view of front loader operations
- Category I, 3-point hitch extends versatility to a variety of rear implements
- B20 Models and B3350SUHSD standard tractor have a quarter inching valve for 3-point hitch. B2650HSD and B3350HSD have position control
- (B20 Models) Backlit dash panel features large numbers and a white background to help you easily keep track of vital tractor functions
- (B3350) Diesel Particulate Filter (DPF) is compliant with the latest Tier 4 Final emission regulations
- B2650HSD and B3350HSD offer an adjustable parallel link suspension seat with standard armrest



## B Series

	B2320DT/HSD	B2620HSD	B2650HSD	B3350HSD	B3350SUHSD
<b>Engine Type</b> (Kubota E-TVCS, Liquid-Cooled, Diesel)	3-cylinder	3-cylinder	3-cylinder	4-cylinder	4-cylinder
<b>Horsepower (gross)</b>	23	26	26	33	33
<b>Horsepower (PTO)</b>	18/17	19	19.5	27	27
<b>Displacement (cu. in.)</b>	61.1	68.5	77	91.5	91.5
<b>Length (w/o 3-point)</b>	93.9"	95.1"	101.2"	101.2"	101.2"
<b>Width (min. tread)</b>	45.1"	49"	53.7"	53.7"	53.7"
<b>Wheelbase</b>	61.5"	61.5"	65.6"	65.6"	65.6"
<b>Ground Clearance</b>	12"	12.8"	14.6"	14.6"	14.6"
<b>Speeds (mph) (front/reverse) with standard tires</b>	0–11.2/0–5.4 0–11.7/0–9.4	0–12.6/0–10.1	0–11.9/0–9.5	0–14.3/0–11.4	0–14.3/0–11.4
<b>Transmission (HST)</b>	Gear 9 forward/ 3 reverse HST (3-Range)	HST (3-Range)	HST (3-Range)	HST (3-Range)	HST (3-Range)
<b>Tractor Weight (lbs.)</b>	1433/1477	1554	1786	1896	1874

## COMPATIBLE IMPLEMENTS

<b>Backhoe</b>	BH65	BH65	BH77	BH77	BH77
<b>Front Loader</b>	LA304FL	LA364FL	LA534A	LA534A	LA534A
<b>Mid-Mount Mower</b>	RCK54-29B RCK60-29B	RCK54-29B RCK60-29B	RCK60-30BA RC72-30B	RCK60-30BA RC72-30B	N/A

## ADDITIONAL IMPLEMENTS

<b>2-Lever Quick Coupler</b>	N/A	N/A	Optional	Optional	Optional
<b>Standard Bucket (Quick-attach/pin on)</b>	48"	50"	54"	54"	54"
<b>Light Material Bucket (Quick-attach/pin on)</b>	N/A	N/A	60"	60"	60"
<b>3rd Function Valve</b>	N/A	N/A	Optional	Optional	Optional
<b>Loader Mounted Mechanical Blade</b>	N/A	N/A	60", 72"	60", 72"	60", 72"
<b>Loader Mounted Hydraulic Blade</b>	N/A	N/A	60", 72"	60", 72"	60", 72"
<b>Quick Hitch – Front Blade</b>	60"	60"	60", 72"	60", 72"	60", 72"
<b>Snowblower (front)</b>	50", 51"	50", 51"	51", 63"	51", 63"	N/A
<b>Snowblower (rear)</b>	51"	51"	51", 64"	51", 64"	51", 64"
<b>Sweeper</b>	47"/60"	47"/60"	60"	60"	N/A
<b>Ballast Box</b>	Optional	Optional	Optional	Optional	Optional
<b>Grass Catcher (capacity)</b>	3 bag, 9.75 bushel	3 bag, 9.75 bushel	3 bag, 9.75 bushel	3 bag, 9.75 bushel	N/A



### BACKHOE SPECIFICATIONS

	BH65 (B2320DT/HSD, B2620HSD)	BH77 (B2650HSD, B3350HSD, B3350SUHSD)
Digging Depth (max.)	80.1"	92.5"
Loading Height	64.5"	66.7"
Bucket Sizes	10", 12", 16"	10", 12", 16", 24"
Thumb	Optional	Optional

### FRONT LOADER SPECIFICATIONS

	LA304FL	LA364FL	LA534A
Maximum Lift Height @ Pivot Pin	74"	78.6"	84.6"
Lift Capacity @ Pivot Pin (lbs.)	772	952	1146
Maximum Height to Bucket Pivot Pin	74"	78.6"	84.6"

### MID-MOUNT MOWER SPECIFICATIONS

	RCK54-29B	RCK60-29B
Mounting Method	Suspended	Suspended
Cutting Width	54"	60"
Cutting Height	1-5"	1-5"

### MID-MOUNT MOWER SPECIFICATIONS

	RCK60-30BA	RC72-30B
Type	Side Discharge	Side Discharge
Number of Blades	3	3
Blade Length	20.6"	24.6"
Mounting Method	Floating	Floating
Cutting Width	60"	72"
Cutting Height	1.5-4"	1.5-4"
Adjustment of Cutting Height	Gauge Wheel	Gauge Wheel
Weight (approx. lbs.)	374	463







## B Series

B2650HSDC | B3350HSDC

With deluxe features, the Premier B2650 and B3350 create the top of the B-Series lineup and fit the bill for a wide range of applications.

- Premium quality design with a slanted hood and wide fenders
- Indirect injection E-TVCS 3- or 4-cylinder diesel engines for smooth running, high-torque and increased power, ranging from 19.5 to 27 PTO horsepower
- More powerful HST for increased efficiency and more powerful operation
- Hydrostatic power steering for nimble handling and fatigue reduction
- Convenient mechanical cruise control engaged with simple sliding hand control
- (B3350) Diesel Particulate Filter (DPF) is compliant with Tier 4 Final Emission regulations
- The B2650HSDC and B3350HSDC feature an all-season, all-weather cab with air conditioning and heat, high ceilings, front work lights, rear defogger, rear wipers and arm rest
- Easy-Step tilt steering wheel for more comfortable driving position
- The B2650 and B3350 offer 26 and 33 gross engine horsepower respectively
- Category I, 3-point hitch telescoping lower link arms extend versatility to a variety of rear implements
- Hydraulic independent PTO provides non-stop implement operation
- Loader valve included with tractor

## B Series

	B2650HSDC	B3350HSDC
Engine Type (Kubota, liquid-cooled, diesel)	Indirect injection E-TVCS 3-cylinder	Indirect injection E-TVCS 4-cylinder
Horsepower (gross)	26	33
Horsepower (PTO)	19.5	27
Displacement (cu. in.)	77	91.5
Length (w/3-point)	103.9"	103.9"
Width (min. tread)	53.7"	53.7"
Wheelbase	65.6"	65.6"
Ground Clearance	14.6"	14.6"
Speeds (mph) (front/reverse)	0–11.8/0–8.9	0–13.6/0–10.3
Transmission (HST)	3-range	3-range
Tractor Weight (lbs.)	2293	2447
EPA Emissions	Tier 4 Final	Tier 4 Final

### COMPATIBLE IMPLEMENTS

Backhoe	BH77	BH77
Front Loader	LA534A	LA534A
Mid-Mount Mower	RCK60-30BA RC72-30B	RCK60-30BA RC72-30B

### ADDITIONAL IMPLEMENTS

2-Lever Quick Coupler	Optional	Optional
Standard Bucket (Quick-attach/pin on)	54"	54"
Light Material Bucket (Quick-attach/pin on)	60"	60"
3rd Function Valve	Optional	Optional
Loader Mounted Mechanical Blade	60", 72"	60", 72"
Loader Mounted Hydraulic Blade	60", 72"	60", 72"
Quick Hitch – Front Blade	60", 72"	60", 72"
Snowblower (front, rear)	51", 63" / 51", 64"	51", 63" / 51", 64"
Sweeper	60"	60"
Ballast Box	Optional	Optional
Grass Catcher (capacity)	3 bag, 9.75 bushel	3 bag, 9.75 bushel

### FRONT LOADER SPECIFICATIONS

	LA534A		BH77
Maximum Lift Height @ Pivot Pin	84.6"	Digging Depth (max.)	92.5"
Lift Capacity @ Pivot Pin (lbs.)	1146	Loading Height	66.7"
Maximum Height		Bucket Sizes	10", 12", 16", 24"
Rod Indicator	Standard	Thumb	Optional
3rd Function Valve	Optional		
Mechanical 2-Lever Quick Coupler	Optional		





## L Series

L3301F/DT/HST | L3901F/DT/HST | L4701F/DT/HST

The L-Series Tractors provide more power, cleaner emissions and all the features you need to get the job done right.

- Kubota diesel engines provide outstanding horsepower and more fuel-efficiency with Common Rail System (CRS) and electronic controlled direct fuel injection
- Kubota diesel engines comply with the latest Tier 4 Final emission regulations
- New Synchro-Shuttle Transmission delivers smooth operation with 4 main-shift speeds and 2 range-shift speeds (Hi/Low) for a total of 8 forward and 8 reverse speeds
- Hydrostatic Transmission (HST) designed for smoother performance, improved control and enhanced comfort while reducing shock, vibration and noise
- Suspension system and ergonomically designed contoured seat offer a high level of comfort to reduce fatigue during long workdays
- Dash panel features large gauges and digital LCD panel that displays vital information including engine error codes and parking brakes indicator

## L Series

	L3301F(2WD)/ DT(4WD)/HST(4WD)	L3901F(2WD)/ DT(4WD)/HST(4WD)	L4701F(2WD)/ DT(4WD)/HST(4WD)
<b>Engine Type</b>	Kubota, liquid-cooled, diesel, 4-cycle	Kubota, liquid-cooled, diesel, 4-cycle	Kubota, liquid-cooled, diesel, 4-cycle
<b>Horsepower (gross)</b>	33	37.5	47.3
<b>Horsepower (PTO)</b>	27.7/26.2	32.1/30.6	39.3/37.8
<b>Displacement (cu. in.)</b>	111.4	111.4	148.5
<b>Clutch</b>	Dry-type single stage	Dry-type dual stage/ Dry single	Dry-type single stage/ No clutch
<b>Width (min. tread)</b>	55.1"	55.1"	62.4"
<b>Wheelbase (2WD)</b>	63.3"	63.3"	72.8"
<b>Wheelbase (4WD)</b>	63.3"	63.3"	72.6"
<b>Ground Clearance</b>	13.6" 2WD/ 13.4" 4WD	13.6" 2WD/ 13.4" 4WD	15.2"
<b>Speeds (mph) (front/reverse)</b>	1.1–13.2/1.1–13.1 HST: 0–14.1/0–12.7	1.1–13.2/1.1–13.1 HST: 0–14.1/0–12.7	1.4–14.9/1.3–14.3 HST: 0–15.8/0–14.2
<b>Tractor Weight (lbs.)</b>	2557/2734/2778	2590/2767/2778	3219/3296/3307

## COMPATIBLE IMPLEMENTS

<b>Backhoe</b>	BH77	BH77	BH92
<b>Front Loader</b>	LA525/FL	LA525/FL	LA765

## ADDITIONAL IMPLEMENTS

<b>Rear Mount Snowblower</b>	64", 74"	64", 74"	64", 74"
<b>2-Lever Quick Coupler</b>	Optional	Optional	Standard
<b>Quick Attach Bucket</b>	66"	66"	72"
<b>Bale Spear Quick Attach</b>	Optional	Optional	Optional
<b>Pallet Fork Quick Attach</b>	Optional	Optional	Optional

## BACKHOE SPECIFICATIONS

	BH77	BH92
<b>Digging Depth (max.)</b>	92.5"	106.1"
<b>Loading Height</b>	66.7"	90.6"
<b>Bucket Sizes</b>	10", 12", 16", 24"	12", 16", 18", 24", 30", 36"
<b>Mechanical Thumb</b>	Optional	Optional
<b>Hydraulic Thumb</b>	N/A	Optional

## FRONT LOADER SPECIFICATIONS

	LA525FL	LA525	LA765
<b>Maximum Lift Height @ Pivot Pin</b>	94.3"	94.3"	105.2"
<b>Lift Capacity @ Pivot Pin (lbs.) 1500mm Height</b>	1490	1490	1684
<b>Bucket Width</b>	60"	66"	72"



## Grand L60 Series

L3560 | L4060 | L4760 | L5060 | L5460 | L6060

**Kubota's Grand L60-Series of high-performance tractors offer durability, comfort and versatility to commercial, residential and farm jobs.**

- Your choice of HST PLUS (Hydrostatic Transmission), GST (Glide Shift Transmission) or FST (Fully Synchronized Main and Shuttle Transmission) for the system that best meets your needs
- HST PLUS includes innovative features such as Hydro-Dual Speed (Hi-Lo), Auto-Throttle Advance and Response Control
- HST PLUS includes stall guard which is a load sensing feature to prevent engine stall by detecting a drop in engine RPM, and automatically regulates HST pump and motor activity for smooth operation and improved productivity
- Stall Guard PLUS functions like Stall Guard in PTO applications, preventing excessive drops in engine RPMs
- IntelliPanel™ monitors the status of engine and tractor functions to keep the operator informed
- Available Grand Cab™ provides more comforts, including air conditioning, ample head clearance, spacious floor area, deluxe seat, a tilt steering wheel, dual-level climate control and excellent visibility
- Heavy-duty front axle plus heavy-duty loaders with added strength and versatility
- New throttle up switch provides the power needed with one push. Engine speed increases as needed which enhances fuel economy when power is not needed

# Grand L60 Series

	L3560DT/ L3560GST(4WD)/ HST(4WD)/ HSTC(4WD,CAB)	L4060DT(4WD)/ GST(4WD)/HST(4WD)/ HSTC(4WD,CAB)	L4760GST(4WD)/ HST(4WD)/ HSTC(4WD,CAB)
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	Common Rail Direct Injection 3-cylinder	Common Rail Direct Injection 4-cylinder	Common Rail Direct Injection 4-cylinder
<b>Horsepower (gross)</b>	37	42	49
<b>Horsepower (net)</b>	35	40	47
<b>Horsepower (PTO)</b>	29.5 (DT/GST) 28 (HST/HSTC)	34 (DT/GST) 32.5 (HST/HSTC)	41 (GST) 39.5 (HST/HSTC)
<b>Displacement (cu. in.)</b>	114.4	148.5	148.5
<b>EPA Emissions</b>	Tier 4 Final	Tier 4 Final	Tier 4 Final
<b>3-point Hitch</b>	Category I	Category I	Category I
<b>Lift Capacity (lbs.) @ 24" behind lift point</b>	2650	2760	2760
<b>Transmission</b>	FST: 8F/8R GST: 12F/8R HST: PLUS (3 ranges)	FST: 8F/8R GST: 12F/8R HST: PLUS (3 ranges)	GST: 12F/8R HST: PLUS (3 ranges)
<b>Overall Length (w/o 3P)</b>	115"	121.5"	121.5"
<b>Overall Width (min. tread)</b>	59.8"	66.5"	66.5"
<b>Wheelbase</b>	71.1"	74.6"	74.6"
<b>Min. Ground Clearance</b>	13.5"	14.2"	14.2"
<b>Min. Turning Radius (w/brake, 4WD disengaged)</b>	8.9'	8.9'	8.9'
<b>Tractor Weight (lbs.) (with ROPS, cab)</b>	3351/3395/3494/3847	3384/3428/3527/4023	3472/3571/4068







	L5060GST(4WD)	L5460HST(4WD)/ HSTC(4WD,CAB)	L6060HST(4WD)/ HSTC(4WD,CAB)
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	Common Rail Direct Injection 4-cylinder/turbo	Common Rail Direct Injection 4-cylinder/turbo	Common Rail Direct Injection 4-cylinder/turbo
<b>Horsepower (gross)</b>	52	56	62
<b>Horsepower (net)</b>	50	54	60
<b>Horsepower (PTO)</b>	44	46.5	53
<b>Displacement (cu. in.)</b>	148.5	148.5	148.5
<b>EPA Emissions</b>	Tier 4 Final	Tier 4 Final	Tier 4 Final
<b>3-point Hitch</b>	Category I & II	Category I & II	Category I & II
<b>Lift Capacity (lbs.) @ 24" behind lift point</b>	2980	2980	2980
<b>Transmission</b>	12F/8R	PLUS (3 ranges)	PLUS (3 ranges)
<b>Overall Length (w/o 3P)</b>	126.4"	126.4"	126.4"
<b>Overall Width (min. tread)</b>	67.3"	67.3"	67.3"
<b>Wheelbase</b>	75.4"	75.4"	75.4"
<b>Min. Ground Clearance</b>	15.4"	15.2"	15.2"
<b>Min. Turning Radius (w/brake, 4WD disengaged)</b>	9.2'	9.2'	9.2'
<b>Tractor Weight (lbs.) (with ROPS, cab)</b>	3924	4023/4376	4023/4376



## ADDITIONAL IMPLEMENTS AND ACCESSORIES

	L3560	L4060	L4760	L5060	L5460	L6060
<b>Front Loader</b>	LA555/ LA805	LA805	LA1055	LA1055	LA1055	LA1055
<b>Mechanical 2-Lever Quick Coupler</b>	Std	Std	Std	Std	Std	Std
<b>Square Back Bucket</b>	L2256 (66")/ L2235A (72")	L2235A	L2235A	L2235A	L2235A	L2235A
<b>Heavy Duty Round Back Bucket</b>	— / L2296	L2296	L2296	L2296	L2296	L2296
<b>Light Material Bucket</b>	L2236	L2236	L2236	L2236	L2236	L2236
<b>4-in-1 Bucket</b>	L2244 (60")	L2244 L2245 (72")	L2245	L2245	L2245	L2245
<b>Pallet Fork Frame / Pallet Fork</b>	L2238 / K9048 (36")	L2238 / K9048	L2238 / K9048 / K9058 (42")	L2238 / K9048 / K9058	L2238 / K9048 / K9058	L2238 / K9048 / K9058
<b>Bale Spear</b>	L2237	L2237	L2237	L2237	L2237	L2237
<b>Hydraulic Spill Guard</b>	— / L2261	L2261	L2271	L2271	L2271	L2271
<b>3rd Function Valve</b>	L2247/ L2265	L2265	L2265	L2265	L2265	L2265
<b>Hydraulic 2-Lever Quick Coupler</b>	— / L2270	L2270	L2270	L2270	L2270	L2270
<b>3rd Function Valve &amp; Hydraulic 2-Lever Quick Coupler</b>	— / L2272	L2272	L2272	L2272	L2272	L2272
<b>Single Lever Valve Hose Quick Coupler (4-hoses)</b>	— / L2252	L2252	L2252	L2252	L2252	L2252
<b>Single Lever Valve Hose Quick Coupler (8-hoses)</b>	— / L2262	L2262	L2262	L2262	L2262	L2262
<b>3rd Function Hose Quick Coupler</b>	— / L2260	L2260	L2260	L2260	L2260	L2260
<b>Front Grill Guard* (for non-loader use)</b>	L2257	L2257	L2257	L2257	L2257	L2257
<b>Backhoe</b>	BH77*/BH92	BH92	BH92	BH92	BH92	BH92
<b>Snow Blower (front)</b>	L4469 (64") L4479 (74")	L4469 / L4479	L4469 / L4479	L4469 / L4479	L4469 / L4479	L4469 / L4479
<b>Snow Blower (rear)</b>	BL2664 (64") / L2674 (74")	BL2664 / L2674	BL2664 / L2674	BL2664 / L2674	BL2664 / L2674	BL2664 / L2674
<b>Quick Hitch – Front Blade</b>	L4466 (60") L4476 (72") L4486 (84")	L4476 / L4486	L4476 / L4486	L4476 / L4486	L4476 / L4486	L4476 / L4486
<b>Front Rotary Sweeper</b>	L4467 (60") / L4477 (72")	L4477	L4477	L4477	L4477	L4477
<b>Front Flail</b>	—	L4457 (72")	L4457	L4457	L4457	L4457

\* BH77 cannot be used on L3560HSTC model.



## Loaders/Landscapers

B26 | L39 | L45 | M59

A unique line of 4WD utility tractors – the B26, L39, L45 and M59 – offer versatility and rugged performance for jobs from landscaping to construction.

- Powered by reliable 26, 39, 45 and 59 horsepower Kubota diesel engines
- E-TVCS diesel engines provide a total balance of high torque, low noise, low vibration, low emissions, and quick starts on cold mornings
- Tractors are available as either Tractor/Loaders (TL) or Tractor/Loader/Backhoes (TLB)
- Backhoes are quick attach, exposing a Cat I or Cat II (depending on model) hydraulic, independent, 3-point hitch. Hitch components are stored on the tractor
- Sloped loader arms match the slanted hood for improved visibility in tight working areas. Braceless loader frame improves visibility and service access
- Quick couplers combine with auxiliary hydraulics for quick attachment changes and a variety of tools for both the loader and backhoe
- Side positioned loader controls, display and engine controls provide operator ease and information at a glance whether using the loader or the backhoe
- The L39's GST transmission enables clutchless, shock free and on the go shifting for increased loader production
- The B26, L45 and M59 feature HST transmissions to control both speed and direction changes easily without shifting or clutching. The L45 and M59 also feature a backhoe crawling mode to reposition the machine when using the backhoe

## Loaders/Landscapers

	B26	L39	L45	M59
<b>Engine Type</b> (Kubota, Liquid-Cooled, Diesel)	E-TVCS, 3-cylinder	E-TVCS, 3-cylinder	E-TVCS, 4-cylinder	E-TVCS, 4-cylinder
<b>Horsepower (gross)</b>	26	37.4	45	59
<b>Displacement (cu. in.)</b>	68.5	111.4	134.1	148.5
<b>Overall Length w/Backhoe</b>	198.4"	234.6"	237"	252"
<b>Overall Width</b>	53.7"	66.9"	71.5"	75"
<b>Wheelbase</b>	62.2"	68.9"	72.5"	80.7"
<b>Transmission</b>	Hydrostatic (HST) infinite 3-range	Glide Shift (GST) 12F/8R	Featherstep HST Plus infinite 3-range	Featherstep HST infinite 3-range
<b>Tractor Weight (lbs.)</b> (w/Loader, Backhoe and ROPS/FOPS)	4001	6987	7173	8344

### COMPATIBLE IMPLEMENTS

<b>Backhoe</b>	BT820	BT1000A	BT1000A	BT1200
<b>Front Loader</b>	TL500	TL1000A-1	TL1000A-2	TL1350

### ADDITIONAL IMPLEMENTS

<b>Ballast Box</b>	Optional	Optional	Optional	Optional
<b>Hydraulic Breaker</b>	200 Class	300 Class	300 Class	400 Class
<b>Pallet Fork</b>	36"	48"	48"	48"
<b>Hydraulic Thumb</b>	Optional	Optional	Optional	Optional
<b>4-in-1 Bucket</b>	Optional	Optional	Optional	N/A

### BACKHOE SPECIFICATIONS

	BT820	BT1000A	BT1200
<b>Digging Depth</b>	99.8"	121"	144"
<b>Loading Height</b>	77.3"	91.3"	105.9"
<b>Bucket Sizes</b>	12", 18", 24"	12", 16", 18", 24", 30", 36"	12", 16", 18", 24", 30", 36"

### FRONT LOADER SPECIFICATIONS

	TL500	TL1000A-1/-2	TL1350
<b>Maximum Lift Height</b>	94.5"	113.9"	126.1"
<b>Lift Capacity (lbs.) at Full Height/Pivot Point</b>	1300	2767/2848	3960
<b>Material Bucket</b>	60"	72"	84"
<b>Loader Feature</b>	Mechanical Spill Guard	Automatic Hydraulic Self Leveling	Automatic Hydraulic Self Leveling



## M Series

MX4800F/DT/HST | MX5200F/DT/HST  
M5640SU/SUD-1 | M7040SUH/SUHD

The M-Series offers a line of economical utility tractors full of big features built to tackle the toughest jobs.

- Smoothest running 4-cylinder diesel engine in the industry provides smooth transfer of power, low noise and quick starts
- 8 forward and 8 reverse speeds (MX4800/MX5200) and 8 forward and 4 reverse speeds (M5640) partially synchronized main transmission
- (M5640SU) Choose low range or reverse Synchro-Shuttle with the range shuttle lever allowing for easy direction changes – just stop, shift and go
- Category I and II, 3-point hitch provides hefty lift capacity and makes hooking up to implements easy, the MX5200 DT/HST models include a deluxe hitch with telescoping link ends and telescoping stabilizers
- Performance-matched Kubota quick-attach loaders
- (M7040SUH/SUHD) 8 forward/8 reverse speeds with hydraulic shuttle transmission
- (MX4800/MX5200) New, redesigned dash panel with larger, easy-to-read gauges and digital LCD panel
- (MX4800/MX5200) Common Rail System (CRS) and Diesel Particulate Filter (DPF) comply with the latest EPA Tier 4 Final emission regulations



## M Series

	MX4800F(2WD)/ DT(4WD)/HST(4WD)	MX5200F(2WD)/ DT(4WD)/HST(4WD)	M5640SU/ SUD-1(4WD)	M7040SUH(2WD)/ SUHD(4WD)
<b>ROPS</b>	Foldable ROPS	Foldable ROPS	Foldable ROPS	Foldable ROPS
<b>Engine Type</b> (Kubota, Liquid-Cooled, Diesel)	CRS, Direct Injection	CRS, Direct Injection	E-TVCS, Indirect Injection, 4-cylinder, turbocharged	E-CDIS, Direct Injection, 4-cylinder
<b>Horsepower (net)</b>	49.3	54.7	56	71
<b>Horsepower (PTO)</b>	40.5/39 HST	45.7/44.2 HST	50	64
<b>Displacement (cu. in.)</b>	148.6	148.6	148.5	203
<b>EPA Emission</b>	Tier 4 Final	Tier 4 Final	Tier 4 Interim	Tier 4 Interim
<b>Alternator Amps</b>	45	45	40	45
<b>Transmission</b>	Partially Synchronized, 8-speed Synchronized Shuttle/HST: Hydrostatic Pedal Operate	Partially Synchronized, 8-speed Synchronized Shuttle/HST: Hydrostatic Pedal Operate	Partially Synchronized, 4-speed Synchronized Shuttle	Fully Synchronized, 4-speed Hydraulic Shuttle
<b>Number of Speeds</b> (forward/reverse)	8F/8R	8F/8R	8F/4R	8F/8R
<b>Hydraulic Flow (GPM)</b> (remotes/3 pt. hitch)	9.5	9.5	11	11.6
<b>3 Pt. Lift Capacity (lbs.)</b> (@ 24 in. behind lift points)	2310	2310	3307	3307
<b>Height (top of ROPS)</b>	95.7"	95.7"	92.9"	97.2"
<b>Overall Width</b>	69.7"	69.7"	67.3"	73.2"
<b>Overall Length</b>	127.8" 2WD 126.2" 4WD	127.8" 2WD 126.2" 4WD	136" 2WD 131.5" 4WD	140" 2WD 138" 4WD
<b>Crop Clearance</b>	15.9" 2WD 15.2" 4WD	15.9" 2WD 15.2" 4WD	17.9"	18.5" 2WD 19.7" 4WD
<b>Wheelbase</b>	74.6"	74.6"	78.7"	82" 2WD 81" 4WD
<b>Tractor Weight (lbs.)</b>	3469/3712/3729	3474/3716/3734	3747/3858	4476/4608

## OPTIONAL LOADER ATTACHMENTS

<b>Bale Spear (single spear)</b>	Optional	Optional	N/A	Optional
<b>Pallet Fork</b>	36", 42"	36", 42"	N/A	48"
<b>Rear Mount Snowblower</b>	N/A	64", 74"	64", 74", 84"	74", 84"

## FRONT LOADER SPECIFICATIONS

	LA1065	LA1002	LA1154
<b>Maximum Lift Height @ Pivot Point</b>	111.2"	112.5"	117.2"/ 132.7"
<b>Lift Capacity (lbs.)</b> (@ bucket center)	1691	2205	1587/ 1830
<b>Material Bucket Width</b>	72"	72"	72"
<b>Light Material</b>	72"	N/A	N/A

## BACKHOE SPECIFICATIONS

	BH92
MX4800F/DT/HST, MX5200F/DT/HST only.	
<b>Digging Depth (max.)</b>	110.9"
<b>Bucket Sizes</b>	12", 16", 18", 24", 30", 36"





## M Series

M6060 | M7060

The M6060 and M7060 were designed and built with both you and the environment in mind.

- Kubota's revolutionary Common Rail System (CRS) with Exhaust Gas Recirculation system (EGR) and Diesel Particulate Filter (DPF) Muffler combine more torque at low RPM with less emissions and better fuel efficiency
- The V3307 CRS engine for M6060/M7060 complies with Tier 4 Final EPA emission regulations
- A choice of two transmissions gives you the performance you need. Choose from F8/R8 transmission or F12/R12 transmission (factory option on M7060HD12/HDC12 models)
- State-of-the-art external hydraulic cylinders improve lifting power and offer easier maintenance
- The innovative and stylish design of the new M6060/M7060 Cab gives the operator a more comfortable and spacious environment year-round. Features include a curved upper windshield to increase upward visibility and rounded glass – ideal for long days inside the Cab
- The M6060/M7060 engines feature a new electronic governor that gives you electronic control of engine RPM. With a push of a button, the system keeps engine revolution constant, making working with PTO-driven implements much more efficient
- Hydraulic shuttle transmission is standard on all models

	<b>M6060(2WD/4WD)</b>	<b>M7060(2WD/4WD)</b>
<b>Engine Type</b> (Kubota Injection, diesel)	E-CDIS, V3307-CR-TE4, 4-cylinder	E-CDIS, V3307-CR-TE4, 4-cylinder
<b>Horsepower (net)</b>	63.5	71
<b>Horsepower (PTO)</b>	56	64
<b>Displacement (cu. in.)</b>	203	203
<b>EPA Emission</b>	Tier 4 Final	Tier 4 Final
<b>Alternator Amps</b>	45 ROPS/60 CAB (100 Opt.)	45 ROPS/60 CAB (100 Opt.)
<b>Transmission/Shuttle</b>	Standard Hydraulic Shuttle/4WD	Standard Hydraulic Shuttle/4WD
<b>Height (top of ROPS/CAB)</b>	96.9"/100.6"	97.2"/101"
<b>Overall Width</b>	73"	73"
<b>Overall Length (2WD/4WD)</b>	142.7"/138"	142.7"/138"
<b>Crop Clearance (front axle)</b>	18.1"	18.1"
<b>Wheelbase, All</b>	84.4"/83.1"	84.4"/83.1"
<b>Speeds Std. (forward/reverse)</b>	F8/R8	F8/R8, F12/R12
<b>Tread Width (front/rear)</b>	55.9–71.7"/55.9–59.8"	55.9–71.7"/55.9–59.8"
<b>Turning Radius (w/o brake)</b>	10.8'/11.8'	10.8'/11.8'
<b>Tire Size (front)</b>	7.5–16/9.5–24	7.5–16/9.5–24
<b>Tire Size (rear)</b>	16.9–28	16.9–30
<b>Hydraulic GPM</b>	11.0 GPM	11.0 GPM (16.0 GPM on 12-speed models)
<b>Hydraulic PTO (rpm)</b>	540 (540/540E: Opt)	540 (540/540E: Opt) (540/540E std on 12-speed)
<b>Category I/II, 3-point hitch</b>	Yes	Yes
<b>Lift Capacity (lbs.)</b> (24" behind @ lift points)	3307	3307
<b>Compatible Front Loader</b>	LA1154	LA1154
<b>Tractor Weight (lbs.)</b> <b>ROPS Models</b>	N/A / 5005	N/A / 5027
<b>Tractor Weight (lbs.)</b> <b>Cab Models</b>	5226/5358	5248/5380

**ADDITIONAL LOADER ATTACHMENTS AND IMPLEMENTS**

<b>Bale Spear (single spear)</b>	Optional	Optional
<b>Hay Grapple with Bucket</b>	Optional, 72"	Optional, 72"
<b>Hyd. Self Leveling Valve</b>	Optional	Optional
<b>KSR Shockless Ride</b>	Optional	Optional
<b>Pallet Forks</b>	36", 42", 48"	36", 42", 48"
<b>Single Lever Valve</b>	Optional	Optional
<b>Quick Coupler</b>	Optional	Optional
<b>Third Function Attachment</b>	Optional	Optional
<b>Loader Valve</b>	Optional	Optional
<b>Rear Mount Snowblower</b>	74", 84"	84"
<b>Rear Weight Ballast Box</b>	Optional	Optional
<b>Backhoe</b>	M4011V (for ROPS model)	M4011V (for ROPS model)
<b>Digging Depth</b>	11'	11'



## M Series

M8560 | M9960

The M8560 and M9960 provide powerful yet clean and economic performance, along with a more ergonomically designed cab for easier operation. Work hard, while being gentle on the environment.

- Kubota's revolutionary Common Rail System (CRS) with Exhaust Gas Recirculation system (EGR) and Diesel Particulate Filter (DPF) Muffler combine more torque at low RPMs with less harmful emissions and better fuel efficiency
- The V3800 Engine complies with Tier 4 Interim Emissions
- The M8560/M9960 engines feature a new electronic governor that gives you electronic control of engine RPM. With a push of a button, the system keeps engine revolution constant, making working with PTO-driven implements much more efficient
- Hydraulic shuttle transmission is standard on all models
- A choice of three transmissions gives you the tractor performance you need with less hassle. Choose from the F8/R8 transmission, the F12/R12 transmission or the F24/R24 transmission with dual speed on the M9960
- These tractors have been designed for more space and better visibility. The rounded glass and curved upper windshield increases visibility and provides a more spacious feel, while the wide fenders protect drivers from mud splashes and the pantograph-style front wiper provides a wider coverage area for rainy weather
- State-of-the-art hydraulics improve the lifting power and offer easier maintenance, 15.9 gpm on the ROPS models, 17.0 gpm on the cab models

## M Series

	M8560(2WD/4WD)	M9960(2WD/4WD)
<b>Engine Type</b> (Kubota)	4-cylinder, turbocharged, CRS, direct inject	4-cylinder, turbocharged, CRS, direct inject, w/inter cooler
<b>Horsepower (net)</b>	85.5	100
<b>Horsepower (PTO)</b>	76	89
<b>Displacement (cu. in.)</b>	230	230
<b>EPA Emission</b>	Tier 4 Interim	Tier 4 Interim
<b>Alternator Amps</b>	45 (ROPS Model) 60 (CAB Model) 100 amp optional	45 (ROPS Model) 60 (CAB Model) 100 amp optional
<b>Transmission/Shuttle Speeds</b>	8F/8R-12F/12R	8F/8R, 12F/12R, 24F/24R
<b>Height (top of ROPS/CAB)</b>	99"/100.2"	99.8"/101"
<b>Overall Width</b>	78"/79"	78"/79"
<b>Overall Length (2WD/4WD)</b>	153"/148"	153"/148"
<b>Ground Clearance (front axle)</b>	20.5"/19.7"	20.5"/19.7"
<b>Wheelbase</b>	90"/88.6"	90"/88.6"
<b>Tread Width (front)</b>	56.7-80.3"/59.8-63.8"	56.7-80.3"/59.8-63.8"
<b>Turning Radius (w/o brake)</b>	12.1'/13.8'	12.1'/13.8'
<b>Tire Size (front)</b>	7.5-18/11.2-24	7.5-18/11.2-24
<b>Tire Size (rear)</b>	18.4-28	18.4-30
<b>Hydraulic PTO 540</b> (540E rpm, optional)	1000 rpm optional 540/540E optional	1000 rpm optional 540/540E optional
<b>Category II 3-point hitch</b>	Yes	Yes
<b>Lift Capacity (lbs.)</b> (24" behind @ lift points)	4630/7275 (optional)	4630/7275 (optional)
<b>Compatible Front Loader</b>	LA1353A	LA1353A
<b>Tractor Weight (lbs.)</b>	5400/5820 ROPS 6260/6680 CAB	5535/5950 ROPS 6395/6810 CAB

## ADDITIONAL LOADER ATTACHMENTS AND IMPLEMENTS

<b>Bale Spear</b>	Optional	Optional
<b>Pallet Forks</b>	42", 48"	42", 48"
<b>Bucket Width</b>	72", 84", 90"	72", 84", 90"

## FRONT LOADER SPECIFICATIONS

## LA1353A

<b>Maximum Lift Height</b>	145.7"
<b>Lift Capacity (lbs.)</b> (full height @ bucket center)	2977 2866 at high position
<b>Bucket Width</b>	72", 84"





## Narrow Models

M6040 | M7040 | M8540 | B2320DTN/HSDN

Extremely powerful and versatile, these specialty models offer exceptional maneuverability for work in narrow locations.

- Narrow models (M6040/M7040/M8540) measure just 48" outside to outside at rear axle with standard tire. Narrow model (B2320) maximum narrow width is 37"
- Powered by 56, 64 or 76 PTO horsepower Kubota E-CDIS diesel engines for more power, optimum durability and greater efficiency
- Hydraulic Shuttle Transmission is standard on all M-Series models and makes shifting between forward and reverse a smooth and quick operation
- Bevel Gear Front Wheel Drive with Bi-Speed Turn on the M-Series narrow tractors delivers greater strength, maneuverability and durability
- Automatic 4WD braking on all narrow models from 2WD mode
- All models offer high torque and boast incredible pulling power
- Narrow cab models provide additional comfort and ample head clearance for maximum visibility with a compact 89" overall height
- The B2320DTN/HSDN narrow tractors are specially designed to operate and maneuver around tight, confined areas and include position control



## Narrow Models

	Narrow Model M6040-I(4WD)	Narrow Model M7040-I(4WD)	Narrow Model M8540-I(4WD) M8540(10 speed)	Narrow Model B2320DTN/ B2320HSDN
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	E-CDIS, Direct Injection, 4-cylinder, natural engine, Tier 4 Interim	E-CDIS, Direct Injection, 4-cylinder, natural engine, Tier 4 Interim	E-CDIS, Direct Injection, 4-cylinder, turbocharged, Tier 3	E-TVCS, Indirect Injection, 3-cylinder
<b>Horsepower (net)</b>	63.5	70 CAB	85.5 CAB	23 (gross)
<b>Horsepower (PTO)</b>	56	64 CAB	76 CAB	18/17
<b>Displacement (cu. in.)</b>	203	203	230	61.1
<b>Alternator Amps</b>	45 (80 amp opt.)	45 ROPS 60 CAB (80 amp opt.)	45,60 (80 amp opt.) CAB 80 Std (10 speed)	14.5
<b>Transmission</b> (fully synchronized)	4-speed	4-speed	4-speed 5-speed	Gear 9F/3R HST (3-range)
<b>Height (front of hood/CAB)</b>	46"	46"/89"	46"/89"	75.2" (ROPS)
<b>Overall Width</b>	48"	48"	48"	35.4"/36.9" (min. tread)
<b>Overall Length</b>	136.4"	136.4" 136" CAB	136.4" 138" CAB	92.9" (w/ 3-point)
<b>Crop Clearance (front axle)</b>	14.8"	14.8" 14.6" CAB	14.8" 14.6" CAB	11.8"
<b>Wheelbase</b>	80.7"	80.7"	80.7"	61.5"
<b>Front Loader (CAB)</b>	N/A	LA754N	LA754N	N/A
<b>Tractor Weight (lbs.)</b>	4189	4189	4343/4806	1320
<b>ADDITIONAL LOADER ATTACHMENTS</b>				
<b>Pallet Fork</b>	N/A	36"	36"	N/A
<b>Buckets</b>	N/A	54"	54"	N/A
<b>Ballast Box</b>	N/A	N/A	N/A	Optional
<b>Snowblower (rear)</b>	N/A	N/A	N/A	51"

### FRONT LOADER SPECIFICATIONS

M7040, M8540 CAB models only.

#### LA754N

<b>Maximum Lift Height</b>	108.9"
<b>Lift Capacity (lbs.)</b> (full height @ bucket center)	1036
<b>Bucket Width</b>	54"



## Low Profile Models

M9960 | M108S

Our low profile models are specifically designed for low clearance applications. These tractors keep everything low to meet your high expectations.

- The M9960 overall height is 66.4" (ROPS retracted) while the M108S is 69" (ROPS folded)
- Powered by 89 or 96 PTO horsepower Kubota diesel engines for more power, optimum durability and greater efficiency
- M9960 model meets Tier 4 Interim EPA Emission regulations
- Retractable ROPS on M9960 and foldable ROPS on all other models for safety and ease of convenience for working in low hanging areas

## Low Profile Series

### M9960-I Low Profile (4WD)

### M108S-I Low Profile (4WD)

Engine Type (Kubota, liquid-cooled, diesel)	CRS, Direct Injection, 4-cylinder, turbocharged, w/intercooler Tier 4 Interim	CRS, Direct Injection, 4-cylinder, turbocharged, w/intercooler Tier 3
Horsepower (net)	100	108
Horsepower (PTO)	89	96
Displacement (cu. in.)	230	230
Alternator Amps (80 amp optional)	45	45
Transmission (fully synchronized)	6-speed	8-speed, w/Swing Shift Plus w/dual speed
Speeds (forward/reverse)	12F/12R 18F/18R w/optional creep speed	32F/32R 48F/48R w/optional creep speed
Height (top of ROPS/retracted)	90.6"/66.4"	91"/69"
Overall Width	77.5"	84"
Overall Length (2WD/4WD)	153"/148"	160"
Crop Clearance (front axle)	13.6"	12.2" (drawbar bracket)
Wheelbase	88.6"	95.9"
Compatible Front Loader (ROPS/CAB)	LA1353A / N/A	LA1403A / N/A
Tractor Weight (lbs.)	4895	5314

### ADDITIONAL LOADER ATTACHMENTS

Bale Spear (single spear)	Optional	Optional
Bucket Tine	Optional	Optional
Pallet Fork	42", 48"	42", 48"
Hay Grapple Bucket	84", 90"	72", 84", 96"
Buckets	72", 84"	72", 84", 96"

### FRONT LOADER SPECIFICATIONS

	LA1353A	LA1403A
Maximum Lift Height	141.6"	145.2"
Lift Capacity (lbs.) (full height @ bucket center)	2976	3086
Bucket Width	72", 84"	72", 84", 96"



## M Series

### M96SDHM MUDDER

The M96SHDM Mudder Tractor is engineered with high clearance and more speeds to enhance performance in harvesting applications.

- Powered by Kubota 4-cylinder turbocharged, diesel engines with 84 PTO horsepower
- Special high clearance drop axles and unique spacer for wide row applications
- Swing Shift with creep speeds give you access to 24 forward/24 reverse speeds, providing the flexibility you demand
- Hydraulic Shuttle-Shift provides smooth operation during speed transitioning
- New LCD instrument panel for easy viewing of vital functions
- Hydrostatic power steering takes the chore out of the most challenging jobs
- Slanted, full-open hood makes routine maintenance easier
- Four tires of equal size provide unique tractive force and high clearance – 13.6-38 R1 (95R48) come standard; 230/95R48 and 320/90R46 (12.4R46) radials are optional for special applications



## M Series

### M96SHDM Mudder

<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	E-CDIS, Center Direct Injection, 4-cylinder, turbocharged engine
<b>Horsepower (net)</b>	95
<b>Horsepower (PTO)</b>	84
<b>Displacement (cu. in.)</b>	230
<b>EPA Emission</b>	Tier 3
<b>Alternator Amps</b> (80 amp optional)	45
<b>Transmission</b>	8-speed, Fully Synchronized w/Swing Shift
<b>Speeds (forward/reverse)</b>	24F/24R (includes 8 creep speeds)
<b>Height</b>	111.6"
<b>Overall Width</b>	79.9"
<b>Overall Length</b>	168.5"
<b>Crop Clearance</b>	27.3"
<b>Wheelbase</b>	95.3"
<b>Turning Radius (w/brakes)</b>	21.3'
<b>Tire Size (front/rear)</b>	13.6-38 R1 13.6-38.2 R1
<b>Live Hydraulic Independent</b>	Yes, 540rpm (540/1000 optional)
<b>Hydraulic PTO</b>	Yes
<b>Category II, 3 pt. Hitch</b>	Yes
<b>Lift Capacity (lbs.)</b> (@ 24" behind @ lift points)	4630, 7480 w/dual assist cylinder (optional)
<b>Tractor Weight (lbs.)</b>	7981







## M Series

### M8540 POWER KRAWLER NARROW CAB

The revolutionary technology of the M8540 Power Krawler Narrow Cab offers exceptional traction, greater maneuverability and increased stability in narrow and low clearance applications.

- Powered by a Kubota E-CDIS, 4-cylinder, turbocharged diesel engine with 76 PTO horsepower
- Overall height of 92.1" and a width of just 54" for use in narrow or compact applications
- Synthetic rubber track features hard rubber lugs providing an overall smoother and quieter ride than steel lugs
- Equipped with Bi-speed which offers a turning radius equal to conventional four-wheel tractors
- Split-type drive sprocket with rotating pins enhance track durability and make maintenance easier
- Exerts a mere 4.12 psi of ground pressure, roughly 60% less than a typical rear tractor wheel
- Independently oscillating right and left crawlers keep both sides of the tractor in contact with the ground
- Larger rear footprint offers better flotation, less compaction and less damage to the soil
- Wider ground coverage delivers superior straight-line travel and decreases the likelihood of skidding
- Greater stability than similar sized four-wheel drive tractors thanks to longer effective wheelbase and lower center of gravity

## M Series


### M8540 Power Krawler Narrow Cab

<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	CDIS, Direct Injection, 4-cylinder, turbocharged
<b>Horsepower (net)</b>	85.5
<b>Horsepower (PTO)</b>	76
<b>Displacement (cu. in.)</b>	230
<b>EPA Emission</b>	Tier 3
<b>Alternator Amps</b> (80 amp optional)	60
<b>Transmission</b>	4-speed, Fully Synchronized
<b>Speeds (forward/reverse)</b>	8F/8R (12F/12R w/optional creep speed)
<b>Overall Height</b>	92.1"
<b>Overall Width</b>	54"
<b>Overall Length</b>	138.2"
<b>Crop Clearance (front axle)</b>	15.4"
<b>Wheelbase</b>	84.8"
<b>Turning Radius</b> (w/o brake, w/Bi-Speed)	13.1'
<b>Compatible Front Loader</b>	LA754N
<b>Tractor Weight (lbs.)</b>	6504

### FRONT LOADER SPECIFICATIONS

#### LA754N

<b>Maximum Lift Height</b>	109.8"
<b>Lift Capacity (lbs.)</b> (full height @ pivot pin)	1609
<b>Material Bucket Width</b>	54"
<b>Material Bucket Capacity</b> (cu. ft., heaped)	8.8

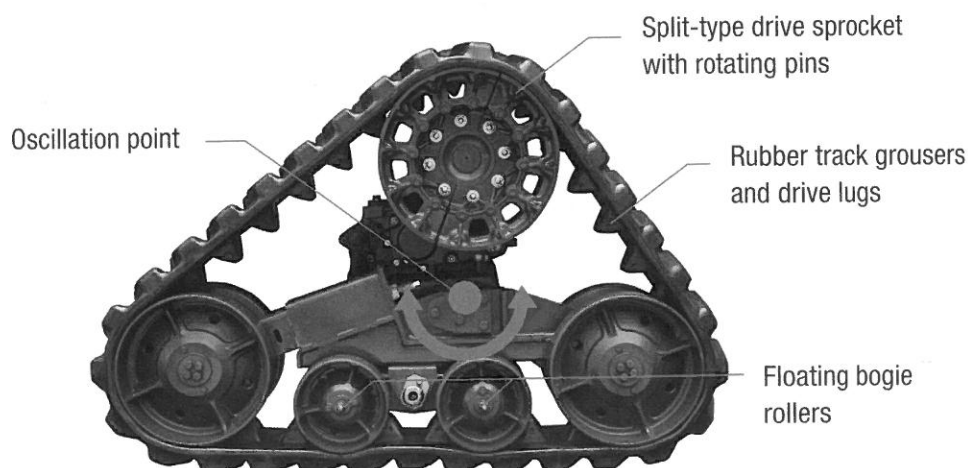



## M Series

M108S

**Ideal for hay and cattle operations, this mid-size tractor boasts powerful PTOs and increased loader capacity for even greater productivity, plus a cleaner running engine.**

- Powered by Kubota 4-cylinder turbocharged, liquid-cooled, Center-Direct Injection diesel engines with 96 PTO horsepower
- The M108S engines run cleaner than ever before due to the Electronic Common Rail Fuel Injection System and Cooled EGR (Exhaust Gas Recirculation) System while delivering 96 PTO horsepower
- 16F/16R or 32F/32R fully synchronized main and hydraulic shuttle transmission with optional creep speeds for specialty applications
- Category II, 3-point hitch provides fast, simple attachment of rear-mounted implements with extendible lower links, standard
- SHDC2/SDS2/SDSC2 = 540/1000 RPM/PTO
- The hydraulic wet disc main clutch is smooth and durable and operates in oil for long life
- When loads suddenly get heavier, our "Swing Shift Plus" (32F/32R) provides an electric over hydraulic dual-speed high/low power shift to increase torque and lower speed by 17%, while increasing lugging force dramatically
- Comfortable cab includes deluxe contoured suspension seat, optional air ride suspension, powerful air conditioner and front-opening side glass for comfort and to reduce driver fatigue
- Multiple front loader options to tackle a greater variety of tasks
- Foldable ROPS for operator safety

## M Series

	<b>Cab Models</b> M108SHC(2WD)/ M108SHDC(4WD)/M108SDSC(4WD)/ M108SDSC2/M108SHDC2	<b>Open Station ROPS Models</b> M108SH(2WD)/ M108SDSF(2WD)/M108SHD(4WD)/ M108SDS(4WD)
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	E-CDIS, Center Direct Injection, 4-cylinder, turbocharged	E-CDIS, Center Direct Injection, 4-cylinder, turbocharged
<b>Horsepower (net)</b>	108	108
<b>Horsepower (PTO)</b>	96	96
<b>Displacement (cu. in.)</b>	230	230
<b>EPA Emission</b>	Tier 2	Tier 3
<b>Alternator Amps</b> (80 amp optional)	60	45
<b>Transmission w/dual speed</b>	8-speed fully synchronized w/Swing Shift and Swing Shift Plus	8-speed fully synchronized w/Swing Shift and Swing Shift Plus
<b>Speeds (forward/reverse)</b> <b>w/creep speed (optional)</b>	16F/16R / 16F/16R / 32F/32R 24F/24R / 24F/24R / 48F/48R	16F/16R / 32F/32R 24F/24R / 48F/48R / 24F/24R / 48F/48R
<b>Height</b>	106"	105"
<b>Overall Width</b>	90"/91"/91"	90"/90"/91"/91"
<b>Overall Length</b>	160"	160"
<b>Ground Clearance</b> (drawbar bracket)	17.1"	17.1"
<b>Wheelbase</b>	95.9"	95.9"
<b>Tread Width (front)</b>	60.6–80.3"/60.2–65.4"/60.2–65.4"	60.6–80.3"/60.6–80.3"/ 60.2–65.4"/60.2–65.4"
<b>Turning Radius (w/o brake)</b>	12.5'/15.4'/15.4'	12.5'/15.4'
<b>Tire Size (front/rear)</b>	10–16/18.4–34 (2WD) 13.6–24/18.4–34 (4WD)	10–16/18.4–34/10–16/18.4–34/ 13.6–24/18.4–34 cast/ 13.6–24/18.4–34 cast
<b>Live Hydraulic Independent</b>	Yes (540 rpm)	Yes (540 rpm)
<b>Hydraulic PTO</b>	540/1000 rpm (optional or factory order on select models)	540/1000 rpm (optional)
<b>Category II, 3-point Hitch</b>	Yes	Yes
<b>Lift Capacity (lbs.)</b> (@ 24" behind lift points)	4630; 7490 (optional)	4630; 7490 (optional)
<b>Compatible Front Loader</b>	LA1403	LA1403
<b>Tractor Weight (lbs.)</b>	6945/8576/8576	6349/7981/7981

## FRONT LOADER SPECIFICATIONS

## OPTIONAL LOADER ATTACHMENTS

	<b>LA1403</b>		<b>M108S</b>
<b>Maximum Lift Height</b>	145.7"	<b>Bale Spear (single spear)</b>	Optional
<b>Lift Capacity (lbs.)</b> (full height @ bucket center)	4299	<b>Pallet Forks</b>	42", 48"
<b>Lift Capacity @ Height Position</b>	4178	<b>Hay Grapple Bucket</b>	72", 84", 90"
<b>Bucket Width</b>	72", 84", 90"		





## M Series

M100GX | M110GX | M126GX | M135GX/GXS

The Grand X generation of M-Series Kubota Tractors is a combination of strength, an advanced Grand Cab and maneuverability all wrapped up in an eco-friendly package.

- A combination of advanced Common Rail System (CRS), Exhaust Gas Recirculation (EGR) and Diesel Particulate Filter (DPF) Muffler makes our engines economical and clean with no sacrifice to power
- The powerful 24F/24R IntelliShift transmission and Kubota Electronic Management System (K-EMS) provide advanced control
- The bi-speed turn and electrohydraulic differential locks give the Grand X Series enhanced stability and tighter control even under tough situations
- With one of the largest cabs in its class, the Grand X Series offers operators unparalleled comfort and visibility
- An ergonomically designed cockpit means all levers, displays and controls are located on the right console or around the steering wheel for easy access and intuitive operation



	M100GX	M110GX	M126GX	M135GX/GXS
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	Common Rail System, 4-cylinder, Direct Injection, turbocharged w/ intercooler	Common Rail System, 4-cylinder, Direct Injection, turbocharged w/ intercooler	Common Rail System, 4-cylinder, Direct Injection, turbocharged w/ intercooler	Common Rail System, 4-cylinder, Direct Injection, turbocharged w/ intercooler
<b>Horsepower (net)</b>	100	109.5	125	135
<b>Horsepower (PTO)</b>	86	96	108	118
<b>Displacement (cu. in.)</b>	230	230	374	374
<b>EPA Emission</b>	Tier 4 Interim	Tier 4 Interim	Tier 4 Interim	Tier 4 Interim
<b>Alternator Amps</b>	80	80	80	80
<b>No. of Speeds (option)</b>	Intelli-Shift Transmission 24F/24R	Intelli-Shift Transmission 24F/24R	Intelli-Shift Transmission 24F/24R	Intelli-Shift Transmission 24F/24R
<b>w/Creep Speed (optional)</b>	32F/32R	32F/32R	32F/32R	32F/32R
<b>Overall Height</b>	109.8"	111.8"	113.2"	113.2"
<b>Overall Length</b>	167"	167"	171.7"	171.7"
<b>Crop Clearance</b>	17.7"	19.5"	22.2"	22.2"
<b>Wheelbase</b>	95.9"	95.9"	105.9"	105.9"
<b>Tread Width (front/rear)</b>	62.2–66" 59.1–81.1"	62.2–66" 60.2–80.1"	69.9–73.8" 62.6–82.3"	69.9–73.8" 62.6–82.3"
<b>Turning Radius (w/o brake)</b>	13.1'	13.1'	13.5'	13.5'
<b>Bi-Speed Turn</b>	Standard	Standard	Standard	Standard
<b>Front Axle Suspension</b>	N/A	N/A	N/A	Standard (M135GX)
<b>Category II, 3-pt. Hitch</b>	Yes	Yes	Yes	Yes
<b>Lift Capacity (lbs.) (@ 24" behind lift point)</b>	6834 (9447 optional)	6834 (9447 optional)	6834 (9447 optional)	6834 (9447 optional)
<b>Radio with Weather Band</b>	Optional	Optional	Optional	Optional
<b>Instructor Seat</b>	Optional	Optional	Optional	Optional
<b>Compatible Front Loader</b>	LA1954(E)*	LA1954(E)*	LA2254(E)*	LA2254(E)*
<b>Tractor Weight (lbs.)</b>	9028	9216	10373	10373/10814


## OPTIONAL LOADER ATTACHMENTS

<b>Bale Spear (single spear)</b>	Optional	Optional	Optional	Optional
<b>Pallet Fork</b>	42", 48"	42", 48"	42", 48"	42", 48"
<b>Hay Grapple</b>	84–90"	84–90"	84–96"	84–96"
<b>Hydraulic Self-Leveling Valve</b>	Optional	Optional	Optional	Optional
<b>Loader KSR Suspension System</b>	Optional	Optional	Optional	Optional
<b>Rear Snowblower</b>	84"	N/A	N/A	N/A

## FRONT LOADER SPECIFICATIONS

\*Euro Quick Attach Coupler Type

	LA1954(E)*	LA2254(E)*
<b>Maximum Lift Height</b>	145.7"	161.4"
<b>Overall Height in Carrying Position</b>	66.9"	74"
<b>Lift Capacity (lbs.) (at high position) (full height @ pivot pin)</b>	4299	4877
<b>Roll Back Angle</b>	40	40
<b>Maximum Dump Angle</b>	63°/52°	60°/50° (at height position)

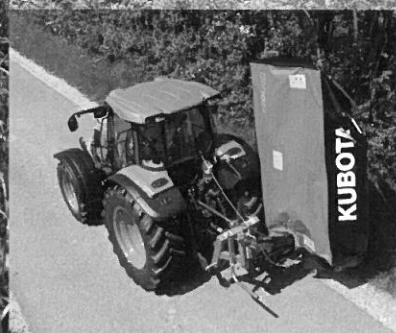

## Hay Tools

### DISC MOWERS

The tough and reliable Disc Mower Series is built with no compromises for maximum cutting performance.

- Fully welded cutterbar with overlapping C-channels for a stiff, strong, durable construction and low maintenance
- High oil capacity ensures low working temperature for efficient cooling and lubrication of the entire cutterbar
- 3-bladed discs creates a third less load per blade producing neat, cleanly cut crop
- Even number of counter-rotating discs for improved overlap, giving smooth, even flow of crop
- Specially tooled gear wheels with round design and long teeth create extremely quiet operation and efficient power transmission
- DM Series Disc Mowers offer flexible suspension well suited for work on slopes and hilly conditions

## Disc Mowers

	DM1017	DM1022	DM1024	DM2028	DM2032
<b>Cutting Width</b>	5' 6"	7' 2"	7' 9"	9' 2"	10' 6"
<b>Weight (approx. lbs.)</b>	860	948	992	1345	1422
<b>Transport Width</b>	3' 9"	3' 9"	3' 9"	4' 7"	4' 7"
<b>ATTACHMENT TO TRACTOR</b>					
<b>Hitch (CAT)</b>	2	2	2	2	2
<b>PTO (RPM)</b>	540	540	540	540	540
<b>Minimum PTO Horsepower Required (hp)</b>	36	42	46	50	55
<b>OPERATION</b>					
<b>Number of Discs / Knives</b>	4 / 12	6 / 18	6 / 18	8 / 24	8 / 24
<b>Remotes</b>	1	1	1	1	1
<b>Cutterbar Operating Angle</b>	-45° / +45°	-45° / +45°	-45° / +45°	-35° / +35°	-35° / +35°
<b>Stubble Height</b>	0.78–1.97"	0.78–1.97"	0.78–1.97"	0.78–1.97"	0.78–1.97"
<b>OTHER FEATURES</b>					
<b>BreakAway</b>	Standard	Standard	Standard	N/A	N/A
<b>Non-Stop BreakAway</b>	N/A	N/A	N/A	Standard	Standard
<b>Overrun Clutch</b>	Standard	Standard	Standard	Standard	Standard
<b>OPTIONAL EQUIPMENT</b>					
<b>Swath Board (RH/LH)</b>	Standard/ Optional	Standard/ Optional	Standard/ Optional	Standard/ Optional	Standard/ Optional
<b>Swath Discs (RH/LH)</b>	Optional (RH/LH)	Optional (RH/LH)	Optional (RH/LH)	Optional (RH/LH)	Optional (RH/LH)
<b>High Skids +20/+40/+80 mm</b>	Standard/ Optional/ Optional	Standard/ Optional/ Optional	Standard/ Optional/ Optional	Standard/ Optional/ Optional	Standard/ Optional/ Optional





## Hay Tools

### ROTARY TEDDER AND RAKE

The Rotary Tedder and Rake Series provides strength, dependability and optimal performance for haymaking at its best.

- (TE4052T) Maintenance friendly gearbox with only one grease nipple is mounted directly to the frame, providing full support across the tedder
- (TE4052T) Super-C tines made of 9mm shot-peened spring steel for added strength and extended service life, even when tedding large quantities of crop
- (TE4052T) Built around a rugged new box section chassis for maximum rigidity, allowing the tedder to withstand the most severe loads
- (RA1042T) Maintenance friendly gearbox with oil-immersed cam discs and guide rollers, tine arm bearings integrated into the cam track and high tensile tine arm holders
- (RA1042T) Curved tine arms to ensure a regular and even window formation that allows higher lifting out of the swath
- (RA1042T) 11 tangential tine arms and 4 double tines per arm ensuring clean raking performance even at reduced rpm and high travel speed



## Rotary Tedder

### TE4052T

Working Width	17' 1"
Tedding Width	17' 9"
Transport Width	9' 6"
Transport Length	8' 6"
Storage Height	8' 8"
Weight (approx. lbs.)	904

#### HITCH TYPE/DRAWBAR

Linkage Drawbar	Standard
-----------------	----------

#### ROTORS/TINE ARMS

Number of Rotors	4
Number of Tine Arms/Rotor	6
Tine Adjustment System	Standard

#### WHEELS AND AXLES

Wheels (4)	16x6.5-8
------------	----------

## Rotary Rake

### RA1042T

Working Width	13' 9"
Transport Width	6' 7"
Transport Length	12' 1"
Weight (approx. lbs.)	1256

#### HITCH TYPE/DRAWBAR

Linkage Drawbar	Standard
-----------------	----------

#### ROTORS/TINE ARMS

Number of Rotors	1
Rotor Diameter	11'
Number of Tine Arms/Rotor	11
Number of Double Times per Arm	4
Detachable Tine Arms	Standard
Height Adjustment	Mechanical

#### WHEELS AND AXLES

Wheels (4)	18.5x8.50-8
Tandem Axle	Standard
Warning Panels	Standard





## VS Series

VS220 | VS330 | VS400ITI | VS500VITI  
VS400 | VS500 | VS600 | VS800 | VS1000

The VS Series offers a unique pendulum spreader range for maximum accuracy, spreading quality and ease of operation.

- Pendulum movement of the spout ensures the application rate is always identical on both sides for excellent overlap
- Available with manual control, hydraulic remote control from the cabin or electronic control from the cab
- Minimum wind influence on the spreading pattern ensures the tractor does not get covered with fertilizer
- Easy setting of the application rate with the scale allows continuous adjustment in lbs/acre minimizing the risk of spreading errors
- Low-filling height makes refilling fertilizer easy as the hopper can be moved under a tipping trailer, silo or filled by hand
- Agitator ensures an even material feed to the spreading unit so there is no risk of crushing the fertilizer

## VS Series

	VS220*	VS330*	VS400VITI*	VS500VITI*	VS400*
<b>Basic Unit</b>		220		400VITI	
<b>Hopper Capacity (lbs.)</b>	485	730	880	1100	880
<b>Hopper Capacity (cu. ft.)</b>	7.8	11.7	14.1	17.7	14.1
<b>Hopper Width</b>	42"	42"	45"	45"	57"
<b>Filling Height</b>	30"	39"	35"	40"	35"
<b>Weight (lbs.)</b>	183	187	267	278	267
<b>Required PTO HP</b>	10	15	20	25	20
<b>Hitch Category</b>	Cat 1	Cat 1	Cat 1 & 2	Cat 1 & 2	Cat 1 & 2

	VS500*	VS600*	VS800*	VS1000*
<b>Basic Unit</b>	400		600	600
<b>Hopper Capacity (lbs.)</b>	1100	1300	1750	2200
<b>Hopper Capacity (cu. ft.)</b>	17.7	21.2	28.3	35.3
<b>Hopper Width</b>	57"	69"	69"	69"
<b>Filling Height</b>	40"	38"	42"	46"
<b>Weight (lbs.)</b>	278	287	342	364
<b>Required PTO HP</b>	25	35	40	45
<b>Hitch Category</b>	Cat 1 & 2	Cat 2	Cat 2	Cat 2

\*Spreads both powder and granules.





## Compact Track Loaders SVL75-2 | SVL90-2

With best-in-class bucket breakout force and lifting capacity, the high performance compact track loaders provide a new level of productivity.

- Powered by 4-cylinder Kubota CRT Tier 4 Compliant engines with 74.3 and 92 horsepower, these best-in-class engines are equipped with Common Rail Fuel Injection and Diesel Particulate Filters to match outstanding performance with increased fuel economy and greatly reduced exhaust emissions
- Highest breakout force in their class, the SVL75-2/ SVL90-2 can easily load all material. Vertical lift design and low center of gravity deliver exceptional stability
- Angled track frame cover prevents soil from accumulating while operating
- Comfortable and spacious cab area features a luxurious, high-back, adjustable full-suspension seat and plenty of legroom
- Standard-equipped two-speed travel and high-ground clearance ensure excellent travel performance in difficult terrains
- Easy maintenance features include a large engine compartment door to access all components for daily routine checks
- Both the SVL75-2 and SVL90-2 have standard auxiliary hydraulics to power most attachments. The SVL90-2 with the optional Hi-flow is suited for high capacity attachments with ½" or ¾" couplings

## Compact Track Loaders

### SVL75-2

### SVL90-2

<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	V3307 CRS-TE4 turbocharged 4-cylinder	V3800 CRS-TE4 turbocharged 4-cylinder
<b>Horsepower (gross)</b>	74.3	92
<b>Displacement (cu. in.)</b>	203.3	230
<b>Overall Length</b> (w/bucket on the ground)	140.8"	148.2"
<b>Overall Height (top of cab)</b>	82"	83.4"
<b>Overall Width (with bucket)</b>	68", 72"	80"
<b>Shipping Weight (lbs.)</b> (ROPS/Cab)	9039/9315	11023/11299
<b>Operator Station</b>	Open ROPS / Enclosed Cab w/AC	Open ROPS / Enclosed Cab w/AC

### LOADER PERFORMANCE

<b>Rated Operating Capacity (ROC)</b>		
35% Tipping Load (lbs.)	2300	3010
50% Tipping Load (lbs.)	3285	4300
<b>Tipping Load (lbs.)</b>	6570	8600
<b>Breakout Force – Bucket (lbs.)</b>	6204	7961
<b>Breakout Force – Lift arm (lbs.)</b>	4766	6742
<b>Lifting Capacity (lbs.)</b>	4881	5869
<b>Lift Arm Path</b>	Vertical	Vertical

### UNDERCARRIAGE

<b>Track Width (standard/wide)</b>	12.6"/15"	17.7"
<b>Ground Pressure (psi)</b> (standard/wide)	5.6/4.7	4.2
<b>Track Rollers (per side)</b>	4	5
<b>Track Ground Contact Length</b>	56.5"	65.6"
<b>Travel Speed (mph)</b>	4.7–7.1	5.0–7.3
<b>Traction Force (lbs.)</b>	9678	12178
<b>Minimum Ground Clearance</b>	11.7"	11.8"

### AUXILIARY HYDRAULIC POWER

<b>Aux. Hydraulic Pressure (psi)</b>	3185	3185
<b>Aux. Hydraulic Flow (gpm)</b> (standard/high)	17.4	23.1/33.7





## Excavators

K008-3 | KX018-4 | KX71-3 | KX91-3

**Kubota's compact excavators combine maneuverability, power and reliability to offer you the ultimate digging machine.**

- Low sound level increases operator comfort and allows work in residential areas
- Light lever action of hydraulic pilot controls provides enhanced front work group control
- Variable width track frame that can be hydraulically retracted to fit through most doorways (K008-3) and gates (KX018-4). Expand with the switch of a lever
- Unique compact size to increase productivity in confined areas
- Two-pattern selection system allows the operator to choose either the ISO or SAE operating pattern
- Optional hydraulic angle blade with float significantly increases productivity (KX91-3)
- One of the largest cabs in its class, the KX018-4 features ample legroom, adjustable seating and a wide door to bring comfort to tough work
- The KX018-4's superior stability is a result of its long tumbler distance and wide variable track width. This enables you to safely perform jobs using a host of Kubota attachments



## Standard Tail Swing Excavators

	K008-3	KX018-4	KX71-3	KX91-3
<b>Engine Type (Kubota)</b>	3-cylinder	3-cylinder	4-cylinder	3-cylinder
<b>Horsepower (gross)</b>	10.3	17	25.6	29.6
<b>Displacement (cu. in.)</b>	44	54.8	91.4	100.5
<b>Overall Length (transport)</b>	9' 0"	12' 2.1"	14' 11"	15' 7"
<b>Overall Height</b>	7' 4"	7' 7" / 7' 8.5"	8'	8'
<b>Overall Width</b>	2' 10" / 2' 4"*	4' 3.2" / 3' 3"	4' 11"	5' 1"
<b>Operating Weight** (lbs.)</b>	2200	3747	6305	7110
<b>Rear Swing Clearance</b>	10"	16.5"	18.1"	21.1"
<b>Maximum Digging Depth</b>	5' 8"	7' 9.7"	9' 9"	10' 5"
<b>Maximum Dumping Height</b>	6' 8"	7' 9.7"	10' 5"	11' 7"
<b>Pump Capacity (GPM)</b>	5.55	13.7	21.4	27.3
<b>Auxiliary Hydraulic Line Flow Rate (GPM)</b>	5.55	7.4	13.1	10.9
<b>Bucket Breakout Force (lbs.)</b>	2200	3594	6350	8059
<b>Maximum Traveling Speed (mph)</b>	1.2/2.5	1.4/2.6	1.8/2.9	1.9/2.9
<b>Ground Contact Pressure (psi)**</b>	3.55	3.7	3.9	4.46
<b>OPTIONAL IMPLEMENTS</b>				
<b>Hydraulic Breaker (ft./lb.)</b>	200	300	350	500
<b>Hydraulic Thumb</b>	N/A	N/A	Optional	Optional
<b>Pin-On Bucket</b>	8-16"	9-18"	12-24"	12-24"
<b>Quick Attach Buckets</b>	N/A	9-18"	12-36"	12-36"
<b>Quick Coupler</b>	N/A	Mechanical	Mechanical	Mechanical

\* Variable Width Track \*\* Canopy, rubber





## Excavators

KX040-4 | KX057-4 | KX080-4

These powerhouse excavators have earned high market acclaim for outstanding utility and exceptional, efficient operation.

- Kubota's original ECO PLUS prioritizes fuel economy and supports the environment. Activate Eco Mode with the flick of a switch and increase fuel savings from 7–9% over standard mode
- Remarkable breakout force of 14660 lbs. to ensure high productivity in the toughest of applications (KX080-4)
- Auto Idling System contributes to significant reduction in noise and fuel consumption
- Superior cabin design with air conditioner, two-pattern selection system, 2-speed travel switch, deluxe suspension seat and retractable seat belt
- Triple Open Covers, ground-level access and angle track frame track frame for ease of maintenance without hassle
- Dual auxiliary hydraulic ports expand attachments and versatility (KX040-4 and KX057-4 optional, KX080-4 standard)
- Advanced Load Sensing Hydraulic System provides optimum oil flow to each cylinder, making operation under any load easier and smoother
- Hydraulic 6-in-1 blade for KX040-4 angles 25° and tilts 10°. This feature makes leveling and backfilling work incredibly easy

## Standard Tail Swing Excavators

	KX040-4	KX057-4	KX080-4
<b>Engine Type (Kubota)</b>	4-cylinder	4-cylinder	4-cylinder
<b>Horsepower</b>	42.4	50	70
<b>Displacement (cu. in.)</b>	111.4	159.6	203.3
<b>Overall Length (transport)</b>	16' 8"	18' 1.3"	21' 1.9"
<b>Overall Height</b>	8' 1.8"	8' 4.4"	8' 4"
<b>Overall Width</b>	5' 6.9"	6' 5.2"	7' 2.6"
<b>Operating Weight* (lbs.)</b>	9195	12200	18280
<b>Rear Swing Clearance</b>	17.7"	11.4"	14.2"
<b>Maximum Digging Depth</b>	11' 2.7"	12' 8.2"	15' 1.1"
<b>Maximum Dumping Height</b>	12' 9.5"	13' 8.6"	17' 2.7"
<b>Pump Capacity (GPM)</b>	24.4	39.4	55.6
<b>Auxiliary Hydraulic Line Flow Rate (GPM)</b>	17.2/9.8	19.8/9.8	26.4/17.6
<b>Bucket Breakout Force (lbs.)</b>	9535	11177	14660
<b>Maximum Traveling Speed (mph)</b>	1.8/3.1	1.8/3.1	1.7/3.1
<b>Ground Contact Pressure (psi)*</b>	4.53	4.54	5.22**

### OPTIONAL IMPLEMENTS AND ACCESSORIES

<b>Hydraulic Breaker (ft./lb.)</b>	500	750	750, 1000
<b>Hydraulic Thumb</b>	Optional	Optional	Optional
<b>Pin-On Bucket</b>	12-36"	N/A	18-60"
<b>Quick Attach Buckets</b>	12-39"	12-48"	18-60"
<b>Quick Coupler</b>	Mechanical/ Hydraulic	Mechanical	Mechanical
<b>Canopy Lights</b>	Optional	Optional	Optional
<b>Travel Alarm</b>	Optional	Optional	Optional

\* Canopy, rubber \*\* Cab, rubber







## Excavators

U17 | U25 | U35-4 | U55-4

The U17, U25, U35-4 and U55-4 compact excavators offer performance, durability, convenience and comfort for superior productivity.

- Kubota's original ECO PLUS prioritizes fuel economy and supports the environment. Activate Eco Mode with the flick of a switch and increase fuel savings by 9% over Standard Mode with the new U55-4
- Zero and tight tail swing offers excellent balance, stability and faster operations in confined areas
- Kubota diesel engine delivers improved fuel efficiency, greater output, higher torque rise, as well as lower noise and vibration levels
- Unique hydraulic system and large-capacity variable displacement pumps deliver the best performance matched boom, arm and bucket movements in the industry
- Ergonomically designed suspension seat with weight compensation, wider foot area and armrest for improved operator comfort
- Strong bucket breakout force for the toughest excavation jobs
- Two Pattern Selection System enables operator to easily switch between ISO and SAE pattern
- ROPS/OPG Top Guard cab and canopy models give the operator unsurpassed protection
- Optional cabs offer spacious operator area with A/C, interior light, windshield wiper/washer for comfortable and efficient all-weather operation
- Double-flanged lower track rollers and V-shaped lugs provide maximum traction, balance and stability
- Optional hydraulic angle blade with float significantly increases productivity (U35-4, U55-4 models)
- Hydraulic, variable width track frame retracts to fit through gates, expands for stable operation (U17)



## Zero and Tight Tail Swing Excavators

	U17	U25	U35-4	U55-4
<b>Engine Type (Kubota)</b>	3-cylinder	3-cylinder	3-cylinder	4-cylinder
<b>Horsepower</b>	17	20.9	26.1	50
<b>Displacement (cu. in.)</b>	54.8	68.5	100.5	159.6
<b>Overall Length (transport)</b>	11' 7"	13' 7"	15' 7"	18' 0.5"
<b>Overall Height</b>	7' 8"	7' 11"	8' 1.2"	8' 4.4"
<b>Overall Width</b>	3' 3" / 4' 1"*	4' 11"	5' 6.9"	6' 5.2"
<b>Operating Weight** (lbs.)</b>	3703	5625	8129	11915
<b>Rear Swing Clearance</b>	0"	0"	2"	2.6"
<b>Maximum Digging Depth</b>	7' 7"	9' 3"	9' 8.9"	11' 10.3"
<b>Maximum Dumping Height</b>	8'	10' 6"	11' 0.7"	13' 2.3"
<b>Pump Capacity (GPM)</b>	11.9	20.3	26.5	39.4
<b>Auxiliary Hydraulic Line Flow Rate (GPM)</b>	7.32	12.7	15.8	19.8/9.8
<b>Bucket Breakout Force (lbs.)</b>	3417.2	5765	7924	11177
<b>Maximum Traveling Speed (mph)</b>	1.4/2.6	1.6/2.9	1.9/2.9	1.8/3.1
<b>Ground Contact Pressure (psi)**</b>	3.8	3.32	4.89	4.42

### OPTIONAL IMPLEMENTS AND ACCESSORIES

<b>Canopy Lights</b>	Optional	Optional	Optional	Optional
<b>Hydraulic Hammer (ft./lb.)</b>	300	350	500	750
<b>Hydraulic Thumb</b>	N/A	Optional	Optional	Optional
<b>Pin-On Buckets</b>	9-18"	12-24"	12-24"	12-48"
<b>Quick Attach Buckets</b>	9-18"	9-24"	12-36"	12-48"
<b>Quick Coupler</b>	Mechanical	Mechanical	Mechanical	Mechanical
<b>Spark Arrest Muffler</b>	Optional	Optional	Optional	DPF
<b>Steel Tracks</b>	N/A	11.8"	11.8"	15.7"
<b>Travel Alarm</b>	Optional	Optional	Optional	Optional

\* Variable Width Track \*\* Canopy, rubber



## Wheel Loaders

R420S | R520S

Equipped with state-of-the-art features, the versatile R-Series wheel loaders offer outstanding visibility, outstanding power and outstanding productivity.

- Equipped with Kubota's own 41.2 or 46 horsepower E-TVCS diesel engine
- Electric shuttle shift lever to allow on-the-go directional change without clutching or braking
- Load Sensing Transmission (LST) automatically adjusts speed and torque in response to load conditions
- 4-wheel drive, limited slip differential and rear frame oscillation provide excellent traction and stability
- Front and rear auxiliary hydraulics provide power for a variety of quick-coupling attachments
- Ultra-comfortable cab with great visibility, suspension seat and hanging-type foot pedals
- Quick coupler for fast, safe and easy attachment changes

## Wheel Loaders

	R420S	R520S
<b>Engine Type</b> (Kubota, liquid-cooled, diesel)	3-cylinder	4-cylinder
<b>Horsepower (gross)</b>	41.2 (turbocharged)	46
<b>Operating Weight (lbs.)</b>	7450	8980
<b>Overall Height (FOPS/ROPS)</b>	8' 2.8"	8' 5.6"
<b>Overall Width (w/o bucket)</b>	4' 11.8"	5' 9.3"
<b>Overall Length</b> (w/bucket and weight)	13' 9.8"	15' 4.5"
<b>Hinge to Hinge Pin</b>	9' 2.7"	10' 10.3"
<b>Reach Fully Raised</b>	2' 6.8"	2' 9.9"
<b>Standard Bucket Capacity (cu. yd.)</b>	0.5	0.75
<b>Bucket Breakout Force (lbs.)</b>	6550	7425
<b>Counterweight (lbs.)</b>	1500	2250
<b>Tipping Load Straight (lbs.)</b> (w/Bucket)	4585	5190
<b>Tipping Load Straight (lbs.)</b> (w/Pallet Forks)	3300	3870
<b>Tipping Load Full Turn (lbs.)</b> (w/Bucket)	3830	4410
<b>Tipping Load Full Turn (lbs.)</b> (w/Pallet Forks)	2800	3250
<b>Auxiliary Hydraulic Flow</b> (front and rear, GPM)	11.1	15.4

### COMPATIBLE IMPLEMENTS


<b>Backhoe</b>	RBK4009S	RBK5009S
----------------	----------	----------

### ADDITIONAL IMPLEMENTS AND ACCESSORIES

<b>Backhoe</b>	9'	9'
<b>Light Material Bucket (cu. yd.)</b>	.75	1
<b>Pallet Fork</b>	48"	48"
<b>Scrap Grapple Bucket</b>	72"	72"

### BACKHOE SPECIFICATIONS

	RBK4009S	RBK5009S
<b>Maximum Digging Depth</b>	9' 3"	9' 3"
<b>Reach from Pivot</b>	12' 2"	12' 2"
<b>Bucket Breakout Force (lbs.)</b>	4100	4100
<b>Boom Cylinder Lift Capacity (lbs.)</b>	1015	1015
<b>Dipperstick Breakout Force (lbs.)</b>	2755	2755
<b>Dipperstick Lift Capacity (lbs.)</b>	896	896
<b>Trenching Bucket Sizes</b>	12-24"	12-24"
<b>Swing Angle</b>	180°	180°

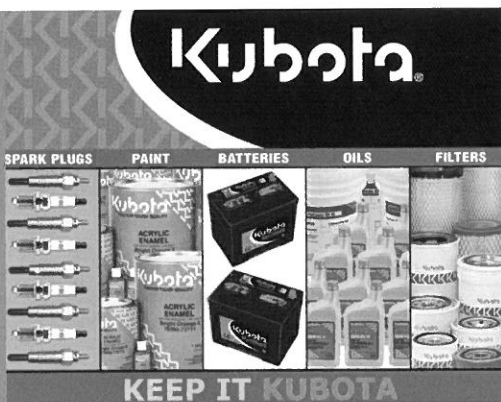

## KUBOTA PARTS

Kubota Tractor Corporation (KTC) Parts operations provide customer parts support, parts and manuals through Kubota's national dealer network. We support our dealers with four large warehouses located strategically throughout the United States and two super warehouses in Japan.

KTC Parts offers a full line of O.E.M. service and maintenance parts designed and engineered to original factory specification to keep your Kubota equipment operating at peak performance.

## KUBOTA ORANGE PROTECTION PROGRAM®

The Kubota Orange Protection Program gives you the opportunity to extend your coverage, without interruption, by one or two years. You can purchase your warranty extension through your Kubota dealer any time before the expiration of the regular Kubota Limited Warranty<sup>1</sup>.

## BENEFITS AT A GLANCE

- Comprehensive coverage
- Protects your investment
- Provides peace of mind
- Reliability of genuine Kubota parts
- Extends both the Basic and applicable Power Train coverage
- Administered by Kubota Tractor Corporation
- Sold and serviced by your Authorized Kubota Extended Warranty Dealer
- Financing available, if purchased at the same time as your tractor
- No deductibles
- Fully transferable



**FOR MORE INFORMATION, VISIT YOUR LOCAL KUBOTA DEALER OR CALL 888-398-9782.**

## KUBOTA CREDIT CORPORATION, U.S.A.

Since 1982, Kubota has extended a wide range of financing alternatives to customers through Kubota Credit Corporations, U.S.A. (KCC). KCC offers competitive interest rates, flexible down payments, monthly and seasonal payment terms and a Kubota sponsored property damage insurance program. Kubota dealers can tailor a variety of finance programs\* to meet the specific requirements of their customers.

**FOR MORE INFORMATION, VISIT YOUR LOCAL KUBOTA DEALER OR [WWW.KUBOTACREDITUSA.COM](http://WWW.KUBOTACREDITUSA.COM).**

<sup>1</sup>The Orange Protection Program is not offered in the State of Florida.

\*Subject to credit approval through Kubota Credit Corporation, U.S.A.



## KTAC INSURANCE AGENCY

Created specifically for Kubota owners, KTAC Insurance is a Kubota endorsed property damage insurance program providing "all risk" protection.

### BENEFITS AT A GLANCE

- Coverage against flood, wind, accidental damage, theft, fire, vandalism and more
- In-transit and off property protection
- Low \$250 deductible
- Convenient payment options
- Transportation reimbursement

KCC customers also receive 100% investment protection\*\* for the first 60 months of your loan.

**FOR MORE INFORMATION, CONTACT A KTAC REPRESENTATIVE AT 800-348-5802 OR  
VISIT [WWW.KTACINSURANCEAGENCY.COM](http://WWW.KTACINSURANCEAGENCY.COM).**

\*\*This is a summary of the Kubota-Endorsed Property Damage Insurance Program. This information is descriptive only and is not intended to be a solicitation or an offer to sell any insurance product or service, nor is the information a complete description of all of the terms, conditions and exclusions applicable. Actual coverage is subject to the language of the policy issued. This policy is underwritten by Ohio Indemnity Company.

## KUBOTA LEASING

In this credit-tight economy, leasing is critical to getting the Kubota equipment your business needs to grow. With the new Kubota Leasing program, commercial customers have access to flexible leasing that makes the full Kubota product line more affordable.

### PROGRAM HIGHLIGHTS INCLUDE:

- Affordable monthly payments
- Fast, easy application process
- Application only required up to \$150,000
- Same Day Credit Decisions with complete information
  - Transactions starting at \$3,000 and up
  - 24, 36, 48 or 60-month terms
- Flexible structures to match your cash flow and budget



For your safety, ROPS with a seatbelt is strongly recommended by Kubota in almost all applications.  
Specifications subject to change without notice. Not all products are available at all dealerships.



## 2014 FULL LINE BROCHURE

### CORPORATE OFFICE

3401 Del Amo Boulevard  
Torrance, CA 90503  
(310) 370-3370

### WESTERN DIVISION

1175 South Guild Avenue  
Lodi, CA 95240  
(209) 334-9910

### CENTRAL DIVISION

14855 FAA Boulevard  
Fort Worth, TX 76155  
(817) 571-0900

### NORTHERN DIVISION

6300 One Kubota Way  
Groveport, OH 43125  
(614) 835-1100

### SOUTHERN DIVISION

1025 Northbrook Parkway  
Suwanee, GA 30024  
(770) 995-8855

**For Earth, For Life**  
**Kubota**

This brochure is for descriptive purposes only. Please contact your local Kubota dealer  
for warranty and safety information. See dealer for details.

**KUBOTA.COM**

FL2014 01/14



2013-2014 RTV X-SERIES  
ACCESSORIES AND  
ATTACHMENTS CATALOG







## TABLE OF CONTENTS

### Cab & Components

- 07 » STEP 1: SELECT YOUR CHOICE OF CANOPIES
- 08 » STEP 2: SELECT YOUR CHOICE OF WINDSHIELDS
- 09 » STEP 3: SELECT YOUR CHOICE OF DOORS
- 09 » STEP 4: REAR PANEL
- 10 » STEP 5: HEAVY DUTY SPRINGS OR STRUTS
- 10 » STEP 6: CUSTOM COMPONENTS
- 12 » STAND-ALONE (NON-CAB) ACCESSORIES

### Attachments

- 15 » FRONT STRAIGHT BLADE
- 15 » HYDRAULIC FRONT ATTACHMENTS
- 16 » QUICK HITCH, CONTROLS & COMPONENT KITS
- 16 » OPTIONAL ITEMS FOR BLADES AND BROOM
- 17 » CARGO BOX SPRAYER
- 18 » SPREADERS

### Exterior & Mechanical

- 21 » WINCH
- 21 » TOWING
- 21 » PROTECTION
- 22 » ELECTRICAL
- 22 » MECHANICAL / MAINTENANCE
- 23 » CARGO BOX BED LIFT

### RAC (Rapid Access Cargo System)

- 25 » FRAME STRUCTURE
- 25 » RAC COMPONENTS

### Tires & Wheels

- 29 » STEEL WHEELS
- 29 » ALLOY WHEELS





## Welcome to Kubota's all-new, high performance RTV X-Series utility vehicles accessory catalog.

Your Kubota RTV gives you the power and durability to tackle the toughest tasks on a variety of terrain. From the daily dependability of the workhorse RTV X900, to the powerful RTV X1120D, and the climate-controlled comfort of the RTV X1100C, there's an RTV model to meet your exact needs.

Your Kubota RTV performs at the highest levels of its design and is capable of even more. The accessories offered here are of the highest quality products engineered to fit your Kubota RTV and designed to take your machine's performance and/or your comfort, convenience, or storage needs to the next level.

No matter where your Kubota works or plays, on the ranch, in the swamp, on the hunt, on the farm, construction site, city or country, we want to offer you the best accessories and attachments to help you get the job done, done quickly, done well, and done safely.



# **“Build your own Cab”**

## **An all-new System for your RTV X900 or RTV X1120D**

Enhance the comfort of your Kubota with a Cab appropriate to your situation. In extreme cold weather, wind, rain and even snow, Kubota offers the ideal Cab for even the most extreme conditions. With this all-new “Build your own Cab” system offered here, you can custom design your own Cab to fit your needs, weather, and applications.

### **Canopies » Step 1**

Select your choice of Canopies — PAGE 07

### **Windshields » Step 2**

Select your choice of Windshields — PAGE 08

### **Doors » Step 3**

Select your choice of Doors — PAGE 09





## Step 4 » Enclosures

Add a Rear Panel — PAGE 09

## Step 5 » Ride

Add heavy duty Springs or Struts — PAGE 10

## Step 6 » Customize

Add functionality and comfort to your cab — PAGE 10





# Ready to get started?

All it takes is 6 easy steps to build a cab just the way you want it »

## Step 1 » Select your choice of canopies

THE BURNING SUN OR THE DRIVING RAINS ARE NO MATCH FOR KUBOTA CANOPIES. THESE CANOPIES ARE SPECIALLY DESIGNED FOR KUBOTA RTV'S FOR IDEA FIT AND FUNCTION TO HELP YOU GET THROUGH THE LONG DAY.



### CANOPY – METAL FOPS

**(FOPS = Falling Object Protection System)**

Metal FOPS - FOPS is a Falling Object Protection System. These Canopies are offered in two colors, Black or Orange to match your Kubota RTV.

VC5000 (BLACK) | AVAILABLE FOR: RTV X900 / RTV X1120D

VC5001 (ORANGE) | AVAILABLE FOR: RTV X900 / RTV X1120D



### CANOPY – PLASTIC (Black)

Plastic, this is an economic option for situations that don't require the added protection of the FOPS Canopy. Offering shade and weather protection, this black plastic Canopy enhances the look of your Kubota RTV.

VC5011 | AVAILABLE FOR: RTV X900 / RTV X1120D

## “Build your own Cab” System (cont.)

### Step 2 » Select your choice of windshields

PROTECT YOURSELF FROM WIND, RAIN, DUST AND DIRT WITH A WINDSHIELD FROM KUBOTA. A WINDSHIELD CAN TURN UNCOMFORTABLE WEATHER CONDITIONS INTO A PLEASANT RIDE IN YOUR RTV.



#### WINDSHIELD – LAMINATED GLASS

Laminated glass is a type of safety glass that holds together when shattered, and its high strength prevents the glass from breaking up into large sharp pieces.

VC5020 | AVAILABLE FOR: RTV X900 / RTV X1120D



#### WINDSHIELD – TEMPERED GLASS

Tempered glass is a type of safety glass processed by controlled thermal or chemical treatments to increase its strength compared with normal glass, and when broken, is designed to crumble into small granular chunks instead of splintering into jagged shards.

VC5025 | AVAILABLE FOR: RTV X900



#### WINDSHIELD – POLYCARB WITH HARD COAT FOR WIPER

Polycarbonate is a versatile, tough plastic used for a variety of applications, from bulletproof windows to compact disks. The main advantage of polycarbonate over other types of plastic is high strength combined with light weight. Polycarbonate is highly impact-resistant. These Polycarb Windshields have been saturated with a high-tech hard coat for use with a wiper for the RTV X900 and the RTV X1120D.

VC5023 | AVAILABLE FOR: RTV X900 / RTV X1120D

If you only need a canopy and windshield (i.e. not a full enclosure) the following Acrylic Windshields will work with the VC5027, VC5028 and VC5011 Canopies. Not compatible with doors.



#### WINDSHIELD – ACRYLIC (not compatible with V5221 Canopy)

Acrylic is a transparent thermoplastic, often used as a lightweight or shatter-resistant alternative to glass very popular for use as RTV windshields. These Acrylic Windshields are offered in Clear and Tinted.

V5027 (CLEAR) | AVAILABLE FOR: RTV X900 / RTV X1120D

V5028 (TINTED) | AVAILABLE FOR: RTV X900 / RTV X1120D

*Uncoated Polycarb windshields listed on page 12 (not cab compatible)*

## "Build your own Cab" System (cont.)

### Step 3 » Select your choice of doors

ON THOSE HARSH DAYS WHEN WINTER UNLEASHES IT'S FURY WITH SLEET HURLING AND FROST GNAWING AT YOUR FACE, YOU LIKELY WANT TO CLOSE UP THE ENTIRE CAB AND STAY SAFE AND WARM INSIDE YOUR RTV. DOORS ARE THE SOLUTION, AND THE INVENTIVE FOLKS AT KUBOTA DESIGNED AND CRAFTED THESE HIGH-QUALITY, EXCEPTIONAL DOORS THAT FEATURE HEAVY DUTY HINGES AND EASY REMOVE-ABILITY. THEY ARE FULL SIZED, ROOF-TO-FLOOR PANEL DOORS DESIGNED SPECIFICALLY FOR THE KUBOTA RTV-X900 AND RTV X1120D.




#### DOORS – METAL

These Steel doors are built to last for years and will keep out the elements thanks to their roof-to-floor panel construction, heavy duty hinges, easy remove-ability, and convenient, wide-opening sliding windows. They are offered in Orange or Black to match your RTV X900 and the RTV X1120D.

VC5090 (BLACK) | AVAILABLE FOR: RTV X900 / RTV X1120D

VC5090 (ORANGE) | AVAILABLE FOR: RTV X900 / RTV X1120D



#### DOORS – VINYL WITH METAL FRAMES (Black)

These metal framed vinyl doors keep out the cold via roof-to-floor panel construction. They are also easily removed for increased ventilation when you want to enjoy the warmer weather. They are offered in Black to match your RTV X900 and the RTV X1120D. The clear vinyl windows also zip open and can be rolled-up.

VC5095 | AVAILABLE FOR: RTV X900 / RTV X1120D

### Step 4 » Complete enclosure by adding a Rear Panel



#### REAR METAL PANEL (Black)

To complete your cab enclosure and seal out the harsh weather, install this outstanding rear panel to your Kubota RTV.

VC5040 | AVAILABLE FOR: RTV X900 / RTV X1120D

## “Build your own Cab” System (cont.)

### Step 5 » Install recommended heavy duty springs or struts to optimize ride height/travel

#### FRONT HEAVY DUTY SPRING KIT

(Recommended use when Full Cab Enclosure or Front Attachments are installed)

Recommended or required for Front Attachment and Cab installation

V5218 | AVAILABLE FOR: RTV X900 / RTV X1120D

#### FRONT HEAVY DUTY SPRING AND DAMPER ASSEMBLY (2 Springs/Struts)


(Recommended use when Full Cab Enclosure or Front Attachments are installed)

Recommended or required for Front Attachment and Cab installation

V5219 | AVAILABLE FOR: RTV X900 / RTV X1120D

### Step 6 » Customize your Cab with the following Components


FURTHER ENHANCE THE COMFORT OF YOUR RTV WITH KUBOTA CAB ACCESSORIES. MIRRORS, WORK LIGHTS, STROBES, AM/FM CD/WEATHER-BAND STEREOS, AND HEATER KITS MAKE FOR AN IDEAL WORK AND PLAY ENVIRONMENT AND HELP YOU ENJOY YOUR KUBOTA EVEN MORE.

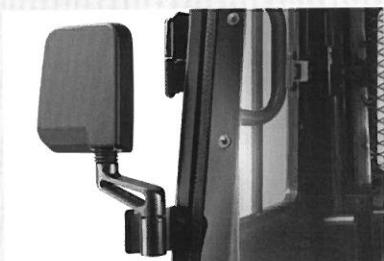

#### MIRRORS – EXTERNAL DELUXE (2)

Kubota offers several internal and external mirrors designed especially for the RTV X900 and the RTV X1120D.

VC5076 | AVAILABLE FOR: RTV X900 / RTV X1120D

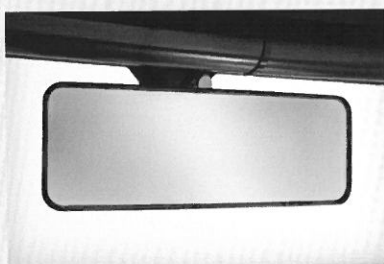

#### MIRROR – INTERNAL REARVIEW (1)

Kubota offers several internal and external mirrors designed especially for the RTV X900 and the RTV X1120D.

VC5070 | AVAILABLE FOR: RTV X900 / RTV X1120D

#### CAB HEATER

An integrated design, powerful blower, and well-placed vents make the Cab Heater an ideal way to stay warm during frigid winters. Available for the RTV X900 and the RTV X1120D with full Cab Enclosures.

VC5083 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5080 Harness/Dash Switch Panel Kit or VC5081 Wire Harness Kits



## "Build your own Cab" System (cont.)



### INTERIOR DOME LIGHT

This Interior Dome Light comes in handy in the late or pre-dawn hours for everything from reading plans to a map.

VC5053 | AVAILABLE FOR: RTV X900 / RTV X1120D



### WIPER KIT – SINGLE, 168 DEGREE SWEEP

Mud, rain, dust, and everyday grime can obstruct your vision out the front windshield. This Wiper Kit helps clear the view and is available for the Laminated, Tempered or Hard-coated Polycarb windshields. (Not compatible with Acrylic or Un-coated polycarb stand-alone windshields).

VC5030 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5080 Harness/Dash Switch Panel Kit or VC5081 Wire Harness Kits



### WORKLIGHTS, LED – FRONT (2)

These LED Work lights are offered for the front of your Kubota RTV and are ideal to help you get the job done when time or weather cause things to darken up.

VC5050 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5080 Harness/Dash Switch Panel Kit or VC5081 Wire Harness Kits



### WORKLIGHTS, LED – REAR (1)

These LED Work lights are offered for the rear of your Kubota RTV and are ideal to help you get the job done when time or weather cause things to darken up.

VC5051 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5080 Harness/Dash Switch Panel Kit or VC5081 Wire Harness Kits



### STROBE LIGHT – CAB, LED

When working in cities and areas with a lot of foot traffic a Strobe Light is a great added safety feature. Kubota offers Strobe Lights and mounting kits (below) for the RTV X900 and the RTV X1120D.

VC5056 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5080 Harness/Dash Switch Panel Kit or VC5081 Wire Harness Kits

### STROBE LIGHT KIT (for RTV X1100C only)

VC5058 | AVAILABLE FOR: RTV X1100C

## “Build your own Cab” System (cont.)

### WIRE HARNESS KIT

(for Single Electrical Accessory or Light)

Offered for the RTV X900 and the RTV X1120D for single electrical accessories or lights.

VC5081 | AVAILABLE FOR: RTV X900 / RTV X1120D

### WIRE HARNESS/DASH SWITCH PANEL KIT

(for Multiple Electric Accessories or Lights)

Offered for the RTV X900 and the RTV X1120D for multiple electrical accessories or lights.

VC5080 | AVAILABLE FOR: RTV X900 / RTV X1120D

Requires: VC5020, VC5025 or VC5023 windshield

## Stand-alone (non-cab) Accessories

IF YOU LIVE IN A MILD CLIMATE, ALL YOU MAY NEED IS A CANOPY TO PROTECT YOU FROM THE SUN AND RAIN AND A WINDSHIELD TO SHIELD YOU FROM THE WIND AND BUGS. THE FOLLOWING ITEMS ARE DESIGNED FOR JUST THOSE TYPES OF ENVIRONMENTS

*(The following items cannot be used to build an enclosed cab or with cab components above & on previous pages)*



### WINDSHIELD – UNCOATED POLYCARB

An affordable alternative for non-cab use.

V5258 (CLEAR) | AVAILABLE FOR: RTV X900 / RTV X1120D

V5259 (TINTED) | AVAILABLE FOR: RTV X900 / RTV X1120D



### PLASTIC CANOPY – BLACK

(not compatible with any ‘VC’ Cab Components)

Affordably provides shade and weather protection and enhances the look of your RTV.

V5221 | AVAILABLE FOR: RTV X900 / RTV X1120D



### MIRROR – EXTERNAL STANDARD (1)

(RTV 1100C Factory Cab model only)

Mounts on door hinges.

V5059 | AVAILABLE FOR: RTV X1100C

### MIRROR (1 – ROPS Models only)

Affordable external mirror. Can mount where needed on your ROPS.

V4358 | AVAILABLE FOR: RTV X900 / RTV X1120D

## “Build your own Cab” System (cont.)

### FRONT HALOGEN WORKLIGHTS (2 – ROPS models only)

Light up the night with these Front Halogen Work lights for the ROPS model RTV X900 and RTV X1120D.

V5222 | AVAILABLE FOR: RTV X900 / RTV X1120D

### REAR HALOGEN WORKLIGHT (1 – ROPS models only)

Light up your cargo area with this Rear Halogen Work light for the ROPS model RTV X900 and RTV X1120D.

V5223 | AVAILABLE FOR: RTV X900 / RTV X1120D

### HEADREST (1)

Add to the comfort of your day with this Headrest from Kubota.

V5231 (BLACK) | AVAILABLE FOR: RTV X1120D

V4231XTC (GRAY) | AVAILABLE FOR RTV X900/RTV X1100C









# Front Attachments, Rear Sprayers And Spreaders

For Snow Removal, Property Maintenance, etc. Enhance the versatility of your Kubota with these outstanding attachments.

## General Duty Front Straight Blade



### 72" STRAIGHT BLADE W/ ELECTRIC LIFT & MANUAL ANGLE

This 72" Straight Blade is ideal for cleaning driveways and parking lots.

V5008 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Requires: V5218 HD Front Springs or V5219 HD Front Dampeners (Struts)

### OPTIONAL HYDRAULIC ANGLE KIT FOR V5008 BLADE

The Hydraulic Angle Kit allows you to remotely adjust the blade angle.

V5007 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Requires: V5271/V5272 Aux Hyd Pump & V5273/V5274 Hyd Valve

## Commercial Use Heavy Duty Hydraulic Front Attachments



### 72" COMMERCIAL STRAIGHT BLADE

This blade is built with the features and options that contractors demand.


V5290 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C



### 72" COMMERCIAL V-BLADE

The 72" V-Blade is designed for daily use in heavy snow and slush.

V5291 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

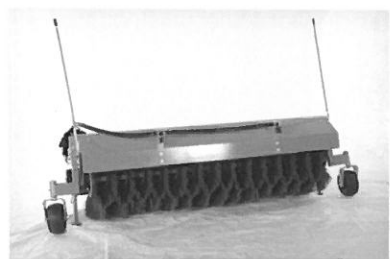

### 60" ROTARY BROOM

This reversible, variable-speed 60" Rotary Broom is perfect for campus and job site clean up.

V5260 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Front Attachments, Rear Sprayers and Spreaders (cont.)

### Hydraulic Quick Hitch, Controls and Component Kits



#### FRONT HYDRAULIC QUICK HITCH

Designed for quick and easy switching of attachments, as well as long term durability, transportation and ground clearance.

**V5289** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Requires: V5218 HD Front Springs or V5219 HD Front Dampeners (Struts)



#### 2-FUNCTION DELUXE HYDRAULIC CONTROL & VALVE KIT

Ergonomically designed, gear-shifter mounted for comfortable, daily use.

**V5232** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

#### 3RD-FUNCTION HYDRAULIC VALVE UPGRADE KIT

**V5233** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Required for the V5291 V-blade and V5260 Rotary Broom

#### HYDRAULIC OIL COOLER KIT

**V5240** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Required for the V5260 Rotary Broom

#### HAND THROTTLE KIT

A Hand Throttle Kit allows for precision throttle control.


**V5245** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Required for V5260 Rotary Broom

#### HYDRAULIC PUMP AND VALVE KITS

See dealer for details.

### Optional Items for Blades and Broom

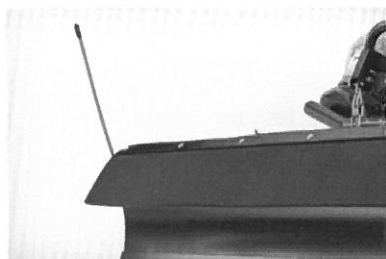

#### BLADE MARKERS FOR V5290

Increase your visibility in heavy weather conditions.

**V5250** | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Front Attachments, Rear Sprayers and Spreaders (cont.)



### CURB GUARDS FOR V5291 V-BLADE

Protects the corners of your V-blade from incidental curb damage.


V5256 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C



### GRILLE GUARD ADAPTOR KIT

A quick and easy way to re-install your Grille Guard when the season's over.

V5255 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

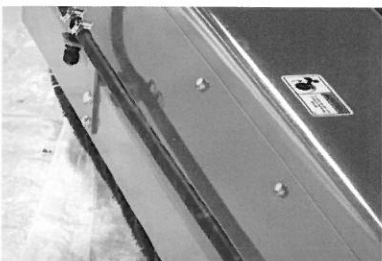


### DUST SUPPRESSION KIT FOR V5260 ROTARY BROOM

For hot, dry, dusty conditions you'll be glad you have this Dust Suppression Kit to your Kubota Rotary Broom.

V4496 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

Requires: V5292 68 gallon Water Tank/Sprayer Kit

## Cargo Box Sprayer

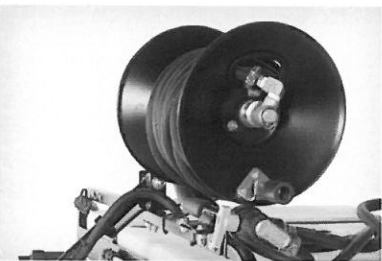

### 68 GALLON SPRAYER WITH WAND & 50' HOSE AND REEL

This low-profile, 68 gallon sprayer is designed for easy, complete drainage.

V5292 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### REAR BOOM SPRAY NOZZLE KIT FOR V5292

Efficient, compact, and retractable boom design to tackle selective spraying applications.

V4494 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Front Attachments, Rear Sprayers and Spreaders (cont.)


### Spreaders



#### 10 CU FT CARGO BOX SALT/SAND SPREADER

This precise, electronically-controlled Salt/Sand Spreader does the job quickly and efficiently (previous model V4405 shown).

V5005 | AVAILABLE FOR: RTV X900 / RTV X1100C

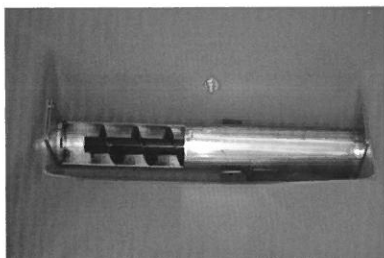

#### OPTIONAL FLOW CONTROL TUBE FOR V5005 SPREADER

This stainless, adjustable flow regulator expands V5005 capabilities to include fertilizer, seed, and other dry materials for true 4 seasons use.

V4407 | AVAILABLE FOR: RTV X900 / RTV X1100C

#### 3 CU FT REAR MOUNT SALT/SAND SPREADER

Designed for precise, efficient spreading; allows tailgate to fold down while attached.

V5002 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C


#### 3 CU FT REAR MOUNT 4 SEASONS SPREADER

Seed a field fast and easy with this Rear Mount 4 Seasons Spreader.

V5003 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C





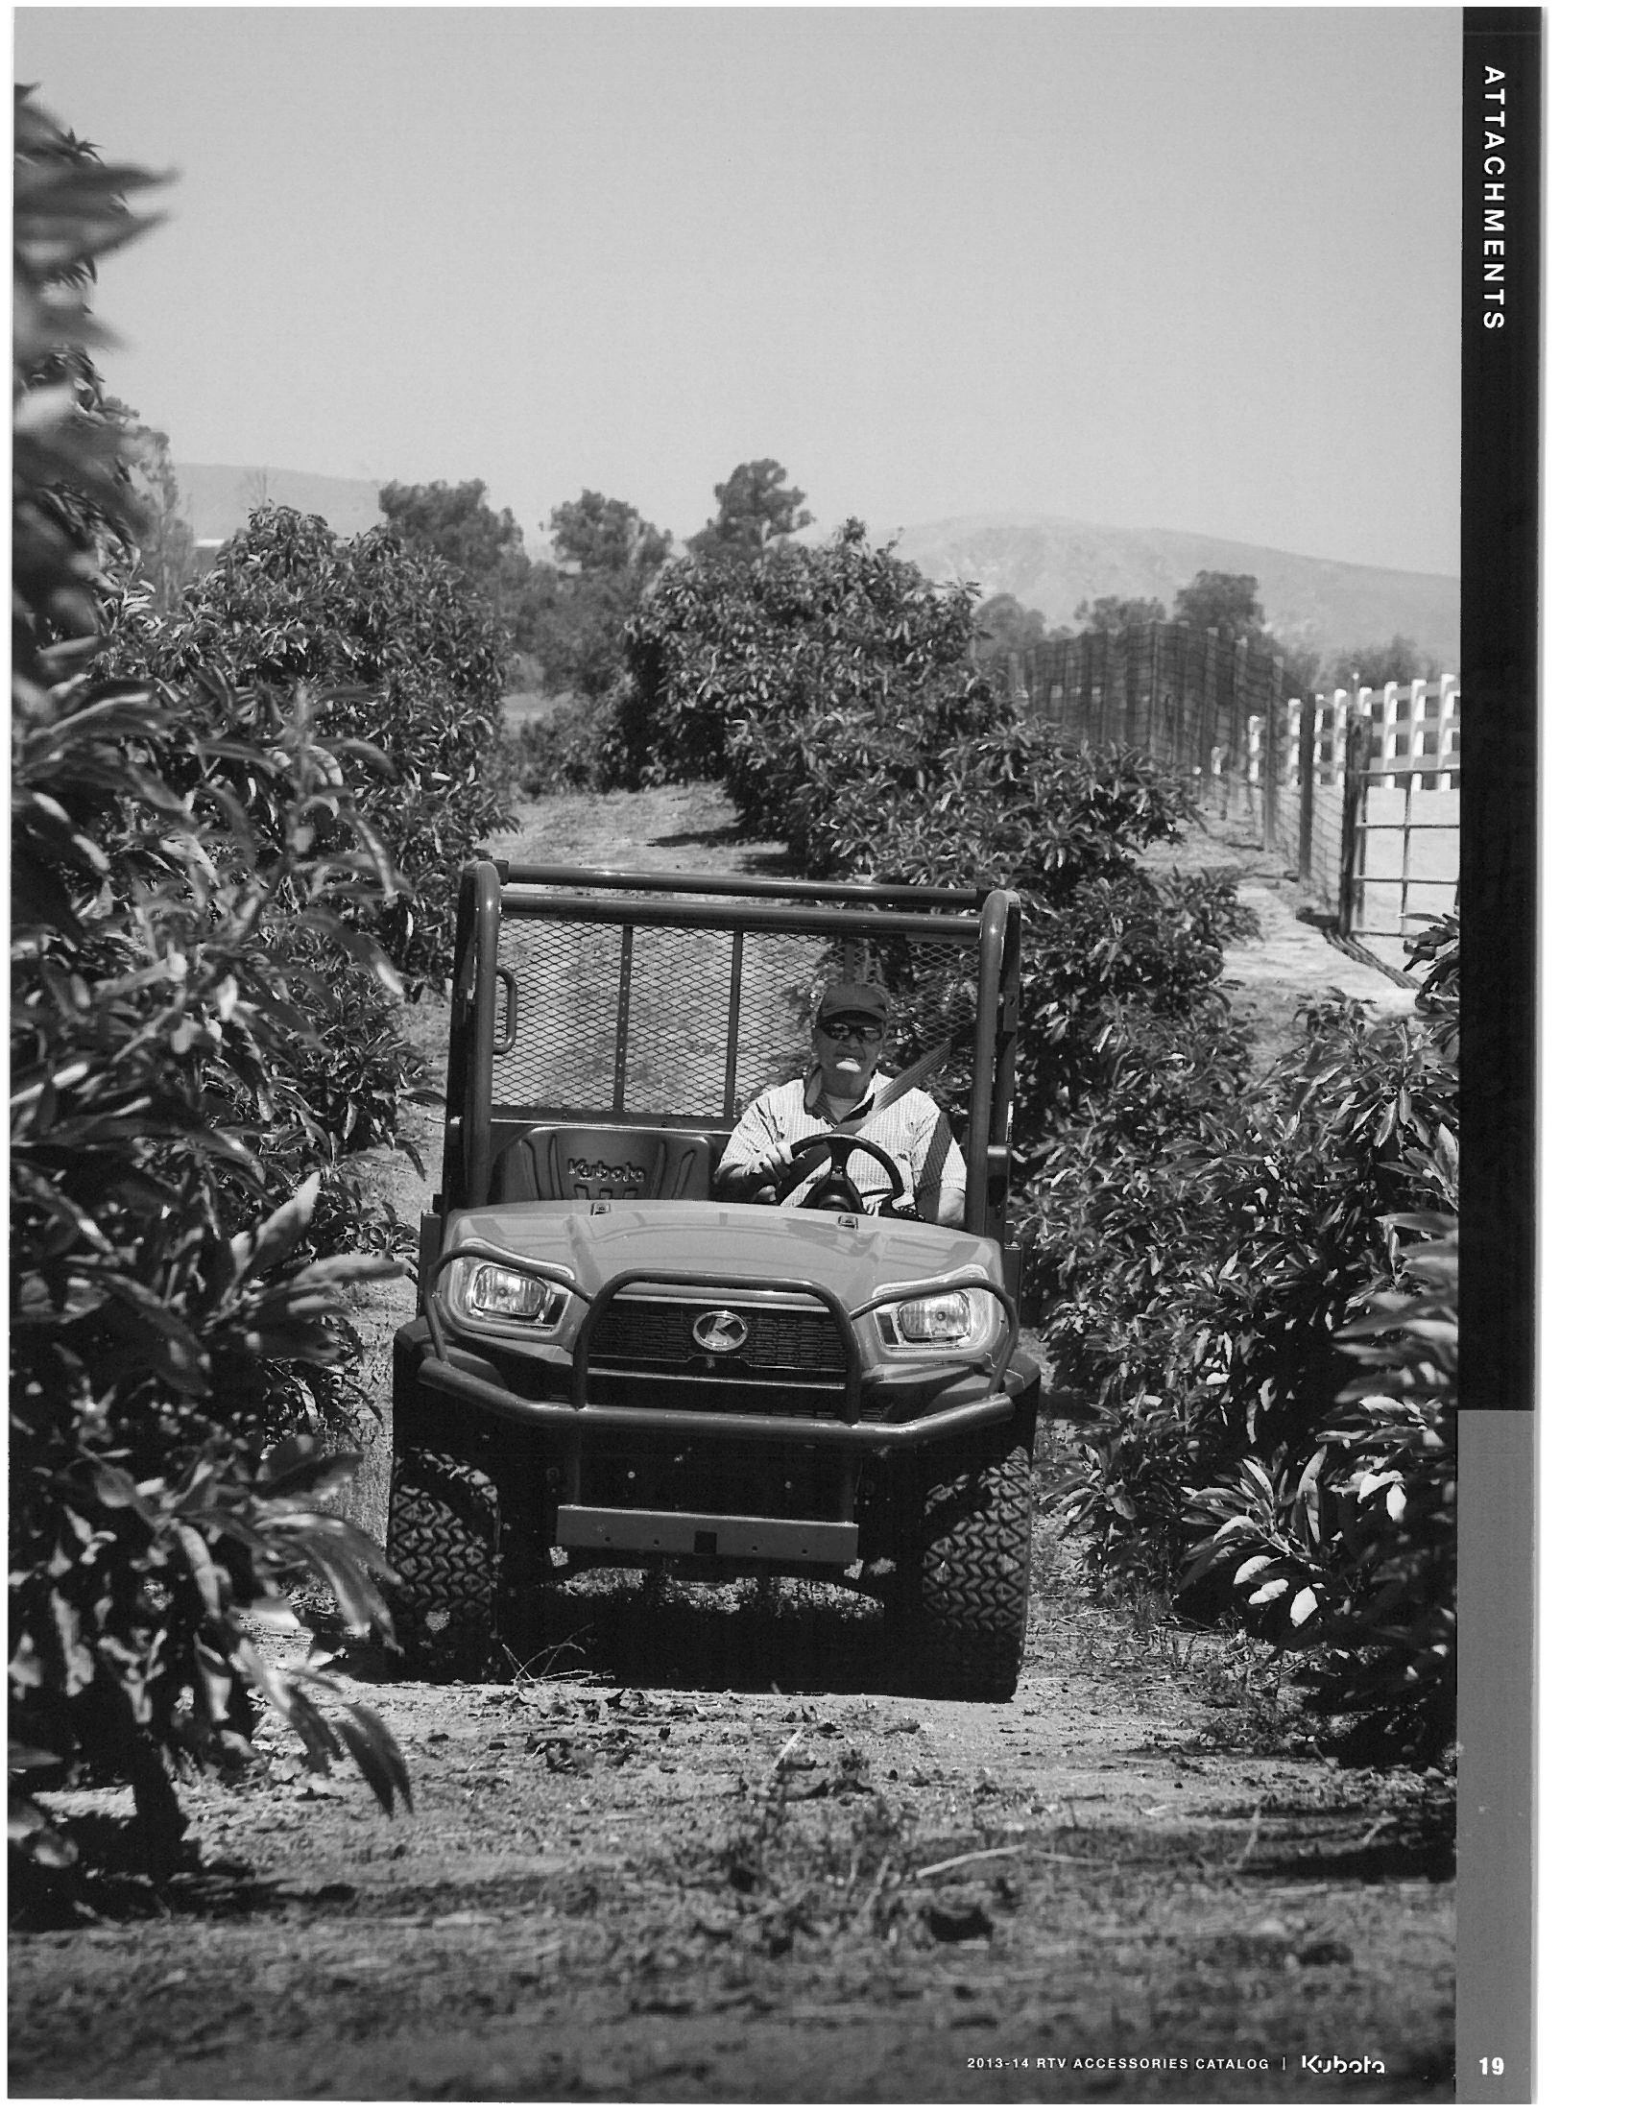



# Exterior & Mechanical Accessories

Whatever the task is that you're facing with your RTV, the following accessories will get the job done easier, faster and more efficiently.

## Winch




### WINCH KIT – 4,000 LBS. CAPACITY

Affordably priced 4,000 pound capacity winch, designed to meet Kubota's engineering requirements

V5244 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Towing

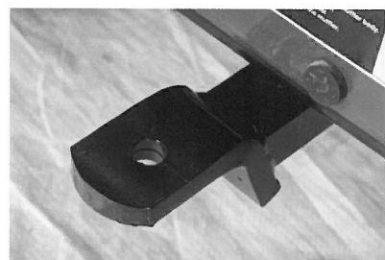


### 2" TRAILER BALL MOUNT KIT

Towing is easy with this 2" Trailer Ball Mount Kit (does not include hitch ball)

V5200 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Protection

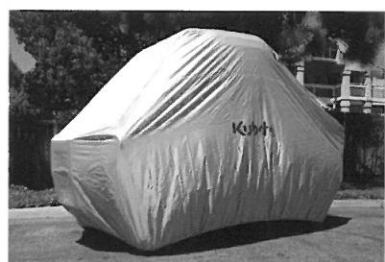

### VEHICLE STORAGE COVER

Use this vehicle cover to help keep you Kubota safe from foul weather, dirt and dust.

V4382 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### PLASTIC CARGO BEDLINER

Protect your bed from dents and dings with this quality plastic bed liner.

V5229 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### TAIL LAMP GUARD KIT

Protect your tail light from damaging debris by installing this Tail Lamp Guard Kit.

V5227 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C



## Exterior & Mechanical Accessories (cont.)

### MUD GUARD KIT FRONT WHEELS (2)

Cut down on flying mud by installing this Mud Guard Kit.

V5225 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### MUD GUARD KIT – REAR WHEELS (2)

Reduced mud spatter off the rear wheels with this Mud Guard Kit.

V5226 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### CV JOINT GUARD – FRONT

Help protect your front CV Joint from rocks and stumps with this CV Joint Guard.

V5238 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### CV JOINT GUARD – REAR

Reduce potential damage to the rear CV Joint with this CV Joint Guard.

V5239 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Electrical

### TURN SIGNAL/HAZARD LIGHT KIT

Designed for great visibility and integration with the RTV's electrical system.

V5237 | AVAILABLE FOR: RTV X900 / RTV X1120D

V5257 | AVAILABLE FOR: RTV X1100C

### BACKUP ALARM KIT

Helps warn pedestrians you're backing up with this Backup Alarm Kit for high trafficked areas.

V5236 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## Mechanical/Maintenance

### FRONT HEAVY DUTY SPRING KIT (2)

Recommended or required for Front Attachment and Cab installation.

V5218 | AVAILABLE FOR: RTV X900 / RTV X1120D

### FRONT HEAVY DUTY SPRING AND DAMPER ASSEMBLY (2 Springs/Struts)

Recommended or required for Front Attachment and Cab installation.

V5219 | AVAILABLE FOR: RTV X900 / RTV X1120D



## Exterior & Mechanical Accessories (cont.)

### EXTENDED OIL DIPSTICK

Check your oil regularly and precisely with this Extended Oil Dipstick.

V5202 | AVAILABLE FOR: RTV X900

V5204 | AVAILABLE FOR: RTV X1120D / RTV X1100C

### ENGINE BLOCK HEATER KIT

This electric Block Heater helps ensure cold starting in frigid climates.

70000-73596 | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

### REPLACEMENT ROPS

Always replace a damaged (ROPS) Roll Over Protection System for your safety.

SFRTV-X9 | AVAILABLE FOR: RTV X900 / RTV X1120D

### TIER IV REPLACEMENT ENGINE RTV X900

Complete, genuine Kubota diesel replacement engine for your RTV.

D902E4UV2 | AVAILABLE FOR: RTV X900

### TIER IV REPLACEMENT ENGINE – RTV X1120D/X1100C

Complete, genuine Kubota diesel replacement engine for your RTV.

D1105ERUV2 | AVAILABLE FOR: RTV X1120D / RTV X1100C

## Cargo Box Bed Lift

### HYDRAULIC BED LIFT KIT FOR RTV X900 GENERAL PURPOSE

Dumping heavy loads is less strenuous and easier with this handy Hydraulic Bed Lift Kit.

V5271 | AVAILABLE FOR: RTV X900





# Rapid Access Cargo (RAC) System

The Rapid Access Cargo (RAC) System greatly increases your productivity and the versatility of your RTV by allowing you to organize and carry more tools and cargo.

AVAILABILITY PENDING. PLEASE CHECK WITH YOUR KUBOTA DEALER.

## Frame Structure



### FULL RAC FRAME SYSTEM\*

This Full Rapid Attach Cargo Frame is the foundation for carrying a large variety of tools and equipment.

V5012 | AVAILABLE FOR: RTV X900 / RTV X1100C

## RAC Components



### EXTENDER BASKET\*

This large basket can be mounted horizontally or vertically.

V5015 | AVAILABLE FOR: RTV X900 / RTV X1100C



### HALF CLIP BASKET\*

Can attach to the inside or outside of the RAC and is ideal for grab and go tools.

V5016 | AVAILABLE FOR: RTV X900 / RTV X1100C



### FULL CLIP BASKET\*

The Full Clip Basket mounts on the RAC Frame for increased cargo capacity.

V5017 | AVAILABLE FOR: RTV X900 / RTV X1100C

\*AVAILABILITY PENDING. PLEASE CHECK WITH YOUR KUBOTA DEALER.



## Rapid Access Cargo (RAC) System (cont.)



### LONG HANDLE TOOL CARRIER\*

This carrier is ideal for shovels, pruners, rakes, and other long handled tools.

V5018 | AVAILABLE FOR: RTV X900 / RTV X1100C



### STRING TRIMMER HOLDER\*

Your String Trimmer is an important tool, keep it secure with this Holder.

V4419 | AVAILABLE FOR: RTV X900 / RTV X1100C



### BACKPACK BLOWER HOLDER\*

Keep your Blower secure with this easy to install Backpack Blower Holder.

V4421 | AVAILABLE FOR: RTV X900 / RTV X1100C



### COOLER/BUCKET CRUISER\*

Holds different sizes and shapes of coolers and buckets.

V4422 | AVAILABLE FOR: RTV X900 / RTV X1100C



\*AVAILABILITY PENDING. PLEASE CHECK WITH YOUR KUBOTA DEALER.







# Tires & Wheels

Kubota offers one of the industry's best selection of tires to meet your needs, whether you're primarily on rough-terrain, hard-pack, asphalt or on delicate turf. These tires are mounted on standard dark gray steel wheels, or on attractive silver or black-painted alloy wheels.

## 25X10-12, ATV TIRE W/ STEEL WHEEL

This standard ATV Tire with a steel wheel is an excellent off-road, rough terrain choice.

ARTV5201 | AVAILABLE FOR: RTV X900 / RTV X1100C (PLEASE SPECIFY RIGHT OR LEFT)

## 25X10-12, HDWS TIRE W/ STEEL WHEEL

Heavy Duty Work Site Tire with a strong steel wheel is ideal for job sites and all-around use.

ARTV5203 | AVAILABLE FOR: RTV X900 / RTV X1100C

## 25X12-12, TURF TIRE W/ STEEL WHEEL

This low-impact Turf Tire with steel wheel is ideal for turf, grass and sports fields.

ARTV5205 | AVAILABLE FOR: RTV X900 / RTV X1100C



## 25X10-12, SILVER ALLOY WHEEL (With ATV tire / HDWS tire)

Silver, machine-polished and clear-coated alloy wheel with ATV or HDWS tire

ARTV5211 (ATV TIRE) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

(PLEASE SPECIFY RIGHT OR LEFT)

ARTV5213 (HDWS TIRE) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C



## 25X10-12, BLACK ALLOY WHEEL (With ATV tire / HDWS tire)

Light weight and strong Alloy Wheel in Black with ATV or HDWS tire

ARTV5212 (ATV TIRE) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

(PLEASE SPECIFY RIGHT OR LEFT)

ARTV5214 (HDWS TIRE) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

## HARDWARE KIT – ALLOY WHEEL

(Silver / Black)

Lug bolts (4) and Center Cap (1) for Alloy Wheel installation

V5205 (SILVER) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C

V5203 (BLACK) | AVAILABLE FOR: RTV X900 / RTV X1120D / RTV X1100C





**FAIRPLAIN TRACTOR SALES**  
**1169 RIPLEY RD**  
**RIPLEY, WV 25271**  
**304-372-9875**  
**Email: [tractorsales@lumos.net](mailto:tractorsales@lumos.net)**

**For Earth, For Life**  
**Kubota**

[www.kubota.com](http://www.kubota.com)

1001TEA - Date 04/2014 - RTV Accessory Brochure  
© 2014 Kubota Tractor Corporation.