




The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

## Header

 List View

### General Information

Contact

Default Values

Discount


Document Information

**Procurement Folder:** 41557

**SO Doc Code:** CRFQ

**Procurement Type:** Central Purchase Order

**SO Dept:** 0506

**Vendor ID:**  

**SO Doc ID:** MMB1500000002

**Legal Name:** SOFTWARE INFORMATION SYSTEMS LLC

**Published Date:** 3/10/15

**Alias/DBA:**

**Close Date:** 3/19/15



**Total Bid:** \$27,020.00

**Close Time:** 13:30

**Response Date:**  

**Status:** Closed

**Response Time:**

**Solicitation Description:**   

**Total of Header Attachments:** 0

**Total of All Attachments:** 0



Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

State Of West Virginia  
Solicitation Response

Proc Folder : 41557

Solicitation Description : ADDENDUM NO. 1 NETWORK SWITCHES & ACCESS., W/5 YR EXTENDED

Proc Type : Central Purchase Order

Date issued	Solicitation Closes	Solicitation No	Version
	2015-03-19 13:30:00	SR        0506   ESR03161500000002617	1

VENDOR
000000219154  SOFTWARE INFORMATION SYSTEMS LLC

FOR INFORMATION CONTACT THE BUYER

Gregory Clay  
(304) 558-2566  
gregory.c.clay@wv.gov

Signature X	FEIN #	DATE
-------------	--------	------

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	NETWORK SWITCH	9.00000	EA	\$2,200.00	

Comm Code	Manufacturer	Specification	Model #
43222612	CISCO		

Extended Description :	SECTION 4.2 CATALYST 2960S 48 GIG POE 740W, 4 X SFP LAN BASE SWITCH OR EQUAL MUST INCLUDE FIVE (5) YEAR EXTENDED SERVICE AGREEMENT.
------------------------	-------------------------------------------------------------------------------------------------------------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	NETWORK SWITCH	2.00000	EA	\$1,300.00	

Comm Code	Manufacturer	Specification	Model #
43222612	CISCO		

Extended Description :	SECTION 4.3 CATALYST 2960S 24 GIG POE 370 W, 2 x SFP LAN BASE SWITCH OR EQUAL. MUST INCLUDE FIVE (5) EXTENDED SERVICE AGREEMENT.
------------------------	----------------------------------------------------------------------------------------------------------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
3	STACK MODULE	7.00000	EA	\$0.00	

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO		

Extended Description :	SECTION 4.4 CISCO CATALYST 2960S FLEX STACK MODULE OR EQUAL
------------------------	----------------------------------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
4	STACKING CABLE	5.00000	EA	\$60.00	

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO		

Extended Description :	SECTIO 4.5 CISCO FLEXSTACK 50CM STACKING CABLE OR EQUAL
------------------------	------------------------------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
5	STACKING CABLE	2.00000	EA	\$60.00	

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO		

Extended Description : SECTION 4.6  
CISCO FLEXSTACK 1M STACKING CABLE OR EQUAL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
6	TRANSCEIVER	14.00000	EA	\$300.00	

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO		

Extended Description : SECTION 4.7  
CISCO GE SFP, LC CONNECTOR SX TRANSCEIVER OR EQUAL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
7	AC POWER CORD	11.00000	EA	\$0.00	

Comm Code	Manufacturer	Specification	Model #
26121636	CISCO		

Extended Description : SECTION 4.8  
AC POWER CORD, 16 AWG OR EQUAL

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
8	INSERT PACKOUT	11.00000	EA	\$0.00	

Comm Code	Manufacturer	Specification	Model #
43222600			

Extended Description : SECTION 4.9.1  
SECTION 4.9.2  
INSERT PACKOUT



Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130

State of West Virginia  
Request for Quotation

Proc Folder: 41557

Doc Description: ADDENDUM NO. 1 NETWORK SWITCHES & ACCESS., W/5 YR EXTENDED

Proc Type: Central Purchase Order

Date Issued	Solicitation Closes	Solicitation No	Version
2015-03-10	2015-03-19 13:30:00	CRFQ 0506 MMB1500000002	2

**BID RECEIVING LOCATION**

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV

25305

US

**VENDOR**

Vendor Name, Address and Telephone Number:

Software Information System, LLC  
200 Association Drive, Suite 210  
Charleston, WV 25311

304 768-1645

Total \$27,020.00

Please see page 6 regarding  
service. This bid meets the  
specifications required.

ccst

**FOR INFORMATION CONTACT THE BUYER**

Gregory Clay  
(304) 558-2566  
gregory.c.clay@wv.gov

Signature X

FEIN #

61-1371685

DATE

3-11-2015

All offers subject to all terms and conditions contained in this solicitation



INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	NETWORK SWITCH	9.00000	EA	2200.00	\$19,800.00

Comm Code	Manufacturer	Specification	Model #
43222612	CISCO - <i>Brocade</i>	<i>48 Port 16 SWCH POE + 78W / 10G SFP</i>	<i>1CX6450-48P</i>

Extended Description :

SECTION 4.2

CATALYST 2960S 48 GIG POE 740W, 4 X SFP LAN BASE SWITCH OR EQUAL

MUST INCLUDE FIVE (5) YEAR EXTENDED SERVICE AGREEMENT.

*See page 6 - Included*

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	NETWORK SWITCH	2.00000	EA	1300.00	\$2600.00

Comm Code	Manufacturer	Specification	Model #
43222612	CISCO - <i>Brocade</i>	<i>24 Port 16 SWCH POE + 350W / 10G SFP</i>	<i>1CX8450-24P</i>

Extended Description :

SECTION 4.3

CATALYST 2960S 24 GIG POE 370 W, 2 x SFP LAN BASE SWITCH OR EQUAL.

MUST INCLUDE FIVE (5) EXTENDED SERVICE AGREEMENT.

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
3	STACK MODULE	7.00000	EA	<i>included on switch - 0-0</i>	

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO <i>Spec 17</i>		

Extended Description :

SECTION 4.4

CISCO CATALYST 2960S FLEX STACK MODULE OR EQUAL

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
4	STACKING CABLE	5.00000	EA	<i>60-02</i>	<i>300.02</i>

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO <i>Procure</i>	<i>1 pk in DASFD / cop</i>	<i>106-SFPP-TWX 0101</i>

Extended Description :

SECTIO 4.5

CISCO FLEXSTACK 50CM STACKING CABLE OR EQUAL

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	



Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
5	STACKING CABLE	2.00000	EA	60.00	120.00

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO <i>Biscole</i>	1PK 1M DfS Pp x cot	10G-SAPP-7wx-0101

Extended Description :

SECTION 4.6

CISCO FLEXSTACK 1M STACKING CABLE OR EQUAL

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
6	TRANSCEIVER	14.00000	EA	300.00	4200.00

Comm Code	Manufacturer	Specification	Model #
43222600	CISCO <i>Biscole</i>	1000BSX SFP MOD PIM LC	ELMG-SX-019

Extended Description :

SECTION 4.7

CISCO GE SFP, LC CONNECTOR SX TRANSCEIVER OR EQUAL

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
7	AC POWER CORD	11.00000	EA	included to switch	-0-

Comm Code	Manufacturer	Specification	Model #
26121636	CISCO <i>Biscole</i>		

Extended Description :

SECTION 4.8

AC POWER CORD, 16 AWG OR EQUAL

INVOICE TO		SHIP TO	
PROCUREMENT OFFICER - 304-525-7801 HEALTH AND HUMAN RESOURCES MILDRED MITCHELL - BATEMAN HOSPITAL PO BOX 448 HUNTINGTON WV25709 US		WV OFFICE OF TECHNOLOGY BLDG 5, 10TH FLOOR 1900 KANAWHA BLVD E CHARLESTON WV 25304 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
8	INSERT PACKOUT	11.00000	EA	<i>Not applicable</i>	- 0 -

Comm Code	Manufacturer	Specification	Model #
43222600			

Extended Description :

SECTION 4.9.1  
SECTION 4.9.2

INSERT PACKOUT

The bid reads 4.10:

Vendor must provide an extended service agreement to include the following requirements for a total of five (5) years.

The extended service agreement must be Cisco Smartnet for each switch listed in 4.2.

Part number CON-SNTP-2960S4FS or equal.

The service must include telephone technical support eight (8) hours a day, 8:00am to 4:00pm eastern time zone/five (5) days a week, next day hardware replacement, and software updates.

The brocade ICX6450 includes Brocade Assurance in the base price. This includes Advanced parts replacement- Next business day, for up to 5 years after Brocade announces End of Life on the product. The ICX6450 also includes 3 years of phone 8x5 phone support, Software upgrades, and bug fixes.

\*\*\*\*We have provided a 2 year price for TAC and Phone support for years 4 and 5.

The bid reads 4.11:

Vendor must provide an extended service agreement to include the following requirements for year one (1) and renewals for four (4) additional years for a total of five (5) years.

The extended service agreement must be Cisco Smartnet for each switch listed in Section 4.3. Part number CON-SNTP-2960S2PS or equal.

The service must include telephone technical support eight (8) hours a day, 8:00am to 4:00pm eastern time zone/five (5) days a week, next day hardware replacement, and software updates.

The brocade ICX6450 includes Brocade Assurance in the base price. This includes Advanced parts replacement- Next business day, for up to 5 years after Brocade announces End of Life on the product. The ICX6450 also includes 3 years of phone 8x5 phone support, Software upgrades, and bug fixes.

\*\*\*\*We have provided an annual price for TAC and Phone support, renewable each year for years 4 and 5.

page 6

**ADDENDUM ACKNOWLEDGEMENT FORM**  
**SOLICITATION NO.: MMB1500000002**

**Instructions:** Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

**Acknowledgment:** I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

**Addendum Numbers Received:**

(Check the box next to each addendum received)

<input checked="" type="checkbox"/> Addendum No. 1	<input type="checkbox"/> Addendum No. 6
<input type="checkbox"/> Addendum No. 2	<input type="checkbox"/> Addendum No. 7
<input type="checkbox"/> Addendum No. 3	<input type="checkbox"/> Addendum No. 8
<input type="checkbox"/> Addendum No. 4	<input type="checkbox"/> Addendum No. 9
<input type="checkbox"/> Addendum No. 5	<input type="checkbox"/> Addendum No. 10

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Software Information Systems  
Company  
[Signature]  
Authorized Signature  
3-17-2015  
Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.  
Revised 6/8/2012



STATE OF WEST VIRGINIA  
Purchasing Division

## PURCHASING AFFIDAVIT

**MANDATE:** Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

**EXCEPTION:** The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**DEFINITIONS:**

**"Debt"** means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

**"Employer default"** means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

**"Related party"** means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

**AFFIRMATION:** By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

**WITNESS THE FOLLOWING SIGNATURE:**

Vendor's Name: Software Interacting Systems LLC

Authorized Signature: [Signature] Date: 3-16-2015

State of West Virginia

County of Kanawha, to-wit:

Taken, subscribed, and sworn to before me this 16<sup>th</sup> day of March, 2015.


My Commission expires 06-21, 2022.

**AFFIX SEAL HERE**

**NOTARY PUBLIC**

Billy D. Holcomb

*Purchasing Affidavit (Revised 07/01/2012)*

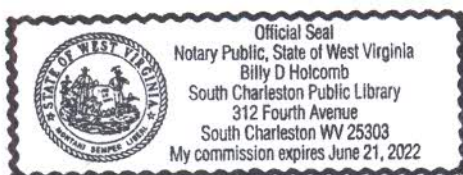



# BROCADE ICX 6430 AND 6450 SWITCHES

## ENTERPRISE LAN SWITCHING

## Enterprise-Class Stackable Switching at an Entry-Level Price

### HIGHLIGHTS

- Offers enterprise-class stackable switching at an entry-level price, allowing organizations to buy what they need now and easily scale as demand grows and new technologies emerge
- Delivers unprecedented feature/price value for enterprise applications, including Unified Communications (UC) and mobility, with 10 Gigabit Ethernet (GbE) and PoE/PoE+
- Provides unmatched availability for low-cost switching with redundant uplink/stacking ports, hitless stacking failover, and configurable power redundancy
- Simplifies network operations and protects investments with the Brocade HyperEdge Architecture, enabling consolidated network management and advanced services sharing across heterogeneous switches
- Offers an attractive 12-port, compact, and enterprise-class fanless switch model for deployments outside the wiring closet
- Includes the Brocade Assurance Limited Lifetime Warranty and three years of technical support

Today's organizations expect their enterprise campus LANs to deliver more services to more users at a lower cost. These services include next-generation business applications as well as anytime, anywhere access for mobile devices. At the same time, campus LANs must be able to scale easily to meet future demands and efficiently evolve within dynamic business environments.

Brocade® ICX® 6430 and 6450 Switches provide enterprise-class stackable LAN switching solutions to meet the growing demands of campus networks. Designed for small to medium-size enterprises, branch offices, and distributed campuses, these intelligent, scalable edge switches deliver enterprise-class functionality at an affordable price—without compromising on performance and reliability. The Brocade ICX 6430 and 6450 are available

in 12-, 24-, and 48-port 10/100/1000 Mbps models and 1 Gigabit Ethernet (GbE) or 10 GbE dual-purpose uplink/stacking ports (see Figures 1 and 2)—with or without IEEE 802.3af Power over Ethernet (PoE) and 802.3at Power over Ethernet Plus (PoE+)—to support enterprise edge networking, wireless mobility, and IP communications.

### BUILT FOR MAXIMUM COST-EFFICIENCY AND INVESTMENT PROTECTION

With Brocade ICX 6430 and 6450 Switches, organizations can buy only what they need today and easily scale user ports and services as their network requirements evolve. Brocade offers maximum investment protection through flexible software licensing options that bring advanced services and performance to lower-cost ports.



# BROCADE

In particular, the Brocade HyperEdge™ Architecture allows premium switch features and services to be shared with entry-level switches (Brocade ICX 6450 only). The Brocade ICX switches also are hardware-capable for easy software implementation (software available in a future release) of emerging security (IEEE 802.1AE MACsec) and energy savings (IEEE 802.3az EEE) standards, helping to protect today's investments while supporting tomorrow's needs.

Brocade ICX 6430 and 6450 Switches come with three years of technical support from the Brocade Technical Assistance Center and software maintenance updates. With these capabilities, organizations gain peace of mind while freeing up IT budget and resources to grow their businesses.

### AUTOMATED DEPLOYMENT AND MANAGEMENT

Brocade ICX 6430 and 6450 Switches help simplify network deployment and management by enabling auto-discovery of new Brocade ICX switches within the stack. IT organizations can auto-configure switches using pre-set instructions on the network. To further simplify management, these stacked switches collectively utilize only a single IP address and offer transparent forwarding across the stack.

By embedding sFlow capabilities into the Brocade ICX 6450, Brocade delivers an “always-on” monitoring technology that operates with wire-speed performance. sFlow dramatically reduces implementation complexity compared to traditional network monitoring solutions that rely on mirrored ports, probes, and line-tap technologies.

### HIGH AVAILABILITY AND RESILIENCY

Brocade Ethernet switch stacking technology helps IT organizations meet growing user demand by delivering high availability through real-time state synchronization across the stack and instantaneous hitless failover support. In addition, organizations can use hot-insertion and removal of stack members to avoid interrupting network service when adding or replacing a switch. High-performance Link Aggregation Groups (LAGs) increase 10 GbE uplink bandwidth and redundancy to the core, giving users uninterrupted high performance to support the most demanding applications. Brocade ICX 6430 and 6450 Switches also offer an external power supply for added resiliency and increased PoE/PoE+ port availability (see Figure 3).

### STACKING TECHNOLOGY FOR THE MOST DEMANDING CAMPUS LAN ENVIRONMENTS

Brocade Ethernet switch stacking technology makes it possible to stack up to eight Brocade ICX 6450 Switches into a single logical switch, providing simple and robust expandability for future growth at the network edge. This stacked switch has only a single IP address to simplify management and offers transparent forwarding across a pool of up to 384 1 GbE ports and 32 10 GbE ports. When new switches join the stack, they automatically inherit the stack's existing configuration file, enabling true plug-and-play network expansion. Flexible licensing of 1 GbE to 10 GbE ports for uplink and stacking allows organizations to optimize network performance based on specific

requirements. Brocade stacking technology also delivers high availability, enabling instantaneous hitless failover to a standby stack controller if the master stack controller fails. In addition, organizations can use hot-insertion and removal of stack members to avoid interrupting network services.

For networks with lower bandwidth requirements, the Brocade ICX 6430 offers the same rugged stacking capability (except the Brocade ICX 6430-C) at a reduced price, providing a lower-density solution of up to 192 1 GbE access ports with 16 1 GbE uplink and stacking ports, and a maximum stack height of four switches.


### Built to Power Next-Generation Edge Devices

The Brocade ICX 6430 and 6450 can deliver both PoE power and data across network connections, providing a single-cable solution for the latest edge devices (see Figure 4). Brocade ICX switches are compatible with industry-standard Voice over IP (VoIP) equipment as well as legacy IP phones. In addition, they support the PoE+ standard (IEEE 802.3at) to provide up to Class 4 (30 watts) power to each device. This high-powered solution simplifies wiring for next-generation edge devices, such as video conferencing and VoIP phones, surveillance cameras, and 802.11n wireless Access Points (APs). The PoE capability reduces the number of power receptacles and power adapters while increasing reliability and wiring flexibility. The Brocade ICX 6450 can provide PoE power to all ports and PoE+ (30 watts) to all ports when an external power supply is deployed.



**Figure 1.**

Brocade ICX 6450 Switches support four dual-mode 1 GbE/10 GbE SFP/SFP+ ports for uplink and stacking, and up to 48 1 GbE RJ-45 ports. Brocade ICX 6430-24 and 6430-48 Switches support four 1 GbE SFP ports for uplink and stacking to provide a cost-optimized solution for lower-traffic networks.



**Figure 2.**

The Brocade ICX 6430-C Compact Switch supports two 1 GbE RJ-45 and two 1 GbE SFP ports for uplink and 12 1 GbE RJ-45 ports with four PoE/PoE+ capable ports in a compact and fanless design—ideal for deployment outside the wiring closet.

## Plug-and-Play Operations for Powered Devices

Brocade ICX switches support the IEEE 802.1AB Link Layer Discovery Protocol (LLDP) and ANSI TIA 1057 Link Layer Discovery Protocol-Media Endpoint Discovery (LLDP-MED) standards that enable organizations to deploy interoperable multivendor solutions for Unified Communications (UC). Configuring IP endpoints such as VoIP phones can be a complex task, requiring manual and time-consuming configuration. LLDP and LLDP-MED provide a standard, open method for configuring, discovering, and managing network infrastructure.

The LLDP protocols also reduce operational costs by simplifying and automating network operations. For example, LLDP-MED provides an open protocol for configuring Quality of Service (QoS), security policies, Virtual LAN (VLAN) assignments, PoE power levels, and service priorities.

## Compact Switch Solution for Deployment Outside the Wiring Closet

The Brocade ICX 6430-C Compact Switch offers enterprise-class LAN switching capabilities, performance, reliability, security, and manageability in a small form factor with fanless operation for deployment outside the wiring closet. It is ideal for deployment in classrooms, retail locations,

factories, small offices, workgroup, and space-constrained environments. The Brocade ICX 6430-C is available in a 12-port 10/100/1000 Mbps model with IEEE 802.3af PoE and 802.3at PoE+ support on four ports plus four additional 1 GbE uplink ports.

In the enterprise, the Brocade ICX 6430-C Compact Switch can be used to extend the reach of the network outside the wiring closet, bringing connectivity to more users and supporting additional wireless AP deployment without running more wires. To simplify deployment in-situ, the Brocade ICX 6430-C offers flexible mounting options, such as wall brackets and a magnetic mount kit.

## Cost-Optimized Cooling Options

The Brocade ICX 6430 48-port and Brocade ICX 6450 24- and 48-port switches offer industry-standard side-to-back airflow with quiet fans at less than 40 dB (except the Brocade ICX 6450-48P). The Brocade ICX 6430-C and 6430-24 Switches are available in a fanless configuration, helping to minimize sound and costs for deployments where users are present, such as classrooms and open office environments.



**Figure 3.**

The optional Brocade ICX 6400-EPS1500 is an external power supply source to provide additional power to the Brocade ICX switches (except the Brocade ICX 6430-C and 6430-24). It also can be used for system power redundancy and increased PoE/PoE+ power budget to enable additional PoE/PoE+ ports. Each Brocade ICX 6400-EPS1500 can connect up to three Brocade ICX 6430 and 6450 Switches.

## BROCADE HYPEREDGE ARCHITECTURE

The Brocade HyperEdge Architecture brings campus networks into the modern era to better support mobility, security, and application agility. This evolutionary architecture integrates innovative wired and wireless technologies to streamline application deployment, simplify network management, and reduce operating costs.

The HyperEdge Architecture enables organizations to build networks that are:

- **Agile:** By eliminating Spanning Tree Protocol (STP) between HyperEdge Domain switches through a flatter Layer 2 design, the HyperEdge Architecture increases link utilization and reduces application deployment complexity. The Distributed AP Forwarding functionality of Brocade wireless Access Points (APs) efficiently secures and directs mobile traffic at the network edge without tunneling data back to a central controller at the network core.
- **Automated:** By grouping premium and entry-level switches with intelligent wireless APs into a consolidated management domain, HyperEdge Domains eliminate the need to provision and manage devices individually—simplifying network deployment and management.
- **Cost-effective:** The HyperEdge Architecture enables the propagation of advanced features and services from premium switches to entry-level switches, allowing IT organizations to purchase only what they need today and add intelligent services as the business evolves. Further cost savings is achieved with Brocade wireless solutions using controller-less or controller-shared license deployment options.



### Basic Layer 3 Capabilities

Brocade ICX 6450 Switches offer an upgrade option to bring Layer 3 capabilities to the network edge, reducing complexity and enhancing the reliability of enterprise networks.

### Data Center ToR Server Connectivity

The Brocade ICX 6430 and 6450 are designed to fit in server racks by consuming only one rack unit. In data center environments where most servers are 1 GbE-capable, the Brocade ICX 6430 and 6450 provide a compact and cost-effective 1 GbE Top-of-Rack (ToR) switch by simply connecting the 1 GbE Network Interface Cards (NICs) in the servers to the Brocade ICX 6430 and 6450 1 GbE ports (see Figure 5). This configuration uses 10 GbE links (Brocade ICX 6450) or 1 GbE links (Brocade ICX 6430) to connect to Brocade ICX data center aggregation switches.

### SIMPLIFIED, SECURE STANDARDS-BASED MANAGEMENT AND MONITORING

Brocade ICX 6430 and 6450 Switches provide simplified, standards-based management capabilities that help organizations reduce administrative time and effort while securing their networks.

### sFlow-based “Always-On” Network Monitoring

sFlow is a standards-based network export protocol (RFC 3176) that addresses many of the challenges that network managers face

today. By embedding sFlow into the Brocade ICX 6450 Switches, Brocade delivers an “always-on” technology that operates with wire-speed performance. sFlow dramatically reduces implementation costs compared to traditional network monitoring solutions that rely on mirrored ports, probes, and line-tap technologies. Moreover, sFlow gives organizations a full, enterprise-wide monitoring capability for every port in the network.

### Simplified Deployment with Auto-Configuration

Brocade ICX 6430 and 6450 Switches support auto-configuration, simplifying deployment with a truly plug-and-play experience. Organizations can use this feature to automate IP address and feature configuration without requiring a highly trained network engineer onsite. When the switches power up, they automatically receive an IP address and configuration from DHCP and Trivial File Transport Protocol (TFTP) servers. At this time, the switches can also automatically receive a software update to be at the same code revision as currently installed switches.

### Open-Standards Management

Brocade ICX 6430 and 6450 Switches include an industry-standard Command Line Interface (CLI) and support Secure Shell (SSHv2), Secure Copy (SCP), and SNMPv3 to restrict and encrypt management communications to the system. In addition, support for Terminal Access Controller Access Control System (TACACS/TACACS+)

and RADIUS authentication helps ensure secure operator access. Embedded Web management is also provided through a GUI-based device interface, and organizations can use Brocade Network Advisor to achieve full device and network management visibility.

### Out-of-Band Management

Brocade ICX 6430 and 6450 Switches include a 10/100/1000 Mbps RJ-45 Ethernet port dedicated for out-of-band management, providing a remote path to manage the switches, regardless of the status or configuration of the data ports.

### UNIFIED WIRED/WIRELESS NETWORK MANAGEMENT WITH BROCADE NETWORK ADVISOR

Managing enterprise campus networks continues to become more complex due to the growth in services that rely on wired and wireless networks. Services such as Internet, e-mail, video conferencing, real-time collaboration, and distance learning all have specific configuration and management requirements. At the same time, organizations face increasing demand to provide uninterrupted services for high-quality voice and Unified Communications (UC), wireless mobility, and multimedia applications.

To reduce complexity and the time spent managing these environments, the easy-to-use Brocade Network Advisor discovers, manages, and deploys configurations to groups of IP devices. By using the Brocade Network Advisor Device Configuration Manager tool, organizations can configure Virtual LANs (VLANs) within the network, manage wireless access point realms, or execute CLI commands on specific IP devices or groups of IP devices. sFlow-based proactive monitoring is ideal for performing network-wide troubleshooting, generating traffic reports, and gaining visibility into network activity from the edge to the core. Brocade Network Advisor centralizes management of the entire family of Brocade wired and wireless products, including the Brocade ICX switches.

### WARRANTY

Brocade ICX 6430 and 6450 Switches are covered by the Brocade Assurance Limited Lifetime Warranty. For details, visit [www.brocade.com/warranty](http://www.brocade.com/warranty).

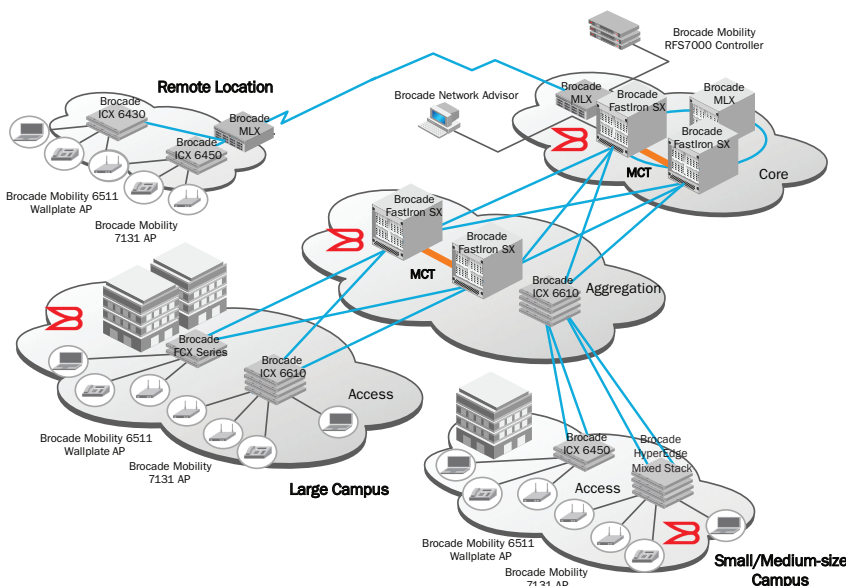


Figure 4.

Brocade ICX 6430 and 6450 Switches are suitable for a wide range of small to medium-size enterprises and branch office deployments at the network access layer.

### BEST-IN-CLASS SUPPORT

Brocade ICX 6430 and 6450 Switches are supported by next-business-day advance replacement where available, as well as software defect repairs and maintenance updates. In an effort to further improve service levels and operational efficiency, Brocade includes three years of technical support for Brocade ICX 6430 and 6450 Switches, providing direct access to the Brocade Technical Assistance Center during normal 8×5 business hours.

### BROCADE GLOBAL SERVICES

Brocade Global Services has the expertise to help organizations build scalable, efficient cloud infrastructures. Leveraging 15 years of expertise in storage, networking, and virtualization, Brocade Global Services delivers world-class professional services,


technical support, network monitoring services, and education, enabling organizations to maximize their Brocade investments, accelerate new technology deployments, and optimize the performance of networking infrastructures.

### CLOUD-OPTIMIZED NETWORK ACQUISITION

Brocade helps organizations easily address their information technology requirements by offering flexible network acquisition and support alternatives to meet their financial needs. Organizations can select from purchase, lease, and Brocade Network Subscription options to align network acquisition with their unique capital requirements and risk profiles. To learn more, visit [www.Brocade.com/CapitalSolutions](http://www.Brocade.com/CapitalSolutions).

### MAXIMIZING INVESTMENTS

To help optimize technology investments, Brocade and its partners offer complete solutions that include professional services, technical support, and education. For more information, contact a Brocade sales partner or visit [www.brocade.com](http://www.brocade.com).

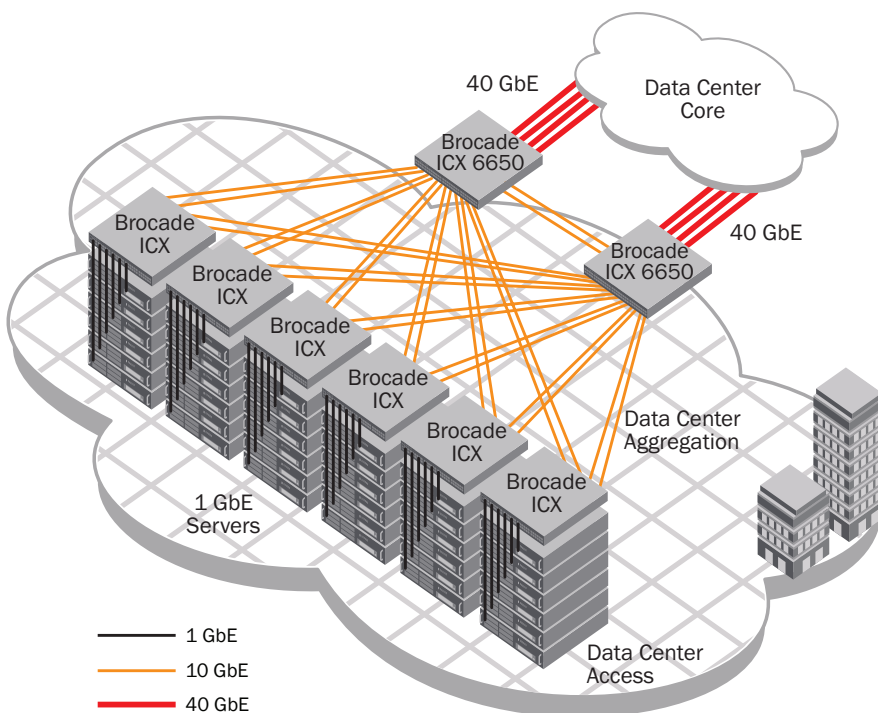

**Figure 5.**

Brocade ICX 6430 and 6450 Switches provide ToR access while Brocade ICX 6650 Switches provide data center aggregation.



## BROCADE ICX 6430/6450 FEATURE AND MODEL SPECIFICATIONS

	Brocade ICX 6430					Brocade ICX 6450			
	6430-C12	6430-24	6430-24P	6430-48	6430-48P	6450-24	6450-24P	6450-48	6450-48P
<b>10/100/1000 Mbps RJ-45 ports</b>	12	24	24	48	48	24	24	48	48
<b>10/100/1000 Mbps RJ-45 uplink ports</b>	2								
<b>1 GbE SFP ports</b> (uplink/stacking)	2*	4	4	4	4				
<b>1/10 GbE SFP/SFP+ ports</b> (uplink/stacking)						4 (Optional 2-port license)	4 (Optional 2-port license)	4 (Optional 2-port license)	4 (Optional 2-port license)
<b>Stacking bandwidth</b> (data rate, full duplex)		4 Gbps	4 Gbps	4 Gbps	4 Gbps	40 Gbps	40 Gbps	40 Gbps	40 Gbps
<b>Units per stack</b>		4	4	4	4	8	8	8	8
<b>Internal AC power supply rating</b>	100 W	36 W	525 W	65 W	525 W	65 W	525 W	100 W	880 W
<b>External power supply</b> (redundant power and PoE power)			Optional 525 W	Optional 525 W	Optional 525 W	Optional 525 W	Optional 525 W	Optional 525 W	Optional 525 W × 2
<b>PoE/PoE+ power budget</b> (internal power supply)	68 W		390 W		390 W		390 W		780 W
<b>PoE Class 3 ports</b> (internal power supply)	4		24		24		24		48
<b>PoE+ ports</b> (internal power supply)	2		12		12		12		24
<b>Max PoE Class 3 ports</b> (with internal and external power supplies)	4		24		48		24		48
<b>Max PoE+ ports</b> (with internal and external power supplies)	2		24		24		24		48
<b>Base software</b>	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2	Layer 3 with static routes	Layer 3 with static routes	Layer 3 with static routes	Layer 3 with static routes
<b>Layer 3 routing</b> (RIP, OSPF)						Optional	Optional	Optional	Optional
<b>Switching capacity</b> (data rate, full duplex)	32 Gbps	56 Gbps	56 Gbps	104 Gbps	104 Gbps	128 Gbps	128 Gbps	176 Gbps	176 Gbps
<b>Forwarding capacity</b> (data rate, full duplex)	24 Mpps	42 Mpps	42 Mpps	77 Mpps	77 Mpps	96 Mpps	96 Mpps	132 Mpps	132 Mpps

\* Stacking is not supported on the Brocade ICX 6430-C12. 100Base-FX is supported on the Brocade ICX 6430-C12.

## BROCADE ICX 6430/6450 SPECIFICATIONS

### System Architecture

Connector options	<p>10/100/1000 Mbps ports: RJ-45</p> <p>Brocade ICX 6430: 1 Gbps SFP ports for uplink/stacking: SX, LX, TX, LHA, LHB, direct-attached copper cable (Twinax) for stacking</p> <p>Brocade ICX 6430-C: 100 Mbps/1 Gbps SFP ports for uplink: FX, SX, LX, TX, LHA, LHB; 10/100/1000 Mbps RJ-45 ports for uplink</p> <p>Brocade ICX 6450: 1/10 Gbps SFP+ ports for uplink/stacking: USR, SR, LR, ER, LRM, direct-attached copper cable (Twinax) for stacking</p> <p>Out-of-band Ethernet management: 10/100/1000 Mbps RJ-45</p> <p>Console management: RJ-45 serial</p> <p>External power connector: Redundant system power supply and extended PoE power supply</p>
Maximum MAC addresses	<p>Brocade ICX 6430, 6430-C: 8000</p> <p>Brocade ICX 6450: 16,000</p>
Maximum VLANs	<p>Brocade ICX 6430-C: 1024</p> <p>Brocade ICX 6430, 6450: 4096</p>
Maximum STP (spanning trees)	<p>Brocade ICX 6430, 6430-C: 32</p> <p>Brocade ICX 6450: 253</p>
Maximum routes (in hardware)	<p>Brocade ICX 6450: 12,000 (IPv4)</p> <p>Brocade ICX 6450: 1070 (IPv6)</p>
Trunking	<p>Brocade ICX 6430</p> <p>Maximum ports per trunk: 8</p> <p>Maximum trunk groups: 29</p> <p>Brocade ICX 6430-C</p> <p>Maximum ports per trunk: 8</p> <p>Maximum trunk groups: 16</p> <p>Brocade ICX 6450</p> <p>Maximum ports per trunk: 8</p> <p>Maximum trunk groups: 124</p>
Priority queues	<p>Brocade ICX 6430, 6430-C: 4</p> <p>Brocade ICX 6450: 8</p>
Maximum jumbo frame size	9216 bytes
Layer 2 switching	<ul style="list-style-type: none"> <li>• 802.1s Multiple Spanning Tree</li> <li>• 802.1X Authentication</li> <li>• Auto MDI/MDIX</li> <li>• BPDU Guard, Root Guard</li> <li>• Dual-Mode VLANs</li> <li>• MAC-based VLANs, Dynamic MAC-based VLAN activation</li> <li>• Dynamic VLAN Assignment</li> <li>• Dynamic Voice VLAN Assignment</li> <li>• Fast Port Span</li> <li>• GARP VLAN Registration Protocol</li> <li>• IGMP Snooping (v1/v2/v3)</li> <li>• IGMP Proxy for Static Groups</li> <li>• IGMP v2/v3 Fast Leave</li> <li>• IGMP Tracking</li> <li>• Inter-Packet Gap (IPG) adjustment</li> <li>• Link Fault Signaling (LFS)</li> <li>• MAC Address Locking, MAC Port Security</li> <li>• MAC-Layer Filtering, Filtering on source and destination MAC address</li> </ul>

Layer 2 switching (continued)	<ul style="list-style-type: none"> <li>• MAC Learning Disable</li> <li>• MLD Snooping (v1/v2)</li> <li>• Multi-device Authentication</li> <li>• Per-VLAN Spanning Tree (PVST/PVST+/PVRST)</li> <li>• Mirroring: Port-based, ACL-based, MAC Filter-based, and VLAN-based</li> <li>• Port Loop Detection</li> <li>• Private VLAN</li> <li>• Protected Link Groups</li> <li>• Protocol VLAN (802.1v), Subnet VLAN</li> <li>• Remote Fault Notification (RFN)</li> <li>• Single-instance Spanning Tree</li> <li>• Single-link LACP</li> <li>• Trunk Groups</li> <li>• Uni-Directional Link Detection (UDLD)</li> </ul>
IPv6 support	<ul style="list-style-type: none"> <li>• Host functionality management</li> <li>• Hardware support for IPv6</li> <li>• IPv6 static routing (Brocade ICX 6450 only)</li> </ul>
Base Layer 3 routing (Brocade ICX 6450)	<ul style="list-style-type: none"> <li>• IPv4 and IPv6 Static Routes</li> <li>• Port-based Access Control Lists</li> <li>• Host Routes</li> <li>• Virtual Interfaces, up to 255 virtual interfaces</li> <li>• Routed Interfaces</li> <li>• Route-only Support</li> <li>• IP helper</li> <li>• Routing Between Directly Connected Subnets</li> <li>• ECMP</li> <li>• Layer 3/Layer 4 ACLs</li> </ul>
Premium Layer 3 routing (Brocade ICX 6450)	<ul style="list-style-type: none"> <li>• OSPF v2</li> <li>• RIP v1/v2</li> <li>• Virtual Route Redundancy Protocol (VRRP)</li> <li>• VRRP-E</li> </ul>
Metro features (except Brocade ICX 6430-C)	<ul style="list-style-type: none"> <li>• Metro-Ring Protocol MRP (v1, v2)</li> <li>• Virtual Switch Redundancy Protocol (VSRP)</li> <li>• VLAN Stacking (Q-in-Q)</li> <li>• VRRP</li> <li>• Topology Groups</li> </ul>
Quality of Service (QoS)	<ul style="list-style-type: none"> <li>• ACL Mapping and Marking of ToS/DSCP</li> <li>• ACL Mapping and Marking of 802.1p</li> <li>• ACL Mapping to Priority Queue</li> <li>• ACL Mapping to ToS/DSCP</li> <li>• Classifying and Limiting Flows Based on TCP Flags</li> <li>• DHCP Relay</li> <li>• DiffServ Support</li> <li>• Honoring DSCP and 802.1p</li> <li>• MAC Address Mapping to Priority Queue</li> <li>• Priority Queue Management using Weighted Round Robin (WRR),</li> <li>• Strict Priority (SP), and a combination of WRR and SP</li> </ul>

IEEE standards compliance	<ul style="list-style-type: none"> <li>• 802.1AB LLDP/LLDP-MED</li> <li>• 802.1D-2004 MAC Bridging</li> <li>• 802.1p Mapping to Priority Queue</li> <li>• 802.1Q with Tagging</li> <li>• 802.1s Multiple Spanning Tree</li> <li>• 802.1w Rapid Spanning Tree (RSTP)</li> <li>• 802.1X Port-based Network Access Control</li> <li>• 802.3 10BASE-T</li> <li>• 802.3ab 1000BASE-T</li> <li>• 802.3ad Link Aggregation (Dynamic and Static)</li> <li>• 802.3ae 10 Gigabit Ethernet</li> <li>• 802.3af Power over Ethernet</li> <li>• 802.3at Power over Ethernet Plus</li> <li>• 802.3u 100BASE-TX</li> <li>• 802.3x Flow Control</li> <li>• 802.3z 1000BASE-SX/LX</li> <li>• 802.3 MAU MIB (RFC 2239)</li> <li>• 802.1AE-MACsec (HW-capable): Brocade ICX 6450 only</li> <li>• 802.3az-2010 - EEE (HW-capable)</li> </ul>
Traffic management	<ul style="list-style-type: none"> <li>• ACL-based inbound rate limiting and traffic policies</li> <li>• Broadcast, multicast, and unknown unicast rate limiting</li> <li>• Inbound rate limiting per port</li> <li>• Outbound rate limiting per port and per queue</li> </ul>
High availability	<ul style="list-style-type: none"> <li>• Redundant external power supply</li> <li>• Layer 3 VRRP protocol redundancy</li> <li>• Real-time state synchronization across the stack</li> <li>• Hitless failover from master to standby stack controller</li> <li>• Protected link groups</li> <li>• Hot insertion and removal of stacked units</li> </ul>

## Management

Management and control	<ul style="list-style-type: none"> <li>• Auto Configuration</li> <li>• Brocade HyperEdge technology (Brocade ICX 6450 only)</li> <li>• Configuration Logging</li> <li>• Digital Optical Monitoring (DOM)</li> <li>• Display Log Messages on Multiple Terminals</li> <li>• Embedded Web Management</li> <li>• Embedded DHCP Server</li> <li>• Industry-standard Command Line Interface (CLI)</li> <li>• Key-based activation of optional software features</li> <li>• Integration with HP OpenView for Sun Solaris, HP-UX, IBM AIX, and Windows</li> <li>• Brocade Network Advisor support</li> <li>• MIB Support for MRP, Port Security, MAC Authentication, MAC-based VLANs</li> <li>• Out-of-band Ethernet Management</li> <li>• RFC 783 TFTP</li> <li>• RFC 854 TELNET Client and Server</li> <li>• RFC 951 Bootp</li> <li>• RFC 1157 SNMPv1/v2c</li> <li>• RFC 1213 MIB-II</li> <li>• RFC 1493 Bridge MIB</li> <li>• RFC 1516 Repeater MIB</li> <li>• RFC 1573 SNMP MIB II</li> <li>• RFC 1643 Ethernet Interface MIB</li> <li>• RFC 1643 Ethernet MIB</li> <li>• RFC 1724 RIP v1/v2 MIB</li> <li>• RFC 1757 RMON MIB</li> <li>• RFC 2068 Embedded HTTP</li> <li>• RFC 2131 DHCP Server and DHCP Relay</li> <li>• RFC 2570 SNMPv3 Intro to Framework</li> <li>• RFC 2571 Architecture for Describing SNMP Framework</li> <li>• RFC 2572 SNMP Message Processing and Dispatching</li> <li>• RFC 2573 SNMPv3 Applications</li> <li>• RFC 2574 SNMPv3 User-based Security Model</li> <li>• RFC 2575 SNMP View-based Access Control Model SNMP</li> <li>• RFC 2818 Embedded HTTPS</li> <li>• RFC 3176 sFlow (Brocade ICX 6450 only)</li> <li>• SNTP Simple Network Time Protocol</li> <li>• Multiple Syslog Servers</li> </ul>
------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Embedded security	<ul style="list-style-type: none"> <li>• 802.1X Accounting</li> <li>• MAC authentication</li> <li>• DHCP snooping</li> <li>• Dynamic ARP inspection</li> <li>• Bi-level Access Mode (Standard and EXEC Level)</li> <li>• EAP pass-through support</li> <li>• Packet filtering on TCP Flags</li> <li>• IEEE 802.1X username export in sFlow</li> <li>• Protection against Denial of Service (DoS) attacks</li> </ul>
Secure management	<ul style="list-style-type: none"> <li>• Authentication, Authorization, and Accounting (AAA)</li> <li>• Advanced Encryption Standard (AES) with SSHv2</li> <li>• Bi-level Access Mode (Standard and EXEC Level)</li> <li>• RADIUS/TACACS/TACACS+</li> <li>• Secure Copy (SCP)</li> <li>• Secure Shell (SSHv2)</li> <li>• Username/password</li> <li>• Web authentication</li> </ul>

## Physical Specifications

Dimensions	<ul style="list-style-type: none"> <li>• Brocade ICX 6430-C12 model: 1.7 in. (H) × 10.6 in. (W) × 8.4 in. (D) 4.34 cm (H) × 26.92 cm (W) × 21.33 cm (D)</li> <li>• All 24-port models: 1.7 in. (H) × 17.44 in. (W) × 9.45 in. (D) 4.34 cm (H) × 44.3 cm (W) × 24 cm (D)</li> <li>• All 48-port models: 1.7 in. (H) × 17.44 in. (W) × 14.57 in. (D) 4.34 cm (H) × 44.3 cm (W) × 37 cm (D)</li> <li>• ICX6400-EPS1500: 1.7 in. (H) × 17.44 in. (W) × 14.57 in. (D) 4.34 cm (H) × 44.3 cm (W) × 37 cm (D)</li> </ul>
Weight	<ul style="list-style-type: none"> <li>• Brocade ICX 6430-C12: 4 lb (1.81 kg)</li> <li>• Brocade ICX 6430-24: 7.58 lb (3.44 kg)</li> <li>• Brocade ICX 6430-24P: 10.08 lb (4.57 kg)</li> <li>• Brocade ICX 6430-48: 11.09 lb (5.03 kg)</li> <li>• Brocade ICX 6430-48P: 13.8 lb (6.26 kg)</li> <li>• Brocade ICX 6450-24: 7.39 lb (3.35 kg)</li> <li>• Brocade ICX 6450-24P: 10.03 lb (4.55 kg)</li> <li>• Brocade ICX 6450-48: 11.07 lb (5.02 kg)</li> <li>• Brocade ICX 6450-48P: 14.11 lb (6.4 kg)</li> <li>• Brocade ICX 6400-EPS1500: 14.85 lb (6.75 kg)</li> </ul>

## Environment

Temperature	<ul style="list-style-type: none"> <li>• Operating temperature: 0°C to 45°C / 32°F to 113°F (Brocade ICX 6430-C12: 0°C to 40°C / 32°F to 104°F)</li> <li>• Storage temperature: -40°C to 70°C / -40°F to 158°F</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Relative humidity: 5% to 95%, non-condensing</li> </ul>
Storage altitude	<ul style="list-style-type: none"> <li>• 10,000 ft (3000 m) maximum</li> </ul>
Acoustic (25 °C)	<ul style="list-style-type: none"> <li>• Brocade ICX 6430-C12: Fanless (ambient)</li> <li>• Brocade ICX 6430-24: Fanless (ambient)</li> <li>• Brocade ICX 6430-24P: 39.2 dBA</li> <li>• Brocade ICX 6430-48: 37.2 dBA</li> <li>• Brocade ICX 6430-48P: 39.3 dBA</li> <li>• Brocade ICX 6450-24: 37.9 dBA</li> <li>• Brocade ICX 6450-24P: 39.2 dBA</li> <li>• Brocade ICX 6450-48: 37.2 dBA</li> <li>• Brocade ICX 6450-48P: 55.5 dBA</li> <li>• Brocade ICX 6400-EPS1500: 60.9 dBA</li> </ul>
Vibration	<ul style="list-style-type: none"> <li>• IEC 68-2-36, IEC 68-2-6</li> </ul>
Shock and drop	<ul style="list-style-type: none"> <li>• IEC 68-2-27</li> <li>• IEC 68-2-32</li> </ul>
MTBF (25 °C, CL: 60%)	<ul style="list-style-type: none"> <li>• Brocade ICX 6430-C12: 1,124,442 hours</li> <li>• Brocade ICX 6430-24: 1,229,732 hours</li> <li>• Brocade ICX 6430-24P: 505,469 hours</li> <li>• Brocade ICX 6430-48: 748,262 hours</li> <li>• Brocade ICX 6430-48P: 384,288 hours</li> <li>• Brocade ICX 6450-24: 906,243 hours</li> <li>• Brocade ICX 6450-24P: 485,749 hours</li> <li>• Brocade ICX 6450-48: 756,081 hours</li> <li>• Brocade ICX 6450-48P: 397,590 hours</li> <li>• Brocade ICX 6400-EPS1500: 789,923 hours</li> </ul>

Power	
Power supplies	<ul style="list-style-type: none"> <li>Integrated AC power supply for system and PoE power</li> <li>External 1500 W AC power supply for redundant system power and extended PoE power</li> </ul>
Power inlet (Max current rating at 100 V input)	<ul style="list-style-type: none"> <li>Brocade ICX 6430-C12: 1.5 Amp</li> <li>Brocade ICX 6430-24: 0.9 Amp</li> <li>Brocade ICX 6430-24P: 6 Amp</li> <li>Brocade ICX 6430-48: 1.5 Amp</li> <li>Brocade ICX 6430-48P: 6 Amp</li> <li>Brocade ICX 6450-24: 1.5 Amp</li> <li>Brocade ICX 6450-24P: 6 Amp</li> <li>Brocade ICX 6450-48: 2 Amp</li> <li>Brocade ICX 6450-48P: 10 Amp</li> <li>Brocade ICX 6400-EPS1500: 16 Amp</li> </ul>
Input voltage	<ul style="list-style-type: none"> <li>Universal 100 to 240 VAC</li> </ul>
AC power cord current rating	<ul style="list-style-type: none"> <li>Brocade ICX 6430-C12: 10 Amp, 100 to 240 V</li> <li>Brocade ICX 6430 and 6450 switches: 13 Amp, 100 to 240 V</li> <li>Brocade ICX 6400-EPS1500: 20 Amp, 100 to 240 V</li> </ul>
DC power cord current rating	<ul style="list-style-type: none"> <li>Brocade ICX 6400-EPS1500: 5.6 Amp at 12 V rail; 6.85 Amp at 54 V rail</li> <li>Brocade ICX 6400-EPS1500: 3 DC cables included; cable length: 3 feet</li> </ul>
Input line frequency	<ul style="list-style-type: none"> <li>50 to 60 Hz</li> </ul>
Heat dissipation (no PoE load)	<ul style="list-style-type: none"> <li>Brocade ICX 6430-C12: 62 BTU/hr</li> <li>Brocade ICX 6430-24: 67 BTU/hr</li> <li>Brocade ICX 6430-24P: 104 BTU/hr</li> <li>Brocade ICX 6430-48: 128 BTU/hr</li> <li>Brocade ICX 6430-48P: 132 BTU/hr</li> <li>Brocade ICX 6450-24: 124 BTU/hr</li> <li>Brocade ICX 6450-24P: 129 BTU/hr</li> <li>Brocade ICX 6450-48: 186 BTU/hr</li> <li>Brocade ICX 6450-48P: 192 BTU/hr</li> </ul>

Regulatory Compliance and Safety Approvals	
Electromagnetic compatibility	<ul style="list-style-type: none"> <li>FCC Part 15, Subpart B, Class A</li> <li>ICES-003: 2004</li> <li>VCCI—Technical Requirement (V-3/2011.04)/Class A</li> <li>EN 55022: 2006+A1: 2007 Class A</li> <li>EN 61000-3-2: 2006+A1:2009+A2:2009 Class A</li> <li>EN 61000-3-3: 2008</li> <li>EN 61000-6-1: 2007</li> <li>EN 61000-6-3: 2007</li> <li>EN 55024: 1998+A1:2001+A2:2003</li> <li>EN 300 386 (V1.4.1): 2008</li> <li>IEC 61000-4-2: 2008 ED. 2.0</li> <li>IEC 61000-4-3: 2006+A1:2007+A2:2010 ED. 3.2</li> <li>IEC 61000-4-4: 2004+A1:2010 ED. 2.0</li> <li>IEC 61000-4-5: 2005 ED. 2.0</li> <li>IEC 61000-4-6: 2008 ED. 3.0</li> <li>IEC 61000-4-8: 2009 ED. 2.0</li> <li>IEC 61000-4-11: 2004 ED. 2.0</li> </ul>
Safety	<ul style="list-style-type: none"> <li>CAN/CSA-C22.2 NO. 60950-1-07; UL 60950-1 2nd Edition; IEC 60950-1 2nd Edition; EN 60950-1:2006 Safety of Information Technology Equipment; EN 60825-1 Safety of Laser Products—Part 1: Equipment Classification, Requirements and User's Guide; EN 60825-2 Safety of Laser Products—Part 2: Safety of Optical Fibre Communication Systems</li> </ul>
Environmental regulatory compliance	<ul style="list-style-type: none"> <li>RoHS-compliant (6 of 6); WEEE-compliant</li> </ul>

Measured Power Utilization			
Models	Idle <sup>1</sup>	5% Throughput <sup>2</sup>	100% Throughput <sup>3</sup>
Brocade ICX 6430-C12	10 W	56 W	93 W
Brocade ICX 6430-24	7 W	19 W	20 W
Brocade ICX 6430-24P	9 W	391 W	396 W
Brocade ICX 6430-48	15 W	37 W	38 W
Brocade ICX 6430-48P	16 W	401 W	403 W
Brocade ICX 6450-24	20 W	29 W	37 W
Brocade ICX 6450-24P	21 W	395 W	400 W
Brocade ICX 6450-48	30 W	51 W	55 W
Brocade ICX 6450-48P	31 W	771 W	776 W

<sup>1</sup> All ports are disconnected with no PoE load.

<sup>2</sup> 5 percent traffic load on all ports connected with maximum possible PoE loads (if equipped).

<sup>3</sup> 100 percent traffic load on all ports connected with maximum possible PoE loads (if equipped).



## BROCADE ICX 6430/6450 ORDERING INFORMATION

Part Number	Description
ICX6430-C12	12-port 1 GbE compact switch (4 PoE+), 2×100 Mbps/1 GbE SFP and 2×100 Mbps/1 GbE copper uplinks, fanless
ICX6430-24	24-port 1 GbE switch, 4×1 GbE SFP uplink/stacking ports, fanless
ICX6430-24P	24-port 1 GbE switch PoE+ 390 W, 4×1 GbE SFP uplink/stacking ports
ICX6430-48	48-port 1 GbE switch, 4×1 GbE SFP uplink/stacking ports
ICX6430-48P	48-port 1 GbE switch PoE+ 390 W, 4×1 GbE SFP uplink/stacking ports
ICX6450-24	24-port 1 GbE switch, 2×1 GbE SFP+ (upgradable to 10 GbE) and 2×1 GbE/10 GbE SFP+ uplink/stacking ports
ICX6450-24P	24-port 1 GbE switch PoE+ 390 W, 2×1 GbE SFP+ (upgradable to 10 GbE) and 2×1 GbE/10 GbE SFP+ uplink/stacking ports
ICX6450-48	48-port 1 GbE switch, 2×1 GbE SFP+ (upgradable to 10 GbE) and 2×1 GbE/10 GbE SFP+ uplink/stacking ports
ICX6450-48P	48-port 1 GbE switch PoE+ 780 W, 2×1 GbE SFP+ (upgradable to 10 GbE) and 2×1 GbE/10 GbE SFP+ uplink/stacking ports
Accessories and Options	
ICX6450-PREM-LIC	Brocade ICX 6450 premium license (Layer 3 features)
ICX6450-2X10G-LIC-POD	Brocade ICX 6450 2×10 GbE capacity-based license; upgrade 1 GbE uplink/stacking ports to 1GbE/10 GbE
ICX6400-EPS1500	Brocade ICX 6430/6450 1500 W external power supply for RPS/EPS (connect up to three switches)
ICX6400-RMK	Brocade ICX 6400 two-post rack mount kit, spare
ICX6400-C12-RMK	Brocade ICX 6400-C compact switch 2-post rack mount kit
ICX6400-C12-MGNT	Brocade ICX 6400-C compact switch magnet mount kit
10G-SFPP-TWX-0101	Direct-attached SFP+ copper cable, 1 m, one-pack, stacking cable
10G-SFPP-TWX-0301	Direct-attached SFP+ copper cable, 3 m, one-pack, stacking cable
10G-SFPP-TWX-0501	Direct-attached SFP+ copper cable, 5 m, one-pack, stacking cable
1G-SFP-TWX-0101	Direct-attached 1 Gbps SFP copper cable, 1 m, stacking cable
1G-SFP-TWX-0501	Direct-attached 1 Gbps SFP copper cable, 5 m, stacking cable
10G-SFPP-USR	10GE USR SFP+ optic (LC), target range 100 m over MMF, one-pack
10G-SFPP-SR	10GBASE-SR, SFP+ optic (LC), target range 300 m over MMF
10G-SFPP-LR	10GBASE-LR, SFP+ optic (LC), for up to 10 km over SMF
10G-SFPP-ER	10GBASE-ER SFP+ optic (LC), for up to 40 km over SMF
10G-SFPP-LRM	10GBASE-LRM, 1310 nm SFP+ optic (LC), TAR
E1MG-TX	1000BASE-TX SFP copper, RJ-45 connector
E1MG-SX-OM	1000BASE-SX SFP optic, MMF, LC connector, optical monitoring-capable
E1MG-LX-OM	1000BASE-LX SFP optic, SMF, LC connector, optical monitoring-capable
E1MG-LHA-OM	1000BASE-LHA SFP optic, SMF, LC connector, optical monitoring-capable; 80 km
E1MG-LHB	1000BASE-LHB SFP optic, SMF, LC connector, 150 km maximum reach
E1MG-100FX-OM	100BASE-FX SFP optic MMF, LC connector, optical monitoring-capable (Brocade ICX 6400-C only)

**Corporate Headquarters**

San Jose, CA USA  
T: +1-408-333-8000  
info@brocade.com

**European Headquarters**

Geneva, Switzerland  
T: +41-22-799-56-40  
emea-info@brocade.com

**Asia Pacific Headquarters**

Singapore  
T: +65-6538-4700  
apac-info@brocade.com

© 2013 Brocade Communications Systems, Inc. All Rights Reserved. 04/13 GA-DS-1654-02

ADX, AnyIO, Brocade, Brocade Assurance, the B-wing symbol, DCX, Fabric OS, ICX, MLX, MyBrocade, OpenScript, VCS, VDX, and Vyatta are registered trademarks, and HyperEdge, The Effortless Network, and The On-Demand Data Center are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned may be trademarks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.

