



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

Jump to: FORMS Go

Home Personalize Accessibility App Help About

Welcome, Lu Anne Cottrill

Procurement

Budgeting

Accounts Receivable

Accounts Payable

Solicitation Response(SR) Dept: 0612 ID: ESR02151600000003511 Ver.: 1 Function: New Phase: Final Modified by batch , 03/03/2016

Header

List View

General Information

Contact

Default Values

Discount

Document Information

Procurement Folder: 185234

Procurement Type: Central Master Agreement

Vendor ID: 000000206376

Legal Name: ELECTRONIC SERVICES INC

Alias/DBA:

Total Bid: \$100,500.00

Response Date: 02/22/2016

Response Time: 20:06

SO Doc Code: CRFQ

SO Dept: 0612

SO Doc ID: DPS1600000004

Published Date: 2/19/16

Close Date: 3/3/16

Close Time: 13:30

Status: Closed

Solicitation Description: Addendum No. 1 - Vehicular Repeaters

Total of Header Attachments: 0

Total of All Attachments: 0



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Solicitation Response

Proc Folder : 185234
Solicitation Description : Addendum No. 1 - Vehicular Repeaters
Proc Type : Central Master Agreement

Date issued	Solicitation Closes	Solicitation No	Version
	2016-03-03 13:30:00	SR 0612 ESR02151600000003511	1

VENDOR

000000206376
ELECTRONIC SERVICES INC

FOR INFORMATION CONTACT THE BUYER

Tara Lyle
(304) 558-2544
tara.l.lyle@wv.gov

Signature X FEIN # DATE

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	Interface Cable - GE/Ericsson Orion	10.00000	EA	\$65.000000	\$650.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description :	Interface Cable - GE/Ericsson Orion
------------------------	-------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	Interface Cable - Kenwood TK-690H	25.00000	EA	\$65.000000	\$1,625.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description :	Intrface Cables - Kenwood TK-690H
------------------------	-----------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
3	Intrface Cable - Kenwood TK-5810	25.00000	EA	\$65.000000	\$1,625.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description :	Interface Cables - Kenwood TK-5810
------------------------	------------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
4	Interface Cable - Tait TM-9100	15.00000	EA	\$65.000000	\$975.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description :	Interface Cable - Tait TM-9100
------------------------	--------------------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
5	Interface Cable - Motorola XTL-2500 (high power)	15.00000	EA	\$105.000000	\$1,575.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface cable - Motorola XTL-2500 (High Power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
6	Interface Cable - Motorola XTL-2500 (Mid/Low power)	25.00000	EA	\$105.000000	\$2,625.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface Cable - Motorola XTL-2500 (Mid/Low power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
7	Interface Cable - Motorola APX-6500 (High power)	15.00000	EA	\$105.000000	\$1,575.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface Cable - Motorola APX-6500 (High power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
8	Interface Cable - Motorola APX-6500 (Mid/Low Power)	50.00000	EA	\$105.000000	\$5,250.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface Cable - Motorola APX-6500 (Mid/Low Power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
9	Interface Cable - Motorola APX-7500 (High Power)	15.00000	EA	\$105.000000	\$1,575.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface Cable - Motorola APX-7500 (High power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
10	Interface Cable - Motorola APX-7500 (Mid/Low Power)	50.00000	EA	\$105.000000	\$5,250.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description : Interface Cable - Motorola APX-7500 (Mid/Low power)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
11	VHF Vehicular Repeater	50.00000	EA	\$1,017.000000	\$50,850.00

Comm Code	Manufacturer	Specification	Model #
43222817			

Extended Description : VHF Vehicular Repeaters

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
12	UHF Vehicular Repeaters	25.00000	EA	\$1,017.000000	\$25,425.00

Comm Code	Manufacturer	Specification	Model #
43222817			

Extended Description : UHF Vehicular Repeaters

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
13	Programming Software	5.00000	EA	\$0.000000	\$0.00

Comm Code	Manufacturer	Specification	Model #
43230000			

Extended Description :	Programming Software
------------------------	----------------------

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
14	Programming Cable	25.00000	EA	\$60.000000	\$1,500.00

Comm Code	Manufacturer	Specification	Model #
26121629			

Extended Description :	Programming Cables
------------------------	--------------------

SOLICITATION NUMBER: CRFQ– DPS1600000004

Addendum Number: 1

The purpose of this addendum is to modify the solicitation identified as CRFQ DPS1600000004 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- ☐ Modify bid opening date and time
- ☐ Modify specifications of product or service being sought
- ☒ Attachment of vendor questions and responses
- ☐ Attachment of pre-bid sign-in sheet
- ☐ Correction of error
- ☐ Other

Description of Modification to Solicitation:

1. Responses to vendor questions attached.
2. The bid opening remains on 03/03/2016 at 1:30 pm.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

ATTACHMENT A
CRFQ DPS1600000004

QUESTIONS:

Q1: Would it be possible to get corresponding part numbers for each line item?

A1a: To delete Section 3.1.1.1 of the specifications in its entirety and replace with the following:

3.1.1 VEHICULAR REPEATERS

3.1.1.1 The vehicular repeater must utilize an interface cable for one of the following radios:

- 3.1.1.1(A)** GE/Ericsson Orion -7500-06-1014 (Low Band)
- 3.1.1.1(B)** Kenwood TK-690H -7500-10-1045 (Low Band)
- 3.1.1.1 (C)** Kenwood TK-5810 -7502-10-1045(UHF)
- 3.1.1.1 (D)** Tait TM9100 - 7500-10-1010 (UHF)
- 3.1.1.1 (E)** Motorola XTL-2500/5000 - 7505-10-1045
(High Power)
- 3.1.1.1 (F)** Motorola XTL-2500/5000 - 7505-10-1094
(Mid/Low power)
- 3.1.1.1 (G)** Motorola APX-6500 - 7506-10-1045
(High Power)
- 3.1.1.1 (H)** Motorola APX-6500 - 7506-10-1094
(Low Power)
- 3.1.1.1 (I)** Motorola APX-7500 - 7506-10-1045
(High Power)
- 3.1.1.1 (J)** Motorola APX-7500 - 7506-10-1094
(Low Power)

A1b: To delete Section 3.1.1.2 of the specifications in its entirety and replace with the following:

3.1.1.2 Repeater shall operate in one of the following bands:

- 3.1.1.2(A)** VHF 150-174 MHZ BAND - SVR-200-VBN
- 3.1.1.2(B)** UHF 450-470 MHZ BAND - SVR-200-UDN

A1c: To delete Section 3.1.4.10 of the specifications in its entirety and replace with the following:

3.1.4.10 Programming cables shall be available for optional
Purchase - Programming Cables---FY1

OTHER INFORMATION:

1. The bid opening remains on 03/03/2016 at 1:30 pm.

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: CRFQ DPS1600000004

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

- | | |
|--|--|
| <input checked="" type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6 |
| <input type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7 |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8 |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9 |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

Electronic Services Inc.
Company

[Signature]
Authorized Signature
2/22/2016
Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.

ATTACHMENT A



Electronic Services Inc.

8800 State Route 34
P.O. Box 474
Winfield, WV 25213
304-586-0024 Fax: 304-521-1525
wvesi@aol.com
WV Contractor License # WV042278

Quote #:	1258
Quote Date:	2/9/2016
Page:	1
Customer #:	1500

Quoted To:
West Virginia State Purchasing
2019 Washington Street East
Charleston, WV 25305
US

Phone:		Cust PO:		Valid Through: 3/10/2016	
Reference: DPS1600000004		Ship Via:		Terms:	
				Salesperson: Aaron	
Stock Code	Description	Quantity	Price	Extended	
7500-06-1014	Pyramid - Harris Orion Single Band Interface Cable 6□ (DB9F to DB37)	10.00	65.00	650.00	
7500-10-1045	Pyramid - Kenwood TK-X90 Series Interface Cable (Black)	25.00	65.00	1,625.00	
7502-10-1045	Pyramid - Kenwood TK-5x10, TK-5x20, TK-x180, NX-x00 Series Interface Cable	25.00	65.00	1,625.00	
7500-10-1010	Pyramid - Tait TM Series Interface Cable	15.00	65.00	975.00	
7505-10-1045	Pyramid - Motorola XTL-5000/2500 / PM1500 High Pwr Dual Gender DB25 (Smart Cable)	15.00	105.00	1,575.00	
7505-10-1094	Pyramid - Motorola XTL-5000/2500 Mid/Low Power DB26 (Smart Cable)	25.00	105.00	2,625.00	
7506-10-1045	Pyramid - Motorola APX Series High Power Dual Gender Power DB25 (Smart Cable)	15.00	105.00	1,575.00	
7506-10-1094	Pyramid - Motorola APX Series Mid/Low Power DB26 (Smart Cable)	50.00	105.00	5,250.00	
7506-10-1045	Pyramid - Motorola APX Series High Power Dual Gender Power DB25 (Smart Cable)	15.00	105.00	1,575.00	
7506-10-1094	Pyramid - Motorola APX Series Mid/Low Power DB26 (Smart Cable)	50.00	105.00	5,250.00	
SVR-200VBN	Pyramid - VHF Repeater 150-174Mhz 15Khz	50.00	915.00	45,750.00	
SVR-200UDN	Pyramid - UHF Repeater 450-470MHz 12.5Khz	25.00	915.00	22,875.00	
9500-02-0250	Pyramid - 2 Year Extended Warranty Per unit total warrenty 3Yr.	75.00	102.00	7,650.00	
PYRAMID	Pyramid - SVR-200 Programming Software Free Download on Pyramid Web Site	5.00	0.00	0.00	
FY-1	Pyramid - Programming Cable & Software (SVR-200, 2017 Merlin)	25.00	60.00	1,500.00	

*** 2/9/2016 09:16 pm ***

DPS1600000004

Proc Folder: 185234
Doc Description: Vehicular Repeaters

**Electronic Services Inc.**

8800 State Route 34
P.O. Box 474
Winfield, WV 25213
304-586-0024 Fax: 304-521-1525
wvesi@aol.com
WV Contractor License # WV042278

Quote #:	1258
Quote Date:	2/9/2016
Page:	2
Customer #:	1500

Quoted To:

West Virginia State Purchasing
2019 Washington Street East
Charleston, WV 25305
US

Phone:	Cust PO:	Valid Through: 3/10/2016
Reference: DPS1600000004	Ship Via:	Terms:
Stock Code	Description	Salesperson: Aaron
		Quantity Price Extended

SubTotal:	100,500.00
Tax:	0.00
Shipping:	0.00
Total:	100,500.00



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Request for Quotation
31 — Public Safety

Proc Folder: 185234

Doc Description: Vehicular Repeaters

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2016-02-05	2016-03-03 13:30:00	CRFQ 0612 DPS1600000004	1

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV 25305

US

VENDOR

Vendor Name, Address and Telephone Number:

Electronic Services Inc.
8800 State Route 34
Winfield, WV
(304)586-0024

FOR INFORMATION CONTACT THE BUYER

Tara Lyle
(304) 558-2544
tara.l.yyle@wv.gov

Signature X

FEIN # 55-0685473

DATE 02/10/2016

All offers subject to all terms and conditions contained in this solicitation

ADDITIONAL INFORMATION

The West Virginia Purchasing Division is soliciting bids on behalf of WV State Police, WV Division of Natural Resources Police, WV Department of Health and Human Resources and all agencies within the WV Department of Military Affairs and Public Safety (DMAPS), to establish an open-end contract for vehicular repeaters, per the attached documentation.

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	Interface Cable - GE/Ericsson Orion	10.00000	EA	\$65.00	\$650.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	Harris/Orion DB9FtoDB37	7500-06-1014

Extended Description :

Interface Cable - GE/Ericsson Orion

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	Interface Cable - Kenwood TK-690H	25.00000	EA	\$65.00	\$1625.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	90Series Cable	7500-10-1045

Extended Description :

Interface Cables - Kenwood TK-690H

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
3	Interface Cable - Kenwood TK-5810	25.00000	EA	\$65.00	\$1625.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	Kenwood Cable	7502-10-1045

Extended Description :

Interface Cables - Kenwood TK-5810

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
4	Interface Cable - Tait TM-9100	15.00000	EA	\$65.00	\$975.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	TM Series	7500-10-1010

Extended Description :

Interface Cable - Tait TM-9100

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
5	Interface Cable - Motorola XTL-2500 (high power)	15.00000	EA	\$105.00	\$1575.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	XTL High Power	7505-10-1045

Extended Description :

Interface cable - Motorola XTL-2500 (High Power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
6	Interface Cable - Motorola XTL-2500 (Mid/Low power)	25.00000	EA	\$105.00	\$2625.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyamid	XTL Mid Low DB26 Cable	7505-10-1094

Extended Description :

Interface Cable - Motorola XTL-2500 (Mid/Low power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
7	Interface Cable - Motorola APX-6500 (High power)	15.00000	EA	\$105.00	\$1575.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyamid	High Power DB25 Smart Cable	7506-10-1045

Extended Description :

Interface Cable - Motorola APX-6500 (High power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
8	Interface Cable - Motorola APX-6500 (Mid/Low Power)	50.00000	EA	\$105.00	\$5250.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyamid	Mid/Low DB26 Smart Cable	7506-10-1094

Extended Description :

Interface Cable - Motorola APX-6500 (Mid/Low Power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
9	Interface Cable - Motorola APX-7500 (High Power)	15.00000	EA	\$105.00	\$1575.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyamid	High Power DB25 Smart Cable	7506-10-1045

Extended Description :

Interface Cable - Motorola APX-7500 (High power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
10	Interface Cable - Motorola APX-7500 (Mid/Low Power)	50.00000	EA	\$105.00	\$5250.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyamid	Mid/Low DB26 Smart Cable	7506-10-1094

Extended Description :

Interface Cable - Motorola APX-7500 (Mid/Low power)

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
11	VHF Vehicular Repeater	50.00000	EA	\$915.00	\$45750.00

Comm Code	Manufacturer	Specification	Model #
43222817	Pyramid	VHF mobile Repeater	SVR-200VBN

Extended Description :
VHF Vehicular Repeaters

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
12	UHF Vehicular Repeaters	25.00000	EA	\$915.00	\$22875.00

Comm Code	Manufacturer	Specification	Model #
43222817	Pyramid	UHF Mobile Repeater	SVR-200UDN

Extended Description :
UHF Vehicular Repeaters

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
13	Programming Software	5.00000	EA	\$0.00	\$0.00

Comm Code	Manufacturer	Specification	Model #
43230000	Pyramid	Programming	Software

Extended Description :
Programming Software

INVOICE TO		SHIP TO	
VARIOUS AGENCY LOCATIONS AS INDICATED BY ORDER		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
No City	WV99999	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
14	Programming Cable	25.00000	EA	\$60.00	\$1500.00

Comm Code	Manufacturer	Specification	Model #
26121629	Pyramid	Cable & Software	FY-1

Extended Description :
Programming Cables

SCHEDULE OF EVENTS		
Line	Event	Event Date

1	Technical question deadline by 4:00 pm	2016-02-18
---	--	------------

DPS1600000004	Document Phase Final	Document Description Vehicular Repeaters	Page 8 of 8
---------------	-------------------------	---	----------------

ADDITIONAL TERMS AND CONDITIONS


See attached document(s) for additional Terms and Conditions

CERTIFICATION AND SIGNATURE PAGE

By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

Electronic Services Inc.

(Company)

 (Aaron McCallister, President)

(Authorized Signature) (Representative Name, Title)

(304-586-0024)(1-304-521-1525)(02/10/2016)

(Phone Number) (Fax Number) (Date)

REQUEST FOR QUOTATION
CRFQ DPS1600000004 - Vehicular Repeaters

8.4 Contract Manager: During its performance of this Contract, Vendor must designate and maintain a primary contract manager responsible for overseeing Vendor's responsibilities under this Contract. The Contract manager must be available during normal business hours to address any customer service or other issues related to this Contract. Vendor should list Contract manager and his or her contact information below.

Contract Manager: Aaron McCallister
Telephone Number: 304-586-0024
Fax Number: 1-304-521-1525
Email Address: wvesi@aol.com

RFQ No. _____

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

MANDATE: Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

EXCEPTION: The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

AFFIRMATION: By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

WITNESS THE FOLLOWING SIGNATURE:

Vendor's Name: Electronic Services Inc.

Authorized Signature: _____ Date: 2/15/16

State of West Virginia


County of Putnam, to-wit:

Taken, subscribed, and sworn to before me this 15 day of February, 2016.

My Commission expires 23 August, 2016.

AFFIX SEAL HERE

NOTARY PUBLIC

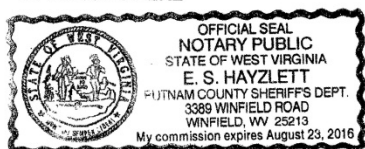

Purchasing Affidavit (Revised 07/01/2012)

State of West Virginia

VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Vendor Preference, if applicable.

1. **Application is made for 2.5% vendor preference for the reason checked:**
☐ Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
☒ Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or** 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
☐ Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or**,
2. **Application is made for 2.5% vendor preference for the reason checked:**
☒ Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,
3. **Application is made for 2.5% vendor preference for the reason checked:**
☐ Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,
4. **Application is made for 5% vendor preference for the reason checked:**
☒ Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or**,
5. **Application is made for 3.5% vendor preference who is a veteran for the reason checked:**
☐ Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or**,
6. **Application is made for 3.5% vendor preference who is a veteran for the reason checked:**
☐ Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.
7. **Application is made for preference as a non-resident small, women- and minority-owned business, in accordance with West Virginia Code §5A-3-59 and West Virginia Code of State Rules.**
☐ Bidder has been or expects to be approved prior to contract award by the Purchasing Division as a certified small, women- and minority-owned business.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: Electronic Services Inc.

Signed: _____

Date: 02/10/2016

Title: President



P Y R A M I D
COMMUNICATIONS

February 10, 2016

Electronic Services Inc.
PO Box 474
Winfield, WV 25213

Dear Mr. McCallister.:

Pyramid Communications is a manufacturer of Vehicular Repeaters and Mobile Data equipment with our corporate offices located in Irvine CA. Our company has been providing products and services to the Two-Way Radio Communications Industry and marketplace for 20 years.

We have structured our organization to utilize Manufactures Representative Firms and Dealers who are charged with the responsibility of soliciting and managing our dealer network. We primarily sell, service and provide warranty support for our products through our dealer network. However in the event that the dealer becomes unable to maintain or support the equipment, we guarantee maintenance and support per our Warranty Agreement.

Accordingly, please be advised that the following dealer is Authorized by Pyramid Communications to sell and service all products to West Virginia State and Local Government entities as well as to any additional State of West Virginia entities authorized by the State of West Virginia to procure products under any contract award resulting from their offering to the above referenced ITB.

Electronic Services Inc.
PO Box 474
Winfield, WV 25213

We thank you for your attention to this matter.

Sincerely,

Seth Chandler
Eastern Regional Sales Manager, Pyramid Communications



Synthesized Vehicular Repeaters



PYRAMID
COMMUNICATIONS

Since 1990

Communicate with Confidence



SVR 200 The Industry Standard

SINGLE CHANNEL

2 WATT COVERAGE

PRIORITY STRUCTURE



- ▲ Motorola PAC/RT Compatible
- ▲ "First Man Out" with Priority Sampling
- ▲ Synthesized Operation PC Programmable Frequencies and Tones
- ▲ LTR, EDACS and Motorola Trunking Compatible
- ▲ Factory Interface Cables for Most Popular Public Safety Radios
- ▲ Remote Channel Selector, Auxiliary Receiver, and In-Band Filtering Options

SVR 200 Single Channel Synthesized Vehicular Repeater

The Pyramid Communications model **SVR-200** is a μ P controlled, synthesized low power vehicle repeater. It is designed to **interface between a high power mobile radio and a low power handheld**. If the radio operator is out of the vehicle and the mobile radio is receiving a transmission, the SVR-200 will repeat the signal to the user's handheld. The user may also transmit back to the SVR-200 via their handheld, and the transmission will be repeated back to the base by the high power mobile radio, effectively **extending the range of the low power handheld** to that of the mobile radio. On-board logic control by the microprocessor ensures that only one vehicle will become active as the repeater, should several vehicles arrive at the same scene. The logic also **handles cases where the priority vehicle leaves** the scene, or another priority vehicle arrives from another scene.

The SVR-200 **remains the industry standard** in Public Safety Vehicular Repeaters with a complete line of accessories to ensure you get the most from your communications system. Factory interface cables for most popular public safety mobiles, **simplify installation** and **enhance reliability**. A complete line of filter products that **eliminate interference in crossband** and in-band applications. The RCS-200* allows personnel to remotely change the mobile channel from a DTMF keypad on the portable allowing **seamless communications with the appropriate agencies**.

714 901-5462
www.pyramidcomm.com


P Y R A M I D
COMMUNICATIONS
Since 1990

Specifications SVR 200



TRANSMITTER

	VHF	UHF	700	800	900
Frequency Range	150–174 MHz	450–470 MHz 405–425 MHz^⓪	764–776 MHz 794–806 MHz^⓪	806–824 MHz 851–869 MHz	897–902 MHz^⓪ 936–941 MHz
RF power out	250mW - 2W	250mW - 2W	100mW - 600mW	100mW - 600mW	100mW - 600mW
Spurious emissions	-50dBc	-52dBc	-45dBc	-45dBc	-45dBc
Frequency stability -30°~+60°C	±1.5 PPM	±1.5 PPM	±1.5 PPM	±1.5 PPM	±1.5 PPM
Modulation	11KOF3E/16KOF3E	11KOF3E/16KOF3E	11KOF3E	11KOF3E/16KOF3E	11KOF3E
Hum and noise	-40dB	-40dB	-40dB	-40dB	-40dB
Audio response (300-3kHz)	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave
Audio distortion	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation
Local mic sensitivity	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP
FCC Type Acceptance	LRUSVR-200VB	LRUSVR-200UD	LRUSVR-200M	LRUSVR-200M	LRUSVR-200M
Industry Canada Approval	2390 195 458A	2390 212 113A	2390A-SVR200M	2390A-SVR200M	2390A-SVR200M

RECEIVER

	VHF	UHF	700	800	900
Frequency Range	150–174 MHz	450–470 MHz 405–425 MHz^⓪	764–776 MHz 794–806 MHz^⓪	806–824 MHz 851–869 MHz	897–902 MHz^⓪ 936–941 MHz
RF sensitivity	.35μV	.35μV	.35μV	.35μV	.35μV
Squelch sensitivity	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable
Modulation acceptance	±3.75/±7.5kHz	±3.75/±7.5kHz	±3.75kHz	±3.75/±7.5kHz	±3.75kHz
Selectivity	72dB	60dB	50dB	50dB	50dB
Spurious/image rejection	70dB	60dB	60dB	60dB	60dB
IMD response	60dB	60dB	60dB	60dB	60dB
Frequency stability	1.5 PPM	1.5 PPM	1.5 PPM	1.5 PPM	1.5 PPM
Audio response (300-3kHz)	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave
Audio output	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K
Local Rx audio	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion



^⓪ SPECIAL ORDER

Power Requirements

DC Supply	13.6VDC negative ground ± 25%
Standby	170mA
Receive	250mA @ 400mW Rx Audio
Transmit	<1A @ rated output

Physical Dimensions	5.275"W x 6"L x 1.12"H
Weight	18 ounces
Case	One piece extruded aluminium

Mil-Std-810D/E Ratings

501.2	Procedure II High Temp +60°C
502.3	Procedure II Low Temp -30°C
507.2	Procedure II Humidity
510.2	Procedure II Blowing Dust
514.3	Procedure I Category 8 Vibration, Ground Vehicle
516.3	Procedure I Shock

"For years, security force personnel have had to endure the consequences of ineffective communications. Now we are able to constantly communicate in all previously identified dead spot areas."

– USAF Director of Security Forces



SVR 250 The Next Generation

MULTI CHANNEL

2 WATT COVERAGE

NEW ESP™ PRIORITY STRUCTURE

WIDE OR NARROW BAND

EMERGENCY SIGNALING



- ▲ SVR-200 Compatible
- ▲ 20 Channels
- ▲ 5 mS Priority Sampling
- ▲ Wide or Narrow Band Programmable Per Channel
- ▲ New ESP™ Multi Vehicle Format
- ▲ Optional Internal Auxiliary Receiver
- ▲ Emergency Signaling
- ▲ Factory Interface Cables for Most Popular Public Safety Radios

SVR 250 Twenty-Channel Synthesized Vehicular Repeater

The SVR-250 is the **next generation analog vehicular repeater** from Pyramid Communications. Available in VHF, UHF, 700, 800 and 900 MHz.

Enhanced features include the **fastest priority sampling time in the industry at 5 mS**, and **emergency signalling** from portable to dispatch. PC programmable for up to **20 channels**, with **wideband/narrowband, CTCSS/DCS, emergency or dual tone on a per channel basis**.

The SVR-250 utilizes the new ESP™ priority structure that **resolves priority conflicts during repeater idle time** rather than at the critical start of a conversation. With ESP™, priority vehicles are assigned without user intervention to ensure **uninterrupted communications** when users exit their vehicles. ESP™ also ensures a quick recovery if two vehicles get in a priority mode at one scene.

The SVR-250 can **interface to analog or P25 digital mobile radios**, providing flexible inter-operability between systems that wouldn't normally be able to communicate with analog

portable radios on a scene. The SVR-250 can **also interface to conventional or trunking mobiles** and is **capable of operating with Lightsquared (formerly SkyTerra) mobile satellite phones**. In trunking mode, the SVR-250 ensures proper acquisition of the trunking channel and uses the **Smart Trunking Access™** mechanism of alerting the portable users of trunking status information.

SVR-250 is **fully compatible with existing SVR-200** vehicular repeaters to provide **seamless integration** while users expand their systems or upgrade to the new SVR-250 with ESP™ system.

Optional capabilities include **full duplex operation for extended coverage** between handhelds, and the ARS-250 auxiliary receiver for half duplex mobile systems that do not repeat car-to-car.

714 901-5462
www.pyramidcomm.com


P Y R A M I D
COMMUNICATIONS
Since 1990

Specifications SVR 250 / SVR 252

SVR

TRANSMITTER

	VHF	UHF	700	800	900
Frequency Range	150–174 MHz	450–470 MHz 405–425 MHz^⓪	764–776 MHz 794–806 MHz^⓪	806–824 MHz 851–869 MHz	897–902 MHz^⓪ 936–941 MHz
RF power out	250mW - 2W	250mW - 2W	100mW - 600mW	100mW - 600mW	100mW - 600mW
Spurious emissions	-50dBc	-52dBc	-45dBc	-45dBc	-45dBc
Frequency stability -30°~+60°C	±1.5 PPM	±1.5 PPM	±1.5 PPM	±1.5 PPM	±1.5 PPM
Modulation	11KOF3E/16KOF3E	11KOF3E/16KOF3E	11KOF3E	11KOF3E/16KOF3E	11KOF3E
Hum and noise	-40dB	-40dB	-40dB	-40dB	-40dB
Audio response (300-3kHz)	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave
Audio distortion	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation	<3%@60% deviation
Local mic sensitivity	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP
FCC Type Acceptance	LRUSVR-200VB	LRUSVR-200UD	LRUSVR-200M	LRUSVR-200M	LRUSVR-200M
Industry Canada Approval	2390 195 458A	2390 212 113A	2390A-SVR200M	2390A-SVR200M	2390A-SVR200M

RECEIVER

	VHF	UHF	700	800	900
Frequency Range	150–174 MHz	450–470 MHz 405–425 MHz^⓪	764–776 MHz 794–806 MHz^⓪	806–824 MHz 851–869 MHz	897–902 MHz^⓪ 936–941 MHz
RF sensitivity	.35μV	.35μV	.35μV	.35μV	.35μV
Squelch sensitivity	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable
Modulation acceptance	±3.75/±7.5kHz	±3.75/±7.5kHz	±3.75kHz	±3.75/±7.5kHz	±3.75kHz
Selectivity	72dB	60dB	50dB	50dB	50dB
Spurious/image rejection	70dB	60dB	60dB	60dB	60dB
IMD response	60dB	60dB	60dB	60dB	60dB
Frequency stability	1.5 PPM	1.5 PPM	1.5 PPM	1.5 PPM	1.5 PPM
Audio response (300-3kHz)	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave
Audio output	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K
Local Rx Audio	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion



^⓪ SPECIAL ORDER

Power Requirements

DC Supply	13.6VDC negative ground ± 25%
Standby	170mA
Receive	250mA @ 400mW Rx Audio
Transmit	<1A @ rated output

Physical Dimensions	5.75"W x 10"L x 2.25"H
Weight	38 ounces
Case	One piece extruded aluminium

Mil-Std-810D/E Ratings

501.2	Procedure II High Temp +60°C
502.3	Procedure II Low Temp -30°C
507.2	Procedure II Humidity
510.2	Procedure II Blowing Dust
514.3	Procedure I Category 8
	Vibration, Ground Vehicle
516.3	Procedure I Shock



SVR **P250** P25 Compliant

MULTI CHANNEL

2 WATT COVERAGE

NEW ESP™ PRIORITY STRUCTURE

WIDE OR NARROW BAND

EMERGENCY SIGNALING

P25 PHASE 1 COMPLIANT

AES/DES ENCRYPTION



- ▲ **P25 Phase 1 Compliant**
- ▲ 20 Channels
- ▲ New ESP™ Multi Vehicle Format
- ▲ AES / DES Encryption
- ▲ Programmable P25 or Analog Per Channel
- ▲ SVR-200 and SVR-250 Compatible
- ▲ Wide or Narrow Band Programmable Per Channel
- ▲ Emergency Signaling
- ▲ Factory Interface Cables for Most Popular Public Safety Radios

SVR **P250** P25 Twenty-Channel Digital Vehicular Repeater

The SVR-**P250** is the next generation vehicular repeater from Pyramid Communications that is fully compliant with the **APCO Project 25 Phase 1 Digital Common Air Interface (CAI)** protocol.

Advanced features include **secure communications** with P25 portable radios, **AES and DES encryption**, and **emergency signaling** from portable to dispatch. **PC programmable** for up to **20 channels**, with P25, wideband/narrowband, CTCSS/DCS, and emergency signaling on a per channel basis.

The **SVR-P250** utilizes the new **ESP™ priority structure** that **resolves priority conflicts during repeater idle time** rather than at the critical start of a conversation. With ESP™, priority vehicles are assigned without user intervention to ensure **uninterrupted communications** when users exit their vehicles. ESP™ also ensures a quick recovery if two vehicles get in a priority mode at one scene.

The SVR-**P250** is **both P25 and analog capable** and can interface to analog or P25 mobiles providing **flexible inter-operability between systems**

that wouldn't normally be able to communicate.

The SVR-**P250** will **interface to analog, digital, conventional or trunking mobiles** and is capable of operating with Lightsquared (formerly SkyTerra) mobile satellite phones. In trunking mode, the SVR-**P250** ensures proper acquisition of the trunking channel and uses the **Smart Trunking Access™** mechanism of alerting the portable users of trunking status information.

In analog mode, the SVR-**P250** is **fully compatible with existing SVR-200 and SVR-250** vehicular repeaters to provide seamless integration while users upgrade their systems from analog to P25 digital.

714 901-5462
www.pyramidcomm.com


P Y R A M I D
COMMUNICATIONS
Since 1990

Specifications SVR P250



TRANSMITTER

	VHF	UHF	764-870
Frequency Range	136-174 MHz	450-530 MHz	764-776 MHz + 850-870 MHz
RF power out	0.5 - 2W	0.5 - 2W	0.25 - 1W
Spurious emissions	-70dBc	-70dBc	-70dBc
Frequency stability -30°~+60°C	±1.5PPM	±1.5PPM	±1.5PPM
Modulation	10K0F1D, 10K0F1E, 10K0F7D, 10K0F7E, 11K0F3E, 12K3F1D, 16K0F3E, 4K80F2D, 7K60F1D, 8K10F1D, 8K10F1E, 8K10F7D, 8K10F7E, 8K40F2D	10K0F1D, 10K0F1E, 10K0F7D, 10K0F7E, 11K0F3E, 12K3F1D, 16K0F3E, 4K80F2D, 7K60F1D, 8K10F1D, 8K10F1E, 8K10F7D, 8K10F7E, 8K40F2D	10K0F1D, 10K0F1E, 10K0F7D, 10K0F7E, 11K0F3E, 12K3F1D, 16K0F3E, 4K80F2D, 7K60F1D, 8K10F1D, 8K10F1E, 8K10F7D, 8K10F7E, 8K40F2D
Hum and noise			
25/30kHz	-43dB	-43dB	-40dB
12.5kHz	-38dB	-38dB	-33dB
Audio response (300-3kHz)	Flat or -6dB/octave	Flat or -6dB/octave	Flat or -6dB/octave
Audio distortion	<3% @ 1kHz 60% deviation	<3% @ 1kHz 60% deviation	<3% @ 1kHz 60% deviation
Local mic sensitivity	300mV - 5VPP	300mV - 5VPP	300mV - 5VPP
FCC Type Acceptance	LRUSVR-P250V	LRUSVR-P250U	LRUSVR-P250M
Industry Canada Approval	2390A-SVRP250V	2390A-SVRP250U	2390A-SVRP250M

RECEIVER

	VHF	UHF	764-870
Frequency Range	136-174 MHz	450-530 MHz	764-776 MHz + 850-870 MHz
Analog sensitivity	0.28uV	0.28uV	0.28uV
Digital sensitivity (5% BER)	0.20uV	0.20uV	0.20uV
Squelch sensitivity	.2uV to 2uV adjustable	.2uV to 2uV adjustable	.2uV to 2uV adjustable
Selectivity			
25/30kHz channel	75dB	75dB	75dB
12.5kHz channel	65dB	65dB	65dB
Spurious/image rejection	75dB	75dB	75dB
IMD response	75dB	75dB	75dB
Frequency stability	±1.5PPM	±1.5PPM	±1.5PPM
Audio response (300-3kHz)	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave
Audio output	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K	0-5VPP AC coupled 600/2.2K
Local Rx audio	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion	400 mW 8 Ohms@ <5% distortion



Power Requirements

DC Supply	13.6VDC negative ground ± 25%
Standby	170mA
Receive	250mA @ 400mW Rx Audio
Transmit	<2A @ rated output

Physical	
Dimensions	5.75"W x 10"L x 2.25"H
Weight	38 ounces
Case	One piece extruded aluminium

Mil-Std-810D/E Ratings

501.2	Procedure II High Temp +60°C
502.3	Procedure II Low Temp -30°C
507.2	Procedure II Humidity
510.2	Procedure II Blowing Dust
514.3	Procedure I Category 8 Vibration, Ground Vehicle
516.3	Procedure I Shock



SVR 252 Full Duplex Repeater

FULL DUPLEX REPEATER

DEPLOYABLE OR FIXED CONFIGURATION

COST EFFECTIVE

- ▲ PC Programmable Full Duplex Repeater
- ▲ VHF/UHF/700/800/900 MHz
- ▲ CTCSS and DCS
- ▲ 2 Watt Transmit Power Output
- ▲ Optional Duplexer, Housing and Power Supply for Tactical Deployment



SVR 252 Full Duplex Repeater (Shown with optional PS 252 and Duplexer)

The popular SVR-250 is now available in a **full duplex version** with many of the same features as the original. The SVR-252 is **PC programmable** on a per channel basis for frequency, tone/code, wide/narrow band operation and emergency operation. In addition, the SVR-252 is **full duplex**, which allows **extended coverage** from **portable to portable** as well as **portable to base** communications. Full duplex operation eliminates the "sampling" normally heard during base to portable transmissions.

The SVR-252 can be used as a **standalone repeater** in a command vehicle application to improve on-scene portable coverage. It is also available in a standard enclosure with a duplexer and DC power supply for **rapid deployment** in

emergency and interoperability applications. (As pictured: SVR-PS252)

When powered off of 110VAC, the Auxiliary DC terminals can be used as a **back-up battery input**, or used as a convenient **DC trickle charger**/power supply (Max current: 2 amps)

The SVR-252 can interface to analog or P25 digital mobile radios. The SVR-252 can also interface to conventional or trunking mobiles and is **capable of operating with Lightsquared (formerly Skyterra) mobile satellite phones**. In trunking mode, the SVR-252 ensures proper acquisition of the trunking status information.

The SVR-PS252 is a rapid deployment, cost-effective solution for **on-scene portable to portable communications**.

For SVR 252 specifications, see www.pyramidcomm.com/svr252.html



Made in the USA



PYRAMID
COMMUNICATIONS
Since 1990

37 Shield, Irvine, CA 92618
Ph 714 901-5462
Fax 714 901-5472
www.pyramidcomm.com

SVR-200 Vehicular Repeater

This manual is intended for use by qualified technicians and includes all necessary information pertaining to the SVR-200 operation, circuit design and maintenance. Changes that occur after date of printing will be incorporated in supplemental service publications.

Foreword

Scope of this manual

This manual contains the specifications, functional description, operating instructions, schematic, parts locator and parts list for the SVR-200 synthesized vehicular repeater.

This manual is intended for use by qualified service technicians to aid them with installation, interfacing, alignment and trouble shooting of the SVR-200 when used with other land mobile radios.

Service manual revisions

Component changes, additions and deletions may occur in the circuit design to improve operation and will be reflected in future releases of this service manual. Specifications and circuit changes are subject to change without prior notice or obligation by Pyramid Communications.

Safety Information

The SVR-200 is designed to operate within all applicable Federal regulations at the time of manufacture. Proper operation and service procedures will assure continued compliance with these regulations:

- Do not operate the SVR-200 without an antenna or appropriate RF load connected to the antenna connector.
- Do not operate the SVR-200 in the presence of unshielded electrical blasting caps or explosive environmental conditions.
- Do not operate the SVR-200 while refueling the vehicle or in the presence of explosive fumes.
- Do not operate the SVR-200 with persons standing closer than 2 feet from the mobile or repeater antenna.

FCC information

The SVR-200 complies with the FCC rules parts 90 and 22 for radio frequency transmitters. The user must apply for a license to operate the SVR-200 transmitter pursuant to parts 90.243 and 90.247. Other FCC rules may apply depending on the class of service the user qualifies for. A complete listing of FCC rules and regulations may be ordered from:

Superintendent of Documents
Government printing office
Washington DC 20402

The following information pertaining to the SVR-200 should be included in the FCC license application:

	VHF	UHF	700/800/900 MHz
Type Acceptance:	LRUSVR-200VB	LRUSVR-200U	LRUSVR-200M
Output Power:	0.25-2.0W	0.25-2.0W	100mW-600mW
Emission designator:	11K0F3E/16K0F3E	11K0F3E/16K0F3E	11K0F3E/16K0F3E
Frequency band:	150-174 MHz	400-512MHz	764-806(700M), 806-824 or 850-870(800M) 897-902 or 936-941 (900M)
Number of Channels:	1/14	1/14	1/14

Specifications

Transmitter:	VHF	UHF	700/800/900 MHz
Frequency Range:	150-174MHz	405-425 MHz (UA) ¹ 450-470 MHz (UD) 470-490 MHz (UE) ¹	764-776, 794-806 (MC,MD) 806-824, 850-870 (MB,MA) 897-902, 936-941 (ME,MF)
Rf power out:	250mW - 2W	250mW - 2W	100mW - 600mW
Spurious emissions:	-50dBc	-50 dBc	-50dBc
Freq stability -30°~+60°C:	1.5 PPM	1.5 PPM	1.5 PPM
Modulation:	16K0F3E/11K0F3E	16K0F3E/11K0F3E	16K0F3E ² /11K0F3E
Hum and Noise:	-40/-37dB(25/12.5kHz)	-40/-37dB(25/12.5kHz)	-40/-37dB(25/12.5kHz)
Audio response (300-3kHz):	Flat or +6dB/octave	Flat or +6dB/octave	Flat or +6dB/octave
Audio distortion:	<3% @ 60% deviation	<3% @ 60% deviation	<3% @ 60% deviation
Local mic sensitivity:	300mV-5VPP	300mV-5VPP	300mV-5VPP
FCC Type Acceptance:	LRUSVR-200VB	LRUSVR-200U	LRUSVR-200M
Industry Canada Approval:	2390 195458A	2390 212 113A	2390A-SVR200M

Receiver:

Frequency Range:	150-174MHz	405-425 MHz (UA) ¹ 450-470 MHz (UD) 470-490 MHz (UE) ¹	764-776, 794-806 (MC,MD) 806-824, 850-870 (MB,MA) 897-902, 936-941 (ME,MF)
RF sensitivity:	.35μV	.35μV	.35μV
Squelch sensitivity:	.2μV to 2μV adjustable	.2μV to 2μV adjustable	.2μV to 2μV adjustable
Modulation acceptance:	±7.5/±3.75kHz	±7.5/±3.75kHz	±7.5 ² /±3.75kHz
Selectivity:	60/57dB(25/12.5kHz)	60/57dB(25/12.5kHz)	50dB
Spurious/image rejection:	60db	60db	60db
IMD response:	60db	60db	60db
Frequency stability:	1.5 PPM	1.5 PPM	1.5 PPM
Audio response (300-3kHz):	Flat or -6db/octave	Flat or -6db/octave	Flat or -6db/octave
Audio output:	0-5VPP AC coupled	0-5VPP AC coupled	0-5VPP AC coupled
Local Rx Audio:	400 mW 8 Ohms	400 mW 8 Ohms	400 mW 8 Ohms

Power Requirements:

DC Supply	13.6VDC	13.6VDC	13.6VDC
Standby	170mA	170mA	170mA
Receive	250mA	250mA	250mA
Transmit	1 A @ 2W	1.5A @ 2W	700mA @ 600mW

Physical:

Dimensions:	5.275"W x 6"L x 1.12"H
Weight:	18 oz.
Case:	One piece extruded aluminium

¹405-425 and 470-490 available as special order Only

²16K0F3E & ±7.5kHz available on 806-824 and 850-870 MHz Only

Functional Description

Generally, vehicular repeaters are used as mobile extenders in cross-band operation: the link is VHF/UHF/800 MHz simplex and the mobile is Lo-band, VHF, UHF or trunking. In-band operation is possible, but care must be taken to prevent interference between the mobile's higher power transmitter and the repeater receiver. Proper frequency selection and antenna placement are important even in cross-band operation, but especially for inband use. The use of low power pre-selector cavities may be placed in line with the repeater antenna cable since it is simplex and low power.

Important Note

The SVR-200 operates on simplex frequencies; part of the multi-vehicle format dictates that all of the SVR-200s must be able to monitor all link traffic on site and be able to determine if a handheld is transmitting, or if other repeaters are transmitting. The handhelds must transmit CTCSS, but should be carrier squelch receive. ***The handhelds should not use CTCSS decode if the repeater is utilizing the multi-vehicle format***, as this will interfere with the priority sampling which is essential for multi-vehicle operation. Also, the handhelds would have to have different encode and decode tones in order for the repeater to be able to tell the difference between handhelds and other repeaters, so the handhelds would not be able to hear each other. ***The repeaters should not transmit CTCSS unless used only in a single vehicle environment.***

When the user leaves the vehicle, they activate the SVR-200 via their mobile radio front panel or a separate switch. When the mobile radio is receiving carrier and proper tone, the SVR-200 will begin transmitting on the handheld's receive frequency. The user is able to hear and respond to all radio traffic, including other handhelds at the site. The SVR-200 can be programmed to give the handhelds priority in a conversation by periodically sampling for handheld activity (carrier and proper tone) during base-to-portable transmissions. During sampling, if the SVR-200 detects a handheld transmission, it will cease transmissions, key the mobile radio and repeat portable-to-base. This allows the handheld to respond during repeater hang time or during full duplex interconnect calls. Priority sampling can be enabled/disabled through PC programming and the interval can be programmed between .25 seconds and 2.5 seconds in .25 second increments.

The SVR-200 has a fixed 3 minute time out timer for base-to-portable transmissions. If the mobile COR is active for more than 3 minutes (and the SVR-200 is the priority unit) it will send a double blip and cease transmission until the mobile COR is inactive. The 3 minute time-out is in affect regardless of whether the SVR-200 is programmed for priority sampling or not.

Multi-vehicle operation

When the SVR-200 is first activated, it will transmit a short "lock tone" that alerts the user that the system is functioning. It will then assume the priority status and be ready to repeat any base-to-portable or portable-to-base transmissions. If another unit arrives on scene and is activated, it too will transmit the "lock tone"; when the first SVR-200 detects the lock tone from the second unit, it will increment a "priority counter" and will no longer repeat any transmissions. The recently arrived unit will be the priority repeater, and the first unit will be 1 count away from priority. This process will continue for each unit that arrives at the site, creating a priority hierarchy for up to 256 vehicles, each with a unique count and only one unit at priority status. The SVR-200 will not transmit its lock tone if the radio channel is busy when first enabled. It will wait in non-priority status until all transmissions cease, then send its lock tone and become the priority unit.

Even though the other SVR-200s are not at priority status, they will continue to monitor the channel for activity. If the priority unit were to leave the scene or become disabled, the other units will detect the condition to repeat and determine that there is no priority unit repeating the transmission. They will then begin to decrement their priority counters until one of them reaches the priority status and begins repeating the transmission. Since the SVR-200s are all at different counts, only one will reach priority status and begin transmitting. The other units will sense the new priority repeater and cease counting down, preserving the priority hierarchy.

If another unit were to arrive from a different scene and it is still the active priority, there will be two active repeaters on the air when a condition to repeat exists. When one of the SVR-200s unkeys to check for handheld activity, it will detect the presence of the other active SVR-200 and increment its priority counter and cease transmission. This is the self clearing mode to prevent radio collisions.

If the handheld operator is out of the vehicle and their partner still in the vehicle were to key the mobile radio using the local mic, the SVR-200 will detect the local PTT and repeat the transmission to the other handhelds so that both sides of the conversation will be heard by everyone on the link. The local mic repeat function can be enabled/disabled via the PC software.

The SVR-200 also has a local receive audio speaker jack that enables the person in the vehicle to monitor portable-to-base transmissions that are being repeated through the mobile.

If the users wish to communicate portable-to-portable without accessing the mobile repeater, they may transmit on the same frequency without CTCSS (or a different CTCSS); the SVR-200 only responds to carrier and proper tone from the handhelds.

Trunking operation

When the SVR-200 is connected to a trunking mobile and the handheld operator wishes to access the system, they key their handheld briefly then release. The SVR-200 will attempt to acquire a voice channel on the trunking system by keying the mobile for 200mS and monitoring the on-air detect line from the mobile. If it does not see the radio transmit at all (system is busy), it will send a low tone to the hand held operator to alert them that the system is busy. The SVR-200 will automatically retry every 5 seconds and send busy tone to the handheld with each unsuccessful attempt to indicate progress of the call attempt. If unsuccessful after 30 seconds, the SVR-200 will transmit intercept tone to alert the handheld operator that the call attempt failed.

When the SVR-200 detects that the mobile is transmitting, it will continue to monitor the on-air line until the transmitter remains keyed for at least 250mS to ensure that the radio is merely handshaking or retrying. After successful acquisition of a voice channel, it will continue to hold the mobile PTT active for 2 seconds and transmit a go-ahead blip to the handheld operator. The user then keys their handheld to speak on the voice channel. If the user does not key up within the 2 second period, the SVR-200 will unkey the mobile and send intercept tone as before.

If the user keys their handheld only once, or they key the first time for more than 1 second, the SVR-200 will cancel the call attempt and send intercept tone to the handheld operator. All of the queuing and error tones will only be sent if the handheld is not transmitting to ensure that the user hears the proper tones.

LEDs

CPU:	Flashes at a 1 Hz rate to indicate proper operation of the microprocessor.
PRI:	When on, indicates that the unit is at priority count zero and will repeat all transmissions.
RCOR:	Repeater Carrier detect.
RTONE:	Repeater sub-audible decode; when on, indicates a condition to repeat portable-to-base.
RTX:	Repeater transmit indicator.
MCOR:	Mobile unmute detector indicating a condition to repeat base-to-portable.
MTX:	Mobile transmit indicator.
OPT:	Should be on steady during programming operations only. If OPT LED flashes at 10Hz rate, it is an indication that the PLL did not lock within the allotted 50mS and the unit should be serviced.

Installation

Before installing the SVR-200, ensure that the RF and repeater sections are properly aligned per the tuning instructions on pages 8-14 of this manual. Additionally, ensure that the SVR-200 jumpers are properly configured for use with the particular mobile radio that it will be connected to:

- J1 Controls the maximum drive level of the transmit audio output to the mobile radio. If J1 is installed, output amp U1B will have an adjustment range of 0-100 mVPP. If J1 is removed, U1B can be adjusted between 0-5VPP.
- J2 Controls the output impedance of the transmit audio line to the mobile radio. If connected to a low impedance point in the mobile, installing JP2 sets the output impedance to 600 ohms. If JP2 is open, the output impedance is 2.2Kohms. Install the jumper for radios that require a lot of modulation drive or that have low impedance microphone circuits. Remove the jumper if the SVR-200 installation decreases local microphone audio at the mobile.
- J3 Used for testing the SVR-200 receiver and setting the lock tone deviation transmit level. If JP3 is shorted at power up, the SVR-200 receiver will be active all of the time and receiver audio will be heard at the speaker regardless of the repeater squelch setting or CTCSS tone decoded. Remove the jumper and turn the SVR-200 off to return to normal operation. If JP3 is shorted while power is applied, the SVR-200 will go into transmit mode and send lock tone for as long as the jumper is shorted. Remove the jumper to return to normal operation.
- J4 Used to internally tie the local mic input of the SVR-200 to the transmit audio output line which is usually connected to the mic hi line in the mobile.
- J5 Used to internally tie the on-air detect input of the SVR-200 to the PTT output. Do so *only on conventional radios*; trunking radios *must have the on-air detect line connected to a line indicating that the radio is transmitting*.
- J6 Changes the maximum gain of the local mic input amp from unity (Out) to 10x (In).
- J7 Changes the maximum gain of the receive audio line input from unity (Out) to 7x (In).
- J8 Adds a pull up (+ position) or pull down (- position) resistor to the remote enable line (blue).
- J9 Adds a pull up resistor (10K to 5VDC) to mobile COR line (violet)
- J11 Removing J11 adds 100K ohm resistor in series with SVR-200 mobile transmit audio path. Used for situations where mobile radio has noise on transmit audio.
- J12 Enables external speaker circuit.

Make the connections between the mobile radio and the SVR-200 cable as follows:

Pin 1: Ground. Connect to the radio's chassis or ground plane.
Black/Shield

Pin 2: Mobile transmit audio. Connect to the mobile transmit audio path or tone input. If connected before pre-emphasis, ensure that the SVR-200 is programmed for de-emphasis (common data). If connected after pre-emphasis, ensure that the SVR-200 transmit audio path is programmed as flat. Pin 2 is AC coupled and has an output impedance of 600 or 2.2Kohms (determined by J2). RV3 sets the transmit audio output level and J1 sets the adjustment range between 0-5VPP (J1 open) or 0-100mVPP (J1 shorted).
White

Pin 3: <i>Blue</i>	Remote enable/disable. Connect to the radio's auxiliary output or a separate switch to remotely enable or disable the repeater. If this line goes high to activate the repeater, ensure that JP1 is set to the "+" position. If this line goes to ground, set JP1 to the "-" position. J8 has two positions to add a pull up (+) or pull down (-) resistor to this line if used with an open collector or dry contact output.
Pin 4: <i>Green</i>	Mobile PTT output. Connect to mic PTT on the mobile radio, or a line that goes active low to transmit. Pin 4 is an open collector output rated at 100mA at 50VDC.
Pin 5: <i>Red</i>	12 VDC input. Connect to the radios 12V switched supply or a point capable of supplying at least 1.5A of current.
Pin 6: <i>Yellow</i>	Mobile receive audio. Connect this line to the mobile receive audio path before the volume control. If pin 6 is connected before de-emphasis, ensure that the SVR-200 receive path is programmed as flat (common data). If connected after de-emphasis, program the receive path for pre-emphasis. Pin 6 is AC coupled and high impedance (>15K ohm). RV5 sets the receive audio level sensitivity; this input should be between 30mVPP and 5VPP. J7 sets the gain of the receive input amp. If open, the input has a maximum gain of one; if installed, the input has a maximum gain of 7.
Pin 7: <i>Violet</i>	Mobile COR detect. This line is used to indicate when the SVR-200 should repeat the transmission to the handheld. Connect to a logic point in the radio that indicates proper tone and carrier have been detected or the audio unmute line. If this line goes more positive during an unmute condition, program the mobile COR line as active high (common data). If the line goes more negative during an unmute condition, program the mobile COR line as active low. The input from pin 7 is high impedance and does not have to go rail to rail. The SVR-200 uses a voltage comparator as a COR threshold detector. RV1 sets the mobile COR threshold level and should be set for half way between the mute and unmute levels at pin 7. Example: If Pin 7 is connected to a point that goes from 0VDC (mute) to 5VDC (unmute), set RV1 for 2.5VDC and program the mobile COR line as active high. If Pin 7 goes between 7.2VDC (mute) and 5.8VDC (unmute), set RV1 for 6.5VDC and program the mobile COR line as active low.
Pin 8: <i>Brown</i>	Local mic audio. If programmed for local mic repeat, the SVR-200 will go into transmit mode and repeat the audio from this line whenever the mobile radio is keyed by the local mic. Connect this line to the mobile transmitter audio path before limiting or filtering. This input is AC coupled and high impedance (>5.6Kohms). The input level at this pin should be 300mV to 5VPP. RV2 sets the local mic sensitivity. If the mic high line has sufficient drive for this input, install J4 and leave pin 8 unconnected. J6 sets the gain of the local mic input amp. If open, the maximum gain is one; if installed, the maximum gain is 10.
Pin 9: <i>Gray</i>	On-Air detect. Trunking: Connect to a point in the radio that indicates the mobile transmitter is actually on the air. This is not the same as mic PTT. If pin 9 goes positive during transmit, program the on-air detect line for active high (common data). If pin 9 goes to ground during transmit, program the on air detect line for active low. Conventional: Used for local mic repeat indication from the mobile. Connect pin 9 to pin 4 of the SVR-200 and program the on-air detect line for active low. Solder jumper J5 will connect pin 9 to pin 4 (PTT output) and can be used on <i>conventional systems only</i> . Do not install J5 for trunking operation.

Install the SVR-200 in the vehicle using the supplied mounting bracket and hardware. Install the unit where it will be easily visible by the driver and will not interfere with the drivers vision or constitute a hazard during a vehicle collision. The SVR-200 mounts in the bracket using the four 8-32 x 1/4" machine screws. Do not use longer screws to mount the SVR-200 to the bracket or circuit damage may result.

Alignment VHF

Before aligning the SVR-200, ensure that the mobile radio is aligned per the manufacturer's service procedure; Ensure that the SVR-200 is properly programmed and the jumpers are set per the previous section. In order to properly align the SVR-200, you will need two service monitors and the mobile radio that the repeater will be installed with. Refer to figure 1 for alignment points.

Dis-assemble the repeater by removing the two cap screws on the rear panel and the phillips screw on the bottom. Slide the main circuit board out of the housing with the rear panel attached. Connect one service monitor to the SVR-200 TNC jack and the other to the mobile antenna jack. Connect the cable from the mobile radio to the SVR-200 (See figure 4 on page 14). Turn on the mobile and activate the SVR-200.

Adjust the repeater squelch control (RV9) so that the repeater COR led is off. Adjust the mobile so that the audio is squelched.

SVR-200 VHF Transmitter

1. **Transmitter Output:** Short J3 and adjust RV10 for maximum. Confirm the SVR-200 RF Power out is at least 2W. Adjust RV10 for 250 mW. The SVR-200 case is integral to the voltage regulator heat sink and the unit should not transmit at full power when removed from the case for extended periods.
2. **Transmitter frequency:** Adjust the TCXO on the RF board for the transmit frequency.
3. **Maximum deviation/lock tone deviation:** Adjust RV7 (lock tone deviation) for maximum. If the SVR-200 is programmed for sub-audible encode, adjust RV6 (CTCSS) for minimum. Adjust RV8 (repeater deviation) for 95% deviation. Adjust RV7 for 60% deviation. Remove J3.
4. **Mobile COR:** Measure the voltage at TP2 on the SVR-200 main PCB and record. Set the mobile service monitor for the mobile receive frequency, 1mV RF output and CTCSS modulation of 15% deviation. Measure the voltage again at TP2 and record. Turn the mobile service monitor off and adjust RV1 on the SVR-200 main board for the halfway point between the two voltage readings as read at pin 3 of U1.
5. **RX audio sensitivity/CTCSS deviation:** Set the service monitor connected to the mobile for the mobile receive frequency and 1mV RF output. Modulate the signal generator with a 1kHz tone at 60% deviation and CTCSS tone at 15% deviation. Ensure that the SVR-200 mobile COR and repeater PTT LED's are on. Adjust RV5 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the SVR-200. If programmed for sub-audible encode, remove the 1kHz tone deviation from the mobile service monitor and adjust RV6 on the SVR-200 main board for 15% deviation. Turn the RF output from the mobile service monitor off and ensure that the SVR-200 mobile COR and repeater PTT LEDs are off.
6. **Local mic repeat:** If the SVR-200 is programmed for local mic repeat, key the mobile local mic and inject an audio signal into the local mic to produce 60% deviation on the service monitor connected to the mobile. Confirm that the SVR-200 repeater PTT LED is on; adjust RV2 for 60% deviation as read on the service monitor connected to the SVR-200. Unkey the mobile radio.
7. **RF power out:** Short J3 and adjust RV10 for the operating power output. Open J3.

VHF Receiver

1. **Receiver front end:** Connect a DC voltmeter to TP1 on the SVR-200 main board. Set the service monitor connected to the SVR-200 to the generate mode, receive frequency with a 1kHz tone and 60% deviation. Adjust the RF output of the monitor for a 1VDC reading at TP1. Adjust L1-L5 on the RF board for a maximum reading at TP1.
2. **Repeater squelch:** Adjust the service monitor RF output for .5 μ V. Adjust RV9 on the SVR-200 main board so the repeater COR LED is just on. Decrease the service monitor RF output to .3 μ V and ensure that the repeater COR LED is off.
3. **Transmit audio output:** Adjust the service monitor RF output for 1mV. Turn the CTCSS modulation on and set for 15% deviation. Confirm that the repeater COR, CTCSS and mobile PTT LED's are on. Adjust RV3 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the mobile radio.
4. **Local Rx audio:** Connect an 8 ohm speaker to P4 and set RV4 for the desired listening level. Turn off the CTCSS modulation of the service monitor connected to the SVR-200. Confirm that the repeater CTCSS and mobile PTT LED's are off.
5. **Lock Tone Decode:** Change the 1kHz tone modulation to the lock tone frequency. Confirm that the PRI LED goes off after approximately .5 seconds.

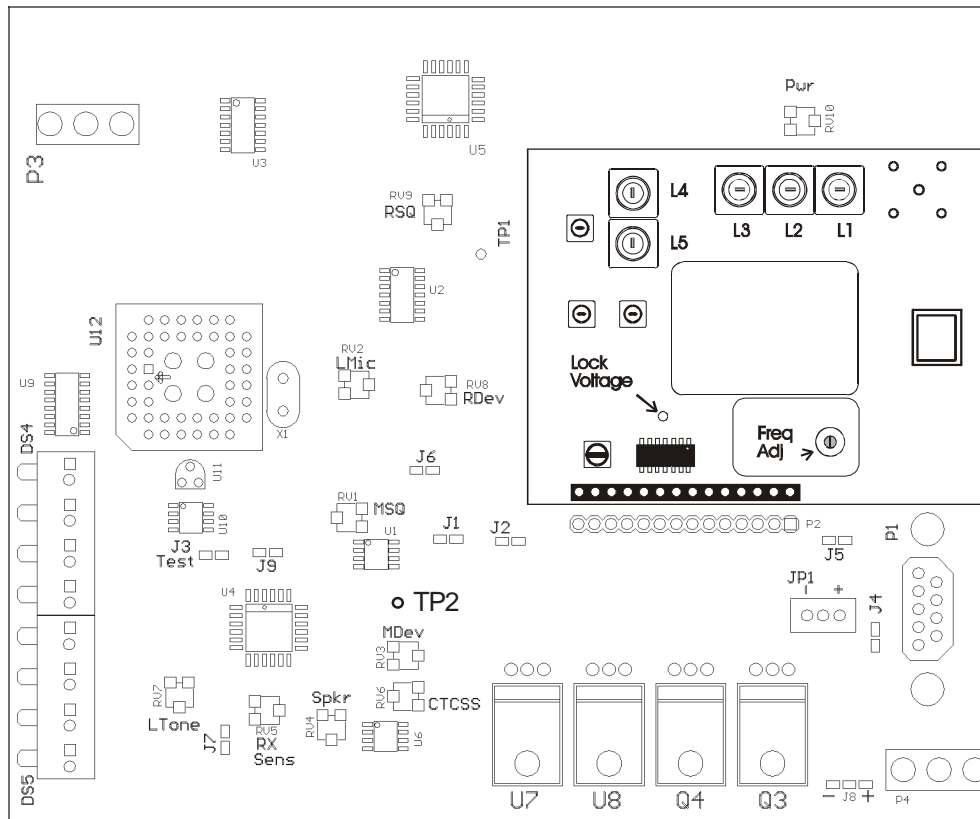


Figure 1

Alignment UHF

Before aligning the SVR-200, ensure that the mobile radio is aligned per the manufacturer's service procedure; Ensure that the SVR-200 is properly programmed and the jumpers are set per the previous section. In order to properly align the SVR-200, you will need two service monitors and the mobile radio that the repeater will be installed with. Refer to figure 2 for alignment points.

Dis-assemble the repeater by removing the two cap screws on the rear panel and the phillips screw on the bottom. Slide the main circuit board out of the housing with the rear panel attached. Connect one service monitor to the SVR-200 TNC jack and the other to the mobile antenna jack. Connect the cable from the mobile radio to the SVR-200 (See figure 4 on page 14). Turn on the mobile and activate the SVR-200.

Adjust the repeater squelch control (RV9) so that the repeater COR led is off. Adjust the mobile so that the audio is squelched.

SVR-200 UHF Transmitter

1. **Transmitter Output:** Short J3 and adjust RV10 for maximum. Confirm the SVR-200 RF Power out is at least 2W . Adjust RV10 for 250 mW. The SVR-200 case is integral to the voltage regulator heat sink and the unit should not transmit at full power when removed from the case for extended periods.
2. **Transmitter frequency:** Adjust the TCXO on the RF board for the transmit frequency.
3. **Maximum deviation/lock tone deviation:** Adjust RV7 (lock tone deviation) for maximum. If the SVR-200 is programmed for sub-audible encode, adjust RV6 (CTCSS) for minimum. Adjust RV8 (repeater deviation) for 95% deviation. Adjust RV7 for 60% deviation. Remove J3.
4. **Mobile COR:** Measure the voltage at TP2 on the SVR-200 main PCB and record. Set the mobile service monitor for the mobile receive frequency, 1mV RF output and CTCSS modulation of 15%. Measure the voltage again at TP2 and record. Turn the mobile service monitor off and adjust RV1 on the SVR-200 main board for the halfway point between the two voltage readings as read at pin 3 of U1.
5. **RX audio sensitivity/CTCSS deviation:** Set the service monitor connected to the mobile for the mobile receive frequency and 1mV RF output. Modulate the signal generator with a 1kHz tone at 60% deviation and CTCSS tone at 15% deviation. Ensure that the SVR-200 mobile COR and repeater PTT LED's are on. Adjust RV5 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the SVR-200. If programmed for sub-audible encode, remove the 1kHz tone deviation from the mobile service monitor and adjust RV6 on the SVR-200 main board for 15% deviation. Turn the RF output from the mobile service monitor off and ensure that the SVR-200 mobile COR and repeater PTT LEDs are off.
6. **Local mic repeat:** If the SVR-200 is programmed for local mic repeat, key the mobile local mic and inject an audio signal into the local mic to produce 60% deviation on the service monitor connected to the mobile. Confirm that the SVR-200 repeater PTT LED is on; adjust RV2 for 60% deviation as read on the service monitor connected to the SVR-200. Unkey the mobile radio.
7. **RF power out:** Short J3 and adjust RV10 for the operating power output. Open J3.

UHF Receiver

1. **Receiver front end:** Connect a DC voltmeter to TP1 on the SVR-200 main board. Set the service monitor connected to the SVR-200 to the generate mode, receive frequency with a 1kHz tone and 60% deviation. Adjust the RF output of the monitor for a 1VDC reading at TP1. Adjust BPF1 and BPF2 on the RF board for a maximum reading at TP1.
2. **Repeater squelch:** Adjust the service monitor RF output for .5 μ V. Adjust RV9 on the SVR-200 main board so the repeater COR LED is just on. Decrease the service monitor RF output to .35 μ V and ensure that the repeater COR LED is off.
3. **Transmit audio output:** Adjust the service monitor RF output for 1mV. Turn the CTCSS modulation on and set for 15% deviation. Confirm that the repeater COR, CTCSS and mobile PTT LED's are on. Adjust RV3 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the mobile radio.
4. **Local Rx audio:** Connect an 8 ohm speaker to P4 and set RV4 for the desired listening level. Turn off the CTCSS modulation of the service monitor connected to the SVR-200. Confirm that the repeater CTCSS and mobile PTT LED's are off.
5. **Lock Tone Decode:** Change the 1kHz tone modulation to the lock tone frequency. Confirm that the PRI LED goes off after approximately .5 seconds.

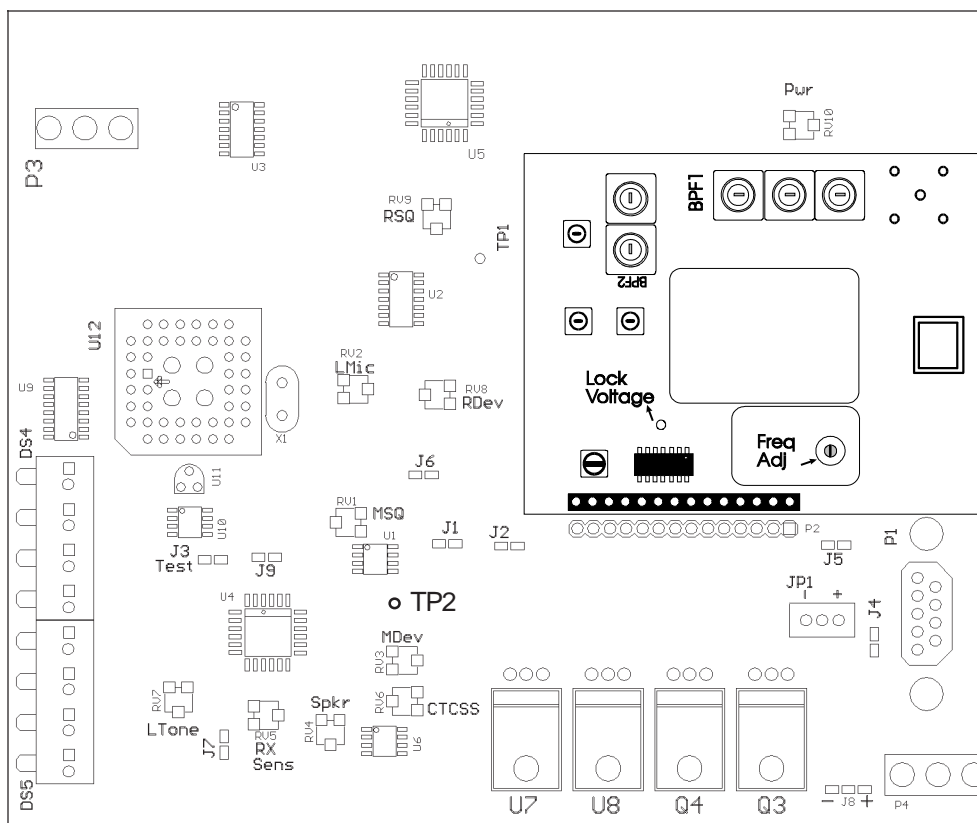


Figure 2

Alignment 700/800/900 MHz

Before aligning the SVR-200, ensure that the mobile radio is aligned per the manufacturer's service procedure; Ensure that the SVR-200 is properly programmed and the jumpers are set per the previous section. In order to properly align the SVR-200, you will need two service monitors and the mobile radio that the repeater will be installed with. Refer to figure 3 for alignment points.

Dis-assemble the repeater by removing the two cap screws on the rear panel and the phillips screw on the bottom. Slide the main circuit board out of the housing with the rear panel attached. Connect one service monitor to the SVR-200 TNC jack and the other to the mobile antenna jack. Connect the cable from the mobile radio to the SVR-200 (See figure 4 on page 14). Turn on the mobile and activate the SVR-200.

Adjust the repeater squelch control (RV9) so that the repeater COR led is off. Adjust the mobile so that the audio is squelched.

SVR-200 700/800/900 MHz Transmitter

1. **Transmitter Output:** Short J3 and adjust RV10 for maximum. Confirm the power out is at least 600mW. Adjust RV10 for 100 mW. The SVR-200 case is integral to the voltage regulator heat sink and the unit should not transmit at full power when removed from the case for extended periods.
2. **Transmitter frequency:** Adjust the TCXO on the RF board for the transmit frequency ± 100 Hz.
3. **Maximum deviation/lock tone deviation:** Adjust RV7 (lock tone deviation) for maximum. If the SVR-200 is programmed for sub-audible encode, adjust RV6 (CTCSS) for minimum. Adjust RV8 (repeater deviation) for 95% deviation. Adjust RV7 for 60% deviation. Remove J3.
4. **Mobile COR:** Measure the voltage at TP2 on the SVR-200 main PCB and record. Set the mobile service monitor for the mobile receive frequency, 1mV RF output and CTCSS modulation of 15%. Measure the voltage again at TP2 and record. Turn the mobile service monitor off and adjust RV1 on the SVR-200 main board for the halfway point between the two voltage readings as read at pin 3 of U1.
5. **RX audio sensitivity/CTCSS deviation:** Set the service monitor connected to the mobile for the mobile receive frequency and 1mV RF output. Modulate the signal generator with a 1kHz tone at 60% deviation and CTCSS tone at 15% deviation. Ensure that the SVR-200 mobile COR and repeater PTT LED's are on. Adjust RV5 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the SVR-200. If programmed for sub-audible encode, remove the 1kHz tone deviation from the mobile service monitor and adjust RV6 on the SVR-200 main board for 15% deviation. Turn the RF output from the mobile service monitor off and ensure that the SVR-200 mobile COR and repeater PTT LEDs are off.
6. **Local mic repeat:** If the SVR-200 is programmed for local mic repeat, key the mobile local mic and inject an audio signal into the local mic to produce 60% deviation on the service monitor connected to the mobile. Confirm that the SVR-200 repeater PTT LED is on; adjust RV2 for 60% deviation as read on the service monitor connected to the SVR-200. Unkey the mobile radio.
7. **RF power out:** Short J3 and adjust RV10 for the operating power output. Open J3.

700/800/900 MHz Receiver

1. **Receiver front end:** Connect a DC voltmeter to TP1 on the SVR-200 main board. Set the service monitor connected to the SVR-200 to the generate mode, receive frequency at .5 μ V RF output with a 1kHz tone and 60% deviation. Confirm a reading of 1VDC \pm .2VDC at TP1.
2. **Repeater squelch:** Adjust the service monitor RF output for .5 μ V. Adjust RV9 on the SVR-200 main board so the repeater COR LED is just on. Decrease the service monitor RF output to .25 μ V and ensure that the repeater COR LED is off.
3. **Transmit audio output:** Adjust the service monitor RF output for 1mV. Turn the CTCSS modulation on and set for 15% deviation. Confirm that the repeater COR, CTCSS and mobile PTT LED's are on. Adjust RV3 on the SVR-200 main board for 60% deviation as read on the service monitor connected to the mobile radio.
4. **Local Rx audio:** Connect an 8 ohm speaker to P4 and set RV4 for the desired listening level. Turn off the CTCSS modulation of the service monitor connected to the SVR-200. Confirm that the repeater CTCSS and mobile PTT LED's are off.
5. **Lock Tone Decode:** Change the 1kHz tone modulation to the lock tone frequency. Confirm that the PRI LED goes off after approximately .5 seconds.

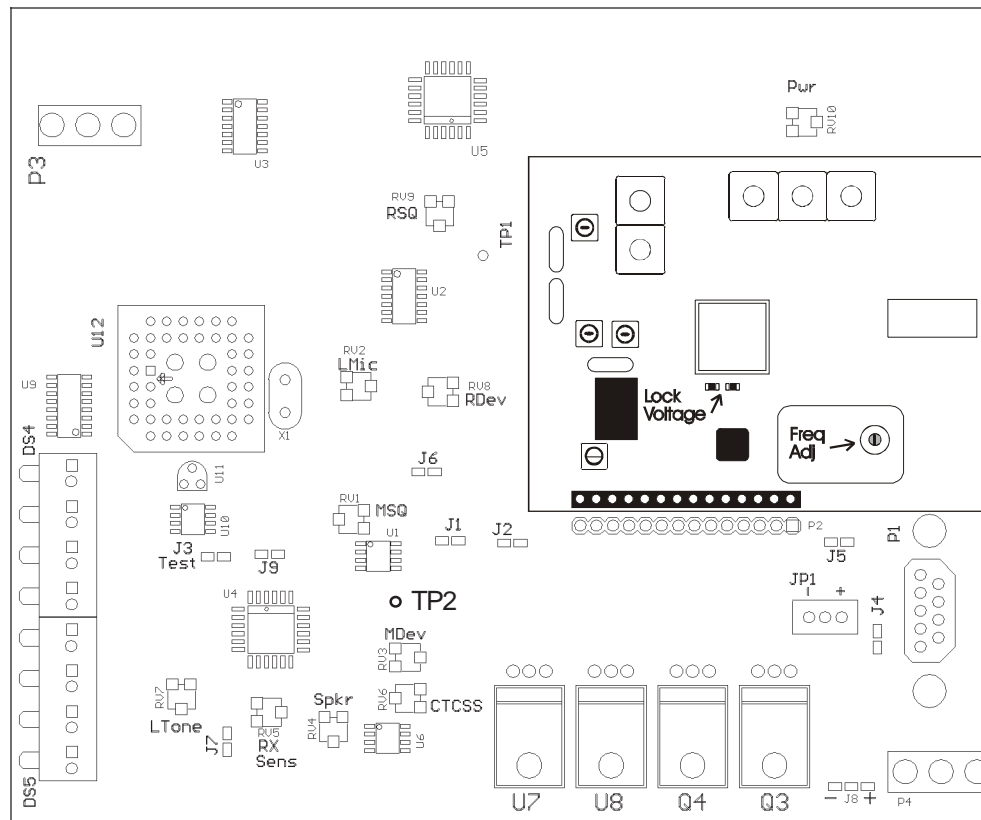


Figure 3

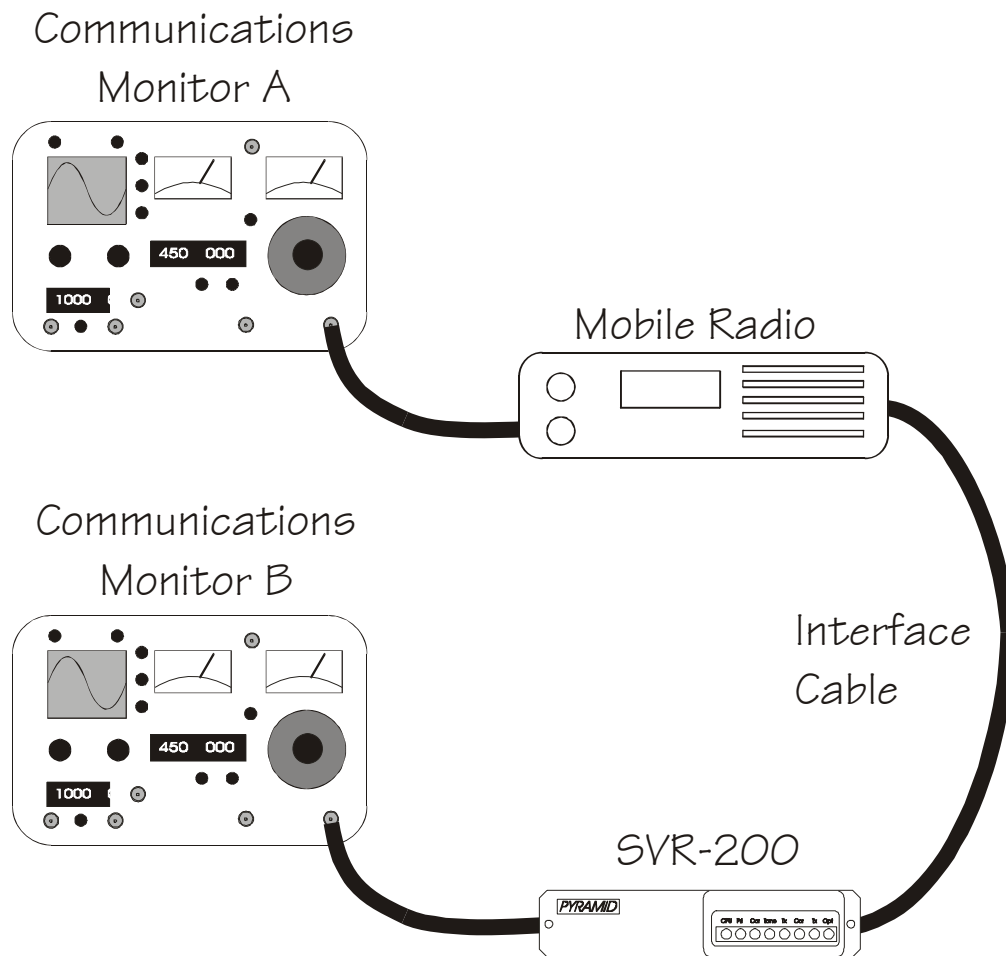


Figure4


Programming

Using the Software

The SVRCPS personalization software is used to program the SVR-200 for all of the operating parameters and options. The software is compatible with Windows 2000 and later operating systems. The software is menu driven and on-line help is available at any time by clicking the left mouse button on the HELP icon on the right side of the tool bar.

Important Note:

Before attempting to program the SVR-200 start the software and ensure the FY-1 programming cable is plugged into the correct serial port. The com port may be selected under the "Transfer" menu. Plug the FY-1 programming cable into P3 on the front of the SVR-200; the OPT LED on the SVR-200 front panel should be on continuously:

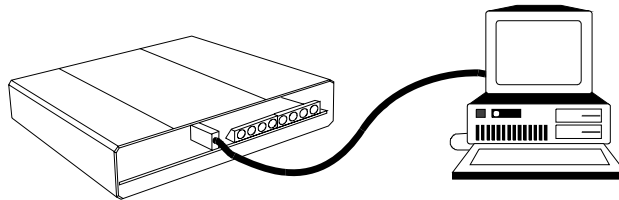

Menu selections

File

Open: Allows you to load a previously saved file from disk. Enter the file name or select from the Windows Dialog box. Only files with the .VR2 extension can be loaded.

Save: Allows you to save the current configuration to disk. Enter the file name to save as or select a previous file from the Windows Dialog box to overwrite. The .VR2 extension is automatically added to the file name. The program will prompt you before overwriting an existing file.

Print: Sends the current configuration to the selected printer. Make sure the printer is on line and paper is loaded before executing this command.

Exit: You will be asked to confirm before exiting the program. The software will also prompt you if the configuration has changed since program start up and data has not been saved to disk.

Data

Frequencies: Enter the transmit and receive frequencies and select the encode and decode sub-audio data. The program will automatically round off the frequencies to the nearest channel step if incorrect data is entered. To enter VHF offset frequencies (6.25kHz channel steps), go to common data and select the "VHF Offset" band. To disable sub-audio encode operation, select "-----"; sub-audio decode cannot be disabled.

Common data: Controls all of the options and input polarities of the SVR-200. Make sure all of the settings are correct for the type of mobile radio the repeater is connected to or improper operation may result.

File name: This data is stored in the E²PROM of the SVR-200 during downloads.

Model: Select either SVR-200 (single frequency) or SVR-214 (14 channel).

Band: Select the proper frequency band to correspond with the model SVR-200 you are programming. This selection is automatically set by reading the SVR-200. The IF frequency, injection side and channel step are displayed next to the band selection. Select VHF Offset band for 6.25kHz channel steps.

Mobile COR polarity: Determines if the COR signal from the mobile is active high or active low.

Radio Type: Select either conventional or trunking. If a trunking mobile is selected, the SVR-200 will go through the voice channel acquisition procedure during portable-to-base repeat mode.

On-air polarity: Select either active high or active low. This line is used to monitor the local mobile PTT for local mic repeat on conventional radios. On trunking radios, it is also used to determine if the mobile is actually transmitting.

TX Audio: If the mobile transmit audio output from the SVR-200 is connected after pre-emphasis in the mobile, select **Flat** response. If connected before pre-emphasis or to the mic input, select **De-Emp**.

RX Audio: If the receive audio coming from the mobile is connected to the discriminator or before de-emphasis, select **Flat** response. If connected after de-emphasis, select **Pre-Emp**.

Lock Tone: Select either 682.5, 832.5 or 847.5 Hz. All units in the system must have the same lock tone frequency.

Local mic repeat: Enables or disables the local mic repeat function; if enabled, ensure that the on-air polarity input is correctly configured.

Courtesy Blip: (Firmware version 3.02 & above) Enables or disables the courtesy tone at the end of each portable-to-base transmission. The tone verifies the handheld is within range of the repeater and transmission was successful. It also serves to notify other handheld users that the channel is clear for use.

Pri-sampling: Enables or disables the pri-sampling feature of the SVR-200. ***If used in multi-vehicle applications, this must be enabled for proper operation.*** During base-to-portable repeat mode, the SVR-200 transmitter will switch to receive mode to check for other repeaters or handheld activity. If another repeater is detected (carrier without/wrong tone) the repeater will cease activity to prevent radio “collisions”. If handheld activity is detected (carrier & correct tone) the SVR-200 will switch to portable-to-base repeat mode.

Sampling rate: If pri-sampling is enabled, this selects the sampling interval. The range is 0.25 seconds to 2.5 seconds in .25 second increments. The higher this setting, the longer the handheld operator must wait before speaking after pressing PTT during base-to-portable repeat mode, since the repeater may still be in transmit mode (there is no delay if the repeater is idle). If the interval is too short, some users may complain about the “chop” that is heard in the handhelds.

Transfer

Send: Downloads the current configuration to the repeater. The program will prompt you to make the FY-1 connection before downloading. Download takes approximately 5 seconds.

Receive: Uploads the current data from the repeater. The program will prompt you to make the FY-1 connection before uploading. Upload takes approximately 4 seconds.

Comm Port: Selects the serial port to use for uploading and downloading between the PC and the SVR-200. Comm ports 1-4 are supported.

Help

Help is available at any time by clicking the left mouse button on the HELP icon on the right side of the tool bar. The help is context sensitive and will depend upon where the cursor is located on particular menu displayed.

Theory of Operation

Receiver:

The receiver is a double-conversion superheterodyne type, designed for narrow band FM reception. The first local oscillator is derived from the frequency synthesizer. The second LO is crystal controlled.

RF Stage: The incoming RF signal from the antenna jack is directed to the first RF bandpass filter to improve selectivity and then to the input of the RF amplifier. The output of the RF amplifier is then presented to a second bandpass filter.

First LO/Mixer: The first LO signal is developed by the synthesizer and is mixed with the incoming signal to produce the first IF frequency (45 MHz). The IF frequency is filtered by FL1A and FL1B and amplified by the IF amplifier before being presented to the second LO/Mixer IC.

Second LO/Mixer: The first I.F. signal is presented to the second IF IC (MC3371) which performs the functions of second LO, second I.F. amp and mixer, FM discriminator and squelch. The second LO crystal (44.545 MHz) is mixed with the 45 MHz first I.F. signal to produce the second I.F. frequency of 455 kHz. A 6 pole ceramic filter provides selectivity for the 455 kHz signal.

Detector/Squelch: The MC3371 demodulates the 455 kHz signal via quadrature coil to produce the audio and noise components. The output of the MC3371 is the recovered audio and the RSSI voltage (receiver signal strength indicator) which is compared by the controller board with a threshold voltage level for squelch setting.

VHF Transmitter

The output of VCO buffer U8 is input to the predriver transistor U7. The output of U7 drives the RF driver Q8. The collector of Q8 is fed by the transmit 9V line from Q10. The final amp Q13 is a class C power amplifier and drives the output lowpass and harmonic filter, C47-C50 and L20-L22. D3 is the transmit output switch and L19 is a $\frac{1}{4}$ wave transmission line to isolate the receiver switching diode D2. RF output power is controlled by changing the bias on the gate of Q13 via the TX 9V line (pin 3) from the controller PCB.

UHF Transmitter

The output of VCO buffer U6 is input to the predriver transistor U5. The output of U5 drives the RF driver transistor Q4. The collector of Q4 is fed by the transmit 9V line from Q5. The final amp Q3 is a class C power amplifier and drives the output lowpass and harmonic filter, C39-C42 and L26-L28. D3 is the transmit output switch and L14 is a $\frac{1}{4}$ wave transmission line to isolate the receiver switching diode D2. RF output power is controlled by changing the bias on the gate of Q3 via the TX 9V line (pin 3) from the controller PCB.

700/800/900 MHz Transmitter

The output of the transmit VCO is buffered by U5 input to the driver transistor U1. The output of U1 drives the RF hybrid output amp U4 through lowpass filter FL3. The final amp U4 is a class C power amplifier and drives the output lowpass and harmonic filter FL4. U7 is the Tx/Rx antenna switch. RF output power is controlled by changing the voltage on pin 1 of U4 via the TX 9V line (pin 3) from the controller PCB.

Control Board

Power Supply: DC power comes from the mobile radio via P1 pins 1 and 5. Fuse F1 and MOV VAR1 provide over current and voltage spike protection. Q3 is the remote enable/disable pass switch, controlled by Q1 and Q2 via P1 pin 3. Q3 output is switched 12VDC and is presented to audio amp U6, and voltage regulators U7 and U8. Bias voltage for the op-amp circuits is provided by voltage divider R68, R69 and buffer amp U2A.

Transmit audio path: Receiver audio from the mobile is input to the mic amp portion of U4; PC programming of the SVR-200 provides flat response or +6db/octave pre-emphasis. The output of the mic amp is internally connected to the limiter and lowpass filter. When a condition to repeat exists (base-to-portable) U4 audio is switched on and audio is presented to amplifier/limiter and lowpass filter to remove audio components above 3kHz. U4 provides -48db/octave of attenuation to out of band signals. Transmit audio is output on pin 22 of U4 and passes through the final lowpass filter U2C to remove any clock noise generated by U4's switched capacitive filters before being presented to the RF module on P2 pin 6.

Receive audio path: Receiver audio from the transceiver module is input on P2 pin 13 and presented to U5 pin 10 and pin 16. Pin 10 is the input of the receiver highpass filter to remove any sub-audible signals before being output on pin 11 and sent to U4 for receiver audio processing. Pin 16 is the input to the sub-audible tone decoder section of U5. Receive audio entering pin 7 of U4 is processed as flat, or -6db/octave depending upon PC programming. The receive audio then passes through the internal lowpass filters to remove unwanted noise and output on pin 21, where it is sent to the local receiver audio amp and mobile transmit audio output amp U1B. J1 selects either high sensitivity (open) or low sensitivity (shorted) and J2 selects the output impedance (600/2.2K Ohms).

Sub-Audible tone signalling: U5 processes the sub-audible signal from the receiver by comparing the incoming signal to previous samples in a noise correlator. If the signal is sufficiently coherent, the output of the comparator is counted by the internal circuitry and an interrupt is generated to the main microprocessor. U12 reads the data from U5 in 2 bytes: byte one contains the number of complete cycles detected within 122mS, and byte 2 contains the number of internal clock cycles elapsed for the remainder. U12 performs a comparison of minimum and maximum values allowed in a look up table and determines if the data is within the decode bandwidth for the programmed tone.

In band tone signalling: Audio from the transceiver is also fed to U3B where it is amplified and limited for input to the commutating switched capacitive filter made up by C23-C26 and P0.4-P0.7 of the microprocessor. The microprocessor outputs four identical signals with 90° phase difference on the respective port pins. The resultant wave form will be a function of the difference between the incoming signal frequency and the decode frequency output by the microprocessor. The signal is buffered by U3C and amplified by U3A before being rectified and filtered by D1 and C2. The resulting DC voltage is compared to the reference voltage by U3D. If the incoming signal is within the decode bandwidth, the output of U3D will be a logic 1 and read by the microprocessor.

Logic and control: U12 is an Atmel 89C52 microprocessor with flash E²PROM memory. The microprocessor provides all of the logic and control functions for the repeater including mobile/repeater PTT output, local mobile PTT sense, mobile transmitter activity sense, audio switching, in-band & CTCSS detect, and repeater status indications via DS4 and DS5 led arrays.

The 89C52 has four 8 bit ports that interface with the rest of the hardware on the controller board; a brief description of each port follows:

- P0.0-0.3 Channel Selector input; used only on SVR-214 version.
- P0.4-0.7 These four lines make up the input to the switched capacitive filter network of C23-C26. During receive mode, the lock tone frequency will be output on each of these lines with a 90° phase difference between them at any given time. During transmit mode, these lines are in active and open collector.
- P1.0-P1.2 LED data is output on P1.0 line every 10mSec. Data is loaded into shift register U9 8 bits at a time and is clocked by P1.1. P1.2 latches the data into U9 for display.
- P1.3 PLL latch enable output to the RF module. During transmit to receive and receive to transmit transitions, this line is used to latch the serial data into the PLL shift registers. The serial data and clock lines are shared with U10 (E²PROM) U4 (audio processor) and U5 (sub-audio processor).
- P1.4 E²PROM chip enable, active high. Data is output to the E²PROM on P1.6 and clocked by P1.5. Data is input from the E²PROM on P1.7. P1.4 will go active during read and write operations with U10. U10 is written to every time the unit is programmed. U10 is read only at power up.

P1.5	Serial clock line output. Serial data that is sent to the PLL, the E ² PROM and the audio processor chips are clocked by each low-high-low transition on this line.
P1.6	Serial data output. Data sent to U10, U4 and U5 are output on this line and clocked by P1.5.
P1.7	Data input to the microprocessor. Serial data is read from U10 (E ² PROM) and U5 (sub-audio processor) on this line.
P2.0	Lock tone output. Lock tone encode is generated by this pin at power up and during lock tone test mode. All of the queuing tones are also generated by this pin for trunking operation.
P2.1	Lock tone decode input, active high. The output of lock tone decoder U3D is input on this line and checked during receiver activity. If lock tone is detected, the microprocessor increments its priority counter and ceases activity as priority unit.
P2.2	Repeater Tx enable. This line is used to turn on the TX 9V signal to the RF PCB. The output drives buffers Q7 and Q6. The output of Q6 switches Q4 on during transmit for TX 9V. RV10 and APC circuit U13 are used to set the TX 9V level for RF power control.
P2.3	Mobile PTT output, active low. This line is brought low to key the mobile radio during portable-to-base repeat operations.
P2.4	Mobile COR input. U1A is a threshold detector for the mobile COR input on pin 7 of P1. The output of U1A is read by the microprocessor on this port to determine if the SVR-200 should repeat base to portable. Polarity of this input is determined by PC programming.
P2.5	Repeater COR input, active low. RSSI output from the RF module is sent to threshold detector U2D for comparison with the squelch setting at RV9. R47 and R70 provide hysteresis to prevent chatter. Repeater COR is used to enable the CTCSS decoder circuitry; the microprocessor will not decode the signal from U5 unless repeater COR is also active.
P2.6	Chip select output for U4 (audio processor), active low. Serial data is sent to U4 on P1.6 and clocked by P1.5. These lines are shared by U5, U10 and the PLL; data is ignored by U4 unless the chip select line is asserted during data write operations.
P2.7	Chip select output for U5 (sub-audio processor), active low. Serial data is sent to U5 on P1.6 and clocked by P1.5. These lines are shared by U4, U10 and the PLL; data is ignored by U5 unless the chip select line is asserted during data read and write operations.
INT0	External interrupt #0. This line monitors the PLL lock detector output. The line is active high to indicate the PLL is functioning on frequency during transmit-receive and receive to transmit changes. The output will go briefly unlocked, then revert back to a locked condition. If the PLL does not achieve lock within 50mS, the transmitter will be disabled and the OPT LED will flash rapidly to alert the user that the unit should be brought in for service.
INT1	External interrupt #1 active low. This line is used by U5 to signal the microprocessor that it has completed a decode cycle and data can be read. During receiver activity, this line will go active approximately every 122 mS in the presence of sub-audio signalling. During transmit mode and receiver activity without sub-audio signalling, this line will be inactive.

T0	<p>Test input, active low. Shorting J3 puts the microprocessor into test mode for alignment purposes. If shorted at power up, the receiver will operate open squelch mode and audio will be heard at the local speaker port regardless of carrier or tone input to the receiver. Although alignment is normally done with the RSSI output at TP1, a Sinad reading can be obtained using this mode of the test input. All other functions of the SVR-200 are disabled in this mode and power will have to be turned off then on to reset the unit.</p> <p>If J3 is shorted after power has been applied, the microprocessor will enter the lock tone test mode, key the repeater and send the programmed lock tone for as long as J3 is shorted. Remove the short from J3 to return to normal operation.</p>
T1	<p>On-air detect input. The on-air detect line (P1 pin 9) is used to detect local mic PTT from the mobile, and in trunking mode, this line is used to detect that the mobile transmitter is actually on the air. The input is buffered by Q10 and the polarity of the signal is determined by PC programming.</p>
WR	<p>Turns the Rx 5V line on or off to the RF PCB.</p>
RD	<p>Detects the version of RF PCB installed (UHF only).</p>
TXD	<p>Transmit data output for programming. Data is sent to the PC on this line at 300 baud, 8 data bits, 1 stop bit and no parity. This line is active only during programming mode.</p>
RXD	<p>Receive data input for programming. Data is received from the PC on this line at 300 baud, 8 data bits, 1 stop bit and no parity. This line is also used to sense when the programming cable is inserted. If RXD is grounded, the SVR-200 operates in the normal mode. If this line is high, programming mode is entered and the OPT LED is on continuously.</p>
Reset	<p>Active high input to reset the microprocessor. U11 provides a 350mSec delayed high signal to this pin during power up or if the 5V line falls below 4.5VDC.</p>
Xtal	<p>The microprocessor uses a 4.032MHz xtal for all of the timing and program execution clock cycles. The output of the on board oscillator also drives the xtal input to U5. The output of U5 xtal oscillator drives the input of U4.</p>


Notes


This Page Intentionally left blank


Parts List


Reference	Description	Part #
C1,C5,C6,C9,C10,C12,C15,C18,C35,C37	.1 μ Fd chip capacitor	1010-03-5104
C2	22 μ Fd 16V tantalum chip capacitor	1610-25-6226
C3,C27	.047 μ Fd chip capacitor	1010-03-5473
C7,C8,C13,C41	220pFd chip capacitor	1010-03-5221
C11	.0033 μ Fd chip capacitor	1010-03-5332
C16	1000pFd chip capacitor	1010-03-5102
C17	.0022 μ Fd chip capacitor	1010-03-5222
C19,C20	22pFd chip capacitor	1010-03-5220
C40	0.5pFd chip capacitor	1010-03-5050
C21A,C21B	6.8 μ Fd tantalum chip capacitor	1610-05-6685
C22,C32,C33,C34	100 μ Fd electrolytic cap	1400-08-7107
C21,C23,C24,C25,C26	0.47 μ Fd tantalum chip capacitor	1610-04-6474
C28,C29,C36	1.0 μ Fd tantalum chip capacitor	1610-04-6105
C14,C30,C38	2.2 μ Fd tantalum chip capacitor	1610-04-6225
D1,D2,D3,D6	BAV99 dual diode SOT23	3110-01-0099
D4,D5	Schotkey diode SOT23	3110-01-0301
DS4/DS5	8 position multi-color LED	4003-08-0200
F1	2A SMT Pica fuse	2610-04-0020
JP1	0.1" 3 position vertical header	7300-53-0103
P1	DB-9 M right angle PCB	7400-00-0011
P2	0.1" 14 position vertical header	7300-83-0114
P3	2.5mm RA programming jack	7401-02-0250
P4	3.5mm RA speaker jack	7401-02-0051
Q1,Q2,Q6,Q7,Q9,Q10	2N4401 NPN transistor SOT23	3010-01-4401
Q3	IRF-9540 P Ch MOSFET TO220	3300-08-9540
Q4	TIP 32 PNP transistor TO220	3000-08-0032
Q5	2N4403 PNP transistor SOT23	3010-01-4403
Q8	NPN Darlington SOT23	3010-01-0038
RV1,RV8,RV9,RV10	10K 3mm SMT pot	2030-08-8103
RV2,RV3,RV5,RV7	100K 3mm SMT pot	2030-08-8104
RV4	20K 3mm SMT pot	2030-08-8203
RV6	200K 3mm SMT pot	2030-08-8204
R82	10 Ohm chip resistor	2010-03-5100
R10,R23,R41,R52,R76	10K chip resistor	2010-03-5103
R8,R11,R16,R21,R22,R24,R26,R30,R35,R44, R47,R53,R66,R73	100K chip resistor	2010-03-5104
R1,R2,R4,R6,R15,R17,R18,R31,R36,R74,R83	22K chip resistor	2010-03-5223
R3,R12,R13,R65,R72,R87	2.2K chip resistor	2010-03-5222
R5,R14,R86	820 Ohm chip resistor	2010-03-5821
R7,R48,R49,R63,R71	5.6K chip resistor	2010-03-5562
R9,R81	56K chip resistor	2010-03-5563
R19,R20	470K chip resistor	2010-03-5474
R25,R29,R34,R51	1.0M chip resistor	2010-03-5105
R27,R33,R37,R38,R45,R46,R85	33K chip resistor	2010-03-5333
R32,R70	27K chip resistor	2010-03-5273
R39,R40	150K chip resistor	2010-03-5154
R42	330K chip resistor	2010-03-5334


R50,R77-R80	15K chip resistor	2010-03-5153
R54-R62,R64	330 Ohm chip resistor	2010-03-5331
R68,R69	4.7K chip resistor	2010-03-5472
R43	68K chip resistor	2010-03-5683
R67	8.2 Ohm 1W resistor	2000-10-5829
U1	TS922 dual op-amp	3410-01-0922
U2,U3	MC3403 quad op-amp	3410-01-3403
U4	MX-806ALH audio processor	3710-02-0806
U5	MX-805ALH sub-audio processor	3710-02-0805
U6	LM386 audio amp	3410-01-0386
U7	LM7805 1A regulator	3400-08-7805
U8	LM7809CV 1.5A regulator	3400-08-7809
U9	CD4094 shift register	3410-01-4094
U10	93C46 1Kbit Serial E ² PROM	3610-01-9346
U11	MCP101-450 reset controller	3410-11-0450
U12	AT89C52-12JC Microprocessor	3610-02-8952
U13	LM321 opamp	3410-12-0321
X1	4.032 MHz HC18/U	6000-07-4032
VAR1	18V MOV	2580-02-0018
	Extruded aluminium case	8100-01-5010
	Aluminium end panel	8200-04-5010
	ABS Plastic front panel	8200-03-2502
	TNC PCB mount RA connector	7401-02-0007
	10ft. radio cable with DB-9F conn.	7500-10-1001
	Shorting block for JP1	7200-03-0102
	TP1, RF Ant connection	7300-13-0101
	Mounting bracket	9600-05-0001
	RF interconnect board	9100-00-0001
	4-40 SS jack screw	8000-42-4404
	8-32 x 1/4" SS philips	8000-24-8324
	4-40 x 3/8" SS cap screw	8000-34-4406
	4-40 SS nut	8000-54-4400
	4-40 x 1/4" SS philips	8000-24-4404
	2-56 x 3/16" SS philips	8000-24-2563
	4-40 x 3/16" SS philips	8000-24-4403
	2-56 x 1/8" aluminium spacer	8000-65-2562
	Aluminium heat sink (U7 & U8)	8400-05-0001
	Right Angle heat sink (RF module)	8400-05-0007

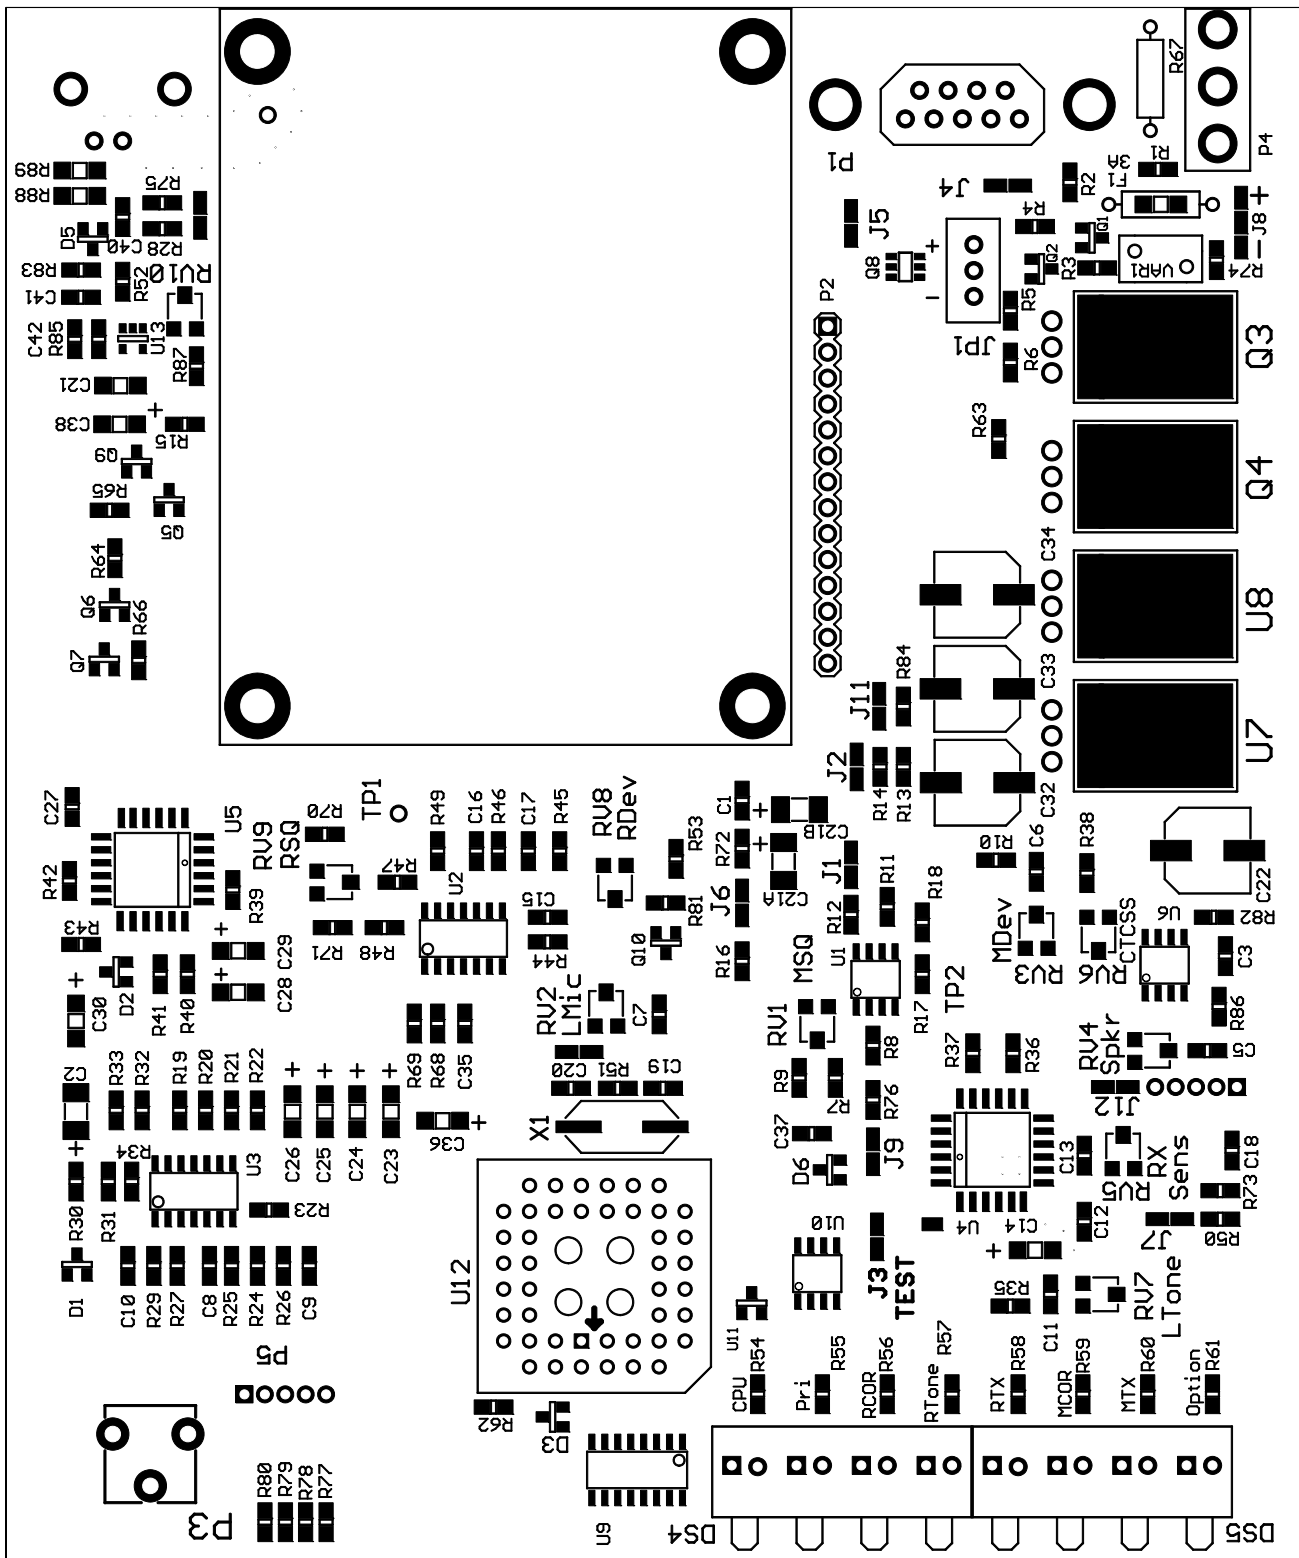

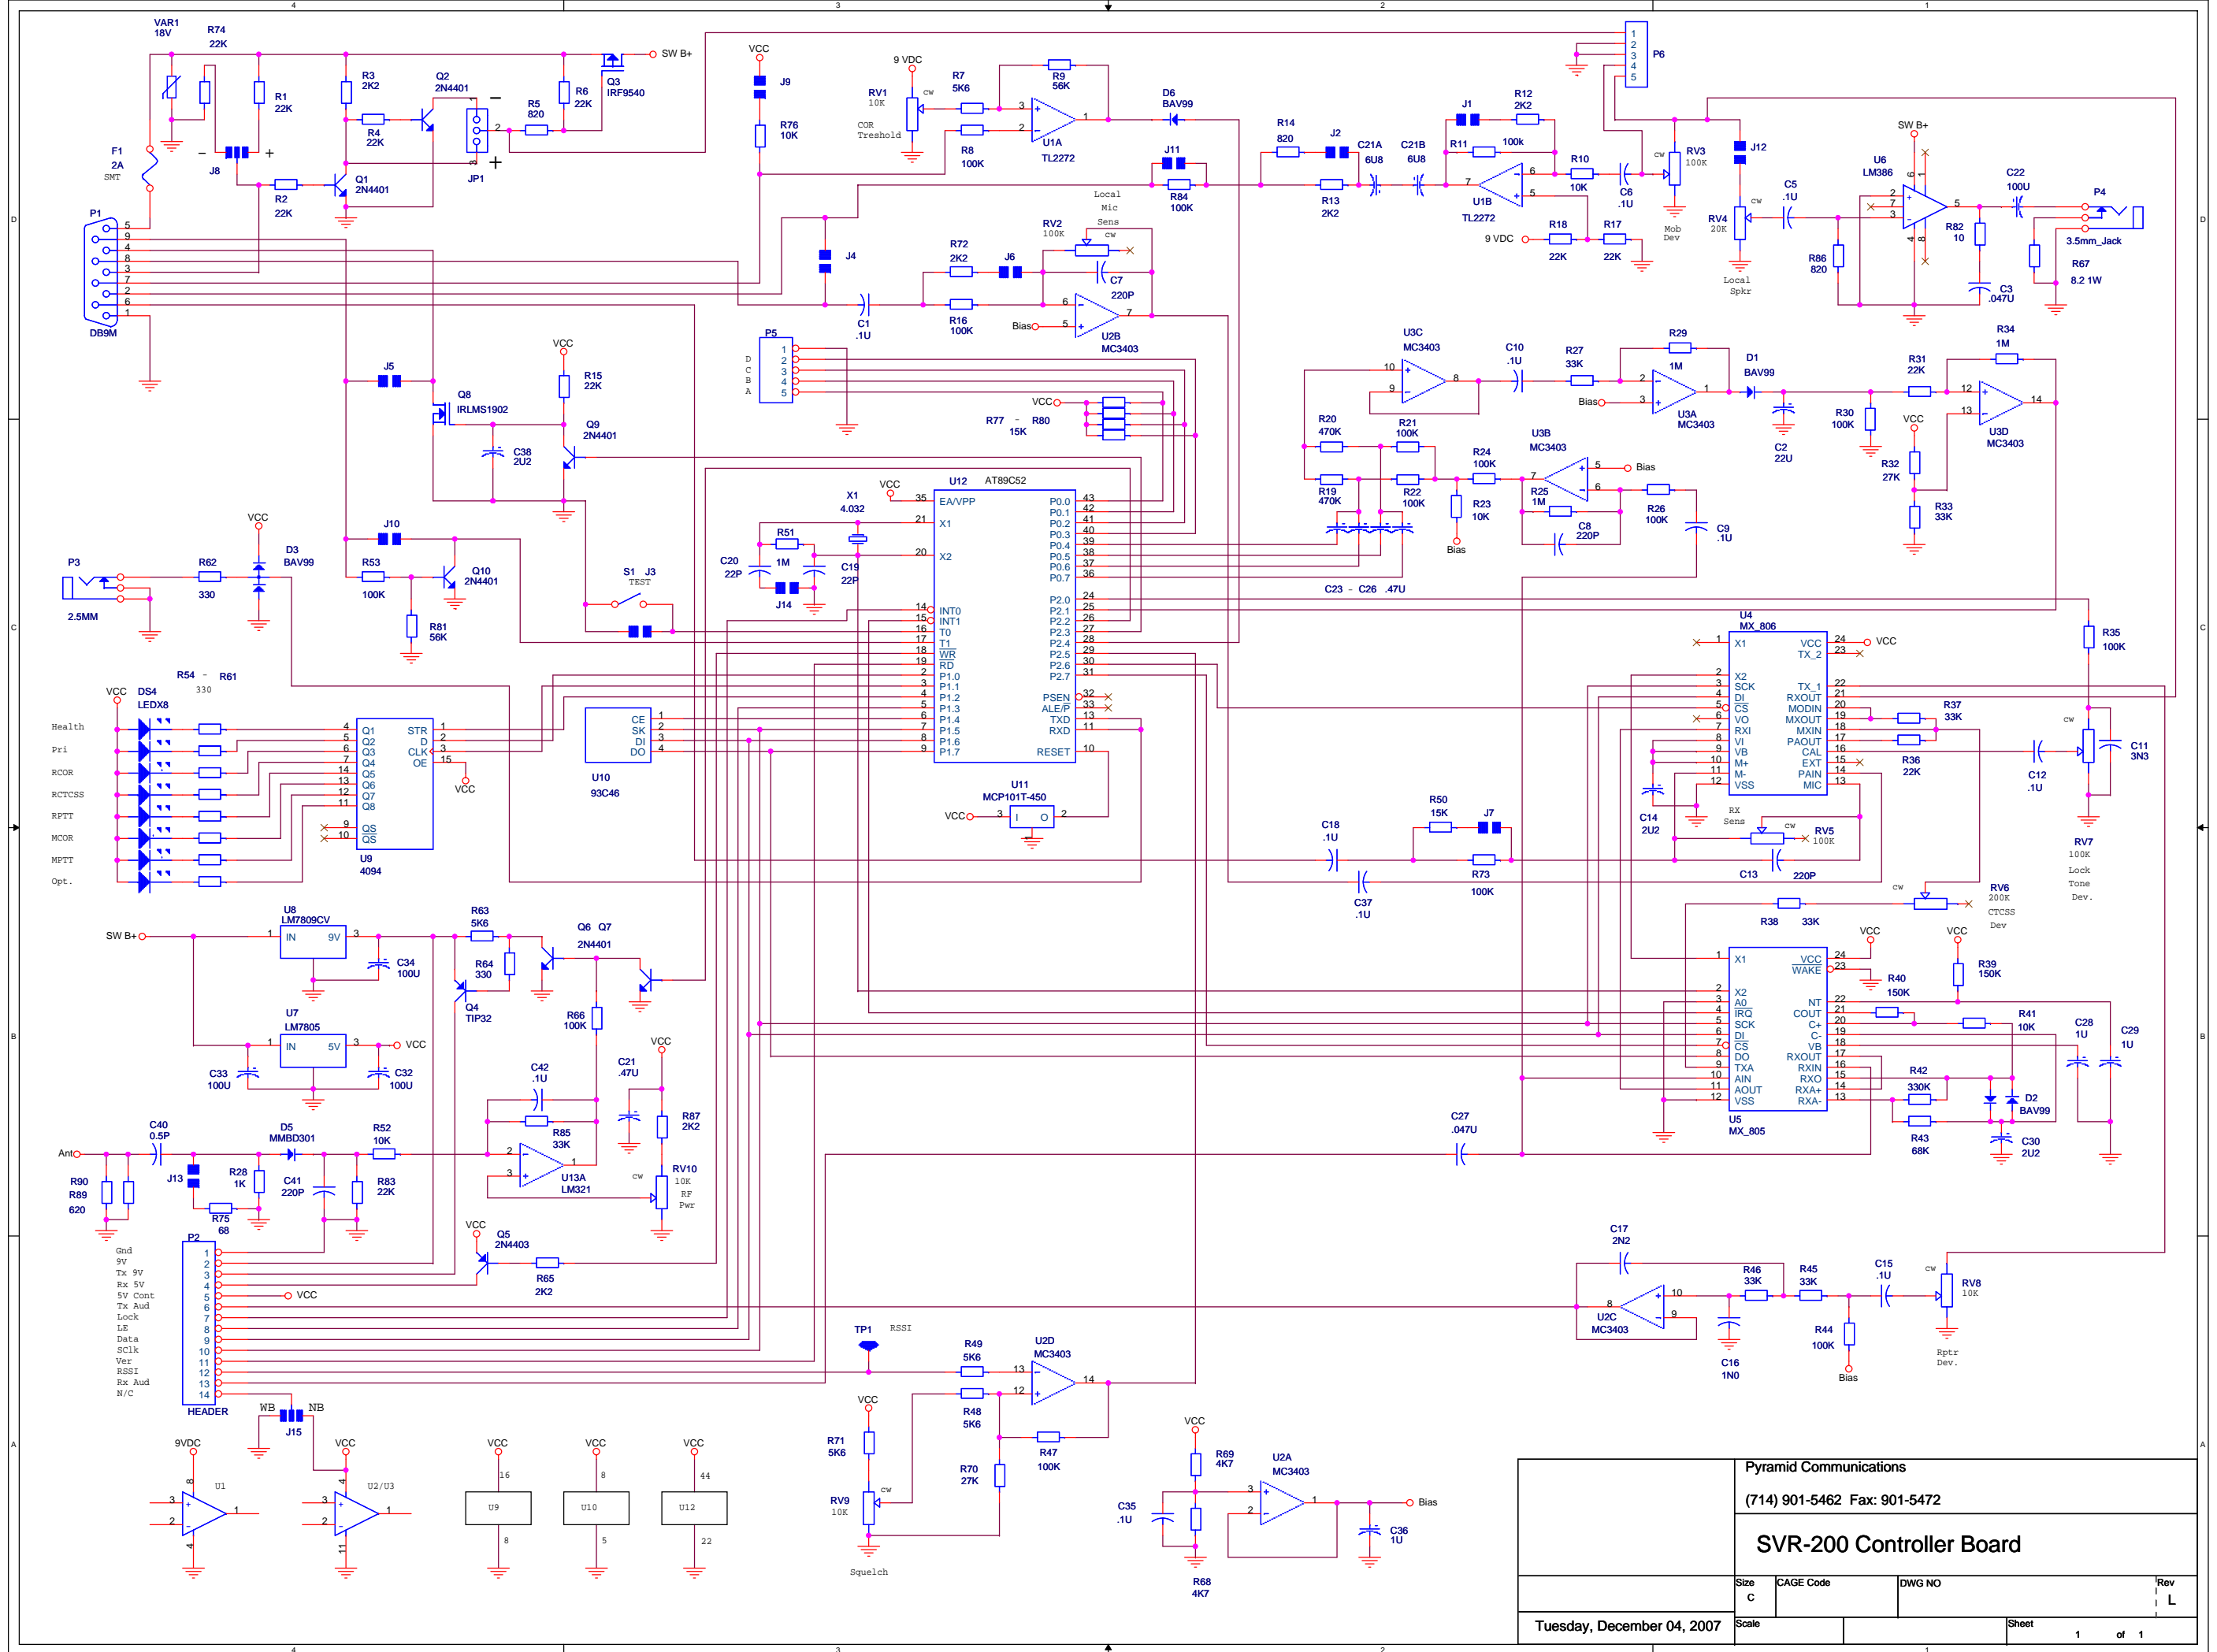


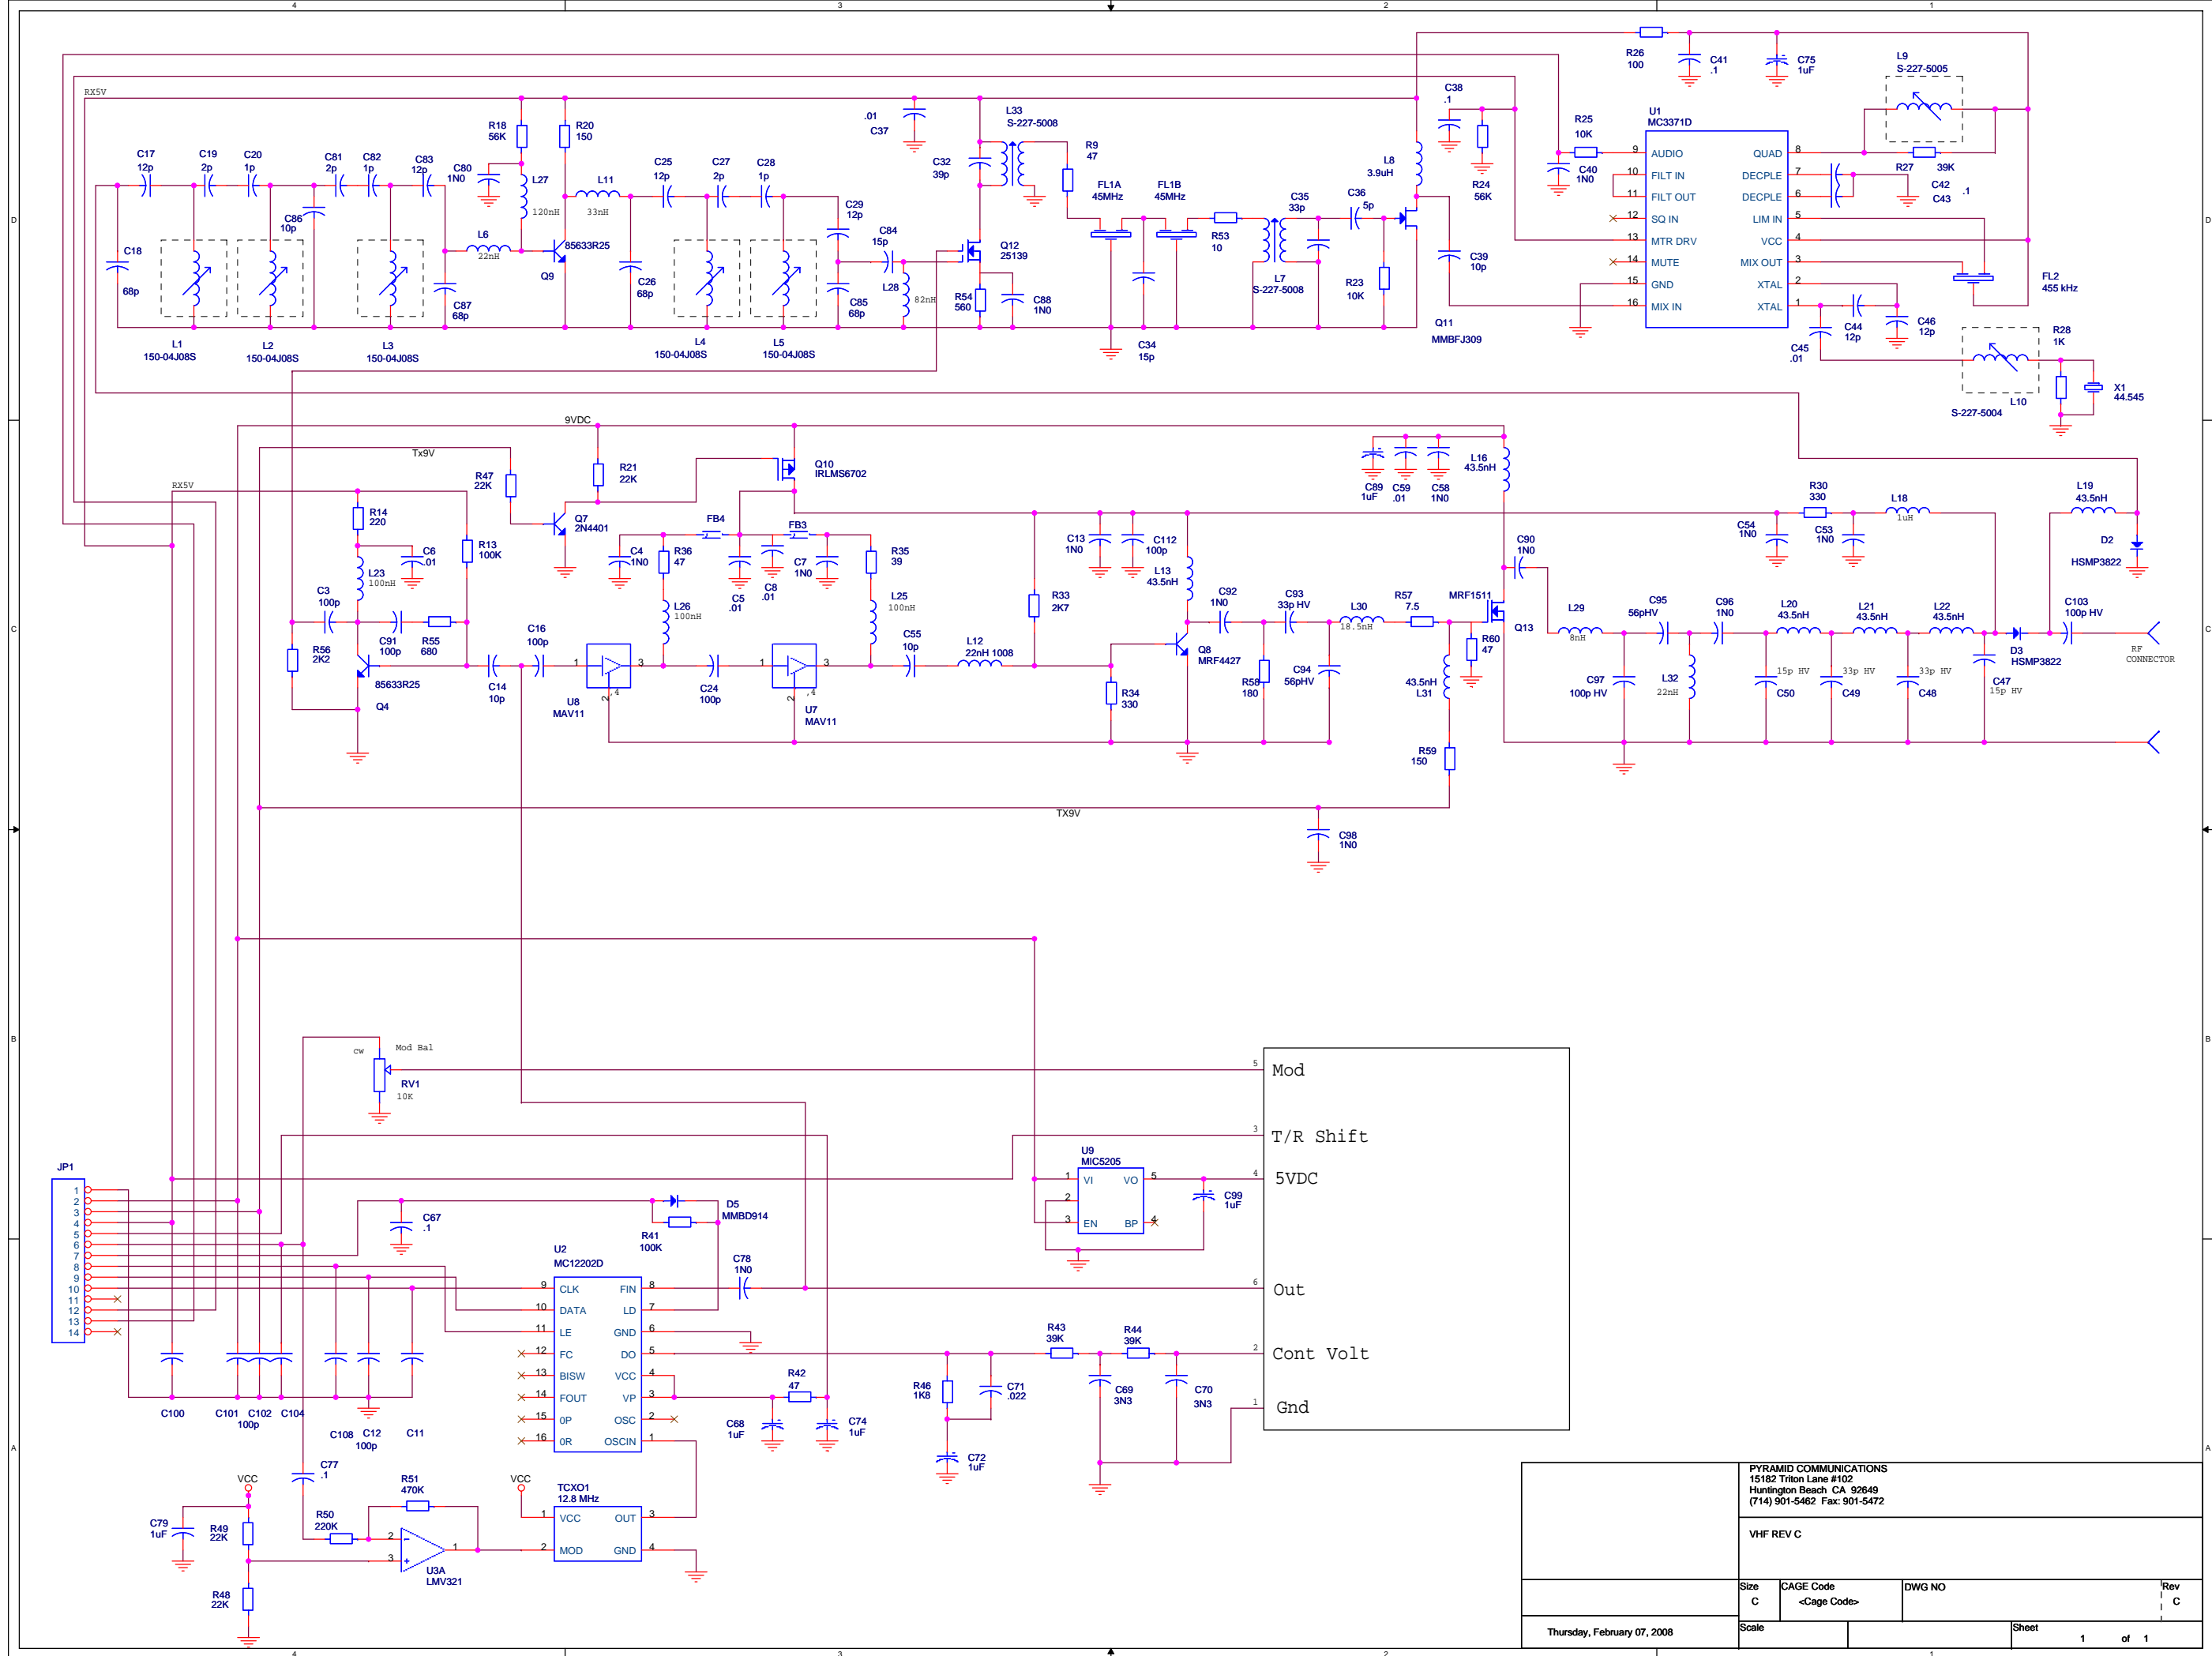

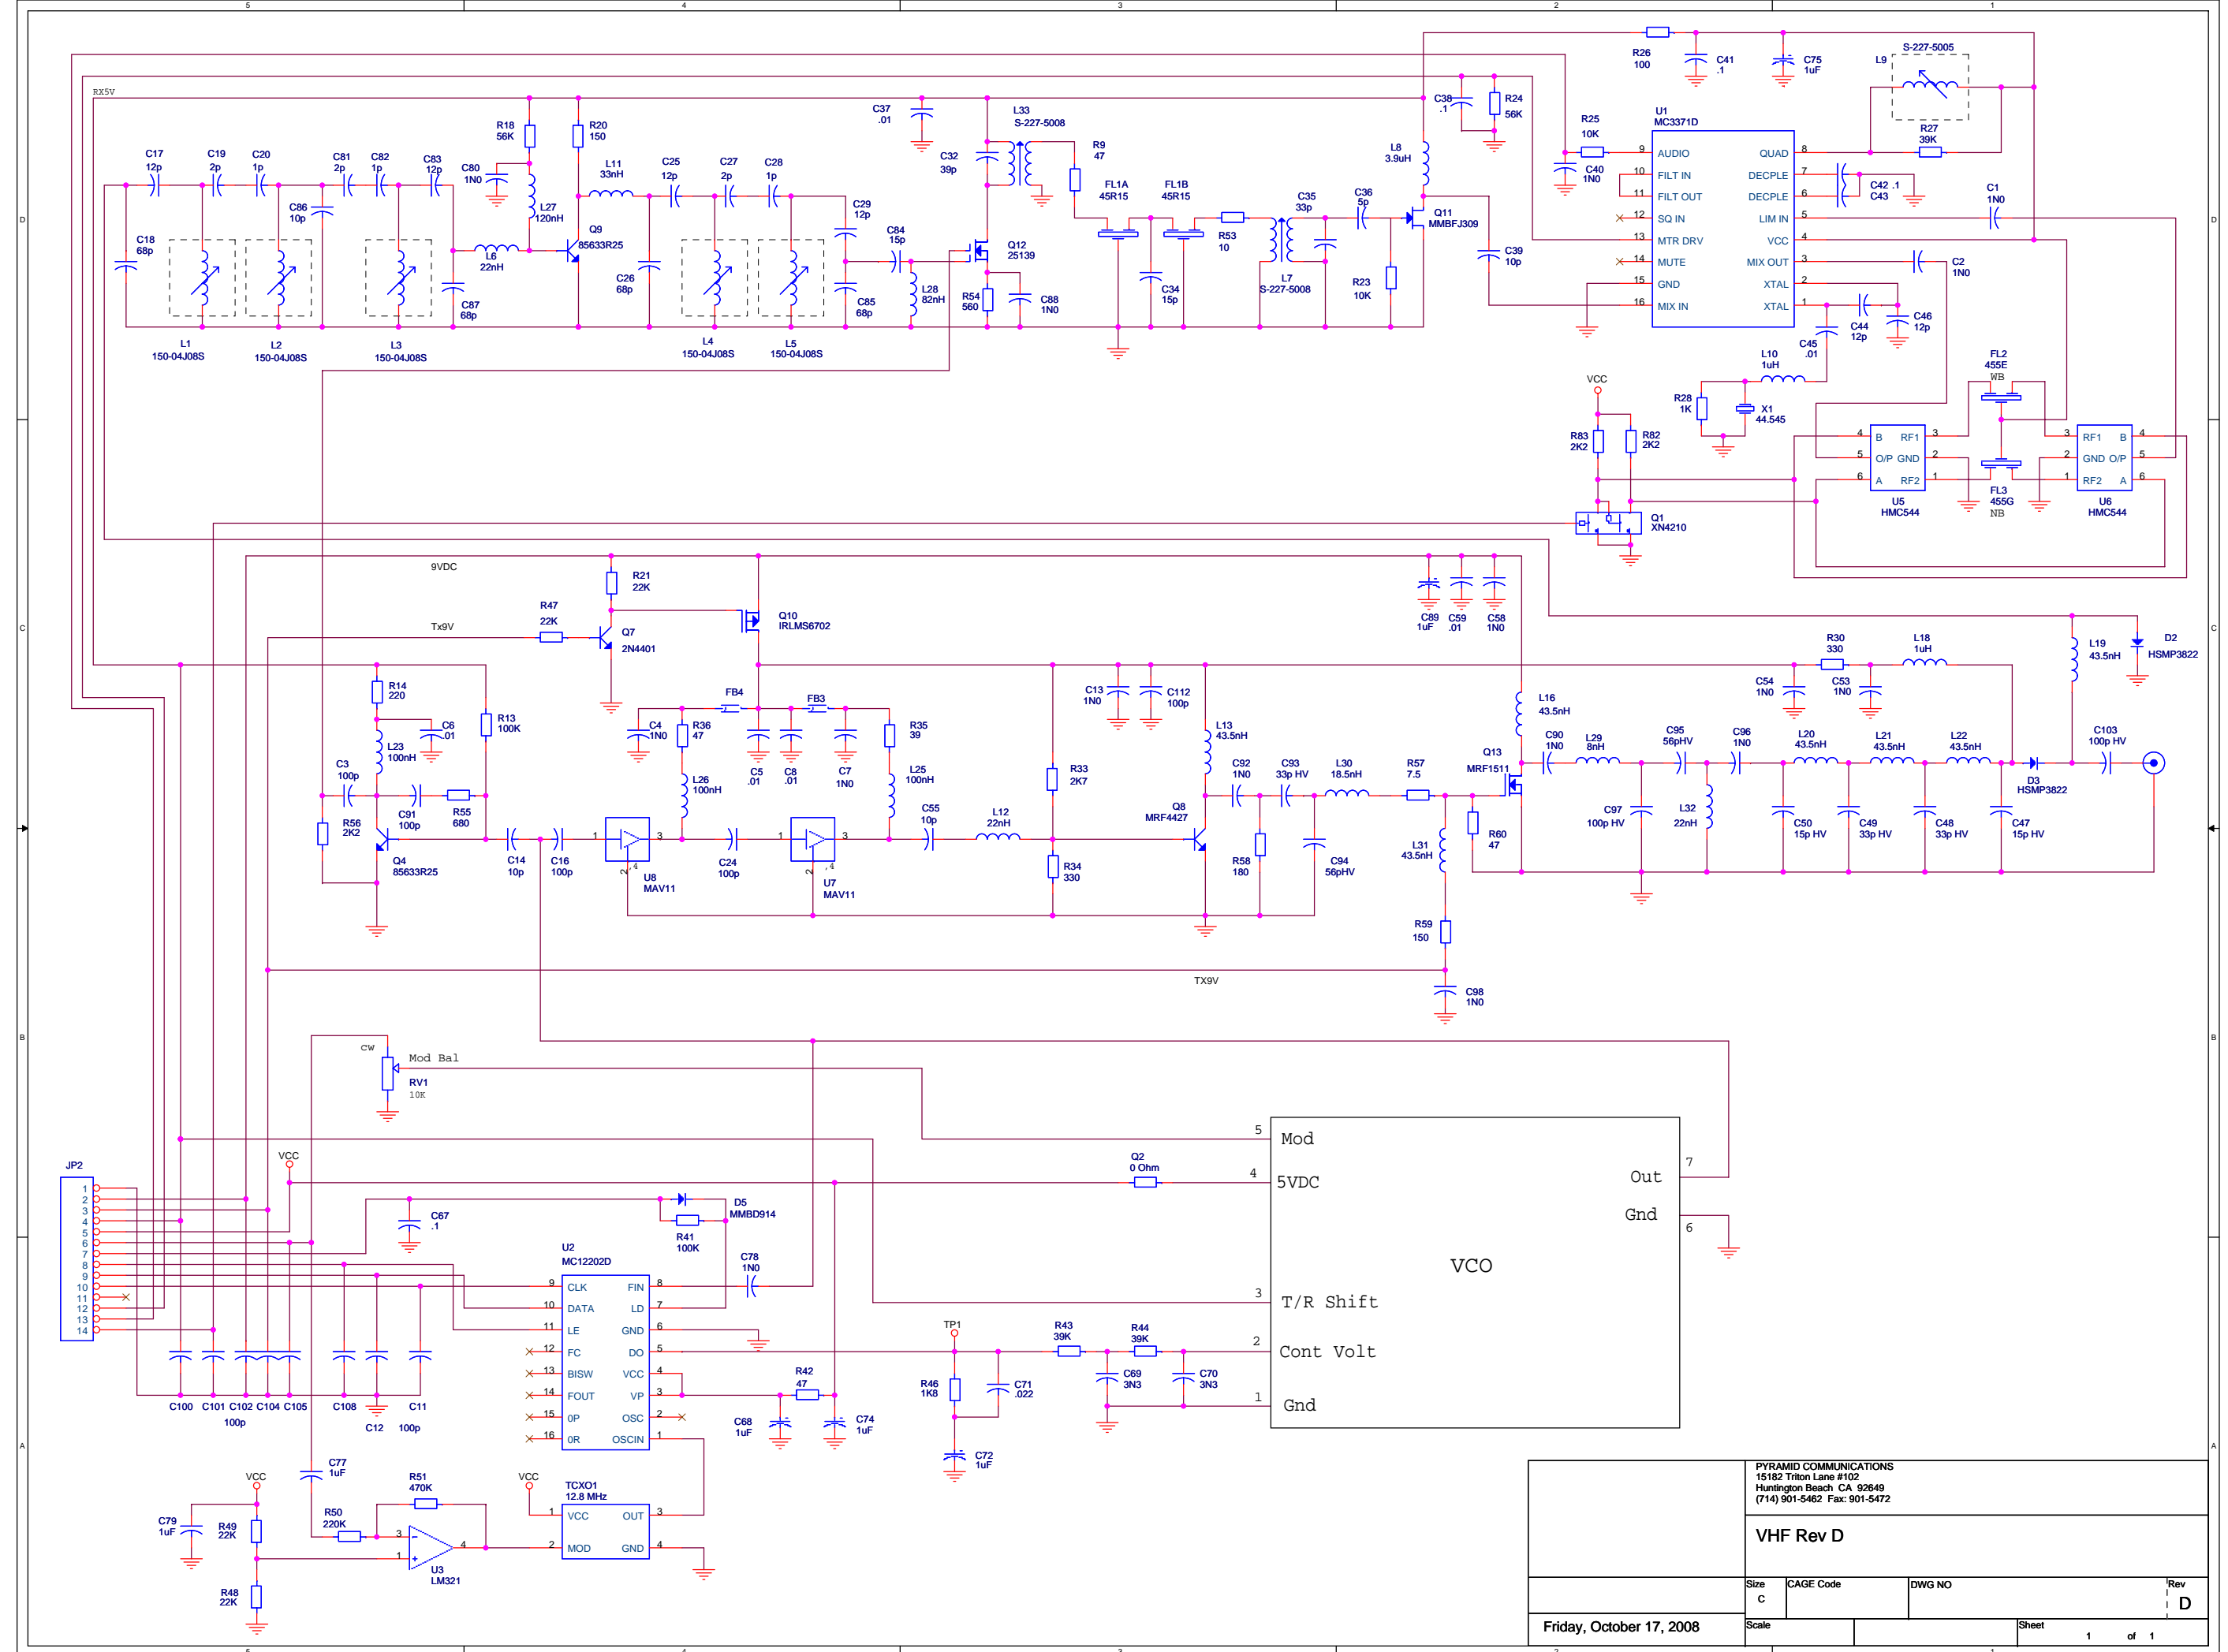

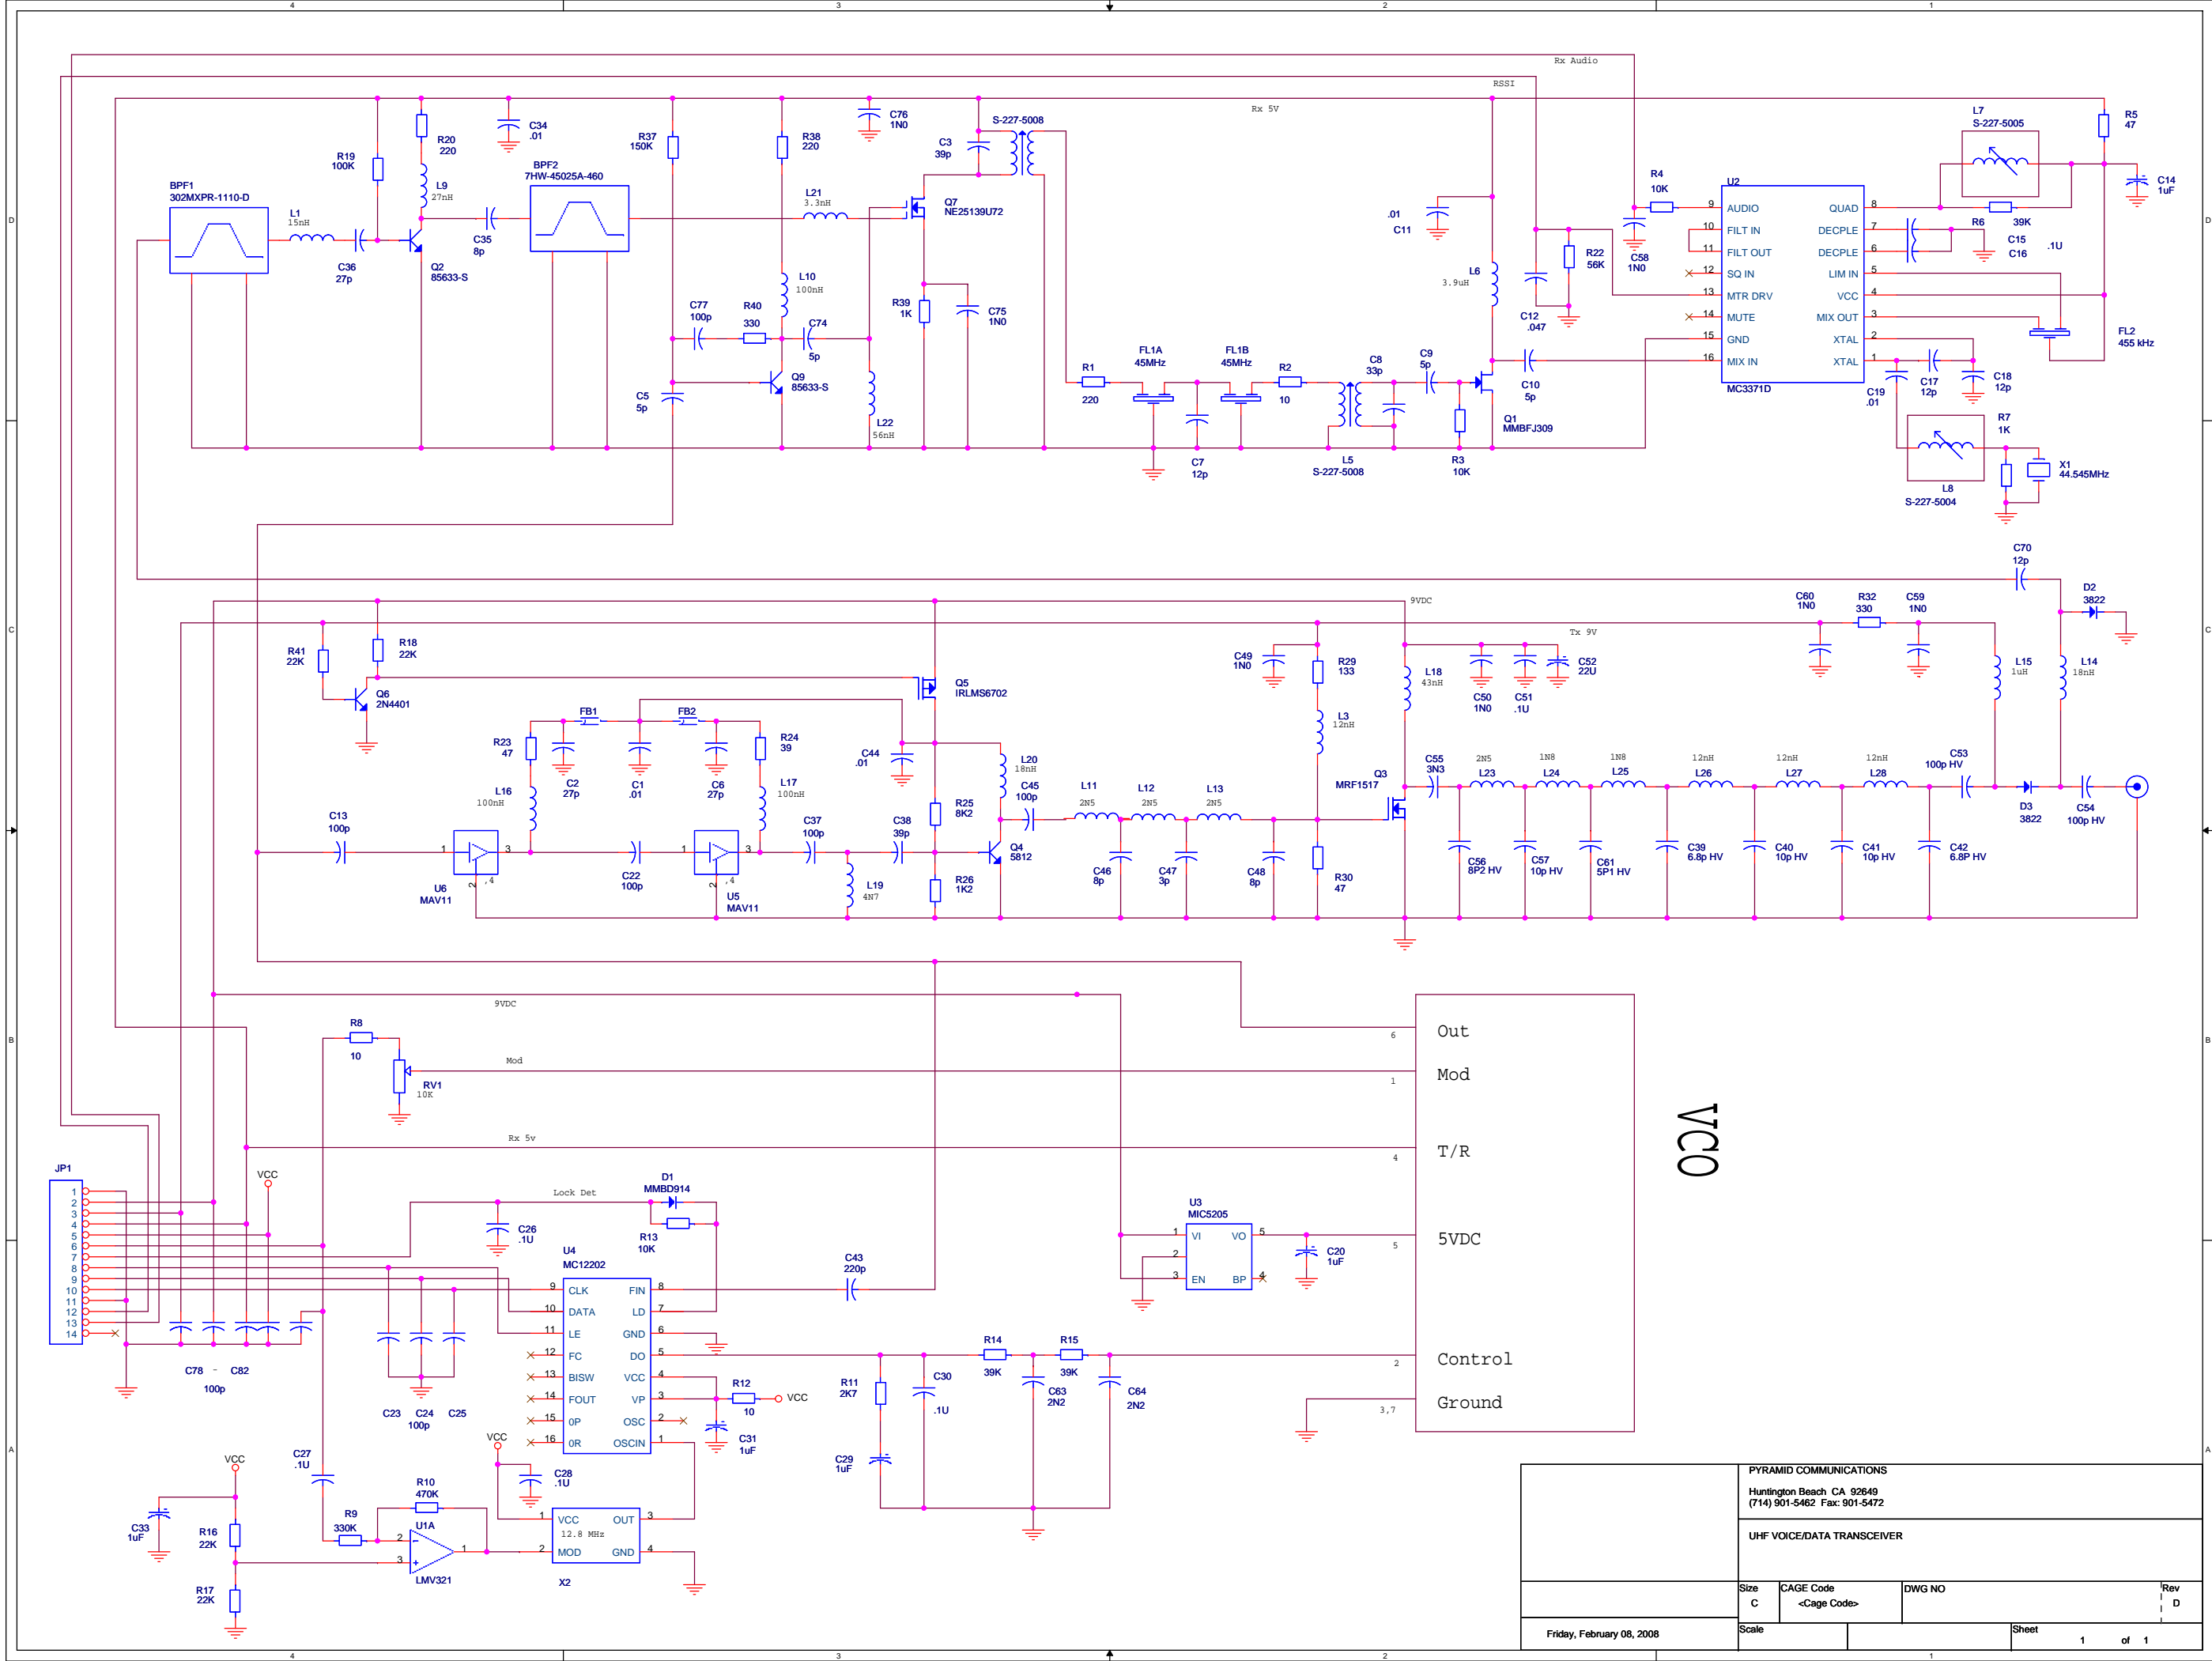

PYRAMID COMMUNICATIONS Huntington Beach CA 92649 (714) 901-5462 Fax: 901-5472				
UHF VOICE/DATA TRANSCIVER				
Size C	CAGE Code <Cage Code>	DWG NO	Rev D	
Scale		Sheet 1	of 1	

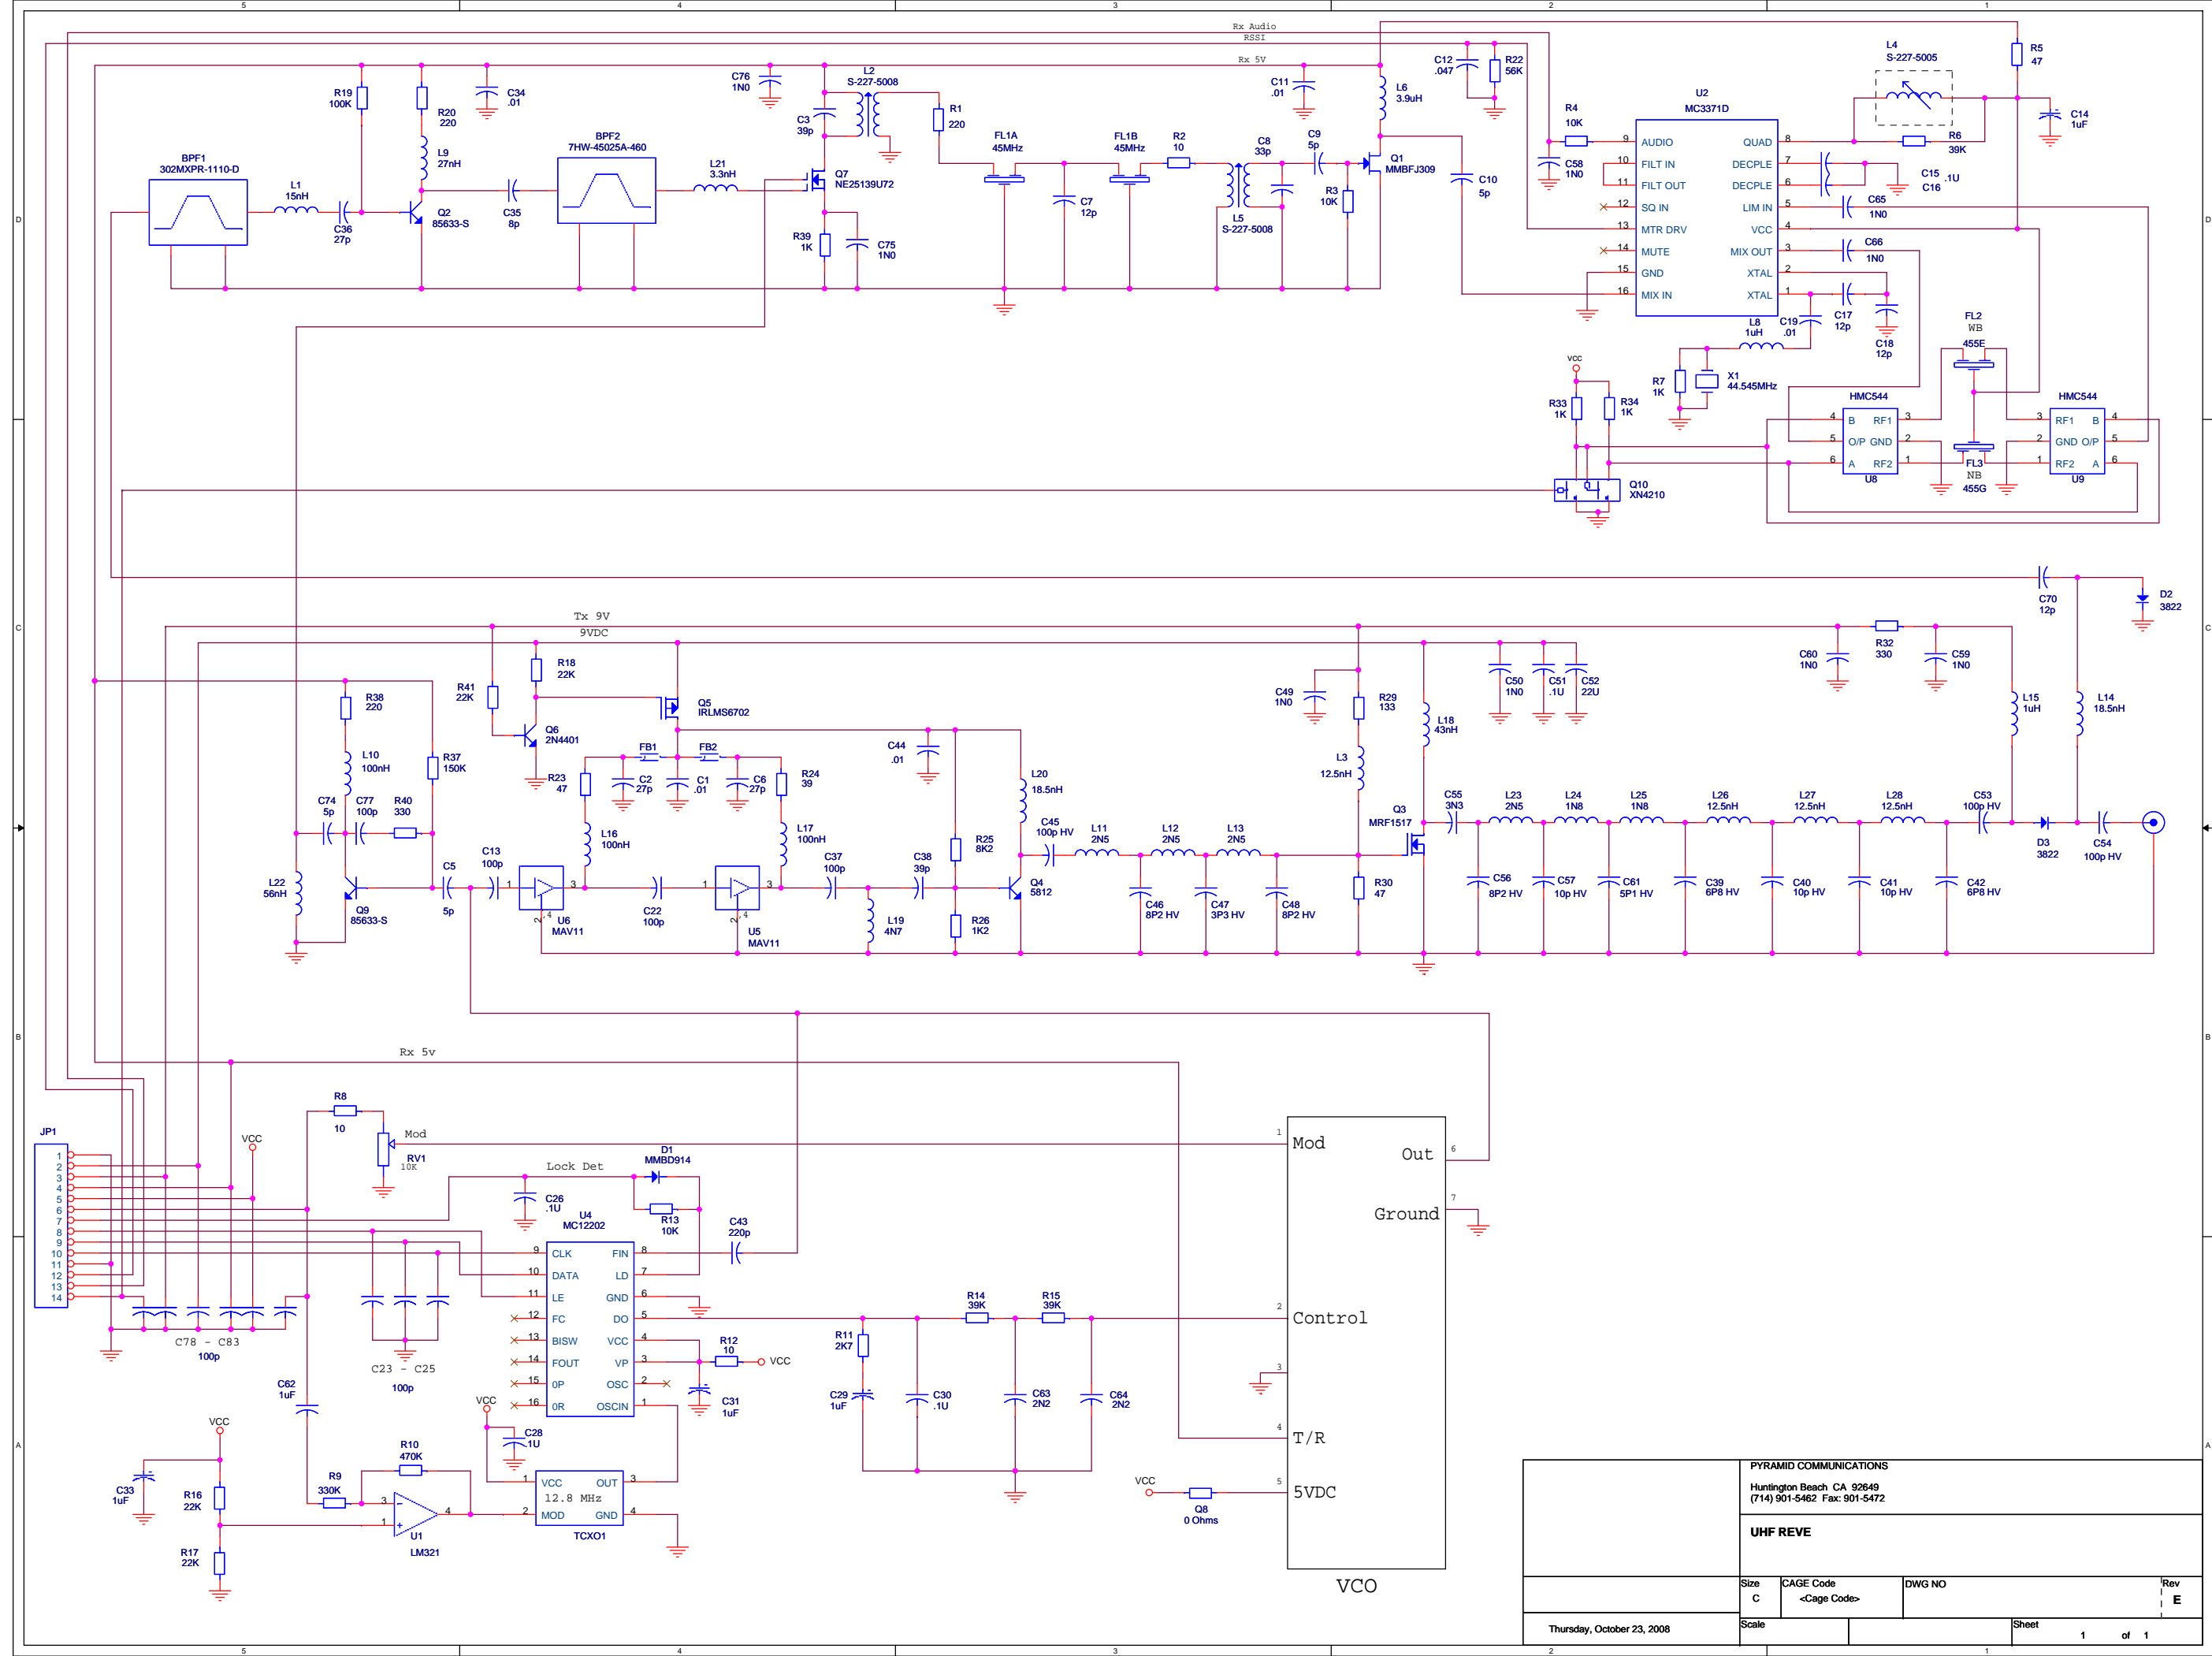

PYRAMID COMMUNICATIONS			
Huntington Beach CA 92649			
(714) 901-5462 Fax: 901-5472			
UHF REVE			
Size	CAGE Code	DWG NO	Rev
C	<Cage Code>		E
Scale			
Thursday, October 23, 2008		Sheet	1 of 1

