



2019 Washington Street, East Charleston, WV 25305 Telephone: 304-558-2306 General Fax: 304-558-6026 Bid Fax: 304-558-3970

The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at *wvOASIS.gov*. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at *WVPurchasing.gov* with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

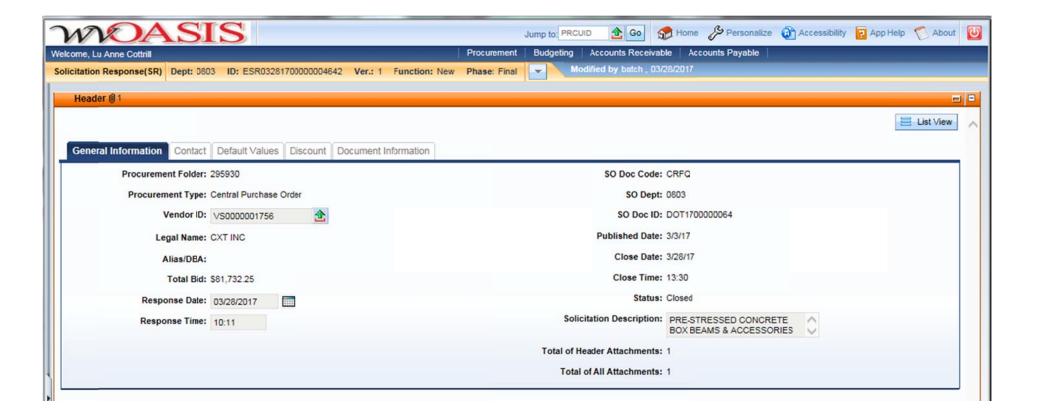



State of West Virginia Solicitation Response

Proc Folder: 295930

Solicitation Description: PRE-STRESSED CONCRETE BOX BEAMS & ACCESSORIES

Proc Type: Central Purchase Order

 Date issued
 Solicitation Closes
 Solicitation Response
 Version

 2017-03-28 13:30:00
 SR
 0803 ESR03281700000004642
 1

VENDOR

VS0000001756

CXT INC

Solicitation Number: CRFQ 0803 DOT1700000064

Total Bid: \$81,732.25 **Response Date:** 2017-03-28 **Response Time:** 10:11:21

Comments:

FOR INFORMATION CONTACT THE BUYER

Mark A Atkins (304) 558-2307 mark.a.atkins@wv.gov

Signature on File FEIN # DATE

All offers subject to all terms and conditions contained in this solicitation

Page: 1 FORM ID: WV-PRC-SR-001

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	EXTERIOR BOX BEAM SECTION	369.00000	SF	\$43.250000	\$15,959.25

Comm Code	Manufacturer	Specification	Model #	
30101717				

Exterior beams must be 27" deep by 26" wide by 61'-6" overall length. (60'-0" c-c bearing anchor bolt holes).Beams Skewed 10 degrees right forward.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	INTERIOR BEAM SECTION:	922.50000	SF	\$43.200000	\$39,852.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Interior beams must be 27" deep by 36" wide by 61'-6" overall length. (60'-0" c-c bearing anchor bolt holes). Beams skewed 10 degrees right forward.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
3	ELASTOMERIC LAMINATED BEARING PADS	12.00000	EA	\$109.000000	\$1,308.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Type B1 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
4	ELASTOMERIC LAMINATED BEARING PADS	4.00000	EA	\$109.000000	\$436.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description :

Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
5	SWEDGED ANCHOR BOLTS	14.00000	EA	\$62.500000	\$875.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
6	PREFORMED JOINT FILLER	28.00000	SF	\$1.000000	\$28.00

Comm Code	Manufacturer	Specification	Model #
30101717			

Extended Description:

Performed joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
7	PREFORMED JOINT FILLER	98.00000	SF	\$1.000000	\$98.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam ends shall be 21.7' long by 27" wide at each abutment yielding 48.8 square feet/abutment for total of 98 square feet of joint filler

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
8	GUARDRAIL ASSEMBLY	20.00000	EA	\$181.250000	\$3,625.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Guardrail assembly provided as shown in the plans (Attachement 1) must include all the necessary studs, nuts and washers.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
9	1" DIAMETER POST-TENSIONING	121.90000	LF	\$10.000000	\$1,219.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Post tensioning bars must be 1" diameter. 5 bars @ 24'-41/2" are required for a total length of 121.9'. Post tensioning bars must be threaded and supplied with 12 hex nuts and other hardware as required in the plans (Attachment 1)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
10	BEARING PLATE	10.00000	EA	\$58.000000	\$580.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Bearing plates for exterior beams must be 9"x9" x 1" thick.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
11	TYPE TL-2 BRIDGE GUARDRAIL POSTS	20.00000	EA	\$368.000000	\$7,360.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Bridge guardrail post must be designed for a minimum TL-2 crash testing criteria as shown in the plans (Attachment 1)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
12	TYPE TL-2 BRIDGE GUARDRAIL	131.00000	LF	\$77.250000	\$10,119.75

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Bridge guardrail must be designed for a minimum TL-2 crash testing criteria as shown in the plans (Attachment 1)

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
13	1" GROUT STOP	369.00000	LF	\$0.250000	\$92.25

Comm Code	Manufacturer	Specification	Model #	
30101717				

Grout stop must be 1" thick sponge rubber or 1" backer rod.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
14	1" X 8"X 8" WASHER	30.00000	EA	\$6.000000	\$180.00

Comm Code	Manufacturer	Specification	Model #	
30101717				

Extended Description:

Washers must be 8"x8" squares of 1" thick sponge rubber with a 3-1/2" diameter hole in the center.



Purchasing Divison 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

State of West Virginia **Request for Quotation** 06 - Building Supply

Proc Folder: 295930

Doc Description: PRE-STRESSED CONCRETE BOX BEAMS & ACCESSORIES

Proc Type: Central Purchase Order

Date Issued Solicitation Closes Solicitation No Version 2017-03-03 2017-03-28 CRFQ 0803 DOT1700000064 1 13:30:00

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV

25305

US

Vendor	Name	Addrass	and	Telephone	Marenhau
Vendor	ivaille,	Addiess	anu	rereprione	Number:

Carr Concrete a division of CXT, Inc. P.O. Box 265 Waverly, WY 26184

FOR INFORMATION CONTACT THE BUYER

Mark A Atkins (304) 558-2307 mark.a.atkins@wv.gov

Signature X

FEIN# 91-1498605

DATE 3-28-17

All offers subject to all terms and conditions contained in this solicitation

Page: 1

FORM ID: WV-PRC-CRFQ-001

ADDITIONAL INFORMAITON:

The West Virginia Purchasing Division is soliciting bids on behalf of West Virginia Division of Highways District 3 Bridge Department to establish a contract for the one time purchase of Pre-stressed Concrete Box Beams and accessories for Road Fork Bridge Project No. S354-25/13-0.19. per attached documents.

INVOICE TO	医电子规则 化自己等级 自己不是,这是	SHIP TO	
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VIRO JOBSITE - SEE SPECII	
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	EXTERIOR BOX BEAM SECTION	369.00000	SF	\$43.25	\$15,959,25

Comm Code	Manufacturer	Specification	Model #	
30101717			Wodol II	
_				

Extended Description:

Exterior beams must be 27" deep by 26" wide by 61'-6" overall length. (60'-0" c-c bearing anchor bolt holes). Beams Skewed 10 degrees right forward.

INVOICE TO		SHIP TO	2862/2016年大学的《农村大学》2008年
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VIR	1
624 DEPOT ST			
PARKERSBURG	WV26101	No City	WV 99999
us		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	INTERIOR BEAM SECTION:	922.50000	SF	\$12 20	\$ 20 pm 00

Comm Code	Manufacturer	Specification	Model #	
30101717			model ii	

Extended Description:

Interior beams must be 27" deep by 36" wide by 61'-6" overall length. (60'-0" c-c bearing anchor bolt holes). Beams skewed 10 degrees right forward.

INVOICE TO	建设设施的支持。 该用的数据的数据	SHIP TO	据《华州·西南部》(1886年) 1886年 - 1886年
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VII JOBSITE - SEE SPE	
624 DEPOT ST			
PARKERSBURG	WV26101	No City	WV 99999
US		us	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
3	ELASTOMERIC LAMINATED BEARING PADS	12.00000	EA	\$10900	\$1,308.60

Manufacturer	Specification	Model #	
	opcomoditori	Wodel #	
	Manufacturer	Opecification	Specification Model #

Type B1 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness.

INVOICE TO	X X X 20 X 19 16 16 16 16 18 18 18 18 18 18 18 18 18 18 18 18 18	SHIP TO	
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VII JOBSITE - SEE SPE	
PARKERSBURG	WV26101	No City	WV 99999
us		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
4	ELASTOMERIC LAMINATED BEARING PADS	4.00000	EA	\$10900	\$ 121,00

Manufacturer	Specification	Model #	
		WOUE! #	
	Manufacturer	Manufacturer Specification	Manufacturer Specification Model #

Extended Description:

Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness.

INVOICE TO		SHIP TO	CLASSIC DESIGNATION OF THE PROPERTY OF THE PRO	200
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VIF		
PARKERSBURG	WV26101	No City	WV 99999	
US		us		

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
5	SWEDGED ANCHOR BOLTS	14.00000	EA	DI 2 50	9075 00
				OL.	673.

Comm Code	Manufacturer	Specification	Model #	
30101717				

Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length

INVOICE TO	巴纳金安和爱巴斯特里斯	SHIP TO	国。2018年1月21日 1月1日 1月1日 1月1日 1月1日 1月1日 1月1日 1月1日
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VII JOBSITE - SEE SPE	
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
6	PREFORMED JOINT FILLER	28.00000	SF	#1 00	\$200 00
				71.	120.

Comm Code	Manufacturer	Specification	Model #	
30101717		An agrand states in both		

Extended Description:

Performed joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler.

INVOICE TO	如何是这种类似的是,是有的 对 数可	SHIP TO	实验 对 的是更有"多"的"专业是包含的数据"。
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VIF	
624 DEPOT ST			
PARKERSBURG	WV26101	No City	WV 99999
US		US	=

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
7	PREFORMED JOINT FILLER	98.00000	SF	\$ 100	40800

Comm Code	Manufacturer	Specification	Model #	
30101717			We do n	

Extended Description:

Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam ends shall be 21.7' long by 27" wide at each abutment yielding 48.8 square feet/abutment for total of 98 square feet of joint filler

INVOICE TO		SHIP TO	发热的弹用现在是 对三类似有多类的疾病中的疾病中心
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VIF JOBSITE - SEE SPEC	
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
8	GUARDRAIL ASSEMBLY	20.00000	EA	\$12125	\$21.200
				101,	*0,665.

Comm Code	Manufacturer	Specification	M - J - 1 #	
30101717		opeomeation	Model #	

Guardrail assembly provided as shown in the plans (Attachement 1) must include all the necessary studs, nuts and washers.

INVOICE TO		SHIP TO	
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VIR JOBSITE - SEE SPEC	
624 DEPOT ST		!	
PARKERSBURG	WV26101	No City	WV 99999
us		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
9	1" DIAMETER POST-TENSIONING	121.90000	LF	41- 600	+ + - 10 00
				DIO'0	71,219.

Comm Code	Manufacturer	Specification	Model #	
30101717			IN OCCI IF	

Extended Description:

Post tensioning bars must be 1" diameter. 5 bars @ 24'-41/2" are required for a total length of 121.9'. Post tensioning bars must be threaded and supplied with 12 hex nuts and other hardware as required in the plans (Attachment 1)

INVOICE TO	的是我是可能的是多 。	SHIP TO	(a) (a) (a) (b) (b) (b) (b) (b) (b) (b) (b) (b) (b
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VII	· · · · · · · · · · · · · · · · · · ·
624 DEPOT ST			
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
10	BEARING PLATE	10.00000	EA	\$50 00	3/70 00

Comm Code	Manufacturer			
	Manufacturer	Specification	Model #	
30101717	*			

Bearing plates for exterior beams must be 9"x9" x 1" thick.

INVOICE TO		SHIP TO	医性神经管 经营业 医自己 医多种性性皮肤
DIVISION OF HIGHWAYS DISTRICT THREE		STATE OF WEST VI JOBSITE - SEE SPE	
624 DEPOT ST			
PARKERSBURG	WV26101	No City	WV 99999
US		us	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
11	TYPE TL-2 BRIDGE GUARDRAIL POSTS	20.00000	EA	368°00	\$7.360.00

Comm Code	Manufacturer	Specification		
30101717		Specification	Model #	

Extended Description:

Bridge guardrail post must be designed for a minimum TL-2 crash testing criteria as shown in the plans (Attachment 1)

INVOICE TO	是是是在19年间的19年度。 1950年	SHIP TO	医内部性心理的现在分词类似的现象
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VIRGIN JOBSITE - SEE SPECIFIC	l l
PARKERSBURG	WV26101	No City	WV 99999
us		us	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
12	TYPE TL-2 BRIDGE GUARDRAIL	131.00000	LF	47125	\$10.110.75

Comm Code	Manufacturer	Specification	Model #	
30101717			inodol #	

Extended Description:

Bridge guardrail must be designed for a minimum TL-2 crash testing criteria as shown in the plans (Attachment 1)

INVOICE TO	Marie Television (Company)	SHIP TO	
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VII JOBSITE - SEE SPE	
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
13	1" GROUT STOP	369.00000	LF	An ac	+00 75
				30,25 g	892.23

Comm Code	Manufacturer	Specification	Madel 4	
30101717		Ореспісацоп	Model #	
55101111			v.	

Grout stop must be 1" thick sponge rubber or 1" backer rod.

INVOICE TO		SHIP TO	2. 12. 2. 13. 13. 13. 13. 13. 13. 13. 13. 13. 13
DIVISION OF HIGHWAYS DISTRICT THREE 624 DEPOT ST		STATE OF WEST VII JOBSITE - SEE SPEC	
PARKERSBURG	WV26101	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
14	1" X 8"X 8" WASHER	30.00000	EA	\$1.00	Spage
				16.	4/900

Comm Code	Manufacturer	Specification	Model #	
30101717		•	model if	

Extended Description:

Washers must be 8"x8" squares of 1" thick sponge rubber with a 3-1/2" diameter hole in the center.

SCHEDULE OF EVENTS

<u>Line</u>

Event

Technical Questions due by:

Event Date

2017-03-14

	Document Phase	Document Description	Page 8
DOT170000064	Draft	CONCRETE BEAMS	of 8

ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions

gason Morman Project Manager
(Name, Title)
Jason Norman Project Managly
(Printed Name and Title)
P.D. Box 265, Waverly, WV 26184
(Address) 304-464-4441 / 304-464-4013
(Phone Number) / (Fax Number)
morman @ 16 foster. Com
(chail address)
(
CERTIFICATION AND SIGNATURE: By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require
registration.
Carr Concrete a division of CXT, Inc.
Jason Norman, Project Manage (Authorized Signature) (Representative Name, Title)
Ason Worman Project Manager (Printed Name and Title of Authorized Representative)
3-28-17 (Date)

304-464-4013

DESIGNATED CONTACT: Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

(Phone Number) (Fax Number)

Bid Evaluation Page Exhibit A

2 92 3 1 4 5 1 6 2 7 9 8 2		Square Feet	Interior beams must be 27" deep by 36" wide by 61'-6" overall length. (60'-0" c-c bearing anchor bolt holes). Beams skewed 10° right forward. Type B1 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness. Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness. Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length Performed Joint Tiller for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at	1104.00	\$ \$ \$	15,959 2 39,852 - 4 1,308 - 4 436 - 4 875 - 4
3 1 4 5 5 1 6 2 7 9 8 2	12 4 14 28	Each Each Square Feet	Type B1 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness. Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness. Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness. Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length Performed Joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at	109.00	\$ \$ \$	39,852 -9 1,308 -9
4 5 1 6 2 7 9 8 2	14 28	Each Each Square Feet	Type B1 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 28" length. Must be 60 Duro Hardness. Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness. Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length Performed joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at	109.00	\$ \$ \$	1,308 -
5 1 6 2 7 9 8 2	28	Each Square Feet Square Feet	Type B2 elastomeric laminated bearing pads at 1-13/16" thick by 4-3/4" wide by 15-1/2" length. Must be 60 Duro Hardness. Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length Performed Joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at	62.50	\$	436 -
7 9	28	Square Feet Square Feet	Swedged anchor bolt or Number 8 deformed reinforcing bar (Grade 60) galvanized. Must be 1" diameter by 2'-0" Length Performed Joint filler for use around bearing pads must be 2-1/8" thick. The dimensions of joint filler to be placed behind the bearing pads shall be 21.7' long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at	1.00	\$	875 -a
7 9		Square Feet	long by 6-1/2" wide at each abutment yielding 11.8 square feet/abutment for a total of 24 square feet of joint filler. The dimensions of joint filler to be placed between the bearing pads shall be 5.1' long by 4-3/4" wide at each abutment yielding 2.0 square feet/abutment for a total of 4 square feet of joint filler. Preformed joint filler for use at the beam ends must be 1" thick. The dimensions of joint filler for beam eands sall be 21.7' long by 27" wide at			28 -ª
8 2	98	Square reet	urnersions of joint filler for beam eands sall be 21.7' long by 27" wide at	1.00		
			each abutment vielding 48.8 square feet/abutment for total of 98 square feet	(10	\$	98 -°
9 12:	20	Each	include all the necessary study, nuts and washers.	181.25	\$	3,625.0
	21.9	Linear Foot	Post tensioning bars must be 1" diameter. 5 bars @ 24'-41/2" are required for a total length of 121.9'. Post tensioning bars must be threaded and supplied with 12 hex nuts and other hardware as required in the plans (Attachment 1)	10,00	\$	1,219-00
10 1	10	Each	Bearing plates for exterior beams must be 9"x9" x 1" thick.	58,00	+	CON 60
11 2	20	Each	criteria as shown in the plans (Attachment 1)	368,00	\$ \$	7,360-°°
		Linear Feet	Bridge guardrail must be designed for a minimum TL-2 crash testing criteria as shown in the plans (Attachment 1)	77.25	\$	10,119 7
13 36	369	Linear Feet	Grout stop must be 1" thick sponge rubber or 1" backer rod	0.25	\$	97-75
	30	Fach	Washers must be 8"x8" squares of 1" thick sponge rubber with a 3-1/2" diameter hole in the center.	6,00	\$	M
rand Total			diameter note in the center.	6,00	T	(80 - 2

STATE OF WEST VIRGINIA **Purchasing Division**

PURCHASING AFFIDAVIT

MANDATE: Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

EXCEPTION: The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

AFFIRMATION: By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

WITNESS THE FOLLOWING SIGNATURE:	
Vendor's Name: Car Concrete	a division of CXT, Inc.
Authorized Signature: Jason Norm	an Date: 3-28-17
State of	
	1/2 - 2/2
Taken, subscribed, and sworn to before me this $2\!$	day of, 2017.
My Commission expires	<u>-8</u> , 20 <u>20</u> .
OFFICIAL SEAL STATE OF WEST VIRGINIA NOTARY PUBLIC WIND: KAPRAUN CARR CONCRETE CORP. P.C. BOX 285 WAVERLY, WV 26184 Adv Cammission Expires February 8, 2020	NOTARY PUBLIC Windle Aproximal Purchasing Affidavit (Revised 08/01/2015)