



Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

State of West Virginia
 Centralized Request for Quote
 Equipment

Proc Folder: 798511			Reason for Modification:
Doc Description: 4 x 4 Utility Tractor Plus Accessories			
Proc Type: Central Purchase Order			
Date Issued	Solicitation Closes	Solicitation No	Version
2020-10-27	2020-11-12 13:30	CRFQ 0432 DCH2100000004	1

BID RECEIVING LOCATION

BID CLERK
 DEPARTMENT OF ADMINISTRATION
 PURCHASING DIVISION
 2019 WASHINGTON ST E
 CHARLESTON WV 25305
 US

RECEIVED
 2020 NOV 12 AM 9:37
 WV PURCHASING
 DIVISION

VENDOR

Vendor Customer Code:
Vendor Name : STATE EQUIPMENT, INC.
Address : 560 NEW GOFF MOUNTAIN ROAD
Street :
City : GROSS LANES,
State : WEST VIRGINIA
Principal Contact : EDDIE ROWAN, JR
Vendor Contact Phone: 304-776-4405

Country : US

Zip : 25313

Extension: 1012

FOR INFORMATION CONTACT THE BUYER

Dusty J Smith
 (304) 558-2063
 dusty.j.smith@wv.gov

Vendor
 Signature X

FEIN# 550658298

DATE 11/11/2020

All offers subject to all terms and conditions contained in this solicitation

ADDITIONAL INFORMATION

THE STATE OF WEST VIRGINIA PURCHASING DIVISION FOR THE WEST VIRGINIA DIVISION OF CULTURE & HISTORY, IS SOLICITING BIDS FOR THE ONE-TIME PURCHASE OF A 4 X 4 UTILITY TRACTOR PLUS ACCESSORIES PER THE ATTACHED DOCUMENTS.

QUESTIONS REGARDING THE SOLICITATION MUST BE SUBMITTED IN WRITING TO DUSTY.J.SMITH@WV.GOV PRIOR TO THE QUESTION PERIOD DEADLINE CONTAINED IN THE INSTRUCTIONS TO VENDORS SUBMITTING BIDS.

****PLEASE NOTE MAKE SURE YOU DOWNLOAD ALL OF THE DOCUMENTS ****

INVOICE TO		SHIP TO	
DIVISION OF CULTURE & HISTORY CULTURAL CENTER 1900 KANAWHA BLVD E CHARLESTON WV 25305-0300 US		DIVISION OF CULTURE & HISTORY CAMP WASHINGTON-CARVER RT 1, BOX 5 CLIFFTOP WV 25831 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	3.1.1 UTILITY TRACTOR	1.00000	EA	\$16,890.00	\$16,890.00

Comm Code	Manufacturer	Specification	Model #
25101901	KUBOTA	TRACTOR	L3301HST

Extended Description:

3.1.1 UTILITY TRACTOR

INVOICE TO		SHIP TO	
DIVISION OF CULTURE & HISTORY CULTURAL CENTER 1900 KANAWHA BLVD E CHARLESTON WV 25305-0300 US		DIVISION OF CULTURE & HISTORY CAMP WASHINGTON-CARVER RT 1, BOX 5 CLIFFTOP WV 25831 US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	3.1.2 UTILITY TRACTOR LOADER	1.00000	EA	\$4,100.00	\$4,100.00

Comm Code	Manufacturer	Specification	Model #
25101901	KUBOTA	LOADER	LA525

Extended Description:

3.1.2 UTILITY TRACTOR LOADER: KUBOTA LA525, OR EQUAL

INVOICE TO	SHIP TO
DIVISION OF CULTURE & HISTORY CULTURAL CENTER 1900 KANAWHA BLVD E CHARLESTON WV 25305-0300 US	DIVISION OF CULTURE & HISTORY CAMP WASHINGTON-CARVER RT 1, BOX 5 CLIFFTOP WV 25831 US

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
3	3.1.3 UTILITY TRACTOR BACKHOE	1.00000	EA	\$7,100.00	\$7,100.00

Comm Code	Manufacturer	Specification	Model #
25101901	KUBOTA	BACKHOE	BH77

Extended Description:

3.1.3 UTILITY TRACTOR BACKHOE : KUBOTA BH77 OR EQUAL

INVOICE TO	SHIP TO
DIVISION OF CULTURE & HISTORY CULTURAL CENTER 1900 KANAWHA BLVD E CHARLESTON WV 25305-0300 US	DIVISION OF CULTURE & HISTORY CAMP WASHINGTON-CARVER RT 1, BOX 5 CLIFFTOP WV 25831 US

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
4	3.1.4 UTILITY HYDRAULIC CLAW GRAPPLE	1.00000	EA	\$2,635.00	\$2,635.00

Comm Code	Manufacturer	Specification	Model #
25101901	LAND PRIDE	HYDRAULIC GRAPPLE	SGC0660

Extended Description:

3.1.4 UTILITY HYDRAULIC CLAW GRAPPLE : LAND PRIDE SCG0660, OR EQUAL

INVOICE TO	SHIP TO
DIVISION OF CULTURE & HISTORY CULTURAL CENTER 1900 KANAWHA BLVD E CHARLESTON WV 25305-0300 US	DIVISION OF CULTURE & HISTORY CAMP WASHINGTON-CARVER RT 1, BOX 5 CLIFFTOP WV 25831 US

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
5	3.1.5 UTILITY TRACTOR PALLET FORKS	1.00000	EA	\$650.00	\$650.00

Comm Code	Manufacturer	Specification	Model #
25101901	LAND PRIDE	PALLET FORKS	PFL2042

Extended Description:
3.1.5 UTILITY TRACTOR PALLET FORKS: LAND PRIDE , PLF2042 OR EQUAL

SCHEDULE OF EVENTS

<u>Line</u>	<u>Event</u>	<u>Event Date</u>
1	TECHNICAL QUESTION DEADLINE DUE BY 11AM	2020-11-04

	Document Phase	Document Description	Page
DCH2100000004	Final	4 x 4 Utility Tractor Plus Accessories	5

ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions

**ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.:**

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:
(Check the box next to each addendum received)

- | | |
|---|--|
| <input type="checkbox"/> Addendum No. 1 | <input type="checkbox"/> Addendum No. 6 |
| <input type="checkbox"/> Addendum No. 2 | <input type="checkbox"/> Addendum No. 7 |
| <input type="checkbox"/> Addendum No. 3 | <input type="checkbox"/> Addendum No. 8 |
| <input type="checkbox"/> Addendum No. 4 | <input type="checkbox"/> Addendum No. 9 |
| <input type="checkbox"/> Addendum No. 5 | <input type="checkbox"/> Addendum No. 10 |

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

STATE EQUIPMENT, INC.
Company


Authorized Signature

11/11/2020
Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.

DESIGNATED CONTACT: Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

GENERAL MANAGER
(Name, Title)
EDDIE ROWAN, JR. GENERAL MANAGER
(Printed Name and Title)
560 NEW GOFF MOUNTAIN ROAD CROSSLANES, WV 25313
(Address)
(304)776-4405 (304)776-4409
(Phone Number) / (Fax Number)
eddie@stateequipment.com
(email address)

CERTIFICATION AND SIGNATURE: By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

STATE EQUIPMENT, INC
(Company)

EDDIE ROWAN, JR GENERAL MANAGER
(Authorized Signature) (Representative Name, Title)

EDDIE ROWAN, JR GENERAL MANAGER
(Printed Name and Title of Authorized Representative)

11/11/2020
(Date)

(304)776-4405 (304)776-4409
(Phone Number) (Fax Number)

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

CONSTRUCTION CONTRACTS: Under W. Va. Code § 5-22-1(i), the contracting public entity shall not award a construction contract to any bidder that is known to be in default on any monetary obligation owed to the state or a political subdivision of the state, including, but not limited to, obligations related to payroll taxes, property taxes, sales and use taxes, fire service fees, or other fines or fees.

ALL CONTRACTS: Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

EXCEPTION: The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

AFFIRMATION: By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (*W. Va. Code §61-5-3*) that: (1) for construction contracts, the vendor is not in default on any monetary obligation owed to the state or a political subdivision of the state, and (2) for all other contracts, that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

WITNESS THE FOLLOWING SIGNATURE:

Vendor's Name: STATE EQUIPMENT, INC


Authorized Signature: [Signature] Date: 11/11/2020

State of WEST VIRGINIA

County of KANAWHA, to-wit:

Taken, subscribed, and sworn to before me this 11th day of November, 2020

My Commission expires March 27, 2021.

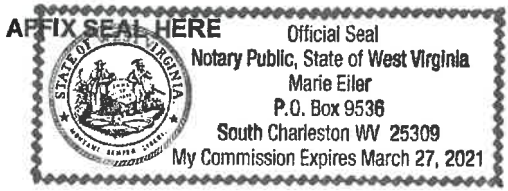

NOTARY PUBLIC Marie Eiler



For Earth, For Life
Kubota

KUBOTA DIESEL TRACTOR L3301/L3901/L4701

More power, cleaner emissions and a bold new look put the new Standard L-Series tractors at the top of their class.



State Equipment, Inc.
560 New Goff Mountain Road
Cross Lanes, WV 25313
304-776-4405

L3301/L3901

HST TRANSMISSION

With more horsepower than ever, the L3301 and L3901 tractors will take you to a higher level of performance.

HYDROSTATIC TRANSMISSION

HST provides infinite speed control with HST pedal that can be operated simply by pressing down on the pedal. The more the pedal is pressed, the faster the wheels go. An inline shifting pattern enables easy range shifting between low, medium and high. The shift lever is conveniently located on the left side of the operator's seat for easy operation.



HST Pedal



Range Shift Lever and Cruise Control


Cruise Control (Optional)

The cruise control lever is conveniently located on the left side of the operator's seat for easy access. Simpler than button and pedal combination systems, our lever lets you select and maintain the right travel speed to help reduce operator fatigue. When the cruise control is set, just press the HST pedal to override the speed, and the tractor resumes the preset speed when the foot is removed.

GEAR-DRIVE TRANSMISSION

Power and Versatility Means Getting the Job Done Faster.

You'll finish the big jobs easily with the mechanical Synchro-Shuttle transmission featuring inline forward and reverse shifting for quick directional changes. The transmission offers 8 forward and 8 reverse speeds (8F/8R), enabling you to select the right speed for better productivity.

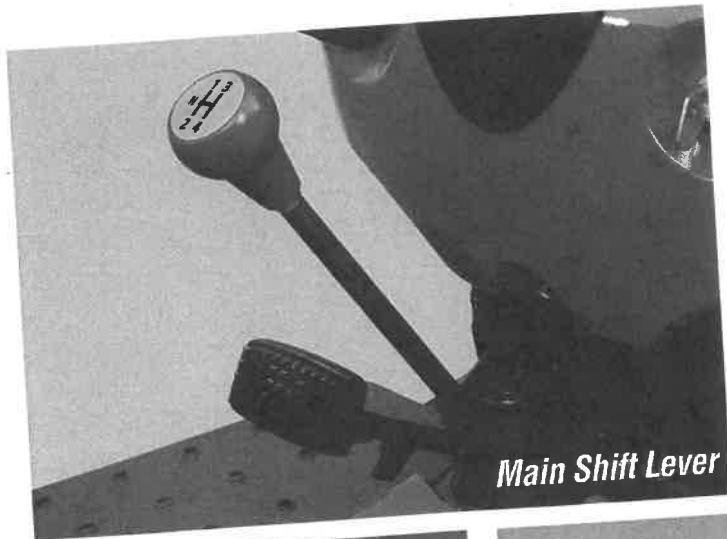

Main Shift Lever




Reverse



Forward


Synchro Shuttle Shift



R


N

F

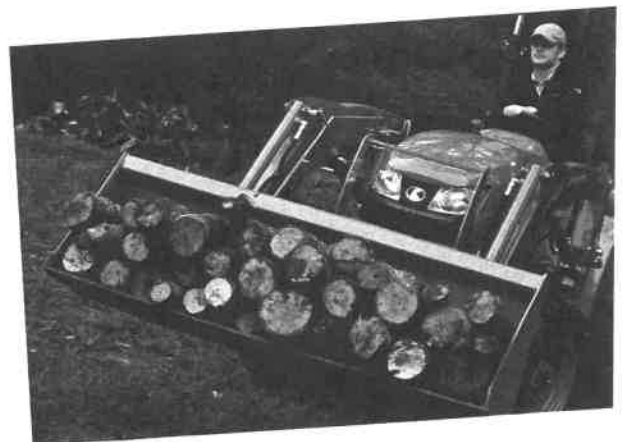

L3301/L3901

EASY OPERATION

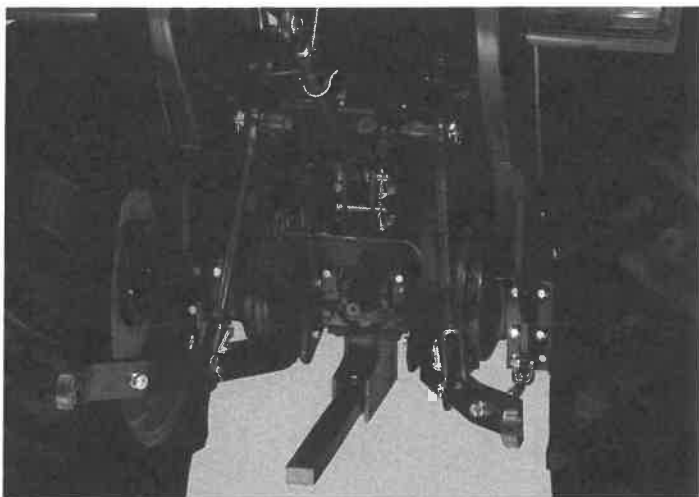


PTO

The L3301/L3901 HST models and the L3901 gear-drive model include a live, continuous-running rear PTO for easier operation. The HST models also feature an over-running clutch on the PTO shaft to protect the transmission. Finally, a stationary PTO feature allows the use of various implements, such as pumps.

Conveniently Located PTO Lever

To further enhance access and entry/exit, the PTO lever is located on the right side of the operator's seat (HST models), or to the right side of the foot platform center cover (gear-drive models).

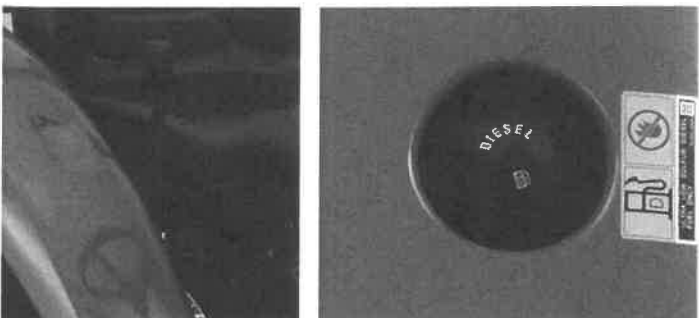

3-Point Hitch

The large capacity hydraulic pump and cylinder provide powerful lifting capacity, allowing you to use a wider range of implements.


Large Capacity Fuel Tank

An ample 11.1 gallon fuel tank lets you operate longer between fill ups.

L3301/L3901/L4701

MANEUVERABILITY

The Standard L series gives you more of what compact tractors should provide.

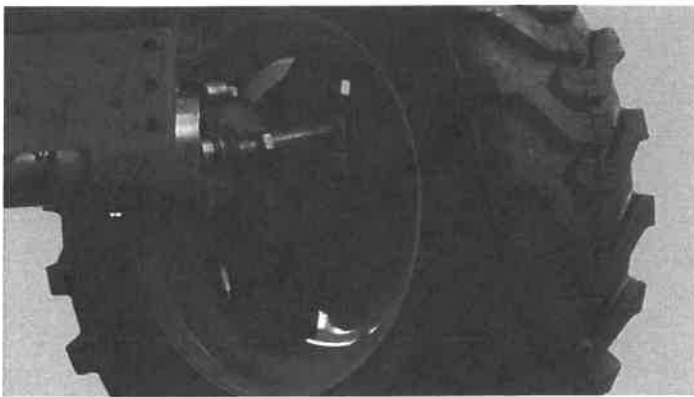

Bevel Gear Front Axle (4WD model)

A superior feature that delivers an extremely tight turning radius with full power transfer to the wheels at every steering angle.

Wet-Disc Brakes


Responsive and smooth, our long-life, multi-plate wet-disc brakes are immersed in oil, and require only the slightest foot pressure to activate.

Smooth Power Steering

To reduce fatigue, both 2-wheel drive and 4-wheel drive models come equipped with smooth, easy-turn power steering.

Choice of Tires


Tires designed for specific jobs allow the Standard L-Series tractors to perform even better. Select from AG, Industrial, and Turf.

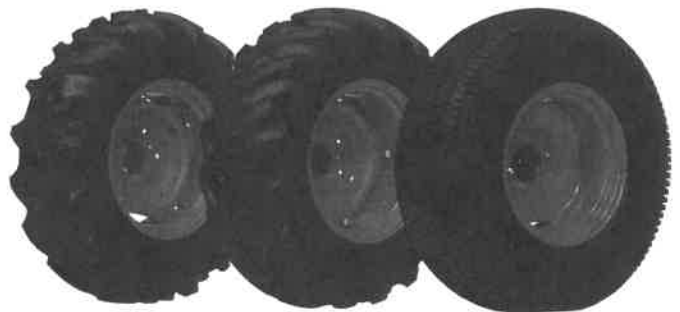

L3301/L3901/L4701

COMFORT

The Standard L-Series brings more comfort to hard work, with a spacious and ergonomic operator layout, suspension seat and more.

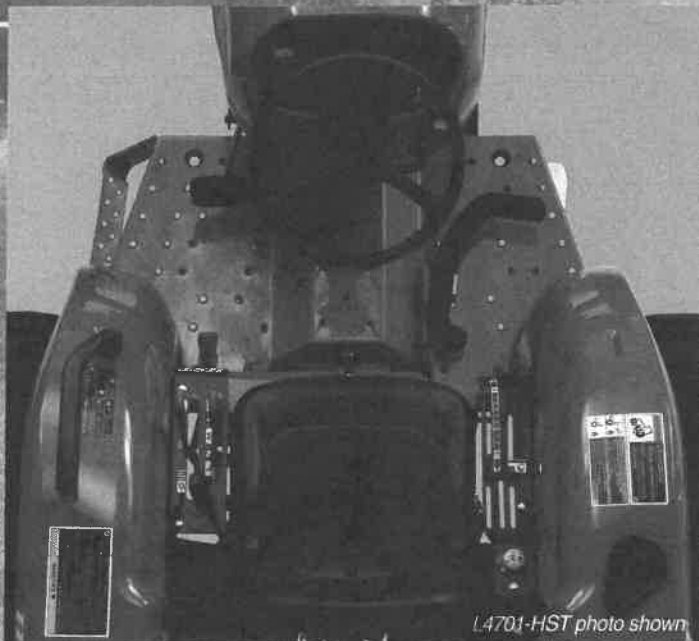

Spacious Operator's Deck

To provide maximum comfort, the Standard L-Series features a spacious operator platform. Its flat* design also makes getting on and off the tractors easier.

**semi-flat deck on L3301/L3901*



New Seat

The adjustable seat suspension offers a high level of comfort. The seat is contoured and ergonomically designed to help reduce operator fatigue when working long days. A drain hole has been added to allow water to escape so it does not accumulate on the seat.



New Dash Panel

The dash panel features large gauges and a digital LCD panel that provide vital information including engine error codes and a parking brake indicator.

Sleek Design

The Standard L-Series' sleek slanted hood provides a great field of vision. This comes in handy for front loader work. Multiple headlamps are useful in dark and inclement conditions. Additionally, the one-piece hood can be fully opened for easier access to the engine and other maintenance items.

Cup/Mug Holder

This convenient holder securely fits a cup or a mug to keep operators hydrated while on the job.

Tool Box

A large toolbox is located right behind the operators seat for easy access. Models with the backhoe will have the toolbox above the left fender, next to the operators seat.



Roll-Over Protective Structure (ROPS)

For maximum protection, all models come with a foldable ROPS and a retractable seat belt as standard equipment.



L3301/L3901/L4701

IMPLEMENTS

Maximize Standard L-Series' versatility with Kubota's Performance-Matched quick attach/detach implements.

LA525 and LA765 Front Loaders

The LA525 and LA765 Front Loaders have a specially designed curved boom that can handle the big tasks the Standard L-Series is made for, providing improved lifting power and height as well as exceptional durability.



Loaders Specifications

MODEL		LA525	LA765
2 Lever Quick Coupler		OPT	STD
Matching Tractor		L3301/L3901	L4701
Maximum Lift Height (Pivot pin)	in.(mm)	94.3 (2394)	105.2 (2673)
Clearance w/Attachment Dump	in.(mm)	76.2 (1936)	81.2 (2063)
Reach @ Maximum Height	in.(mm)	25.4 (645)	21.1 (537)
Maximum Dump Angle	deg.	40	41
Reach w/Attachment on Ground	in.(mm)	63.7 (1618)	70.2 (1783)
Maximum Rollback Angle	deg.	31	27
Digging Depth	in.(mm)	6.9 (176)	6.1 (156)
Overall Height in Carry Position	in.(mm)	51.3 (1302)	54.6 (1387)
Lift Capacity (Pivot pin)	lbs.(kg)	1131 (513)	1684 (764)
Lift Capacity (500 mm forward)	lbs.(kg)	855 (388)	1263 (573)

* Measures taken with Quick Coupler.

**ASSEMBLED
IN
GEORGIA**


BH77 and BH92 Backhoes

The BH77 and BH92 Backhoes are "Performance-Matched" with the L3301, L3901 and L4701 to deliver more power and greater capacity. And, thanks to the full-flat deck, the backhoes deliver optimal legroom for maximum operator comfort.



Backhoes Specifications

MODEL		BH77	BH92
Matching Tractor		L3301/L3901	L4701
Transport height	in. (mm)	80.3 (2040)	100.1 (2544)
Stabilizer spread transport	in. (mm)	51.8 (1315)	69.2 (1758)
Ground clearance	in. (mm)	11.5 (292)	14.2 (360)
Digging depth, 2ft. flat bottom	in. (mm)	89.8 (2280)	106.1 (2695)
Loading height	in. (mm)	65.7 (1669)	90.6 (2300)
Reach from swing pivot	in. (mm)	124.3 (3156)	149.6 (3801)
Swing pivot to rear axle center line	in. (mm)	37.6 (954)	40.9 (1040)
Bucket rotation	deg.	180	180
Stabilizer spread operating	in. (mm)	69.0 (1753)	93.3 (2369)

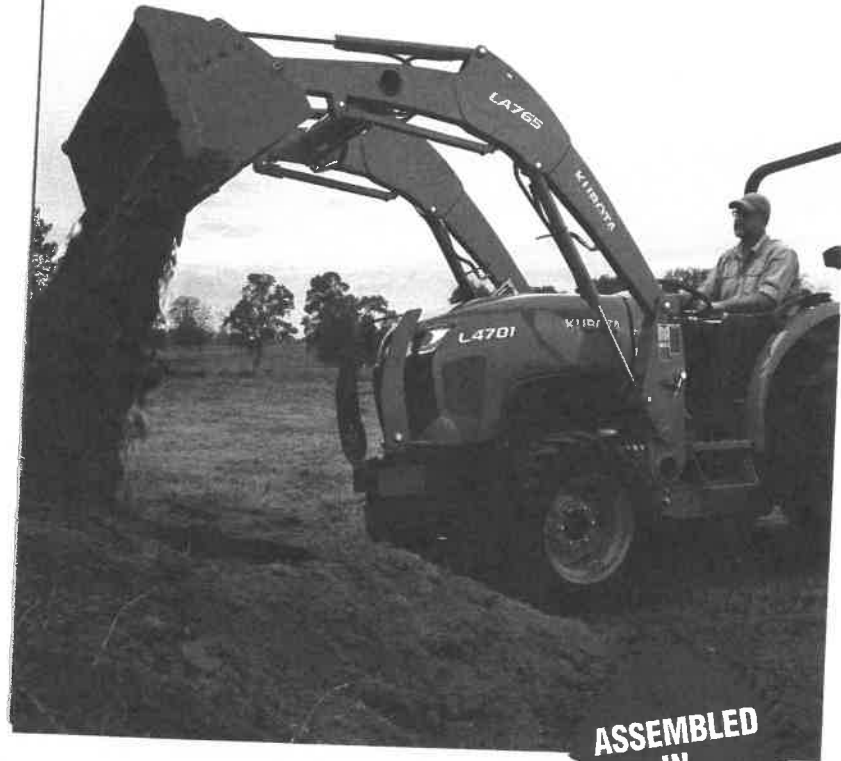

L3301/L3901/L4701

VERSATILE APPLICATIONS



Pallet Forks



Rear Snow Blower



3-Point Bale Spear



Rotary Tiller



Rear Rotary Cutter



Rear Blade

SPECIFICATIONS

Model	L3301			L3901			L4701		
	Gear-Drive Transmission		HST	Gear-Drive Transmission		HST	Gear-Drive Transmission		HST
	2WD	4WD	4WD	2WD	4WD	4WD	2WD	4WD	4WD
Engine									
Type	Direct injection, vertical, water-cooled 4-cycle diesel								
Engine gross power*	HP (kW)	33.0 (24.6)			37.5 (28.0)			47.3 (35.2)	
Engine net power**	HP (kW)	31.4 (23.4)			36.3 (27.1)			44.8 (33.4)	
PTO power	HP (kW)	27.7 (20.7)	26.2 (19.5)	32.1 (23.9)	30.6 (22.8)	39.3 (29.3)	37.8 (28.2)		
No. of cylinders	3			3			4		
Bore & stroke	in. (mm)	3.4 x 4.0 (87 x 102.4)							
Total displacement	cu. in. (cm³)	111.4 (1826)					148.5 (2434)		
Rated speed	rpm	2700					2600		
Battery	12V, RC: 110 min, CCA: 580 A					12V, RC: 120 min, CCA: 600 A			
Alternator	12V, 40A								
Fuel tank capacity	US gal. (ℓ)	11.1 (42)					13.5 (51)		
PTO									
Rear PTO type	Transmission driven with overrunning clutch		Live - with overrunning clutch	Live-continuous running	Live - with overrunning clutch	Live-independent hydraulic PTO with PTO brake, wet clutch			
PTO/Engine speed	540/2430		540/2580	540/2425	540/2580	540/2475		540/2640	
Hydraulic									
Lift control type	Position control								
Pump capacity (main)	gpm (ℓ/min)	6.3 (23.9)			6.3 (23.9)			7.8 (29.4)	
(PS)	gpm (ℓ/min)	3.8 (14.5)			3.8 (14.5)			4.7 (17.9)	
3-point hitch	Category I								
Lift capacity at lift points	lbs. (kg)	1985 (900)					2870 (1300)		
24 in. behind lift points	lbs. (kg)	1433 (650)					2320 (1053)		
System pressure	kgf/cm² (MPa)	165 (16.2)					180 (17.7)		
Traveling System									
Transmission	Gear shift with synchronized shuttle, 8 forward and 8 reverse		Hydrostatic transmission, 3 range speed	Gear shift with synchronized shuttle, 8 forward and 8 reverse		Hydrostatic transmission, 3 range speed	Constant mesh with synchronized shuttle, 8 forward and 8 reverse		Hydrostatic transmission, 3 range speed
Steering	Integral type power steering					Hydrostatic power steering			
Brake	Mechanical, wet disc type								
Clutch	Dry type single stage			Dry type dual stage		Dry single	Dry type single stage		No clutch
Tire size	AG Standard	Front/Rear	300-15/11.2-24	7.2-16/11.2-24	300-15/11.2-24	7.2-16/11.2-24	7.5-15/14.9-24	8.3-16/14.9-24	
	TURF Option	Front/Rear	23 x 8.50-12/13.6-16	25 x 8.50-14/13.6-16	23 x 8.50-12/13.6-16	25 x 8.50-14/13.6-16	27 x 8.50-15/44 x 18-20	27 x 10.5/44 x 18-20, 27 x 8.50-15/44 x 18-20, 306R343LSW/44 x 18-20	
	Indust. Option	Front/Rear	N/A	27 x 8.50-15/15-19.5 R4	N/A	27 x 8.50-15/15-19.5 R4	N/A	10.0-16.5/17.5L-24	
Traveling speed with standard AG tires	mph (km/h)		Forward 1.1 (1.7) - 13.2 (21.2) Reverse 1.1 (1.7) - 13.1 (21.1)	Forward 10.0 (16.1) - 12.7 (20.5) Reverse 10.0 (16.1) - 12.7 (20.5)	Forward 1.1 (1.7) - 13.2 (21.2) Reverse 1.1 (1.7) - 13.1 (21.1)	Forward 10.0 (16.1) - 14.1 (22.7) Reverse 10.0 (16.1) - 12.7 (20.5)	Forward 1.4 (2.2) - 14.9 (24.0) Reverse 1.3 (2.1) - 14.3 (23.0)	Forward 10.0 (16.1) - 15.3 (25.4) Reverse 10.0 (16.1) - 14.2 (22.9)	
Dimensions									
Overall length (w/o 3P)	in. (mm)	110.6 (2810)	107.9 (2740)	110.6 (2810)	107.9 (2740)	122.8 (3120)	119.5 (3035)		
Overall width (min. tread)	in. (mm)	55.1 (1400)							
Overall height (w/Foldable ROPS)	in. (mm)	91.7 (2330)							
Wheelbase	in. (mm)	63.3 (1610)					72.8 (1850)	72.6 (1845)	
Min. ground clearance	in. (mm)	13.6 (345)	13.4 (340)	13.6 (345)	13.4 (340)	15.2 (385)			
Tread									
Front tire	in. (mm)	41.3 (1050)	43.1 (1095)	41.3 (1050)	43.1 (1095)	50.4 (1280) 54.3 (1380) 58.3 (1480) 62.2 (1580)	45.5 (1155)		
Rear tire	in. (mm)	43.8 (1115) / 47.1 (1195) / 50.8 (1290)					46.5 (1180), 47.2 (1200), 51.2 (1300), 57.1 (1450), 60.8 (1545)		
Min. turning radius (w/brake, 4WD disengaged)	feet (m)	7.9 (2.4)	8.2 (2.5)	7.9 (2.4)	8.2 (2.5)	8.9 (2.7)	8.5 (2.6)		
Weight (with ROPS)	lbs. (kg)	2557 (1160)	2734 (1240)	2778 (1260)	2767 (1255)	2778 (1260)	3236 (1460)	3296 (1495)	3377 (1530)

* SAE J1995

** SAE J1349

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, KUBOTA strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications.

©2019 Kubota Corporation

Kubota®

KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: kubotaUSA.com

