



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**1**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**JOHN ABBOTT**  
**304-558-2544**

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/20/2007				
BID OPENING DATE: 06/06/2007		BID OPENING TIME 01:30PM		

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		265-44		
<p style="text-align: center;"><b>REQUEST FOR QUOTATION</b></p> <p>THE PURCHASING DIVISION IS SOLICITING BIDS FOR THE WEST VIRGINIA CORRECTIONAL INDUSTRIES TO PROVIDE AN OPEN-END CONTRACT FOR UPHOLSTERY FABRIC.</p> <p>ATTACHMENTS: 1. SPECIFICATIONS            2. BID FORMS            3. AFFIDAVIT</p> <p>EXHIBIT 3</p> <p>LIFE OF CONTRACT: THIS CONTRACT BECOMES EFFECTIVE ON ..... AND EXTENDS FOR A PERIOD OF ONE (1) YEAR OR UNTIL SUCH "REASONABLE TIME" THEREAFTER AS IS NECESSARY TO OBTAIN A NEW CONTRACT OR RENEW THE ORIGINAL CONTRACT. THE "REASONABLE TIME" PERIOD SHALL NOT EXCEED TWELVE (12) MONTHS. DURING THIS "REASONABLE TIME" THE VENDOR MAY TERMINATE THIS CONTRACT FOR ANY REASON UPON GIVING THE DIRECTOR OF PURCHASING 30 DAYS WRITTEN NOTICE.</p> <p>UNLESS SPECIFIC PROVISIONS ARE STIPULATED ELSEWHERE IN THIS CONTRACT DOCUMENT, THE TERMS, CONDITIONS AND PRICING SET HEREIN ARE FIRM FOR THE LIFE OF THE CONTRACT.</p> <p>RENEWAL: THIS CONTRACT MAY BE RENEWED UPON THE MUTUAL</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

**GENERAL TERMS & CONDITIONS  
REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)**

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the *West Virginia Code* and the *Legislative Rules* of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee.
5. All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the *West Virginia Code*.
8. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, this contract is automatically null and void, and is terminated without further order.
14. **HIPAA Business Associate Addendum** - The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.

---

**INSTRUCTIONS TO BIDDERS**

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in cases of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications.

**SIGNED BID TO:**

Department of Administration  
Purchasing Division  
2019 Washington Street East  
Post Office Box 50130  
Charleston, WV 25305-0130



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**2**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**JOHN ABBOTT**  
**304-558-2544**

VENDOR

RFQ COPY  
 TYPE NAME/ADDRESS HERE

SHIP TO

DATE PRINTED <b>05/20/2007</b>	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
-----------------------------------	---------------	----------	--------	---------------

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>WRITTEN CONSENT OF THE SPENDING UNIT AND VENDOR, SUBMITTED TO THE DIRECTOR OF PURCHASING THIRTY (30) DAYS PRIOR TO THE EXPIRATION DATE. SUCH RENEWAL SHALL BE IN ACCORDANCE WITH THE TERMS AND CONDITIONS OF THE ORIGINAL CONTRACT AND SHALL BE LIMITED TO TWO (2) ONE (1) YEAR PERIODS.</p> <p>CANCELLATION: THE DIRECTOR OF PURCHASING RESERVES THE RIGHT TO CANCEL THIS CONTRACT IMMEDIATELY UPON WRITTEN NOTICE TO THE VENDOR IF THE COMMODITIES AND/OR SERVICES SUPPLIED ARE OF AN INFERIOR QUALITY OR DO NOT CONFORM TO THE SPECIFICATIONS OF THE BID AND CONTRACT HEREIN.</p> <p>OPEN MARKET CLAUSE: THE DIRECTOR OF PURCHASING MAY AUTHORIZE A SPENDING UNIT TO PURCHASE ON THE OPEN MARKET, WITHOUT THE FILING OF A REQUISITION OR COST ESTIMATE, ITEMS SPECIFIED ON THIS CONTRACT FOR IMMEDIATE DELIVERY IN EMERGENCIES DUE TO UNFORESEEN CAUSES (INCLUDING BUT NOT LIMITED TO DELAYS IN TRANSPORTATION OR AN UNANTICIPATED INCREASE IN THE VOLUME OF WORK.)</p> <p>QUANTITIES: QUANTITIES LISTED IN THE REQUISITION ARE APPROXIMATIONS ONLY, BASED ON ESTIMATES SUPPLIED BY THE STATE SPENDING UNIT. IT IS UNDERSTOOD AND AGREED THAT THE CONTRACT SHALL COVER THE QUANTITIES ACTUALLY ORDERED FOR DELIVERY DURING THE TERM OF THE CONTRACT, WHETHER MORE OR LESS THAN THE QUANTITIES SHOWN.</p> <p>ORDERING PROCEDURE: SPENDING UNIT(S) SHALL ISSUE A WRITTEN STATE CONTRACT ORDER (FORM NUMBER WV-39) TO THE VENDOR FOR COMMODITIES COVERED BY THIS CONTRACT. THE ORIGINAL COPY OF THE WV-39 SHALL BE MAILED TO THE VENDOR AS AUTHORIZATION FOR SHIPMENT, A SECOND COPY MAILED TO THE PURCHASING DIVISION, AND A THIRD COPY RETAINED BY THE SPENDING UNIT.</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
-----------	-----------	------

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
-------	------	-----------------------------------

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**3**

ADDRESS CORRESPONDENCE TO ATTENTION OF  
**JOHN ABBOTT**  
**304-558-2544**

VENDOR

RFQ COPY  
 TYPE NAME/ADDRESS HERE

SHIP TO

DATE PRINTED <b>05/20/2007</b>	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
-----------------------------------	---------------	----------	--------	---------------

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p><b>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT IS AUTOMATICALLY NULL AND VOID, AND IS TERMINATED WITHOUT FURTHER ORDER.</b></p> <p><b>THE TERMS AND CONDITIONS CONTAINED IN THIS CONTRACT SHALL SUPERSEDE ANY AND ALL SUBSEQUENT TERMS AND CONDITIONS WHICH MAY APPEAR ON ANY ATTACHED PRINTED DOCUMENTS SUCH AS PRICE LISTS, ORDER FORMS, SALES AGREEMENTS OR MAINTENANCE AGREEMENTS, INCLUDING ANY ELECTRONIC MEDIUM SUCH AS CD-ROM.</b></p> <p><b>VENDOR PREFERENCE CERTIFICATE</b></p> <p><b>CERTIFICATION AND APPLICATION* IS HEREBY MADE FOR PREFERENCE IN ACCORDANCE WITH WEST VIRGINIA CODE, 5A-3-37 (DOES NOT APPLY TO CONSTRUCTION CONTRACTS).</b></p> <p><b>A. APPLICATION IS MADE FOR 2.5% PREFERENCE FOR THE REASON CHECKED:</b></p> <p><b>( ) BIDDER IS AN INDIVIDUAL RESIDENT VENDOR AND HAS RESIDED CONTINUOUSLY IN WEST VIRGINIA FOR FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR</b></p> <p><b>( ) BIDDER IS A PARTNERSHIP, ASSOCIATION OR CORPORATION RESIDENT VENDOR AND HAS MAINTAINED ITS HEAD-QUARTERS OR PRINCIPAL PLACE OF BUSINESS CONTINUOUSLY I WEST VIRGINIA FOR FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR 80% OF THE OWNERSHIP INTEREST OF BIDDER IS HELD BY ANOTHER INDIVIDUAL, PARTNERSHIP, ASSOCIATION OR CORPORATION RESIDENT VENDOR WHO HAS MAINTAINED ITS HEADQUARTERS OR PRINCIPAL PLACE OF BUSINESS CONTINUOUSLY IN WEST VIRGINIA FOR FOUR (4)</b></p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
-----------	-----------	------

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
-------	------	-----------------------------------

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**4**

ADDRESS CORRESPONDENCE TO ATTENTION OF  
**JOHN ABBOTT**  
**304-558-2544**

VENDOR

RFQ COPY  
 TYPE NAME/ADDRESS HERE

SHIP TO

DATE PRINTED <b>05/20/2007</b>	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
-----------------------------------	---------------	----------	--------	---------------

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION; OR</p> <p>( ) BIDDER IS A CORPORATION NONRESIDENT VENDOR WHICH HAS AN AFFILIATE OR SUBSIDIARY WHICH EMPLOYS A MINIMUM OF ONE HUNDRED STATE RESIDENTS AND WHICH HAS MAINTAINED ITS HEADQUARTERS OR PRINCIPAL PLACE OF BUSINESS WITHIN WEST VIRGINIA CONTINUOUSLY FOR THE FOUR (4) YEARS IMMEDIATELY PRECEDING THE DATE OF THIS CERTIFICATION.</p> <p>B. APPLICATION IS MADE FOR 2.5% PREFERENCE FOR THE REASON CHECKED:</p> <p>( ) BIDDER IS A RESIDENT VENDOR WHO CERTIFIES THAT, DURING THE LIFE OF THE CONTRACT, ON AVERAGE AT LEAST 75% OF THE EMPLOYEES WORKING ON THE PROJECT BEING BID ARE RESIDENTS OF WEST VIRGINIA WHO HAVE RESIDED IN THE STATE CONTINUOUSLY FOR THE TWO YEARS IMMEDIATELY PRECEDING SUBMISSION OF THIS BID;</p> <p>OR</p> <p>( ) BIDDER IS A NONRESIDENT VENDOR EMPLOYING A MINIMUM OF ONE HUNDRED STATE RESIDENTS OR IS A NONRESIDENT VENDOR WITH AN AFFILIATE OR SUBSIDIARY WHICH MAINTAINS ITS HEADQUARTERS OR PRINCIPAL PLACE OF BUSINESS WITHIN WEST VIRGINIA EMPLOYING A MINIMUM OF ONE HUNDRED STATE RESIDENTS WHO CERTIFIES THAT, DURING THE LIFE OF THE CONTRACT, ON AVERAGE AT LEAST 75% OF THE EMPLOYEES OR BIDDERS' AFFILIATE'S OR SUBSIDIARY'S EMPLOYEES ARE RESIDENTS OF WEST VIRGINIA WHO HAVE RESIDED IN THE STATE CONTINUOUSLY FOR THE TWO YEARS IMMEDIATELY PRECEDING SUBMISSION OF THIS BID.</p> <p>BIDDER UNDERSTANDS IF THE SECRETARY OF TAX &amp; REVENUE DETERMINES THAT A BIDDER RECEIVING PREFERENCE HAS FAILED TO CONTINUE TO MEET THE REQUIREMENTS FOR SUCH</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**5**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**JOHN ABBOTT**  
**304-558-2544**

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/20/2007				

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>PREFERENCE, THE SECRETARY MAY ORDER THE DIRECTOR OF PURCHASING TO: (A) RESCIND THE CONTRACT OR PURCHASE ORDER ISSUED; OR (B) ASSESS A PENALTY AGAINST SUCH BIDDER IN AN AMOUNT NOT TO EXCEED 5% OF THE BID AMOUNT AND THAT SUCH PENALTY WILL BE PAID TO THE CONTRACTING AGENCY OR DEDUCTED FROM ANY UNPAID BALANCE ON THE CONTRACT OR PURCHASE ORDER.</p> <p>BY SUBMISSION OF THIS CERTIFICATE, BIDDER AGREES TO DISCLOSE ANY REASONABLY REQUESTED INFORMATION TO THE PURCHASING DIVISION AND AUTHORIZES THE DEPARTMENT OF TAX AND REVENUE TO DISCLOSE TO THE DIRECTOR OF PURCHASING APPROPRIATE INFORMATION VERIFYING THAT BIDDER HAS PAID THE REQUIRED BUSINESS TAXES, PROVIDED THAT SUCH INFORMATION DOES NOT CONTAIN THE AMOUNTS OF TAXES PAID NOR ANY OTHER INFORMATION DEEMED BY THE TAX COMMISSIONER TO BE CONFIDENTIAL.</p> <p>UNDER PENALTY OF LAW FOR FALSE SWEARING (WEST VIRGINIA CODE 61-5-3), BIDDER HEREBY CERTIFIES THAT THIS CERTIFICATE IS TRUE AND ACCURATE IN ALL RESPECTS; AND THAT IF A CONTRACT IS ISSUED TO BIDDER AND IF ANYTHING CONTAINED WITHIN THIS CERTIFICATE CHANGES DURING THE TERM OF THE CONTRACT, BIDDER WILL NOTIFY THE PURCHASING DIVISION IN WRITING IMMEDIATELY.</p> <p>BIDDER: -----</p> <p>DATE: -----</p> <p>SIGNED: -----</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
**PRI4024**

PAGE  
**6**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**JOHN ABBOTT**  
**304-558-2544**

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/20/2007				

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p style="text-align: center;">TITLE: -----</p> <p>* CHECK ANY COMBINATION OF PREFERENCE IN EITHER "A" OR "B", OR BOTH "A" AND "B" WHICH YOU ARE ENTITLED TO RECEIVE. YOU MAY REQUEST UP TO THE MAXIMUM 5% PREFERENCE FOR BOTH "A" AND "B". (REV. 12/00)</p> <p style="text-align: center;">NOTICE</p> <p>A SIGNED BID MUST BE SUBMITTED TO:</p> <p style="text-align: center;">DEPARTMENT OF ADMINISTRATION          PURCHASING DIVISION          BUILDING 15          2019 WASHINGTON STREET, EAST          CHARLESTON, WV 25305-0130</p> <p>THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:</p> <p>SEALED BID</p> <p>BUYER: JOHN ABBOTT-----</p> <p>RFQ. NO.: PRI4024-----</p> <p>BID OPENING DATE: 06/06/2007-----</p> <p>BID OPENING TIME: 1:30 PM-----</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
-----------	-----------	------

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
-------	------	-----------------------------------

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER:  
**PRI4024**

PAGE:  
**7**

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
**JOHN ABBOTT**  
**304-558-2544**

RFQ COPY  
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
05/20/2007				

BID OPENING DATE: **06/06/2007** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID: ----- CONTACT PERSON (PLEASE PRINT CLEARLY): -----  ***** THIS IS THE END OF RFQ PRI4024 ***** TOTAL: _____						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



**WV Correctional Industries  
PRI4024**

WV Correctional Industries (WVCI) hereby solicits bids for upholstery fabric for the upholstery of seating products manufactured in our seating shop.

1. WVCI will award multiple vendor contracts in order to have a wide range of selection and pricing.
2. In addition to the fabric patterns listed in this bid, Vendor shall include and bid additional popular fabrics for the government industry. Vendor shall submit fabric samples and specifications to WVCI.
3. Vendor shall provide digital images of the fabrics to WVCI for incorporation into the WVCI web site. For marketing purposes, Vendor shall supply 500 fabric sample cards to WVCI.
4. All components are specified as brand name or equal. These specifications are meant to establish a minimum quality acceptable within our anticipated price range. If a vendor is bidding an equal or alternate, they must submit fabric samples and specifications.
5. Vendor shall state any minimum order requirements.
6. All fabrics must pass the California 117 flammability tests.
9. All fabrics shall be shipped FOB Destination to:

WV Correctional Industries  
Pruntytown Correctional Center  
WV Highway 250 South  
Grafton, WV 26354

All deliveries must be made in a 28' or smaller trailer.

**OR**

WV Correctional Industries  
Denmar Correctional Center  
HC 64, Box 125  
Hillsboro, WV 24946

10. Price Adjustments: The vendor may request a price increase 30 days prior to the expiration of the contract, in writing, to the Director of Purchasing. The contract price may be adjusted in accordance with the change in the Producer Price Index (PPI) for Product Code WPU122203, Furniture and Household Durables, Furniture). Price adjustments will be made in accordance with the percentage change in the PPI. It is the vendor's responsibility to request this adjustment to price. Requests shall include a copy of the relevant index and must be within the allowed time period for adjustment. Any adjustments authorized as a result of the adjustment request will not be retroactive.

SPECIFICATIONS  
PATTERN SENECA

CONTENT:	58% Cotton, 42% Polyester
WEIGHT:	12.4 ounces per linear yard
STANDARD WIDTH:	54"
REPEAT:	H: 6 3/4" V: 2 1/4"
BACKING:	Acrylic
FLAME RESISTANCE:	California Technical Bulletin 117, Section E NFPA 260-1989 UFAC CLASS 1
PERFORMANCE CHARACTERISTICS:	
COLORFASTNESS TO CROCKING:	Dry: Class 4, minimum Wet: Class 3, minimum
COLORFASTNESS TO LIGHT: AATCC 16A-1974 OR AATCC 16E-1976	Class 4, minimum at 40 hours
BRUSH PILL ASTM:	3 TO 4 MINIMUM
BREAKING STRENGTH ASTM D3597-D1682-64(1975)	Exceeds 50 pounds Warp & Weft
TEAR RESISTANCE:	Exceeds 6 pounds
SEAM SLIPPAGE: ASTM D3597-D434-75	30+ pounds Warp & Fill
ABRASION: ASTM3597 WYZENBEEK METHOD	Passes 30,000 double rubs (Heavy duty) Cotton Duck (#10)
CLEANING CODE:	S- Clean with Solvent Only.

SPECIFICATIONS  
PATTERN **PRIVET**

CONTENT:	61%Acrylic, 39% Polyester
WEIGHT:	13.7 OUNCES
STANDARD WIDTH:	54"
REPEAT:	H:2 1/4" - V:2 1/2"
BACKING:	Acrylic
FLAME RESISTANCE:	California Technical Bulletin 117, Section E NFPA 260 1989 UFAC, Class 1
<b>PERFORMANCE CHARACTERISTICS:</b>	
COLORFASTNESS TO CROCKING:	Dry: Class 5, minimum Wet: Class 4, minimum
COLORFASTNESS TO LIGHT: AATCC 16A-1974 OR AATCC 16E-1976	Class 4, minimum at 40 hours
BREAKING STRENGTH ASTM D3597-D1682-64(1975)	Exceeds 50 pounds in Warp & Weft
TEAR RESISTANCE:	Exceeds 6 pounds
SEAM SLIPPAGE: ASTM D3597-D434-75	30+ pounds - Warp & Fill
ABRASION: ASTM3597 WYZENBEEK METHOD	Passes 30,000 double rubs (Heavy duty) Cotton Duck (#10)
CLEANING CODE:	S - Clean with Solvent only.

SPECIFICATIONS  
PATTERN **LAREDO**

CONTENT:	58% Cotton, 42% Polyester
WEIGHT:	12.4 OUNCES
STANDARD WIDTH:	54"
REPEAT:	H:6 3/4" - V: 13 1/2"
BACKING:	Acrylic
FLAME RESISTANCE:	California Technical Bulletin 117, Section E NFPA 260-1989 UFAC CLASS 1
<b>PERFORMANCE CHARACTERISTICS:</b>	
COLORFASTNESS TO CROCKING:	Dry: Class 4, minimum Wet: Class 3, minimum
COLORFASTNESS TO LIGHT: AATCC 16A-1974 OR AATCC 16E-1976	Class 4, minimum at 40 hours
BRUSH PILL ASTM:	3 TO 4 MINIMUM
BREAKING STRENGTH ASTM D3597-D1682-64(1975)	Exceeds 50 pounds Warp & Weft
TEAR RESISTANCE:	Exceeds 6 pounds
SEAM SLIPPAGE: ASTM D3597-D434-75	30+ pounds Warp & Fill
ABRASION: ASTM3597 WYZENBEEK METHOD	Passes 30,000 double rubs (Heavy duty) Cotton Duck (#10)
CLEANING CODE:	S- Clean with Solvent Only.

SPECIFICATIONS  
PATTERN FANTASY

<b>CONTENT:</b>	58%Cotton/42% Polyester
<b>STANDARD WIDTH:</b>	54"
<b>BACKING:</b>	Laytex
<b>WEIGHT:</b>	12.4 oz. per linear yard
<b>REPEAT:</b>	6-3/4" H - 13.5" V
<b>FLAME RESISTANCE:</b>	Meets requirements of the following fire codes:  California Technical Bulletin 117, Section E NFPA 260-1989 UFAC, Class 1
<b>SURFACE ABRASION:</b> ASTM-D-3597 (Wyzenbeek) Modified	30,000 Double Rubs (#10 Cotton Duck) Heavy Duty
<b>COLORFASTNESS:</b> AATCC-Test Method 8-1974	Wet: Class 3 - Minimum Dry: Class 4 - Minimum
<b>LIGHTFASTNESS:</b> AATCC Test Method 16E 1974	40 hours, Class 4
<b>BREAK STRENGTH:</b> ASTM D3597/D-1682-64 1975	Exceeds 50 lbs. In both Warp & Fill
<b>TEAR STRENGTH:</b>	Exceeds 6 lbs. In both Warp & Fill
<b>SEAM SLIPPAGE:</b> ASTM D4034	Warp -30.0+ Fill -30.0+
<b>BRUSH PILL:</b> ASTM D-3511	3-4 Minimum
<b>CLEANING CODE:</b>	S- Clean with solvent only.

SPECIFICATIONS  
PATTERNS ATHENA

CONTENT:	100% Polyolefin
STANDARD WIDTH:	54"
BACKING:	Acrylic
WEIGHT:	11.0 oz.per linear yard, backed
REPEAT:	N/A
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California Technical Bulletin 117, Section E CS-191-53, Class 1 BIFMA FF1-78 UFAC, Class 1 NFPA 260-1989 ASTM E84, Class A B.S. 5852 Part 1; 1979 Ignition Source O; Smouldering cigarette
SURFACE ABRASION: ASTM D-4157-Wyzenbeek	30,000 Double Rubs
COLORFASTNESS: AATCC-Test Method 8	Dry - Class.5- Wet - Class 5
LIGHTFASTNESS: AATCC Test Method 16E	60 Hours, Class 5
CLEANING CODE:	WS- For water based stains, use water based cleaning agents. For oil based stains, use a solvent cleaner.

SPECIFICATIONS  
PATTERN **EMPIRE**

<b>CONTENT:</b>	57% Acrylic/43% Polyester
<b>STANDARD WIDTH:</b>	54"
<b>BACKING:</b>	Acrylic
<b>WEIGHT:</b>	11.3 oz.
<b>REPEAT:</b>	3/4" H x 1-1/4" V
<b>FLAME RESISTANCE:</b>	Meets requirements of the following fire codes:  California Technical Bulletin 117, Section E NFPA 260-1989 UFAC, Class 1
<b>SURFACE ABRASION:</b> <b>ASTM-D-3597 (Wyzenbeek)</b> <b>Modified</b>	30,000 Double Rubs (#10 Cotton Duck) Heavy Duty
<b>COLORFASTNESS:</b> <b>AATCC-Test Method 8-1974</b>	Wet: Class 4- Dry: Class 5
<b>LIGHTFASTNESS:</b> <b>AATCC Test Method 16E</b> <b>1976</b>	40 hours, Class 4
<b>BREAK STRENGTH:</b> <b>ASTM D3597/D-1682-64 1975</b>	Exceeds 50 lbs. In both Warp & Fill
<b>TEAR STRENGTH:</b>	Exceed 6 lbs.
<b>SEAM SLIPPAGE:</b> <b>ASTM D434-75</b>	Warp - 30+ lbs. Fill - 30+ lbs.
<b>BRUSH PILL:</b> <b>ASTM 3511</b>	3-4 Minimum
<b>CLEANING CODE:</b>	S- Clean with solvent only.

**SPECIFICATIONS  
PATTERN GLAMOUR**

<b>CONTENT:</b>	58% Cotton/42% Polyester
<b>WEIGHT:</b>	12.40 Ounces per linear yard
<b>STANDARD WIDTH:</b>	54"
<b>REPEAT:</b>	H:2 1/4" - V:2 1/2"
<b>BACKING:</b>	Acrylic
<b>FLAME RESISTANCE:</b>	California Technical Bulletin 117, Section E NFPA 260 1989 UFAC, Class 1
<b>PERFORMANCE CHARACTERISTICS:</b>	
<b>COLORFASTNESS TO CROCKING:</b>	Dry: Class 4, minimum Wet: Class 3, minimum
<b>COLORFASTNESS TO LIGHT:</b> AATCC 16A-1974 OR AATCC 16E-1976	Class 4, minimum at 40 hours
<b>BREAKING STRENGTH</b> ASTM D3597-D1682-64(1975)	Exceeds 50 pounds in Warp & Weft
<b>TEAR RESISTANCE:</b>	Exceeds 6 pounds
<b>SEAM SLIPPAGE:</b> ASTM D3597-D434-75	30+ pounds - Warp & Fill
<b>ABRASION:</b> ASTM3597 WYZENBEEK METHOD	Passes 30,000 double rubs (Heavy duty) Cotton Duck (#10)
<b>CLEANING CODE:</b>	S - Clean with Solvent only.



SPECIFICATIONS  
PATTERN **JAMBOREE**

CONTENT:	58%Cotton/42% Polyester
STANDARD WIDTH:	54"
BACKING:	Acrylic
WEIGHT:	12.0 ounces per linear yard, backed
REPEAT:	H: 7/8" V: 1-7/8"
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California Technical Bulletin 117, Section E NFPA 260-1989 UFAC, Class 1
SURFACE ABRASION: ASTM-D-3597 (Wyzenbeek) Modified	30,000 Double Rubs (#10 Cotton Duck) Heavy Duty
COLORFASTNESS: AATCC-Test Method 8-1974	Wet: Class 3- Dry: Class 4
LIGHTFASTNESS: AATCC Test Method 16E 1976	40 hours, Class 4
BREAK STRENGTH: ASTM D3597/D-1682-64 1975	Exceeds 50 lbs. In both Warp & Fill
TEAR STRENGTH:	Exceed 6 lbs.
SEAM SLIPPAGE: ASTM D434-75	Warp - 30+ lbs. Fill - 30+ lbs.
BRUSH PILL: ASTM 3511	3-4 MINIMUM
CLEANING CODE:	S- Clean with solvent only.

SPECIFICATIONS  
PATTERN HEWITT

CONTENT:	86% Polyolefin/10% Acrylic/4% Polyester
STANDARD WIDTH:	54"
WEIGHT:	17 ounces per linear yard
BACKING:	Acrylic
REPEAT:	N/A
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California 117, Sec. E CS 191-53, Class 1 BIFMA X5.7-1991 NFPA-260-1989 UFAC Class 1 B.S. 5852 Part 1: Ignition Source O; Smouldering cigarette
SURFACE ABRASION: ASTM D-4157 Wyzenbeek	80,000 double rubs
COLORFASTNESS TO LIGHT: AATCC 16 E	Class 5- 60 hours
COLORFASTNESS TO CROCKING: AATCC Test Method 8	Dry - Class 5 Minimum Wet - Class 5 Minimum
SEAM SLIPPAGE: ASTM-D-4034	Warp: 74 lbs. Fill: 70 lbs.
CLEANING CODE:	WS-For water based stains us water based cleaning agents. For oil based stains use solvent cleaner.

SPECIFICATIONS  
PATTERN **SHERPA/SHIRE**

CONTENT:	100% Marquesa Lana (Polyolefin)
STANDARD WIDTH:	54"
WEIGHT:	16.0 oz.per linear yard, backed
BACKING:	Acrylic
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California Technical Bulletin 117, Section E CS-191-53, Class 1 BIFMA FF1-78 ASTM E84, Class A B.S. 5852 Part 1: 1979 Ignition Source 0; Smouldering Cigarette NFPA 260-1989 UFAC, Class 1
CLEANING CODE:	"WS" for water based stains use water based cleaning agents. For oil based stains use solvent cleaner.
ULTRAVIOLET STABILITY	Minimal degradation at 350 hours AATCC 16 - Xenon Fade-Ometer
BREAK STRENGTH: ASTM-D-1682 (Grab Method)	Warp - 300 lbs., Fill - 300 lbs.
TEAR RESISTANCE: ASTM-D-2262 (Tongue Method)	Warp - 60 lbs., Fill - 63 lbs.
SURFACE ABRASION: ASTM D-4157 -Wyzenbeek	Can exceed 250,000 double rubs
RESISTANCE TO SEAM SLIPPAGE ASTM-D-4034	Warp - 50 lbs. , Fill - 54 lbs.
COLORFASTNESS TO LIGHT AATCC Test Method 16-1981	400 Hours, Class 5 Exceeds 200 hours
COLORFASTNESS TO CROCKING AATCC-Test Method 8-1981	Dry - Class 4.5 - Wet - Class 5

SPECIFICATIONS  
PATTERN **HYDE**

CONTENT:	100% Vinyl
STANDARD WIDTH:	54"
ROLL SIZE:	40 Yards
WEIGHT:	29.25 (+ 1.5) ounces per linear yard
GAUGE:	45 Nominal
BACKING:	High Loft Knit (100% Polyester)
FLAME RESISTANCE:	Meets requirements of the following fire code:  California Technical Bulletin 117, Section E FMVSS-302 UFAC, Class 1 BIFMA, Class A
SURFACE ABRASION: Wyzenbeek #8 cotton duck	No significant wear after 100,000 double rubs
MILDEW RESISTANT	
CARE AND CLEANING:	Regular cleaning (dirt and grime): Use a mild soap and water, then fresh water rinse. Cleaning frequently depends on use. As a minimum, please clean weekly. Stubborn stains (crayon, eye shadow, chocolate, blood): Wipe using a soft cloth or soft brush. Use detergent cleaners such as Formula 409 or Fantastik. Rinse with clean water and wipe dry.

**SPECIFICATIONS  
PATTERN TRIO**

CONTENT:	100% Polyolefin
STANDARD WIDTH:	54"
WEIGHT:	8.5 ounces per linear yard ( $\pm$ 1 ounce)
BACKING:	Acrylic
REPEAT:	N/A
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California 117, Sec. E CS 191-53, Class 1 BIFMA X5.7-1991 NFPA-260-1989, Class 1 UFAC Class 1
SURFACE ABRASION: ASTM D-4157 Wyzenbeek	60,000 double rubs
COLORFASTNESS TO LIGHT: AATCC 16 E	Class 5- 60 hours
COLORFASTNESS TO CROCKING: AATCC Test Method 8	Dry - Class 4.5 Minimum Wet - Class 5 Minimum
PILLING: ASTM-D-3511	Class 5
SEAM SLIPPAGE: ASTM-D-4034	Warp: 86 lbs. Fill: 102 lbs.
CLEANING CODE:	WS-For water based stains us water based cleaning agents. For oil based stains use solvent cleaner.

SPECIFICATIONS  
PATTERN NEOCHROME III

ROLL WIDTH:	54 inches
ROLL SIZE:	30 yards
WEIGHT:	37.7 ounces per linear yard
TOP COAT FINISH:	BeautyGard
ABRASION RESISTANCE: Standard 191A, Method 3504	250,000 Double Rubs (Wyzenbeek)
FLAMMABILITY CODES:	<p>California Bulletin 117-Sec. E          BIFMA (Screen Test, Sec. 4.6.1.1)          Port Authority of New York/New Jersey          MVSS-302          Boston Fire Code (BFD IX-1)          CID A-A-2905-A (Federal Standard 191A, test          method 5903 (replaces CCC-A-680a)          Upholstery Requirements of FAR 25.853</p> <p>Superior Tear Strength          -20 degrees F cold crack          Static dissipative slip finish          Resistant to scuffs and scrapes          Produced from environmentally friendly          materials and processes          Non-migratory plasticizers to retain a          soft and supple feel          Made in the U.S.A.          This product contains an agent to protect          against bacterial and fungal microorganisms.</p>
CLEANING INSTRUCTIONS:	<p><b>Light Soiling</b> - 10% household liquid dish soap in          warm water, apply with a soft, damp cloth.  <b>Heavy Soiling</b> - Dampen a soft white cloth with          Lighter fluid (naptha) and rub gently. Rinse with          a water-dampened cloth.  <b>Difficult stains</b> - Dampen a white cloth with a          solution of household bleach (sodium hypochlorite)          10% bleach, 90% water. Rub gently. Rinse with          A water-dampened cloth to remove bleach          concentration.</p>

SPECIFICATIONS  
PATTERN **WHISPER**

ROLL WIDTH:	54 inches
ROLL SIZE:	30 yards
WEIGHT:	27 ozs.
BACKING:	Soft Hi-Loft 2
ABRASION RESISTANCE: Federal Standard 191-A(5304)	100,000 Cycles (Wyzenbeek)/CFFA-1
WEAR RESISTANCE:	Superior - 100,000 cycles
LIGHT FASTNESS:	Passes 1,000 Hours
FLAMMABILITY CODES:	California Bulletin 117-Sec. E BIFMA Class A UFAC Class 1 Motor Vehicle Safety Standard 302

- \* UV STABILIZED PIGMENTS
- \* MILDEW RESISTANT
- \* 4 COMPONENT URETHANE TOPCOATING SYSTEM

CLEANING INSTRUCTIONS:

**Light Soiling** - 10% household liquid dishsoap in warm water, apply with a soft, damp cloth.  
**Heavy Soiling** - One to one (1:1) Fantastik/water or 409/water. Clean with a soft white damp cloth.  
 Rub gently; rinse with a water-dampened cloth.  
**Difficult stains** - Household bleach (10% bleach/90% water). Apply with a dampened soft white cloth. Rub gently. Rinse with a dampened cloth to remove bleach concentration.

USES:

Contract Interiors . Office . Restaurant .  
 Hotel/Motel . Nursing Home/Hospital . Marine/  
 RV/Auto . Residential

**SPECIFICATIONS  
PATTERN BANDEAU**

<b>CONTENT:</b>	70% Polyester/30% Cotton
<b>STANDARD WIDTH:</b>	54"
<b>WEIGHT:</b>	11 oz.
<b>FINISH:</b>	Crypton
<b>REPEAT:</b>	1.375" H x 0" V
<b>FLAME RESISTANCE:</b>	California Technical Bulletin 117, Section E; UFAC Class 1 CS-191-53, Class 1 BIFMA X5.7-1991 NFPA 260-1989, Class 1 B.S. 5852 Parr 1: 1979 Ignition Source 0, smouldering cigarette
<b>SURFACE ABRASION: ASTM-D-4157 (Wyzenbeek)</b>	50,000 Double Rubs
<b>COLORFASTNESS: AATCC 8</b>	Wet - Class 5 Dry - Class 5
<b>LIGHTFASTNESS: AATCC 16E</b>	5 Hours, Class 40
<b>SEAM SLIPPAGE ASTM-D-4034</b>	Warp: 54.6 lbs Fill: 66.7 lbs.
<b>CLEANING CODE:</b>	WS-For water based stains use water based cleaning agent. For oil based stains use solvent cleaner.



SPECIFICATIONS  
PATTERN DAKTARI

<b>CONTENT:</b>	100% Polyester
<b>STANDARD WIDTH:</b>	54"
<b>WEIGHT:</b>	10 ounces per linear yard
<b>FINISH:</b>	Crypton
<b>REPEAT:</b>	H: 2 3/8" V: 4 7/8"
<b>FLAME RESISTANCE:</b>	California 117, Sec. E, Class 1 NFPA 260-1989, Class1 UFAC Class 1 CS-191-53, Class1 BIFMA X5.7-1991 B.S. 5852 Part 1:1979
<b>SURFACE ABRASION: ASTM D-4157</b>	50,000 double rubs Wyzenbeek
<b>COLORFASTNESS TO LIGHT: AATCC-TM 16</b>	Class 5, 40 hours
<b>COLORFASTNESS TO CROCKING: AATCC-8</b>	Wet: Class 5 Dry: Class 5
<b>SEAM SLIPPAGE: ASTM-03</b>	Warp: 46 lbs. Fill: 106 lbs.

**CLEANING CODE:** Studies show that nothing works better on Crypton than a powdered enzyme detergent, such as Cheer, or Tide, mixed with water. Be sure to rinse with a clean cloth and clear water. The fabric must be rinsed thoroughly, leaving no soap residue. Because Crypton fabrics were designed for easy maintenance, the use of solvent-based cleaners is unnecessary. In fact, some heavy-duty solvents can damage the textile's fibers. To be safe, we recommend that you do not use solvents in the general maintenance of Crypton fabrics. Diluted bleach (4 parts water to 1 part bleach) can be used to disinfect Crypton, but should be removed quickly and completely to avoid fading. Bleach that is not completely removed will eventually fade the fabric.

SPECIFICATIONS  
PATTERN **DOMAINE**

<b>CONTENT:</b>	100% Polyester
<b>STANDARD WIDTH:</b>	54"
<b>WEIGHT:</b>	12.4 ounces per linear yard
<b>FINISH:</b>	Crypton
<b>REPEAT:</b>	H: 7" V: 7 3/8"
<b>FLAME RESISTANCE:</b>	California 117, Sec. E, Class 1 NFPA 260-1989, Class1 UFAC Class 1 CS-191-53, Class1 BIFMA X5.7-1991 B.S. 5852 Part 1:1979
<b>SURFACE ABRASION: ASTM D-4157</b>	50,000 double rubs Wyzenbeek
<b>COLORFASTNESS TO LIGHT: AATCC-TM 16</b>	Class 5, 40 hours
<b>COLORFASTNESS TO CROCKING: AATCC-8</b>	Wet: Class 5 Dry: Class 5
<b>SEAM SLIPPAGE: ASTM-4034</b>	Warp: 75 lbs. Fill: 86 lbs.

**CLEANING CODE:** Studies show that nothing works better on Crypton than a powdered enzyme detergent, such as Cheer, or Tide, mixed with water. Be sure to rinse with a clean cloth and clear water. The fabric must be rinsed thoroughly, leaving no soap residue. Because Crypton fabrics were designed for easy maintenance, the use of solvent-based cleaners is unnecessary. In fact, some heavy-duty solvents can damage the textile's fibers. To be safe, we recommend that you do not use solvents in the general maintenance of Crypton fabrics. Diluted bleach (4 parts water to 1 part bleach) can be used to disinfect Crypton, but should be removed quickly and completely to avoid fading. Bleach that is not completely removed will eventually fade the fabric.

SPECIFICATIONS  
PATTERN STRYKER

CONTENT:	38% Cotton/62% Polyester
WEIGHT:	11.6 ( $\pm$ 1) ounces per linear yard
STANDARD WIDTH:	54"
FINISH:	Crypton
REPEAT:	H: 1/4"    V: 3/16"
FLAME RESISTANCE:	California Technical Bulletin 117, Section E NFPA 260-1989, Class 1 UFAC, CLASS 1 BIFMA X5.7-1991 CS-191-53, Class 1 B.S. 5852 Part I: 1979 Ignition Source; Smouldering cigarette
PERFORMANCE CHARACTERISTICS:	
COLORFASTNESS TO CROCKING: AATCC-8	Dry: Class 5 Wet: Class 5
COLORFASTNESS TO LIGHT: AATCC 16A-1974 OR AATCC 16E	Class 5, minimum at 40 hours
BREAK STRENGTH: ASTM-D-5034	Warp: 320.3 lbs.    Fill: 478.2 lbs.
TEAR STRENGTH: ASTM-D-2262	Warp: 23.5 lbs.    Fill: 19.5 lbs.
SEAM SLIPPAGE: ASTM -D-4034	Warp: 44 lbs.    Fill: 66 lbs.
ABRASION: ASTM-D-4157 Wyzenbeek	50,000 double rubs Wire Screen
PILLING: ASTM-D-3511	Class 5
SHRINKAGE:	This test is not performed by the manufacturer.
PICKS AND ENDS PER INCH:	Warp (ends) 173    Fill (picks) 47
CLEANING CODE:	WS-For water-based stains, use water-based clean- ing agent. For oil-based stains, use solvent cleaner.

SPECIFICATIONS  
PATTERN SUEDEGARD

P27

CONTENT:	100% Polyester with backing
STANDARD WIDTH:	54"
WEIGHT:	15 ounces per linear yard
BACKING:	Crypton
REPEAT:	N/A
FLAME RESISTANCE:	Meets requirements of the following fire codes:  California 117, Sec. E, Class 1 NFPA 260 UFAC Class 1
SURFACE ABRASION: ASTM D-4157	150,000 double rubs #10 Cotton duck
COLORFASTNESS TO CROCKING: AATCC 8	Wet: Class 4
TENSILE STRENGTH: ASTM-D-5034	Warp: 120.0 lbs. Fill: 229.3 lbs.
TEAR STRENGTH: ASTM-D-2262 (Tongue Test)	Warp: 8.5 lbs. Fill 6.8 lbs.
SEAM SLIPPAGE: ASTM-D-4034	Warp: 112 lbs. Fill: 165.3 lbs.
CLEANING CODE:	Studies show that nothing works better on Crypton than a powdered enzyme detergent, such as Cheer, or Tide, mixed with water. Be sure to rinse with a clean cloth and clear water. The fabric must be rinsed thoroughly, leaving no soap residue. Because Crypton fabrics were designed for easy maintenance, the use of solvent-based cleaners is unnecessary. In fact, some heavy-duty solvents can damage the textile's fibers. To be safe, we recommend that you do not use solvents in the general maintenance of Crypton fabrics. Diluted bleach (or 4 parts water to 1 part bleach) can be used to disinfect Crypton, but should be removed quickly and completely to avoid fading. Bleach that is not completely removed will eventually fade the fabric.



# SPECIFICATIONS



PATTERN 54"	FIBER CONTENT	WEIGHT/LIN. YD.	PATTERN REPEAT	WEAVE	SURFACE ABRASION Wyzenbeek	TENSILE STRENGTH	LIGHT-FASTNESS	FLAMMABILITY	CLEANING CODE
Armour & Armour II	100% BASF Nylon	14.6 oz.	None	N/A	Exceeds 2,000,000 Double Rubs	Warp 419 lbf. Fill 367 lbf.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
Caressa	Vinyl	28 oz.	None	N/A	Exceeds 100,000 Double Rubs	Warp 83.7 lbf. Fill 55.1 lbf.	Exceeds 500 Hrs.	See Notes	WS
Cosmos *	100% Trace Polyolefin	10.49 oz.	H .875" V .875"	85 ends 52 picks	Exceeds 60,000 Double Rubs	Warp 100 lbf. Fill 100 lbf.	Exceeds 80 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
Duraweave FR	100% Marquesa Lana	17.5 oz.	None	13 ends 13 picks	Exceeds 140,000 Double Rubs	Warp 270 lbf. Fill 270 lbf.	Exceeds 200 Hrs.	See Notes	WS
Foundation *	100% Polyester	13.75 oz.	None	44 ends 46 picks	Exceeds 600,000 Double Rubs	Warp 368 lbf. Fill 339 lbf.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260 ASTM E84	WS
Rubicon *	54% Olefin 26% Nylon 20% Polyester	15.4 oz.	H .8" V 1.7"	36 ends 32 picks	Exceeds 50,000 Double Rubs	Warp 93 lbf. Fill 346 lbf.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
Taj *	50% Polyester 50% Olefin	9.6 oz.	H .5" V .625"	60 ends 64 picks	Exceeds 55,000 Double Rubs	Warp 225 lbf. Fill 200 lbf.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W

\* = Treated with Teflon® fabric protector by Dupont.

### CARESSA - FLAMMABILITY

California Technical Bulletin #117, Section E	(191-53)	Meets Requirements
UFAC Class I	Class I	Meets Requirements
BIFMA Class 1	Class I	Meets Requirements
NFPA 260	Class I	Meets Requirements
NFPA 701 Life Safety Code (small scale)	Class I	Meets Requirements
MVSS 302	Class I	Meets Requirements
New York & New Jersey Port Authority Code	Class I	Meets Requirements
Boston Fire Dept. BFD IX-1	Class I	Meets Requirements

### DURAWEAWE - FLAMMABILITY


State of California 191-53 Technical Bulletin 117, Section E	Class I	Meets Requirements
UFAC	Class I	Meets Requirements
BIFMA	Class I	Meets Requirements
NFPA 260	Class I	Meets Requirements
Tunnel Test - ASTM E 84	Class A	Meets Requirements
NFPA 701 - Large Scale		Meets Requirements
Port Authority of NY/NJ - FTM 5903		Meets Requirements
Smoke Density - ASTM E 662		Passes NFPA Requirements

Please keep this card intact. Individual samples available.  
Color matching: Mayer will always attempt to ship a satisfactory commercial match.  
Because of industry standard dye lot variation, colors may not match exactly.

©1998 Mayer-Paetz, Inc.

**BASF**

WEST VIRGINIA PRISON INDUSTRIES



1-800-525-5381




A Division of Mayer-Paetz Inc.

(800) 428-4415  
Fax (317) 267-2629

# Value Coordinates Collection

PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
CAPE	54% Nylon 46% Polyester	9 oz.	None	Teflon	Exceeds 174,000 Double Rubs	Warp 170 Lbs. Fill 200 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
CARAT	52% Nylon 48% Polyester	9 oz.	.75" H .85" V	Teflon	Exceeds 159,000 Double Rubs	Warp 187 Lbs. Fill 98 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
CELEBRATION	52% Nylon 48% Polyester	9 oz.	8" H 5" V	Teflon	Exceeds 108,000 Double Rubs	Warp 170 Lbs. Fill 200 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
CHARLESTON	52% Polyester 48% Acrylic	10.14 oz.	6.75" H 11.75" V	Teflon	Exceeds 50,000 Double Rubs	Warp 134 Lbs. Fill 144 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
CLARITY	52% Olefin 48% Polyester	7.8 oz.	.5625" H .6878" V	Teflon	Exceeds 80,000 Double Rubs	Warp 120 Lbs. Fill 180 Lbs.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
CLEMATIS	60% Polyester 40% Olefin	10.3 oz.	7.5" H 15" V Non Matching	Teflon	Exceeds 100,000 Double Rubs	Warp 222 Lbs. Fill 225 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
COMPANION	52% Nylon 48% Polyester	9 oz.	2" H 2" V	Teflon	Exceeds 159,000 Double Rubs	Warp 187 Lbs. Fill 98 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
COURTYARD	54% Nylon 46% Polyester	8 oz.	.5" H .5" V	Teflon	Exceeds 95,000 Double Rubs	Warp 120 Lbs. Fill 140 Lbs.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
CROSTOWN	52% Nylon 48% Polyester	9 oz.	0" H .5" V	Teflon	Exceeds 162,000 Double Rubs	Warp 170 Lbs. Fill 200 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
Shown Railroaded									
FOUNDATION	100% Polyester	13.5 oz.	None	Teflon	Exceeds 1,000,000 Double Rubs	Warp 368 Lbs. Fill 339 Lbs.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS

- **W: Water-Based Cleaner** - Spot clean, using the foam only from a water based cleaning agent such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Vacuum when dry. Pretest a small area before proceeding.
- **WS: Water/Solvent Cleaner** - Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.
- **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.
- All patterns should be upholstered as shown on the card.



Fabric "UP THE ROLL" or  
"REGULAR" Position



Fabric "RAILROADED" or  
"TOP TO SELVAGE" Position

Phones (800) 428-4415  
(317) 267-2626  
Order Fax (317) 267-2629  
Fax (877) 7SAMPLE  
www.mayerfabrics.com



A Division of Mayer-Paetz Inc.

# Ambiance Collection




PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
<b>FOLIO</b> Shown Railroaded	62% Cotton 38% Polyester	13.43 oz.	6.814" H 6.76" V	Teflon	Exceeds 51,000 Double Rubs	Warp 278.5 Lbs. Fill 112.57 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>IN MOTION</b> Shown Railroaded	58% Cotton 42% Polyester	12.15 oz.	12.39" H 6.76" V	Teflon	Exceeds 51,000 Double Rubs	Warp 245.5 Lbs. Fill 91.6 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>KEYNOTE</b> Shown Railroaded	62% Cotton 38% Polyester	13.59 oz.	.625" H 1.12" V	Teflon	Exceeds 51,000 Double Rubs	Warp 282 Lbs. Fill 128 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>LADDER</b> Shown Railroaded	58% Cotton 42% Polyester	12.15 oz.	.31" H .56" V	Teflon	Exceeds 57,000 Double Rubs	Warp 275 Lbs. Fill 105 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>MAYA</b>	84% Polyester 16% Olefin	10.74 oz.	Non-Matching Texture	Teflon	Exceeds 50,000 Double Rubs	Warp 210 Lbs. Fill 214 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>NEBULA</b>	100% Terratex Polyester 100% Recycled	17.5 oz.	Non-Matching Texture	NA	Exceeds 45,000 Double Rubs	Warp 450 Lbs. Fill 200 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260 ASTM D E84	WS
<b>PARK AVENUE</b> Shown Railroaded	58% Cotton 42% Polyester	12.15 oz.	1.3" H .28" V	Teflon	Exceeds 39,000 Double Rubs	Warp 278 Lbs. Fill 101 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>PISCES</b>	100% Terratex Polyester 100% Recycled	12.8 oz.	14.5" H 6.75" V Non-Matching Texture	NA	Exceeds 100,000 Double Rubs	Warp 280 Lbs. Fill 230 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260 ASTM D E84	WS
<b>PLAZA</b>	89% Trace Olefin 11% Polyester	17.16 oz.	Non-Matching Chenille	Teflon	Exceeds 30,000 Double Rubs	Warp 100 Lbs. Fill 60 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
<b>RAGTIME</b> Shown Railroaded	58% Cotton 42% Polyester	12.15 oz.	1.52" H .25" V	Teflon	Exceeds 51,000 Double Rubs	Warp 276 Lbs. Fill 105 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS


• **WS: Water/Solvent Cleaner** - Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.

• **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.

• All patterns should be upholstered as shown on the card.




Fabric "UP THE ROLL" or "REGULAR" Position



Fabric "RAILROADED" or "TOP TO SELVAGE" Position


Phones (800) 428-4415  
(317) 267-2626  
Order Fax (317) 267-2629  
Fax (877) 7SAMPLE  
www.mayerfabrics.com

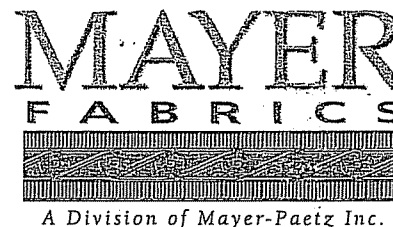


# Prestige Collection

PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
COMPASS	52% Polyester 48% Polyester	11 oz.	1.15" H 1.15" V	Teflon	Exceeds 39,000 Double Rubs	Warp 109.5 Lbs. Fill 108 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	S
CONCENSUS	58% Polyester 42% Polypropylene	11.5 oz.	None	Teflon	Exceeds 75,000 Double Rubs	Warp 157 Lbs. Fill 161 Lbs.	Exceeds 60 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
GIOVANNI Shown Railroaded	75% Polyester 25% Rayon	13 oz.	.5" H .5" V	Teflon	Exceeds 50,000 Double Rubs	Warp 285 Lbs. Fill 196 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
LATITUDE	44% Polyester 36% Rayon 18% Wool 2% Nylon	11.67 oz.	6.75" H 12" V	NA	Exceeds 50,000 Double Rubs	Warp 235 Lbs. Fill 162 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
MASTERTEX	86% Polyester 9% Wool 5% Nylon	12.4 oz.	None	Teflon	Exceeds 40,000 Double Rubs	Warp 126 Lbs. Fill 127 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
PAGEANT	52% Polyester 48% Rayon	11 oz.	6.75" H 7.82" V	Teflon	Exceeds 45,000 Double Rubs	Warp 102 Lbs. Fill 112 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	S
PINPOINT FR	57% Polyester 43% Trevira Polyester	11.68 oz.	None	None	Exceeds 60,000 Double Rubs	Warp 153 Lbs. Fill 112 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	S
PINSTRIPES	50% Polyester 50% Cotton	11.21 oz.	.3125" H 0" V	Teflon	Exceeds 50,000 Double Rubs	Warp 114 Lbs. Fill 66 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	S
RENNIE	40% Polyester 33% Olefin 16% Wool 11% Nylon	9 oz.	13.5" H 14.5" V	Teflon	Exceeds 100,000 Double Rubs	Warp 162 Lbs. Fill 151 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
TRAVERSE	52% Polyester 48% Rayon	10.76 oz.	1.12" H 1.12" V	Teflon	Exceeds 57,000 Double Rubs	Warp 109.5 Lbs. Fill 108 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	S

- **S: Solvent Cleaner** - Spot clean, using a mild water free solvent or dry cleaning product. Clean only in a well ventilated room and avoid any product containing carbon tetrachloride or other toxic materials. Pretest a small area before proceeding.
- **WS: Water/Solvent Cleaner** - Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.
- **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.
- All patterns should be upholstered as shown on the card.




Fabric "UP THE ROLL" or  
"REGULAR" Position



Fabric "RAILROADED" or  
"TOP TO SELVAGE" Position

Phones (800) 428-4415  
(317) 267-2626  
Order Fax (317) 267-2629  
Fax (877) 7SAMPLE  
www.mayerfabrics.com

# MAYER FABRICS



A Division of Mayer-Paetz Inc.




# Mainstream Collection




P32

PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
CHELSEA	54% Polyester 27% Acrylic 19% Olefin	11 oz.	6.75" H 6.75" V	Teflon	Exceeds 50,000 Double Rubs	Warp 178 Lbs. Fill 98 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
DECADE CREPE	100% Infinity Nylon	11.2 oz.	None	NA	Exceeds 765,000 Double Rubs	Warp 210 Lbs. Fill 160 Lbs.	Exceeds 200 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
DECADE ORION	100% Infinity Nylon	12.3 oz.	.5" H .5" V	NA	Exceeds 765,000 Double Rubs	Warp 200 Lbs. Fill 200 Lbs.	Exceeds 200 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
DIAMONIQUE	65% Nylon 35% Olefin	10 oz.	.5" H .75" V	Teflon	Exceeds 100,000 Double Rubs	Warp 331 Lbs. Fill 166 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260 ASTM D E84	WS
INTERLOCHEN Shown Railroaded	60% Polyester 40% Trace Olefin	10.5 oz.	2" H .75" V	Teflon	Exceeds 100,000 Double Rubs	Warp 91 Lbs. Fill 100 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
JIGSAW	53% Acrylic 47% Polyester	12.41 oz.	6.75" H 13.5" V	Teflon	Exceeds 60,000 Double Rubs	Warp 180 Lbs. Fill 118 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS
MONSOON FR	100% FR Polypropylene	11 oz.	13.5" H 5" V	Fire Retardant	Exceeds 63,000 Double Rubs	Warp 112 Lbs. Fill 161 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
PERSPECTIVE FR	100% FR Polypropylene	11.45 oz.	1.69" H 3.10" V	Fire Retardant	Exceeds 50,000 Double Rubs	Warp 157 Lbs. Fill 161 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
WOOLTEX	40% Polyester 33% Olefin 16% Wool 11% Nylon	9.3 oz.	None	Teflon	Exceeds 100,000 Double Rubs	Warp 147 Lbs. Fill 153 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	WS

- **W: Water-Based Cleaner** - Spot clean, using the foam only from a water based cleaning agent such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Vacuum when dry. Pretest a small area before proceeding.
- **WS: Water/Solvent Cleaner** - Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.
- **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.
- All patterns should be upholstered as shown on the card.



Fabric "UP THE ROLL" or "REGULAR" Position



Fabric "RAILROADED" or "TOP TO SELVAGE" Position

Phones (800) 428-4415  
(317) 267-2626  
Order Fax (317) 267-2629  
Fax (877) 7SAMPLE  
www.mayerfabrics.com



A Division of Mayer-Paetz Inc.





## TECHNICAL INFORMATION

Contents: 100% Recycled Polyester  
 Width: 54"  
 Weight: 13.9 oz./linear yard

Backing: None  
 Finish: Teflon  
 Cleanability: WS

Repeat: None  
 Directional: No  
 Railroaded: No

## PERFORMANCE

PERFORMANCE	Test Method	Results
Surface Abrasion: Heavy Duty 	ASTM-D-4157 Wyzenbeek Test	Exceeds 1,00,000 Double Rubs
Breaking Strength: 	ASTM-D-5034	Exceeds Warp 337 lbf/Fill 324 lbf
Colorfastness to Crocking: 	AATCC-8	Dry: Passes Class 4/Wet: Passes Class 4
Colorfastness to Light: 	AATCC-16A	Exceeds 60 Hours

\*Class in the colorfastness requirements is based on a numerical scale of 5 for negligible or no color transfer to 1 for very severe color change or color transfer.

## FLAMMABILITY

California Technical Bulletin #117, Section E  
 NFPA 260  
 ASTM E84  
 BIFMA

Passes  
 Passes  
 Passes  
 Passes

May comply with California Technical Bulletin 133 when combined with appropriate components.

## CLEANING INFORMATION

WS: Water/Solvent Cleaner – Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well-ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.

## TEN YEAR WARRANTY

FOUNDATION10 is covered by a 10-year limited performance warranty from the date of installation, when used for seating applications. FOUNDATION10 is warranted against wear through (i.e. the complete deterioration of the fabric's structure in a particular area) if properly installed and maintained. This warranty does not cover damage due to abuse, misuse, vandalism, inadequate padding or abrasion from other seating components or furniture, use of improper cleaning agents or methods and use subsequent to ownership by the original purchaser. Mayer Fabrics can provide a copy of the manufacturer's warranty.

If FOUNDATION10 fails to perform during to 10-year warranty period, the affected area of fabric will be repaired or replaced including labor and materials upon written request of the customer.

Except as expressly provided herein, Mayer Fabrics makes no representations or warranties, express or implied, including, without limitation, any warranty of merchantability or fitness of its products for any particular purpose, and hereby disclaim the same.

## CUSTOM CAPABILITIES


Patterns in the Mayer line can be custom colored. Please contact Mayer Fabrics for more information.

Please keep this card intact. Individual samples available.

Color matching: Mayer will always attempt to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.



TERRATEX® is a registered trademark of Interface Fabrics Group and designates fabrics that are made from 100% recycled or compostable materials using increasingly sustainable manufacturing practices to produce a high quality product that is recyclable at the end of its useful life.



**MAYERFABRICS**

# TECHNICAL INFORMATION

Pattern 54"	Fiber Content	Weight/ Linear Yd.	Pattern Repeat	Finish	Surface Abrasion Wyzenbeek ☒	Tensile ★ Strength	Light- Fastness ☼	Flammability Code	Cleaning Code
DECADE CREPE10	100% Infinity Nylon Acrylic Backing	11.2 oz.	None	None	Exceeds 765,000 Double Rubs	Warp 210 lbs. Fill 160 lbs.	200 hrs.	Cal. 117-E BIFMA NFPA 260	WS
DECADE ORION10	100% Infinity Nylon Acrylic Backing	12.3 oz.	.5" H .5" V	None	Exceeds 765,000 Double Rubs	Warp 200 lbs. Fill 200 lbs.	200 hrs.	Cal. 117-E BIFMA NFPA 260	WS

☒ WS: Water/Solvent Cleaner – Spot clean, with a mild solvent, an upholstery shampoo, or the foam from a mild detergent. When using a solvent or dry cleaning product, follow instructions carefully and clean only in a well ventilated room. Avoid any product that contains carbon tetrachloride or other toxic materials. With either method, pretest a small area before proceeding.

As a compatible component this fabric may meet the requirements of California Technical Bulletin 133.

INFINITY NYLON™ is covered by a 10 year limited performance warranty from the date of installation, when used for seating applications. Infinity Nylon seating upholstery fabric is warranted against wear through (i.e. the complete deterioration of the fabric's structure in a particular area) and the loss of colorfastness (i.e. the excessive loss of color due to exposure to light) if properly installed and maintained. This warranty does not cover damage due to abuse, misuse or use of improper cleaning agents or methods.


If Infinity Nylon seating upholstery fabrics fail to perform as warranted, the affected area of fabric will be repaired or replaced upon the written request of the customer.

Except as expressly provided herein, Mayer Fabrics makes no representations or warranties, express or implied, including, without limitation, any warranty of merchantability or fitness of its products for any particular purpose, and hereby disclaims the same.

Patterns in the Mayer upholstery line can be custom colored. Please consult your Mayer representative for more information.

Please keep the card intact. Individual samples available.

Color matching: Mayer will always attempt to ship a satisfactory commercial match. Because of industry standard dye lot variation, colors may not match exactly.



**MAYERFABRICS**




# Woven Crypton II Collection




PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
BOARDWALK Shown Railroaded	52% Polyester 48% Acrylic	15.71 oz.	1.75" H 1.25" V	Woven Crypton	Exceeds 60,000 Double Rubs	Warp 213 Lbs. Fill 126 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
CHECKERS	100% Polyester	15.5 oz.	.375" H .375" V	Woven Crypton	Exceeds 60,000 Double Rubs	Warp 259 Lbs. Fill 190 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
GEM	100% Polyester	15.5 oz.	1" H 1" V	Woven Crypton	Exceeds 60,000 Double Rubs	Warp 259 Lbs. Fill 190 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
LEGEND	100% Polyester	15.5 oz.	.75" H .75" V	Woven Crypton	Exceeds 60,000 Double Rubs	Warp 259 Lbs. Fill 190 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
METRO	100% Polyester	12 oz.	None	Woven Crypton	Exceeds 150,000 Double Rubs	Warp 284.8 Lbs. Fill 196.4 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
PARK PLACE	52% Polyester 48% Acrylic	15.24 oz.	6.75" H 13.5" V Random Match	Woven Crypton	Exceeds 60,000 Double Rubs	Warp 223 Lbs. Fill 139 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
SUEDE	100% Polyester	15 oz.	None	Woven Crypton	Exceeds 150,000 Double Rubs	Warp 128 Lbs. Fill 229 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
TRACERY	43% Polyester 56% Cotton	15.5 oz.	4.5" H 4.687" V	Woven Crypton	Exceeds 50,000 Double Rubs	Warp 233 Lbs. Fill 68 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W


- **Cleaning** - Generally, stains are removed with plain water and powdered enzyme detergent. Upholstery foam shampoo, water based cleaning products and germicidal detergents can be used. Be sure to remove all residue from cleaning products with clean water. Do not use solvent based cleaners or dry cleaning products.
- **W: Water-Based Cleaner** - Spot clean, using the foam only from a water based cleaning agent such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Vacuum when dry. Pretest a small area before proceeding.
- **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.
- All patterns should be upholstered as shown on the card.



Fabric "UP THE ROLL" or "REGULAR" Position



Fabric "RAILROADED" or "TOP TO SELVAGE" Position



**CRYPTON**  
SUPER FABRICS

Phones (800) 428-4415  
(317) 267-2626  
Order Fax (317) 267-2629  
Fax (877) 7SAMPLE  
www.mayerfabrics.com



A Division of Mayer-Paetz Inc.

# Woven Crypton Collection



CRAFTED WITH PRIDE  
IN U.S.A. P36


PATTERN 54"	FIBER CONTENT	WEIGHT/ LIN. YD.	PATTERN REPEAT	FINISH	SURFACE ABRASION WYZENBEEK	TENSILE STRENGTH	LIGHT- FASTNESS	FLAMMABILITY	CLEANING CODE
CADENCE Shown Railroaded	100% Polyester Coated	13.58 oz.	7" H .25" V	Crypton	Exceeds 70,000 Double Rubs	Warp 100 Lbs. Fill 100 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
COBBLESTONE	100% Polyester Coated	16.16 oz.	None	Crypton	Exceeds 60,000 Double Rubs	Warp 233 Lbs. Fill 257 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
ECHO	100% Polyester Coated	16.05 oz.	.875" H .875" V	Crypton	Exceeds 200,000 Double Rubs	Warp 129 Lbs. Fill 256 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
GINGER	100% Polyester Coated	16.05 oz.	.875" H .875" V	Crypton	Exceeds 200,000 Double Rubs	Warp 129 Lbs. Fill 256 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
GROVE Shown Railroaded	100% Polyester Coated	13.34 oz.	18" H 6.5" V	Crypton	Exceeds 90,000 Double Rubs	Warp 100 Lbs. Fill 100 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
METRIC	100% Polyester Coated	17.11 oz.	.5" H .25" V	Crypton	Exceeds 100,000 Double Rubs	Warp 100 Lbs. Fill 100 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
MONET	100% Polyester Coated	20.22 oz.	7.1875" H 6.75" V	Crypton	Exceeds 60,000 Double Rubs	Warp 251 Lbs. Fill 251 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
TIDE WATER	100% Polyester Coated	17.07 oz.	13.5" H 13.625" V	Crypton	Exceeds 100,000 Double Rubs	Warp 100 Lbs. Fill 100 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W
TUSCANY	100% Polyester Coated	16 oz.	7.125" H 13.75" V	Crypton	Exceeds 54,000 Double Rubs	Warp 143 Lbs. Fill 147 Lbs.	Exceeds 40 Hrs.	Cal. 117-E UFAC BIFMA NFPA 260	W

• **Cleaning** - Generally, stains are removed with plain water and powdered enzyme detergent. Upholstery foam shampoo, water based cleaning products and germicidal detergents can be used. Be sure to remove all residue from cleaning products with clean water. Do not use solvent based cleaners or dry cleaning products.


• **W: Water-Based Cleaner** - Spot clean, using the foam only from a water based cleaning agent such as a mild detergent or non-solvent upholstery shampoo product. Apply foam with a soft brush in a circular motion. Vacuum when dry. Pretest a small area before proceeding.

• **Railroaded:** This feature allows reduction of seams and enables smoother furniture tailoring.


• All patterns should be upholstered as shown on the card.



Fabric "UP THE ROLL" or "REGULAR" Position



Fabric "RAILROADED" or "TOP TO SELVAGE" Position



CRYPTON<sup>®</sup>  
SUPER FABRICS

Phones (800) 428-4415

(317) 267-2626

Order Fax (317) 267-2629

Fax (877) 7SAMPLE

www.mayerfabrics.com

**MAYER**  
**FABRICS**

A Division of Mayer-Paetz Inc.

Pattern Specifications	EMPIRE	FANTASY	GLAMOUR	LAREDO	PRIVET	SENECA
<b>WIDTH</b>	54"	54"	54"	54"	54"	54"
<b>REPEAT</b>	H-¾", V-1¼"	H-6¾", V-13½"	no repeat	H-6¾", V-13½"	H-2¼", V-2½"	H-6¾", V-2¼"
<b>WEIGHT</b>	11.3 oz/yd lin	12.4 oz/yd lin	12.4 oz/yd lin	12.4 oz/yd lin	13.7 oz/yd lin	12.4 oz/yd lin

**WEAR TESTS**

<b>BREAK STRENGTH:</b>	Exceeds 50 lbs	Exceeds 50 lbs	Exceeds 50 lbs	Exceeds 50 lbs	Exceeds 50 lbs	Exceeds 50 lbs
<b>TEAR RESISTANCE:</b>	Exceeds 6 lbs	Exceeds 6 lbs	Exceeds 6 lbs	Exceeds 6 lbs	Exceeds 6 lbs	Exceeds 6 lbs
<b>SEAM SLIPPAGE:</b>	Warp - 30+ lbs Fill - 30+ lbs	Warp - 30+ lbs Fill - 30+ lbs	Warp - 30+ lbs Fill - 30+ lbs	Warp - 30+ lbs Fill - 30+ lbs	Warp - 30+ lbs Fill - 30+ lbs	Warp - 30+ lbs Fill - 30+ lbs
<b>A SURFACE ABRASION:</b>	30,000 double rubs	30,000 double rubs	30,000 double rubs	30,000 double rubs	30,000 double rubs	30,000 double rubs
<b>★ COLORFASTNESS TO LIGHT:</b>	40 hours Class 4 min.	40 hours Class 4 min.	40 hours Class 4 min.	40 hours Class 4 min.	40 hours Class 4 min.	40 hours Class 4 min.
<b>☘ COLORFASTNESS TO CROCKING:</b>	Wet: Class 4 min. Dry: Class 5 min.	Wet: Class 3 min. Dry: Class 4 min.	Wet: Class 3 min. Dry: Class 4 min.	Wet: Class 3 min. Dry: Class 4 min.	Wet: Class 4 min. Dry: Class 5 min.	Wet: Class 3 min. Dry: Class 4 min.
<b>CLEANING CODE:</b>	S - Clean with Solvent Only					

- FLAME RETARDANCY:**
- California 117, Section E
  - NFPA 260-1989
  - UFAC Class 1



**SCOTCHGARD**  
Protector

**EXPLANATION OF ACT ICONS FOR UPHOLSTERY**

**FIRE RETARDANCY**

Flammability testing determined as fabric's resistance to burning.

- ★** PASSES  
California 117

**COLORFASTNESS TO WET & DRY CROCKING**

Colorfastness to wet & dry crocking refers to the rubbing off of color from the fabric onto clothing, hands or other materials and can occur under wet or dry conditions.

- ☘** PASSES  
AATCC 8-1974 Dry Crocking, Class 4 minimum; Wet Crocking, Class 3 minimum

**COLORFASTNESS TO LIGHT**

Colorfastness to light is the degree to which fabric will retain its color when exposed to light.

- ★** PASSES  
AATCC 16A-1974 or AATCC 16E-1976; Class 4 minimum at 40 hours  
NOTE: Class 4 minimum at 60 hours is recommended for direct sunlight exposure situations.

**PHYSICAL PROPERTIES**


3 physical property tests include: brush pill test to determine a fabric's pilling. Breaking/tensile strength is the ability of a fabric to withstand tension without breaking or tearing. Seam slippage is the pulling apart of fabrics at the seams.

- ★** PASSES  
Brush Pill ASTM D3511, 3-4 minimum  
Breaking Strength ASTM D3597-D1682-64 (1975) 50 lbs. minimum in warp & weft  
Seam Slippage ASTM D3597-D434-75 25 lbs. minimum in warp & weft

**ABRASION**

Abrasion is the ability of a fabric to withstand damage from wear and rubbing. There is a general contract specification as well as a heavy duty specification.


- PASSES  
**General Contract** ASTM 3597 modified (#10 cotton duck); 15,000 double rubs Wyzenbeek Method  
**Heavy Duty** ASTM 3597 modified (#10 cotton duck); 30,000 double rubs Wyzenbeek Method or ASTM D4966 (with 21 oz. weight); 40,000 rubs Martindale Method



**MAYERFABRICS**  
**BIG KISS ALL SEASONS**

**CG122**

321 South Alabama Street Indianapolis, IN 46204 T:317.267.2626 F:317.267.2629 Since 1897

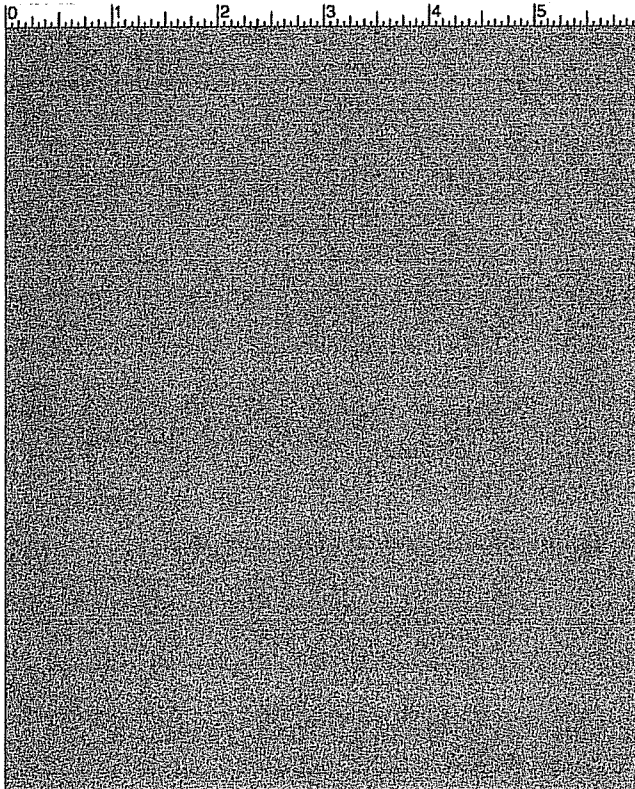

**Notes:**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**CATEGORY**  
Seating

**CONTENT**  
100% Vinyl Surface

**WIDTH**  
54"

**PROPERTIES**



**FINISH**  
PreFixx

**DIRECTIONAL**  
No

**REPEAT**  
None

**BACKING**  
Poly/Cotton Knit

**ABRASION RESISTANCE**  
Exceeds 1,000,000 Double Rubs

**CLEANING**  
WS: Spot clean with water-based cleaning agent, mild solvent or foam. Follow cleaner instructions carefully. Avoid products with carbon tetra- chloride or other toxic agents. Professional cleaning is recommended.

**FLAME RESISTANCE**  
Passes California Technical Bulletin #117, Section E; BIFMA; NFPA 260; Federal Spec. CID A-A-2950; City of Boston Code; NFPA 701; FAA25.853(a); NY & NJ Port Authority Code; FMVSS 302; May comply with California Technical Bulletin 133 when combined with appropriate components.

**WV Correctional Industries  
PRI4024**

**Douglass Fabrics or equal:**

Pattern Name	Estimated Annual Quantity (Yards)	Price Per Yard	Extended Price
Athena	35		
Bandeau	20		
Daktari	20		
Empire	20		
Fantasy	20		
Glamour	40		
Hewitt	35		
Hyde	300		
Jamboree	35		
Laredo	20		
Neochrome III	35		
Privet	50		
Seneca	20		
Sherpa	500		
Shire	225		
Stryker	20		
Suedegard	20		
Trio	35		
Whisper	35		
<b>Total Bid</b>			

**Mayer Fabrics or equal:**

Pattern Name	Estimated Annual Quantity (Yards)	Price Per Yard	Extended Price
All Seasons	100		
Cape	20		
Chelsea	25		
Clematis	15		



Contrex	75		
Cosmos	20		
Courtyard	10		
Crosstown	10		
Decade Orion	10		
Echo	75		
Foundation 10	25		
Gem	10		
Giovanni	10		
Grove	10		
In Motion	15		
Interlochen	45		
Legend	20		
Mastertex	5		
Monet	30		
Monsoon	15		
Nebula	10		
Pageant	5		
Pinstripe	5		
Pisces	5		
Taj	125		
Tidewater	5		
Tuscany	10		
Wooltex	10		
<b>Total Bid</b>			<input type="text"/>

**Grand Total Bid**

STATE OF WEST VIRGINIA  
Purchasing Division

**PURCHASING AFFIDAVIT**

**West Virginia Code §5A-3-10a states:** No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owned is an amount greater than one thousand dollars in the aggregate

**DEFINITIONS:**

“Debt” means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers’ compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

“Debtor” means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions. “Political subdivision” means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. “Related party” means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

**EXCEPTION:** The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers’ compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

**LICENSING:** Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State’s Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

**CONFIDENTIALITY:** The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency’s policies, procedures and rules. Vendors should visit [www.state.wv.us/admin/purchase/privacy](http://www.state.wv.us/admin/purchase/privacy) for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and are in compliance with the requirements as stated.

Vendor’s Name: \_\_\_\_\_

Authorized Signature: \_\_\_\_\_ Date: \_\_\_\_\_