

>₩ZOOR

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

\$ H P

Ţ

RFQ NUMBER

DEFK8082

1	- P	AGE	2333
		•	1

ADDRESS	CORRE	SPONDE	NCE	TOATI

JOHN ABBOTT 304-558-2544

RFQ COPY TYPE NAME/ADDRESS HERE

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRIN	DATE PRINTED TERMS OF SALE		SHIP VIA			F.O.B.			FREIGHTTERMS		
09/18/									·····		
BID OPENING DATE		10/18/	2007			BID	OPE	NING	TIME	01	:30PM
LINE	QU	ANTITY	UOP	CAT NO.	ITEM NU	JMBER		UNE	TPRICE		AMOUNT
0001	ROOF	1 REPLACE	LS MENT		910-66						
	TO RE	MOVE TH	E OLD	ROOF	L LABOR A SYSTEM A ICATIONS	AND INST					
	MANDA	TORY ON	-SITE	PRE-	20-1 RICH CON	HWOOD NA DRY - 10 B AVENUE HWOOD, W TACT: MI (304) 56	0 4 , R V 2 CHA	/07; IVERS 6261 EL BE	1:30 P		
	WITHIN	E TO PR N 120 C CEIVED. FED PUR	ALEND UNL	AR DA ESS O	IS CONTRA YS AFTER THERWISE R WILL BE	THE NOT SPECIFI	ICE ED,	TO P THE	ROCEED FULLY		
	RIGHT NOTICE SUPPL	TO CANCE TO THE ED ARE THE SPEC	CEL TI E VEND OF A	HIS C DOR I N INF	ECTOR OF ONTRACT I F THE MAT ERIOR QUA S OF THE	MMEDIAT ERIALS LITY OR	ELY OR DO	UPON WORKM Not	WRITT ANSHIP CONFOR	EN	
	WAGE R	RATES:	гне с		CTOR OR S				ALL PA	Y	
SIGNATURE				SEE REV	ERSE SIDE FOR T	ERMS AND CON	NDITION	vs	In	ATE	
TITLE		· · · · · · · · · · · · · · · · · · ·	.1			, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,					
HILE		FEII	N		****	• • • • • • • • • • • • • • • • • • • •		ADD	RESS CHAN	IGES 1	TO BE NOTED ABOVE

GENERAL TERMS & CONDITIONS REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

- 1. Awards will be made in the best interest of the State of West Virginia.
- 2. The State may accept or reject in part, or in whole, any bid.
- 3. All quotations are governed by the West Virginia Code and the Legislative Rules of the Purchasing Division.
- 4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125.00 registration fee.
- 5. All services performed or goods delivered under State Purchase Orders/Contracts are to be continued for the term of the Purchase Order/Contract, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
- 6. Payment may only be made after the delivery and acceptance of goods or services
- 7. Interest may be paid for late payment in accordance with the West Virginia Code.
- 8. Vendor preference will be granted upon written request in accordance with the West Virginia Code.
- 9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes
- 10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
- 11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
- 12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
- **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, this contract is automatically null and void, and is terminated without further order.
- HIPAA Business Associate Addendum The West Viginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (http://www.state.wv.us/admin/purchase/vrc/hipaa.htm) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Covered Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.

INSTRUCTIONS TO BIDDERS

- 1. Use the quotation forms provided by the Purchasing Division.
- 2. SPECIFICATIONS: Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as EQUAL to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications
- 3. Complete all sections of the quotation form
- 4. Unit prices shall prevail in cases of discrepancy.
- All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
- 6. BID SUBMISSION: All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications.

SIGNED BID TO:

Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130



VEZDOR

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

DEFK8082

PAGE

JOHN ABBOTT 304-558-2544

ADDRESS CORRESPONDENCE TO ATTENTION OF

oH-p

Ţ

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRIN	ren -	TER	MS OF SAL	F	SHIP	(ΙΔ		F.O.B		FREIGHT TERMS
09/18/					Y!!!!		<i>a</i> (2002/00/00/00			
BID OPENING DATE:		0/18/	2007			RID	OPEN	ING TIME	0.1	:30PM
LINE	QUANT		UOP	CAT	ITEM NU		<u> </u>	UNIT PRICE		AMOUNT
				NO.	TI LIW NO.	"OC"		VIII 1102		AWOON .
	ľ	1						MINIMUM	WAGE	
					OR NICHOL				-	
					21-5A, ET IS PROJEC		CPRE	VAILING		
	WAGE KA	IES A	PPLY	IU IH	IS PRUJEC	1 3				
	ARBITRA	TION:	ANY	REFE	RENCES MA	DE TO A	RBII	RATION OR		
1	l .				DUE (EXCE					
	REQUIRE	D BY	STATE	LAW)	CONTAINE	D IN TH	IS C	ONTRACT		
	OR IN A	NY AM	ERICA	N INS	TITUTE OF	ARCHIT	ECTS	DOCUMENT	s	
	PERTAIN	ING T	O THI	S CON	TRACT ARE	HEREBY	DEL	ETED.		
	HODKEDO		DE 1104	TT011	VENDOD	TO DEOU				
1	Ī	1				-) TO PROVI F SUCCESS	1	
	A CERIL	LICAI	E FRU	m wuk	KEKS' CUM	PENSAII	I NO	.r SULLESS	F U L .	
	ALL OF	THE I	TEMS	CHECK	FD BFLOW	WTII BE	AR	REQUIREMEN	r I	
i .	OF THIS] `` '`		`	
]			
1							1	URNISH PR	00F	
1					LIABILITY		1			
l I			1				1	ECIFIED I	N	
					MINIMUM 250,000.	AMUUNI	0F 1	NSURANCE		
	CUVERAG	C KEU	NIKED	12 3	250,000.					
	() BU	TIDER	S RTS	K TNS	URANCE:	SUCCESS	FUI	VENDOR SHA	Δ1 I	
			ŀ	1				INSURANCE		
	AN AMOU	NT EQ	JAL T	0 100	% OF THE	AMOUNT	OF T	HE CONTRA	СТ. [
								L AMOUNT (
								NIA, SHALI		
			Ŀ	1				E SUCCESSI	1	
								IND AND LAI E CONTRAC		
								TIFIED CH		
		1		ľ			1	ISHED BY	- 1	
1		1			·		1	SINESS IN		
	STATE O	F WES	T VIR	GINȚA	. A LETT	ER OF C	REDI	T SUBMITT	ED	
				SEE DE	ERSE SIDE FOR T	PMS AND COM	NOTION	4		
SIGNATURE						TELEPHONE	wer (. 1941.)		DATE	
TITLE		FEI	N				 -		L	
11125		rei	14					ADDRESS CHA	INGES 1	TO BE NOTED ABOVE



NOCE

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

DEFK8082

PAGE

_

・ 人りつしにぐぐ かか	うしにくしへいいにんか	CE. TO ATTEMPT	ALC: COL
カロひつこうう いし	JUEOL ON THE IAI	CE TO ATTENTIO	JIN UT.

JOHN ABBOTT 304-558-2544

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRINTED T	ERMS OF SALE SHIP	VIA	F.O.B.	FREIGHT TERMS
09/18/2007				
BID OPENING DATE: 10/18	3/2007	BID OP	PENING TIME (1:30PM
LINE QUANTITY	UOP CAT ITEM NO.	JMBER	UNIT PRICE	AMOUNT
ONLY BE ALL OR BUSINESS	A PERFORMANCE AND L.OWED FOR PROJECTS U CHECKS ARE NOT ACC PERFORMANCE BOND,	NDER \$100, ECPTABLE I	000. PERSONAL N LIEU OF THE	
COVERING TH	NANCE BOND: A TWO IE RODFING SYSTEM WI SFUL VENDOR.			ID
REV. 11/00				
EXHIBIT 7		,		
DOMESTIC AL Projects	UMINUM, GLASS & STE	EL IN PUBL	IC WORKS	
SEQ., EVERY ALTERATION, PUBLIC WORK IN THE CASE MORE THAN \$ STEEL ARE R GLASS, OR S IN ADDITION FOR USE AT DOMESTIC AL THE PRODUCT POUNDS OF S	CE WITH WEST VIRGING CONTRACT FOR CONSTRACT FOR CONSTRACT FOR CONSTRACT FOR CONSTRACT OR STEEL ONLY, WHERE MORE EQUIRED, THE STATE WAS OF MACHINERY THE SITE OF PUBLIC WINUM, GLASS OR STEEL ARE USED IN PUBLIC WALLES OF TEEL ARE USED IN PUBLIC WALLES OF THE STATE OF PUBLIC WALLES OF STEEL ARE USED IN PUBLIC WALLES OF THE STATE OF PUBLIC WALLES OF STEEL ARE USED IN PUBLIC WALLES OF THE STATE OF PUBLIC WALLES OF STEEL ARE USED IN PUBLIC WALLES OF THE STATE OF	RUCTION, RIF OR MAINTER THE COSTET THAN 10, THE COSTED IN THE CORE EQUIPMENT OR EQUIPMENT OR LESS BLIC WORKS	ECONSTRUCTION, ENANCE OF N \$50,000 AND, T OF STEEL IS 000 POUNDS OF T ONLY ALUMINU UNITED STATES MENT PURCHASED L BE MADE OF S THE COST OF THAN 10,000 PROJECTS.	M
TO BE UNREA	LY IF THE COST OF DOSONABLE. SUCH COST HIGHER THAN THE BID	IS UNREAS	ONABLE IF IT I	1
1	SEE REVERSE SIDE FOR 1	ERMS AND CONDITION	ONS	
SIGNATURE		TELEPHONE	DATE	
TITLE	FEIN		ADDRESS CHANGE	S TO BE NOTED ABOVE



VENDOR

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER **DEFK8082**

ADDRESS CORRESPONDENCE TO ATTENTION OF:

304-558-2544

JOHN ABBOTT

T O

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRINT	red	TE	RMS OF SAI	LŒ.		SHIP VIA		FOB.	FREIGHTTERMS	
09/18/	2007						.,			
BID OPENING DATE:		10/18/	/2007	4			BID (DPENING TIME	01:30PM	
LINE	QUAI	NTITY	UOP	CAT NO.	ITE	M NUMBER		UNIT PRICE	AMOUNT	
	PRODUC Labor Depart	TS TO SURPLI MENT (F DOME	BE SU JS ARE DF LAB STIC	PPLIE A", A OR, F PRODU	D OR P S DEFI OREIGN CTS AR	RODUCE NED BY PRODU E 30%	D IN THE CTS OR MC	LASS OR STEEL A "SUBSTANTIA UNITED STATES MAY BE SUPPLIE DRE HIGHER IN	AL S ED	
	PROVIS DETERM ALUMIN THAN T OFFICE REDUCT	IONS, INES TO THE LOW MAY FOR ION IN	THE S HAT T ASS O SEST B EQUES THE MUST	PENDI HERE R STE ID DO T, IN LOWES INDIC	NG OFF EXISTS EL THA MESTIC WRITI T BID ATE IN	ICER OF A BID TO SERVING A SUBJECT OF SUBJEC	F THE FOR EASON CTS, REEVA CH DO BID	NDER THE ABOVE E SPENDING UNI LIKE FOREIGN NABLE AND LOWE THE SPENDING ALUATION AND DMESTIC PRODUC IF THEY ARE	IT ER	
	REV. 3									
	NOTICE PROJEC			CE &	ACKNOW	LEDGEM	ENT C	OF CONSTRUCTION	ИС	
ľ	TO ABI	DE BY	THE F	OLLOW	ING SC	HEDULE	IN I	HALL BE REQUIR ISSUING AGENCIES:	RED	
	AND A I AND SPI AND LI: PURCHA:	LIST O ECIFIO ST SHA SING D COPY	F ALL ATION LL BE IVISI OF TH	PART S FOR FORW ON. E ADD T IS	IES TH THE P ARDED THE AR ENDUM ISSUED	AT HAV ROJECT TO THE CHITEC TO THE	E PRO . TH BUYE T/ENG STAT	ARE THE ADDENT DOURED DRAWING HE ADDENDUM IR IN THE STATE SINEER SHALL AFE AGENCY FOR	GS FE	
SIGNATURE				SEE REV	ERSE SIDE I	FOR TERMS.			DATE	
						(ELEP)			DATE	
TITLE		F	ΪN					ADDRESS CHA	NGES TO BE NOTED ABOVE	



VENDOR

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia Department of Administration Quotation Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for

RFQ NUMBER DEFK8082 PAGE 5

ADDRESS CORRESPONDENCE TO ATTENTION OF:

JOHN ABBOTT 304-558-2544

T

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

341-6368

DATE PRINTED TERMS OF SALE SHIP VIA F.O.B. FREIGHT TERMS 09/18/2007 BID OPENING DATE: 10/18/2007 BID OPENING TIME 01:30PM CAT. LINE QUANTITY LICP ITEM NUMBER UNIT PRICE AMOUNT THE BUYER SHALL SEND THE ADDENDUM TO ALL INTERESTED PARTIES AND, IF NECESSARY, EXTEND THE BID ANY ADDENDUM SHOULD BE RECEIVED BY THE OPENING DATE. BUYER WITHIN FOURTEEN (14) DAYS PRIOR TO THE BID OPENING DATE. ALL ADDENDA SHOULD BE FORMALLY ACKNOWLEDGED BY ALL (3) SUBMITTED BIDDERS AND ΤO THE STATE PURCHASING DIVISION. THE SAME RULES AND REGULATIONS THAT APPLY TO THE ORIGINAL BIDDING DOCUMENT SHALL ALSO APPLY TO AN ADDENDUM DOCUMENT. THE ONLY EXCEPTION MAY BE FOR AN ADDENDUM THAT IS ISSUED FOR THE SOLE PURPOSE OF CHANGING A BID OPENING TIME AND/OR DATE. REV. 11/96 EXHIBIT 10 ADDENDUM ACKNOWLEDGEMENT I HEREBY ACKNOWLEDGE RECEIPT OF THE FOLLOWING CHECKED ADDENDUM(S) AND HAVE MADE THE NECESSARY REVISIONS TO MY PROPOSAL, PLANS AND/OR SPECIFICATION, ETC. ADDENDUM NOS .: ND. 1 NO. 2 NO. 3 NO. 4 SEE REVERSE SIDE FOR TERMS AND CONDITIONS SIGNATURE TELEPHONE DATE TITLE ADDRESS CHANGES TO BE NOTED ABOVE



MODOR

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER DEFK8082 PAGE

JOHN ABBOTT 304-558-2544

ADDRESS CORRESPONDENCE TO ATTENTION OF:

Ţ

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRI	NTED	TEF	RMS OF SAL	\$	SHIP	ЛΔ	F.O.B	Imagenta de la composición de la compo	FREIGHT TERMS
on the contraction of the contra	/2007		ino or one			4.0	<u> </u>	***************************************	THEIGHT TERMO
ID OPENING DAT		10/10/	2007			DID	ODENTHO T	THE	7.004
DO LINICIDAT		10/18/	2007	nar	500000000000000000000000000000000000000	<u> </u>	OPENING T	IME U	1:30PM
LINE	QUA	INTITY	UOP	CAT NO.	ITEM NUI	VBER.	UNIT P	RICE	AMOUNT
				<u> </u>					
	NO. 5								
	10. 5	•		* * * * *			"		
	I UNDE	ERSTAND	THAT	FAIL	URE TO CO	NFIRM T	HE RECEIP	T OF THE	=
	1		E I		1		OF THE B		
	VENDOR	R MUST	CLEAR	LY UN	DERSTAND	THAT AN	Y VERBAL		
	,		1 .				ADE DURIN	G ANY	
	ORAL D	DISCUSS	ION H	ELD B	ETWEEN VE	NDOR'S	REPRESENT	ATIVES	
	AND AN	Y STAT	E PER	SONNE	L IS NOT	BINDING	. ONLY T	HE	
	INFORM	NOITAN	ISSUE	D IN	WRITING A	ND ADDE	D TO THE		
	SPECIF	ICATIO	NS BY	AN O	FFICIAL A	DDENDUM	IS BINDI	NG.	
						sI	GNATURE		
				• • • • •		co	MPANY		
	• • • • • •	• • • • •	• • • •	• • • • •		DA	TE		
	DEV 1	1 /0/							
	REV. 1	.1/96							
			CU	NTDAC	TORS LICE	MCE			
			CU	NIKAC	TORS LICE	NOE			,
	WEST V	TRETNT	Δ STA	TE CO	DF 21-11-	2 REOUT	RES THAT	Δ1Ι	
							G WORK IN		
							INIA CONT		
							THE CONTRA		
	LICENS		l b				RS LICENS		
	1						IVISION O		
							CHARLEST		
	25305.	1			4) 558-78	- 1			
	WEST V	IRGINI	A STA	TE CO	DE 21-11-	11 REQU	IRES ANY		
	PROSPE	CTIVE	BIDDE	R TO	INCLUDE T	HE CONT	RACTORS		
					/FDAC AIRE 505 7		DELONG		
NATURE				SEC HE	ERSE SIDE FOR TO	ERMS AND CON	IDITIONS	DATE	
						, wetti 110116			
LE		FE	IN				ADDRE	SS CHANGES	TO BE NOTED ABOVE



State of West Virginia Department of Administration **Purchasing Division** 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

T O

DEFK8082

PAGE

ADDRESS CORRESPONDENCE TO ATTENTION OF:

JOHN ABBOTT 304-558-2544

VEZDOR

RFO COPY TYPE NAME/ADDRESS HERE

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
09/18/2007				
BID OPENING DATE: 10	/18/2007	BID	OPENING TIME 01	:30PM
LINE QUANTITY	Y UOP CAT	ITEM NUMBER	UNIT PRICE	AMOUNT
LICENSE	NUMBER ON THEI	R BID.		
	O COMPLETE:			
	ORS NAME:		• • • • • • • • • • • • • • • • • • •	
	ORS LICENSE NO		• • • • • • • • • • • • • • • • • • • •	
COPY OF		WILL BE REQUIRED ORS LICENSE PRIO ACT		
	АР	PLICABLE LAW		
AND REGUI The "Requ	LATIONS, AND T UEST FOR QUOTA IS THE SOLE A	E CODE, PURCHASI HE INFORMATION PI TION" ISSUED BY UTHORITY GOVERNI	THE PURCHASING	
ANY OTHER	R SOURCE, VERB S THE INFORMAT	ED IN SPECIFICAT AL OR WRITTEN, WI ION PROVIDED FROM PARAGRAPH IS VO	TICH CONTRADICTS THE SOURCES AS	
FOR BANKE	RUPTCY PROTECT	ENT THE VENDOR/CO ION, THIS CONTRAC ND IS TERMINATED	CT IS AUTOMATI-	
REV. 1/20	005			
	NO	TICE		
SIGNATURE	SEE RE	/ERSE SIDE FOR TERMS AND CON	DITIONS	
TITLE	Franci			дани
IIIE	FEIN		ADDRESS CHANGES	TO BE NOTED ABOVE



MODSEA

RFQ COPY

TYPE NAME/ADDRESS HERE

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for **Quotation**

DEFK8082

PAGE

8

JOHN ABBOTT 304-558-2544

ADDRESS CORRESPONDENCE TO ATTENTION OF:

SHIP PTO DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB.	FREIGHT TERMS
09/18/2007	<u>-</u>			
BID OPENING DATE: 10/	18/2007	BID	OPENING TIME O	1:30PM
LINE QUANTITY	UOP CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
DEPA PURC BUIL	BID MUST BE S RTMENT OF ADM HASING DIVISI DING 15 WASHINGTON S	INISTRATION ON		
CHAR THE BID S THE ENVEL	LESTON, WV 2 HOULD CONTAIN OPE OR THE BI	=		
SEALED BI	D	JOHN ABBOTT		-
REQ. NO.:		DEFK8082		
BID OPENI	NG DATE:	10/18/2007		-
BID OPENI	NG TIME:	1:30 PM		-
	OVIDE A FAX N T YOU REGARDI	UMBER IN CASE IT NG YOUR BID:	IS NECESSARY	:
	INT OR TYPE N G THIS QUOTE:	AME OF PERSON TO		
		VERSE SIDE FOR TESTIC AND SOL	INTONO.	
SIGNATURE	SEERE	VERSE SIDE FOR TERMS AND CON TELEPHONE	DATE	
TITLE	FEIN		ADDRESS CHANGE	S TO BE NOTED ABOVE



VENDOR

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

5 H-p

Ţ

RFQ NUMBER **DEFK8082** PAGE

9

ADDRESS	CORRESP	ONDENC	ETOA	TENT!	ON OF:

JOHN ABBOTT 304-558-2544

RFQ COPY TYPE NAME/ADDRESS HERE

DIV ENGINEERING & FACILITIES NATIONAL GUARD ARMORY 20-B AVENUE, RIVERSIDE ADD.

RICHWOOD, WV 26261

DATE PRINTED		TERMS OF SALE			SHIP VIA			F.O.B.		FREIGHT TERMS	
09/18/200											
BID OPENING DATE:]	LO/18/	2007		L		BID	OPE	NING TIME O	1:30PM	
LINE	QUAN	TITY	UOP	CAT NO.		ITEM NUM	BER		UNIT PRICE	AMOUNT	
***	** *	THIS	IS 1	HE EN	D OF	RFQ	DEFK8	082	***** TOTAL	:	
								:			
		7 7 8 7 11 15 16 16 16 16 16 16 16 16 16 16 16 16 16									
				3							
				-			111111111111111111111111111111111111111				
		1		SEE BEV	EBGE GIL	E FOR THE	RMS AND CON	DITION	<u> </u>		
SIGNATURE	0.000.000.000			OLE NEV	EDOE OIL		ELEPHONE	DITION:	S DATE		
TILE		FEII							ADDRESS CHANGE	S TO BE NOTED ABOVE	

RICHWOOD NATIONAL GUARD ARMORY RICHWOOD, WEST VIRGINIA

BALLASTED EPDM REROOF SPECIFICATION

PART 1 GENERAL

1.01 DESCRIPTION

- A The Richwood National Guard Armory is located at 20 B Ave, Riverside Addition, in Richwood, West Virginia Michael J Beckner, Armory Facilities Manager, is the Owner's Representative and may be contacted regarding any questions or for a pre-bid job site inspection, phone 304-561-6333
- B The project consists of installing Carlisle's Sure-Seal Design "B" Loose Laid Ballasted Roofing System OR STATE APPROVED EQUAL as outlined below:

Apply the Ballasted EPDM Roofing System in conjunction with new Carlisle 1.5" Poly Iso Insulation after tear off of the existing Ballasted EPDM roof and existing 1.5" insulation to expose the existing 2" Tectum deck for verification of suitable substrate as specified in this specification. Replace existing tectum where necessary due to deterioration of existing deck. Price deck replacement in base bid based on Square Foot. Mr. Bob Dooley, Richwood Facility Manager will be available to review deck replacement. Mr. Dooley must be contacted before deck is replaced for verification of needed deck replacement.

1.02 EXTENT OF WORK

- A Provide all labor, material, tools, equipment, and supervision necessary to complete the installation of a 060 Standard Black EPDM membrane Loose Laid Ballasted Roofing System including flashings and insulation as specified herein and as indicated on the drawings in accordance with the manufacturer's most current specifications and details
- B. The roofing contractor shall be fully knowledgeable of all requirements of the contract documents and shall make themselves aware of all job site conditions that will affect their work.
- C. The roofing contractor shall confirm all given information and advise the building owner, prior to bid, of any conflicts that will affect their cost proposal.
- D. Any contractor who intends to submit a bid using a roofing system other than the approved manufacturer must submit for pre-qualification in writing fourteen (14) days prior to the bid date. Any contractor who fails to submit all information as requested will be subject to rejection. Bids stating "as per plans and specs" will be unacceptable.
- E. NOTE: Check Section 209, Other related work for further details.

1.03 SUBMITTALS

- A Prior to starting work, the roofing contractor must submit the following:
 - 1. Shop drawings showing layout, details of construction and identification of materials
 - 2. Sample of the manufacturer's Membrane System Warranty
 - 3. Submit a letter of certification from the manufacturer which certifies the roofing contractor is authorized to install the manufacturer's roofing system and lists foremen who have received training from the manufacturer along with the dates training was received.
 - Submit a letter of certification from the manufacturer stating the size and weight of the required ballast are in accordance with ANSI (American National Standards Institute) ANSI/SPRI RP-4 (dated July 7, 1997) Wind Design Standard for Ballasted Single-Ply Roofing Systems NOTE: Carlisle SynTec will not be required for notification as approval has already been verified
 - 5. Certification of the manufacturer's warranty reserve.
- B. Upon completion of the installed work, submit copies of the manufacturer's final inspection to the specifier prior to the issuance of the manufacturer's warranty.

1.04 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to the job site in the manufacturer's original, unopened containers or wrappings with the manufacturer's name, brand name and installation instructions intact and legible. Deliver in sufficient quantity to permit work to continue without interruption.
- B. Comply with the manufacturer's written instructions for proper material storage
 - Store materials, except membrane, between 60°F and 80°F in dry areas protected from water and direct sunlight. If exposed to lower temperature, restore to 60°F minimum temperature before using
 - 2. Store materials containing solvents in dry, well ventilated spaces with proper fire and safety precautions. Keep lids on tight. Use before expiration of their shelf life.
- C Insulation must be on pallets, off the ground and tightly covered with waterproof materials.
- D. Any materials which are found to be damaged shall be removed and replaced at the applicator's expense.

1.05 WORK SEQUENCE

A. Schedule and execute work to prevent leaks and excessive traffic on completed roof sections. Care should be exercised to provide protection for the interior of the building and to ensure water does not flow beneath any completed sections of the membrane system.

B. Do not disrupt activities in occupied spaces.

1.06 USE OF THE PREMISES

- A Before beginning work, the roofing contractor must secure approval from the building owner's representative for the following:
 - 1 Areas permitted for personnel parking.
 - 2. Access to the site.
 - 3. Areas permitted for storage of materials and debris.
 - Areas permitted for the location of cranes, hoists and chutes for loading and unloading materials to and from the roof.
- B Interior stairs or elevators may not be used for removing debris or delivering materials, except as authorized by the building superintendent.

1.07 EXISTING CONDITIONS

If discrepancies are discovered between the existing conditions and those noted on the drawings, immediately notify the owner's representative by phone and solicit the manufacturer's approval prior to commencing with the work. Necessary steps shall be taken to make the building watertight until the discrepancies are resolved.

1.08 PRE-CONSTRUCTION CONFERENCE

- A pre-bid meeting will be held at the job site. A time and date will be provided.

 Contact the owner's representative if there are any questions.
- B Prior to bid submittal, the roofing contractor should schedule a job site inspection to observe actual conditions and verify all dimensions on the roof. The job site inspection may occur on the day of the pre-bid meeting or prior to such a meeting. Should access to the roof be necessary before or after the pre-bid meeting, the contractor must contact the owner's representative to coordinate an appropriate time.
- C. Any conditions which are not shown on the shop drawings should be indicated on a copy of the shop drawing and included with bid submittal if necessary to clarify any conditions not shown.

1.09 TEMPORARY FACILITIES AND CONTROLS

- A. Temporary Utilities:
 - Water, power for construction purposes and lighting are available at the site and wil be made available to the roofing contractor.
 - 2. Provide all hoses, valves and connections for water from source designated by the owner when made available.
 - 3. When available, electrical power should be extended as required from the source. Provide all trailers, connections and fused disconnects.
- B. Temporary Sanitary Facilities

Sanitary facilities will not be available at the job site. The roofing contractor shall be responsible for the provision and maintenance of portable toilets or their equal.

C. Building Site:

- The roofing contractor shall use reasonable care and responsibility to protect the building and site against damages. The contractor shall be responsible for the correction of any damage incurred as a result of the performance of the contract.
- 2. The roofing contractor shall remove all debris from the job site in a timely and legally acceptable manner so as to not detract from the aesthetics or the functions of the building

D. Security:

Obey the owner's requirements for personnel identification, inspection and other security measures.

1.10 JOB SITE PROTECTION

- A The roofing contractor shall adequately protect building, paved areas, service drives, lawn, shrubs, trees, etc from damage while performing the required work. Provide canvas, boards and sheet metal (properly secured) as necessary for protection and remove protection material at completion. The contractor shall repair or be responsible for costs to repair all property damaged during the roofing application.
- B During the roofing contractor's performance of the work, the building owner will continue to occupy the existing building. The contractor shall take precautions to prevent the spread of dust and debris, particularly where such material may sift into the building. The roofing contractor shall provide labor and materials to construct, maintain and remove necessary temporary enclosures to prevent dust or debris in the construction area(s) from entering the remainder of the building.
- C. Do not overload any portion of the building, either by use of or placement of equipment, storage of debris, or storage of materials.
- D Protect against fire and flame spread. Maintain proper and adequate fire extinguishers
- E. Take precautions to prevent drains from clogging during the roofing application. Remove debris at the completion of each day's work and clean drains, if required. At completion, test drains to ensure the system is free running and drains are watertight. Remove strainers and plug drains in areas where work is in progress. Install flags or other telltales on plugs. Remove plugs each night and screen drain.
- F. Store moisture susceptible materials above ground and protect with waterproof coverings.
- G Remove all traces of piled bulk materials and return the job site to its original condition upon completion of the work

1.11 SAFETY

The roofing contractor shall be responsible for all means and methods as they relate to safety and shall comply with all applicable local, state and federal requirements that are safety related. Safety shall be the responsibility of the roofing contractor. All related personnel shall be instructed daily to be mindful of the full time requirement to maintain a safe environment for the facility's occupants including staff, visitors, customers and the occurrence of the general public on or near the site

1.12 WORKMANSHIP

- A Applicators installing new roof, flashing and related work shall be factory trained and approved by the manufacturer they are representing
- B. All work shall be of highest quality and in strict accordance with the manufacturer's published specifications and to the building owner's satisfaction.
- C. There shall be a supervisor on the job site at all times while work is in progress.

1.13 QUALITY ASSURANCE

- A. The EPDM membrane roofing system must achieve a UL Class A rating.
- B. The manufacturer must have a minimum of 20 years experience in the manufacturing of vulcanized thermal set sheeting
- C. Unless otherwise noted in this specification, the roofing contractor must strictly comply with the manufacturer's current specifications and details.
- D The roofing system must be installed by an applicator authorized and trained by the manufacturer in compliance with shop drawings as approved by the manufacturer. The roofing applicator shall be thoroughly experienced and upon request be able to provide evidence of having at least five (5) years successful experience installing single-ply EPDM roofing systems and having installed at least five (5) roofing application or several similar systems of equal or greater size within the past one (1) year
- E Provide adequate number of experienced workmen regularly engaged in this type of work who are skilled in the application techniques of the materials specified. Provide at least one thoroughly trained and experienced superintendent on the job at all times roofing work is in progress.
- There shall be no deviations made from this specification or the approved shop drawings without the prior written approval of the specifier. Any deviation from the manufacturer's installation procedures must be supported by a written certification on the manufacturer's letterhead and presented for the specifier's consideration.
- G. Upon completion of the installation, the applicator shall arrange for an inspection to be made by a non-sales technical representative of the membrane manufacturer in order to determine whether or not corrective work will be required before the warranty will be issued. Notify the building owner seventy-two (72) hours prior to the manufacturer's final inspection.

1.14 JOB CONDITIONS, CAUTIONS AND WARNINGS

Refer to Carlisle's Design "B" Loose Laid Ballasted Roofing System specification, Part II - Application, for General Iob Site Considerations

- A Material Safety Data Sheets (MSDS) must be on location at all times during the transportation, storage and application of materials
- B. When positioning membrane sheets, exercise care to locate all field splices away from low spots and out of drain sumps All field splices should be shingled to prevent bucking of water.
- C When loading materials onto the roof, the Carlisle Authorized Roofing Applicator must comply with the requirements of the building owner to prevent overloading and possible disturbance to the building structure.
- D Proceed with roofing work only when weather conditions are in compliance with the manufacturer's recommended limitations, and when conditions will permit the work to proceed in accordance with the manufacturer's requirements and recommendations.
- Proceed with work so new roofing materials are not subject to construction traffic.

 When necessary, new roof sections shall be protected and inspected upon completion for possible damage
- Provide protection, such as 3/4 inch thick plywood, for all roof areas exposed to traffic during construction. Plywood must be smooth and free of fasteners and splinters.
- G The surface on which the insulation or roofing membrane is to be applied shall be clean, smooth, dry, and free of projections or contaminants that would prevent proper application of or be incompatible with the new installation, such as fins, sharp edges, foreign materials, oil and grease
- H. New roofing shall be complete and weathertight at the end of the work day.
- I. Contaminants such as grease, fats and oils shall not be allowed to come in direct contact with the roofing membrane.

1.15 WARRANTY

- A Provide manufacturer's fifteen (15) year Total System Warranty covering both labor and material with no dollar limitation. The maximum wind speed coverage shall be peak gusts of 55 mph measured at 10 meters above ground level. Certification is required with bid submittal indicating the manufacturer has reviewed and agreed to such wind coverage.
 - B. Pro-rated System Warranties shall not be accepted.
 - C. Evidence of the manufacturer's warranty reserve shall be included as part of the project submittals for the specifier's approval.

PART 2 PRODUCTS

2.01 GENERAL

- A. All components of the specified roofing system shall be products of Carlisle SynTec Incorporated or accepted by Carlisle as compatible.
- B. Unless otherwise approved by the specifier and accepted by the membrane manufacturer, all products (including insulation, fasteners, fastening plates and edgings) must be manufactured and supplied by the roofing system manufacturer and covered by the warranty.

2.02 MEMBRANE

Furnish Carlisle .060 Std. FR EPDM (Ethylene, Propylene, Diene Terpolymer) in the largest sheet possible. The membrane shall conform to the minimum physical properties of ASTM D4637.

2.03 INSULATION/UNDERLAYMENT

- A Insulation shall be loose laid over the substrate and, when applicable, shall be installed in multiple layers Mechanical attachment of the insulation is not required in accordance with the manufacturer's published specifications.
- B. Insulation shall be 1.5" Sure-Seal Poly Iso as supplied by Carlisle. Minimum R-value required is 9.

2.04 ADHESIVES AND CLEANERS

All products shall be furnished by Carlisle and specifically formulated for the intended purpose

- A. Bonding Adhesive
- B. Splicing Cement: Sure-Seal EP-95 Splicing Cement
- C. Splice Tape and Primer: Sure-Seal SecurTAPE and HP-250 or LV-600 Primer
- D. Cleaning Solvent: Sure-Seal Splice Cleaner or Weathered Membrane Cleaner
- E Internal seam sealant: Sure-Seal In-Seam SealantTM (used with adhesive splices only)
- F External seam sealant: Sure-Seal Lap Sealant
- G. Sealer: Sure-Seal Pourable Sealer

2.05 FASTENERS AND PLATES

To be used for additional membrane securement:

A. **HP Fasteners:** A threaded, black epoxy electro-deposition coated fastener used with steel and wood roof decks.

- B CD-10 Fasteners: A non-threaded, hammer driven fastener used with structural concrete roof decks rated 3,000 psi or greater.
- C HD 14-10 Fasteners: A #14 threaded fastener used for minimum 3,000 psi concrete decks
- D HP Term Bar Nail-Ins: A 1-1/4" long expansion anchor with a zinc plated steel drive pin used for fastening the Sure-Seal Termination Bar or Seam Fastening Plates to concrete, brick, or block walls
- E. Seam Fastening Plates: A 2 inch diameter FM approved metal plate used in conjunction with RUSS or with EPDM membrane for membrane securement.
- F. RUSS (Reinforced Universal Securement Strip): A 6 or 9 inch wide, 100 foot long strip of Sure-Seal reinforced EPDM membrane.

The 6 inch wide RUSS shall be utilized horizontally or vertically (in conjunction with Seam Fastening Plates) below the EPDM membrane for additional membrane securement.

The 9 inch wide RUSS shall be utilized in conjunction with metal edgings to allow the continuation of the EPDM deck membrane as flashing in accordance with Carlisle details

2.06 METAL EDGING AND MEMBRANE TERMINATIONS

- A Sure-Seal Termination Bar: a 1 inch wide and 098 inch thick extruded aluminum bar pre-punched 6 inches on center; incorporates a sealant ledge to support Lap Sealant and provide increased stability for membrane terminations
- B. Fabricate and install new .032 Aluminum Mill Finish Fasica to match existing Fasica on Drill Hall Roof.
- C. Install new wood nailers per Carlisle specifications at parapet and all locations where necessary. Fabricate and

Install new 032 Mill Finish Aluminum Metal Flashings per SMACNA Specifications. Color of all new metal

installed to be Mill Finish Aluminum.

2.07 BALLAST

A. Rounded Water-Worn Gravel

- Nominal 1-1/2 inch rounded water-worn gravel which conforms to gradation #4 when sized in accordance with ASTM D 448 method of sizing. Coverage rate shall be no less than 1000 pounds per 100 square feet and gravel must be evenly distributed to maintain an average of 10 pounds per square foot.
- NOTE: REUSE existing ballast. Remove any sharp or foreign objects before reusing ballast.

2.08 WALKWAYS

Protective surfacing for roof traffic shall be concrete pavers (minimum 18 pounds per square foot) installed with Sure-Seal HP Protective Mat or an additional layer of EPDM membrane

2.09 OTHER MATERIALS

- A. Existing ballast to be reused to secure new roof membrane
- B Install new Carlisle Retrofit Drains at all existing locations. New roof drains to be included in manufacturer's Standard Total System Warranty
- C Gutter and Downspouts: Install new Concrete Splashblocks at all existing downspouts.

 Install an extra layer of EPDM membrane under new splashblocks.
- D. Install new Term Bar detail at Drill Hall walls per Carlisle detail.
- E Fabricate and install new pitch pans where necessary.
- F DRILL HALL ROOF NOT IN CONTRACT.

PART 3 EXECUTION

3.01 GENERAL

- A Comply with the manufacturer's published instructions for the installation of the membrane roofing system including proper substrate preparation, jobsite considerations and weather restrictions
- B. Position sheets to accommodate contours of the roof deck and shingle splices to avoid bucking water.

3.02 INSULATION PLACEMENT

- A. Install insulation or membrane underlayment over the substrate with boards butted tightly together with no joints or gaps greater than 1/4 inch. Stagger joints both horizontally and vertically if multiple layers are provided
- B. Insulation shall be loose laid over the substrate in accordance with the manufacturer's specifications.

3.03 MEMBRANE PLACEMENT

- A. Unroll and position membrane without stretching. Allow the membrane to relax for approximately 1/2 hour prior to splicing.
- B Install adjoining membrane sheets in the same manner, overlapping edges approximately 4 inches.

3.05 MEMBRANE SPLICING (Tape Splice)

A. Overlap adjacent sheets and mark a line 1/2 inch out from the top sheet.

- B. Fold the top sheet back and clean the dry splice area (minimum 2-1/2 inches wide) of both membrane sheets with Sure-Seal Primer as required by the membrane manufacturer
- C. Apply Splice Tape to bottom sheet with the edge of the release paper along the marked line. Press tape onto the sheet using hand pressure. Overlap tape roll ends a minimum of 1 inch.
- D Remove the release paper and press the top sheet onto the tape using hand pressure
- E. Roll the seam toward the splice edge with a 2 inch wide steel roller.
- F. Install a 6 inch wide section of Pressure-Sensitive Flashing or Elastoform Flashing over all field splice intersections and seal edges of flashing with Lap Sealant.
- F. The use of Lap Sealant with tape splices is optional except at tape overlaps and cut edges of reinforced membrane where Lap Sealant is required.
- G. TAPE SPLICES ONLY ARE ALLOWED FOR THIS PROJECT.

3.06 FLASHING

- A Wall and curb flashing shall be cured EPDM membrane. Continue the deck membrane as wall flashing where practicable.
- B Follow manufacturer's typical flashing procedures for all wall, curb, and penetration flashing including metal edging/coping and roof drain applications.

3.07 BALLASTING

- A. Install ballast in accordance with the manufacturer's installation instructions.
- B. Install ballast evenly without bare spots to provide complete coverage over the membrane.
- C. When specified, overlap HP Protective Mat a minimum of 6 inches prior to ballast or paver installation.
- D Comply with published ANSI (American National Standards Institute) ANSI/SPRI RP-4 guidelines (dated November 19, 2002) concerning applicable coverage rates.

3.08 WALKWAYS

- A. Install concrete pavers with Sure-Seal HP Protection Mat or an additional layer of EPDM membrane at all traffic concentration points (such as roof hatches, access doors, rooftop ladders, etc.) and all locations as identified on the specifier's drawing.
- B. The protection layer must extend approximately 2 3 inches under the ballast on each side of the walkway.

3.09 DAILY SEAL


- A. On phased roofing, when the completion of flashings and terminations is not achieved by the end of the work day, a daily seal must be performed to temporarily close the membrane to prevent water infiltration
- B. Use Sure-Seal Pourable Sealer or other acceptable membrane seal in accordance with the manufacturer's requirements

3.10 CLEAN UP

- A Perform daily clean-up to collect all wrappings, empty containers, paper, and other debris from the project site. Upon completion, all debris must be disposed of in a legally acceptable manner.
- B Prior to the manufacturer's inspection for warranty, the applicator must perform a pre-inspection to review all work and to verify all flashing has been completed as well as the application of all caulking

END OF SPECIFICATION

Scale drawings, preliminary specifications and documentation provided are preliminary and for bid purposes only. The successful bidder is responsible for all building permits, field conditions and compliance with building codes. Preliminary specifications and budgeting parameters are based upon final field inspections and test cuts where applicable and are subject to revisions based upon final field conditions and construction issues. The successful bidder is responsible to conduct their own field tests and construction inspections to assure proper installation and compliance with building codes. No structural analysis has been provided in these preliminary specifications.

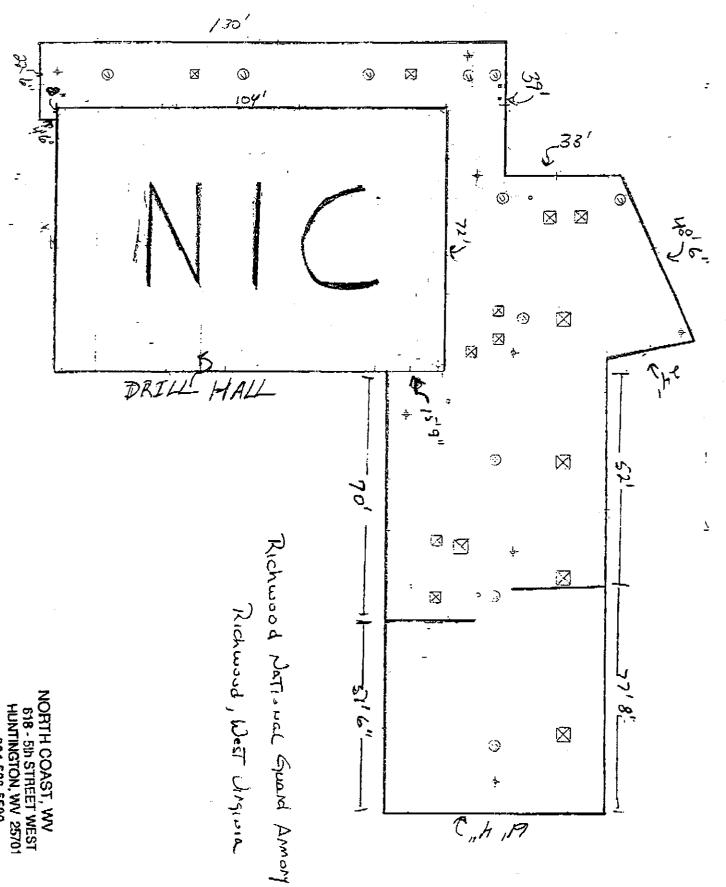

304-523-5500

n	0	0
۲	Z	Z

0	-	NI-	
п	ru.	IND	

STATE OF WEST VIRGINIA Purchasing Division

PURCHASING AFFIDAVIT

West Virginia Code §5A-3-10a states: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owned is an amount greater than one thousand dollars in the aggregate

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Debtor" means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions. "Political subdivision" means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. "Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

EXCEPTION: The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

LICENSING: Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY: The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendors should visit **www.state.wv.us/admin/purchase/privacy** for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and are in compliance with the requirements as stated.

Vendor's Name:	
Authorized Signature: _	Date:

Purchasing Affidavit (Revised 04/15/07)