



ONE DAVIS SQUARE - FOURTH FLOOR

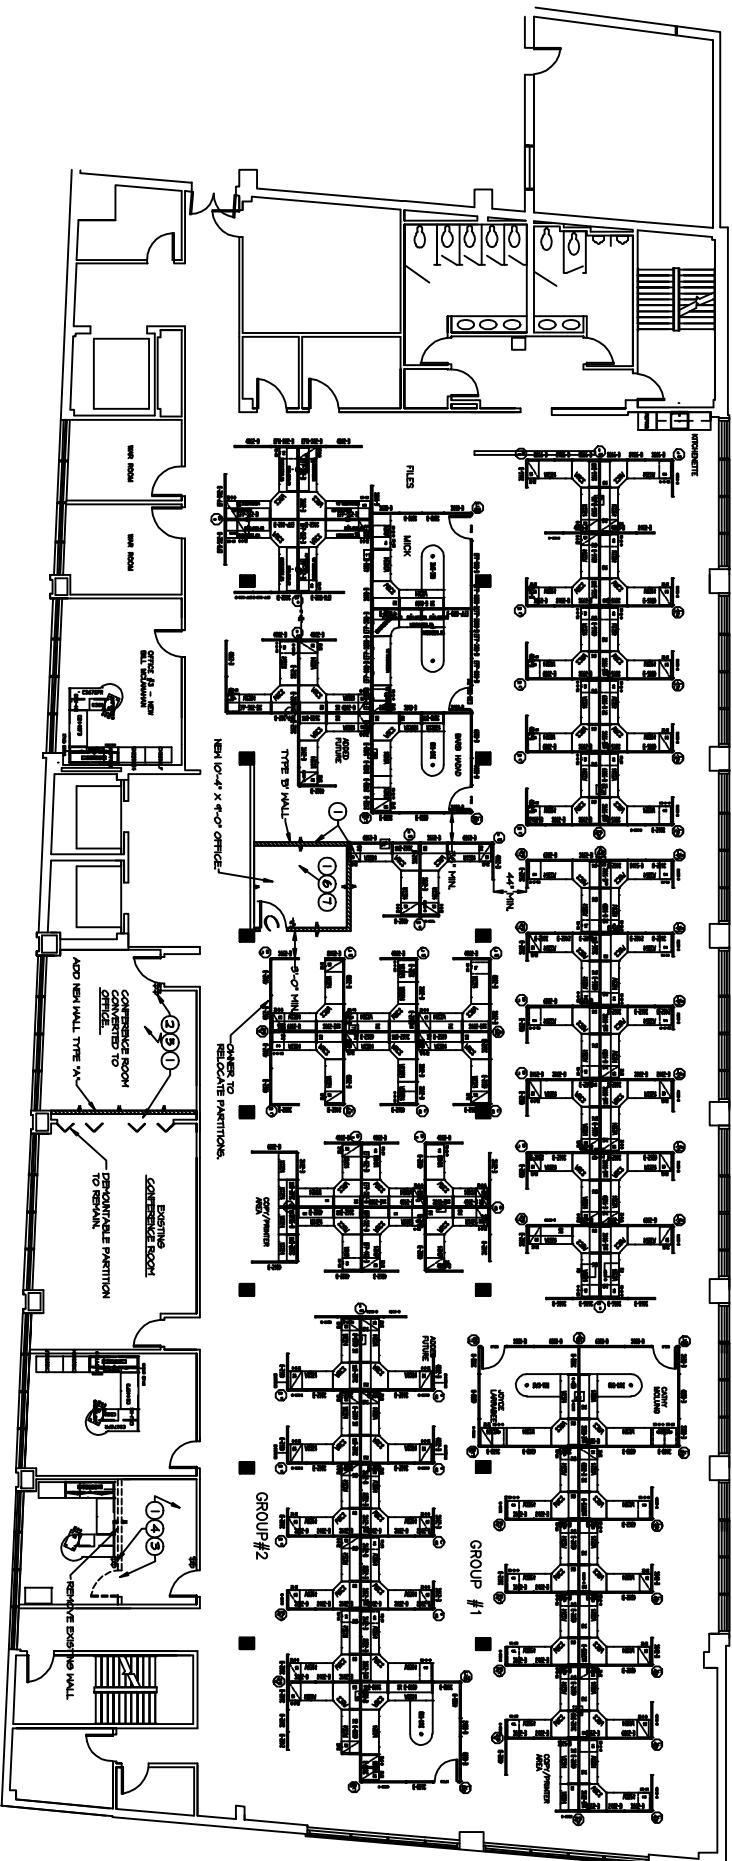

ONE DAVIS SQUARE - THIRD FLOOR

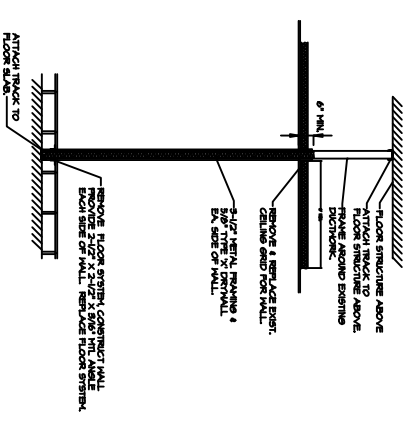

WALL CONSTRUCTION DETAIL

**KEY TO SYMBOLS**

- ◆ INDICATES NEW WALL CONSTRUCTION TO MATCH/ALIGN EXISTING CONSTRUCTION.
- ▲ INDICATES NEW WALL TYPE. SEE WALL TYPES FOR CONSTRUCTION.

**NOTES**

- 1 REPAIR/REPLACE CEILING GRID AND METALL NEW GRID & ACCUSTICAL TILES FOR A SMOOTH CEILING TRANSITION SPACE.
  - 2 REPAIR LIGHT SWITCHES FOR NEW OFFICE SPACE.
  - 3 REMOVE WALL, REMOVE DOOR AND TURN OVER TO OWNER.
  - 4 ELIMINATE ELECTRICAL, OUTLETS & LIGHT FIXTURE / DIMMER / SPRINKLER HEAD LOCATIONS TO REMAIN.
  - 5 RELOCATE EXISTING LIGHT FIXTURES & DIFFUSERS.
  - 6 COORDINATE WITH OWNER TO RELOCATE SPRINKLER HEADS AS REQUIRED BY CODE.
- NOTE: 1x4 PL CORRUGATED FIBREGLASS REINFORCED LINEAR DIFFUSERS TYPICAL. ADD NEW OUTLETS AND SWITCHES IN LOCATIONS SHOWN. REPAIR REPLACE CARPET AS REQUIRED.

**WALL TYPES**

- A** ONE LAYER 5/8" GYPSUM BO. STUDS @ 16" O.C. - PARTITION FRAMED FROM SUBFLOOR TO UNDERSIDE OF FLOOR STRUCTURE ABOVE.
- B** ONE LAYER 5/8" GYPSUM BO. EA. SIDE 3-1/2" METAL STUDS @ 16" O.C. 1/2" HOUND ATTENUATION BLANKETS, PARTITION FRAMED FROM SUBFLOOR TO UNDERSIDE OF FLOOR STRUCTURE ABOVE.
- C** NEW 5'-0" X 6'-6" HOOD DOOR & HOLLOW METAL FRAME. PROVIDE DOUBLE JACKS & HEADER AT DOOR FRAME.
- == EXISTING PARTITION TO REMAIN
- == EXISTING PARTITION TO BE REMOVED
- EXISTING MASONRY/PLASTER WALLS TO REMAIN