
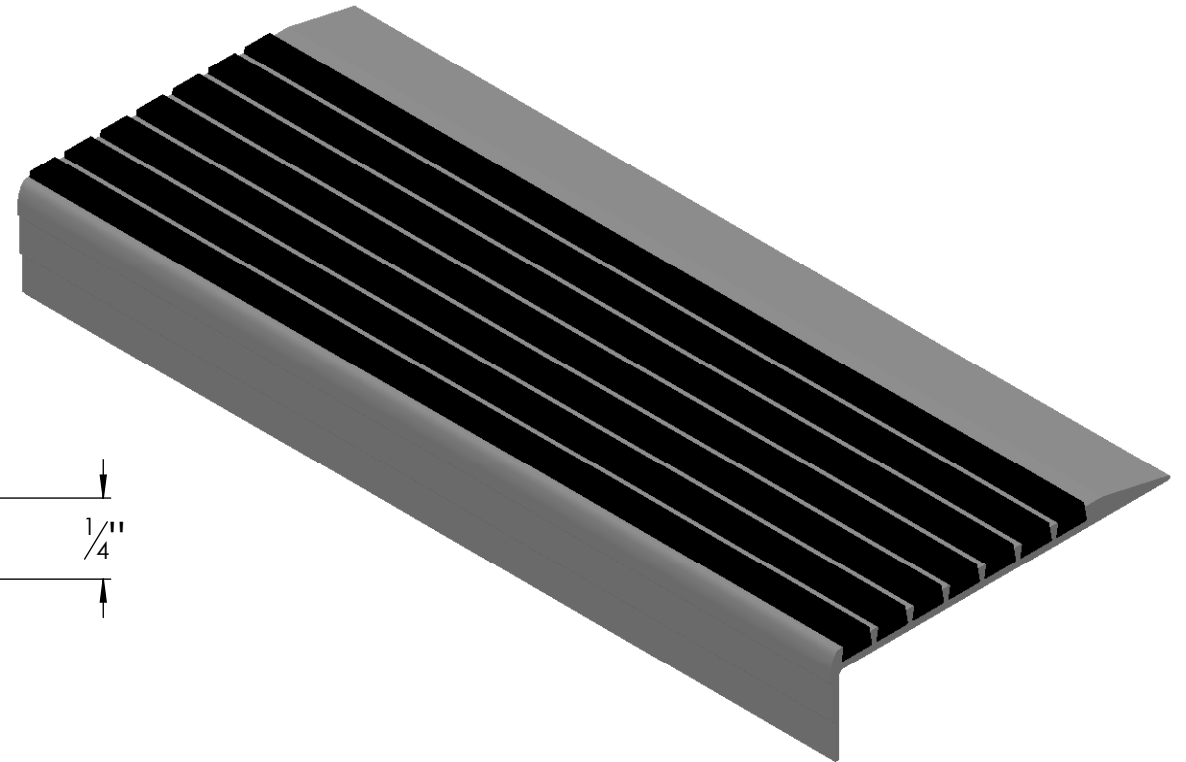


8 7 6 5 4 3 2 1

D

D

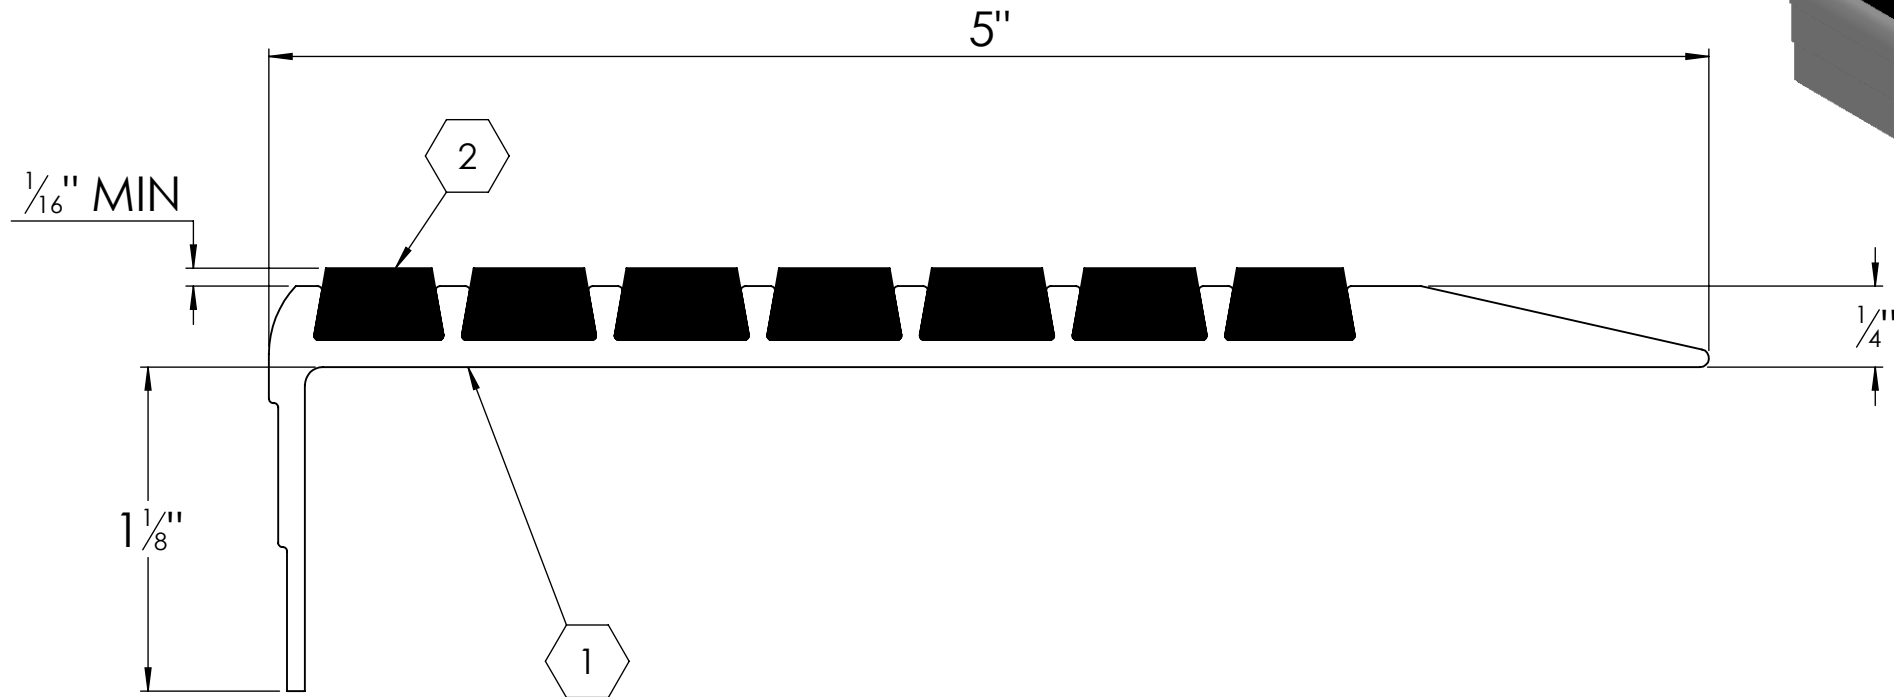

C

B

**MODEL L5D**

(RENOVATION RIBBED ABRASIVE BARS)

**SPECIFICATIONS:**

① **BASE:** HEAT TREATED EXTRUDED ALUMINUM ALLOY 6063 T-5

② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS

3. **BASE FINISH:** MILL

4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS

5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE

6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF

- 7. **LENGTH:** 12'0" MAXIMUM (STANDARD)
- 8. **COUNTER SUNK HOLES** PRE-DRILLED FOR A #10 FASTENER SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.

LENGTH	QTY	COLOR

**STRB-L5D**

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	<p>Right to site. 9300 73rd Avenue North Brooklyn Park, MN 55428</p>		TITLE:		V470, Stair Tread, Bar Ribbed Abrasive, Long Nose, Drilled For Bolt In,	
			MATERIAL	NAME		DATE
6063-T5	DRAWN	BMH	01/24/11	<b>B</b>	<b>STRB-L5D</b>	<b>A</b>
FINISH: MILL	RELEASED	PE	01/24/11	WEIGHT: 0.78 LB/FT		SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.

8 7 6 5 4 3 2 1

A

A