

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	1	-

GOVERNING SPECIFICATIONS

THE WEST VIRGINIA DEPARTMENT OF TRANSPORTATION, DIVISION OF HIGHWAYS STANDARD SPECIFICATIONS FOR ROADS AND BRIDGES, ADOPTED 2010 AS AMENDED BY THE CURRENT SUPPLEMENTAL SPECIFICATIONS. THE CONTRACT PLANS AND CONTRACT SPECIAL PROVISIONS ARE THE GOVERNING PROVISIONS APPLICABLE TO THIS PROJECT.

ALL BEAMS ARE DESIGNED IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS, DATED 1998 AS AMENDED BY THE 2003 INTERIM SPECIFICATIONS.

DESIGN NOTES

ALL STANDARD ADJACENT PRESTRESSED CONCRETE BRIDGE BEAMS ARE DESIGNED TO MEET THE FOLLOWING CRITERIA:

- DESIGN LOADS:
 - HL-93 LIVE LOAD IN ACCORDANCE WITH THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS.
 - FUTURE WEARING SURFACE OF 50 PSF OF ROADWAY.
 - TYPE F PARAPET WEIGHING 321 PLF.
 - DIAPHRAGM DEAD LOAD, NUMBER REQUIRED BASED ON 15'-0" MAX. SPACING.
- TWO LANE BRIDGE WITH AN OVERALL WIDTH OF 24'-5" (INCL. 3/4" GAP BETWEEN ADJ. BEAMS), A CURB-TO-CURB WIDTH OF 22'-1", TRANSVERSE POST-TENSIONING, AND 30 DEGREE SKEW.
- DESIGN STRENGTH AND UNIT STRESSES:

MINIMUM CONCRETE STRENGTH @ STRAND RELEASE	5500 PSI
MINIMUM CONCRETE STRENGTH @ 28 DAYS	8000 PSI
TEMPORARY STRESS LIMITS IN CONCRETE BEFORE LOSSES:	
COMPRESSION STRESS LIMIT @ STRAND RELEASE	3600 PSI
TENSION STRESS LIMIT @ STRAND RELEASE	-200 PSI
COMPRESSIVE STRESS LIMITS IN CONCRETE @ SERVICE I AFTER LOSSES:	
@ FINAL 1 (PS+DL+LL)	4800 PSI
@ FINAL 2 (PS+DL)	3600 PSI
@ FINAL 3 [50%(PS+DL)+LL]	3200 PSI
TENSILE STRESS LIMIT IN CONCRETE @ SERVICE III AFTER LOSSES:	
@ FINAL 1 (PS+DL+LL)	-270 PSI
TENDON STRESS LIMIT PRIOR TO TRANSFER	202.5 KSI
TENDON STRESS LIMIT AFTER ALL LOSSES	194.4 KSI
- DEBONDING OR SHIELDING OF STRANDS TO REDUCE TEMPORARY TENSILE STRESSES IS PERMITTED, HOWEVER DEBONDING IS LIMITED TO 40% PER ROW AND 25% TOTAL. IN NO INSTANCES SHALL OUTER STRANDS BE DEBONDED. DEBONDED STRANDS SHALL BE SEPARATED BY AT LEAST ONE FULLY BONDED STRAND AND SHALL BE SYMMETRICAL ABOUT THE C OF THE BEAM. SHIELDING OF STRANDS SHALL BE ACCOMPLISHED BY TAPING OR TIGHT FITTING PLASTIC TUBES TAPED AT EACH END.
- THE ELASTOMERIC BEARING PADS PROVIDED IN THE STANDARD DESIGNS ARE BASED ON ZERO GRADE AND ARE LIMITED TO A MAXIMUM OF 5% GRADE. IN INSTANCES OF GRADES EXCEEDING THIS LIMIT, PADS SHALL BE SPECIFICALLY DESIGNED. INDIVIDUAL PAD DESIGNS SHALL BE IN ACCORDANCE WITH SECTION 14, AASHTO LRFD. BEVELED SOLE PLATES ARE PERMITTED.
- MAXIMUM BEAM SKEW SHALL BE 30 DEGREES.
- WHEN ALTERNATE DESIGNS OR SITE SPECIFIC DESIGNS ARE PROVIDED, CRITERIA SET FORTH IN THESE STANDARDS SHALL APPLY.
- NEGATIVE DESIGN CAMBER AFTER ALL LOSSES IS NOT PERMITTED.
- EACH BEAM PROVIDED IN THESE STANDARD DESIGNS HAS BEEN LOAD RATED IN ACCORDANCE WITH SECTION 3.15 OF THE WEST VIRGINIA DIVISION OF HIGHWAYS BRIDGE DESIGN MANUAL, 2004. ADDITIONALLY, LOAD RATING PROCEDURES ARE IN ACCORDANCE WITH THE AASHTO MANUAL FOR CONDITION EVALUATION AND LOAD AND RESISTANCE FACTOR RATING OF HIGHWAY BRIDGES, 2003.

MATERIALS & FABRICATION NOTES

• THE PRESTRESSED CONCRETE BEAMS SHALL CONFORM TO ALL APPLICABLE PROVISIONS OF SECTION 603 OF THE STANDARD SPECIFICATIONS.

MILD REINFORCEMENT:

- ALL MILD REINFORCING STEEL SHALL BE GRADE 60, DEFORMED BILLET STEEL AND SHALL BE EPOXY COATED EXCEPT WHERE NOTED. ALL UNCOATED REINFORCING SHALL MEET THE REQUIREMENTS OF AASHTO M31. ALL EPOXY COATED REINFORCING SHALL MEET THE REQUIREMENTS OF AASHTO M284, EXCEPT WHERE AMENDED BY SECTION 709.1 OF THE STANDARD SPECIFICATIONS.
- ALL TENSION LAP SPLICES SHALL BE A CLASS B, CONTACT TYPE. MINIMUM LAP SPLICE LENGTHS SHALL BE AS GIVEN IN THE "LAP SPLICE TABLE", THIS SHEET. ADDITIONALLY, IF LAP SPLICING OF ET, LR, AND BT BARS IS USED, TERMINATION OF THE SPLICE SHALL BE NO CLOSER TO THE END OF THE BEAM THAN 1/10 OF THE SPAN LENGTH.
- MINIMUM BAR BENDING DIAMETER SHALL BE 6 BAR DIAMETERS, EXCEPT THAT NO. 4 AB BARS MAY HAVE A MINIMUM BEND DIAMETER OF 4 BAR DIAMETERS.
- MINIMUM CONCRETE COVER SHALL BE AS SPECIFIED IN SECTION 603.5 OF THE STANDARD SPECIFICATIONS, EXCEPT WHERE NOTED ON THE PLANS.

PRESTRESSING STRAND:

- ALL PRESTRESSING STEEL SHALL BE 1/2" #, GRADE 270, 7 WIRE UNCOATED, LOW-RELAXATION STRAND MEETING THE REQUIREMENTS OF AASHTO M203, SUPPLEMENT S1.
- ALL BEAMS DESIGNED IN THESE STANDARDS UTILIZE STRANDS WITH A NOMINAL AREA OF 0.167 SQ. IN. STRANDS WITH A NOMINAL AREA OF 0.153 SQ. IN. IS PERMITTED FOR INDIVIDUAL OR ALTERNATE DESIGNS, HOWEVER THE DESIGNER IS ENCOURAGED TO USE THE LARGER STRAND FOR UNIFORMITY REASONS. IN NO CASES WILL STRESS-RELIEVED STRAND BE PERMITTED.
- ALL STRANDS SHALL BE ENCLOSED INSIDE THE STIRRUP CAGE FOR THE FULL LENGTH OF THE BEAM.
- ALL EXPOSED PRESTRESSING STRAND AT EACH BEAM END SHALL BE SHOP COATED WITH A LIQUID COLD-APPLIED BITUMINOUS ELASTOMERIC WATERPROOFING MEMBRANE. MATERIAL SHALL MEET ASTM C836-84.

CONCRETE:

- ALL CONCRETE USED IN MANUFACTURING PRESTRESSED CONCRETE BEAMS SHALL MEET THE REQUIREMENTS OF SECTION 603.6 OF THE STANDARD SPECIFICATIONS. DESIGN STRENGTHS SHALL MEET OR EXCEED THE MINIMUM VALUES SET FORTH IN THESE PLANS.
- ALL CONCRETE USED IN PARAPETS AND CURBS SHALL BE CLASS K CONCRETE.

ELASTOMERIC BEARING PADS:

- ALL BEARING PADS SHALL MEET THE APPLICABLE REQUIREMENTS AS SET FORTH IN SECTION 18.2 OF THE AASHTO LRFD BRIDGE CONSTRUCTION SPECIFICATIONS, 1998 EDITION WITH CURRENT INTERIMS. ALL BEARINGS SHALL BE STEEL REINFORCED LAMINATED BEARINGS.
- THE ELASTOMER MATERIAL SHALL BE 60 DUROMETERS WITH A MINIMUM LOW TEMPERATURE GRADE OF 3 (ZONE C).
- ALL STEEL REINFORCING SHALL MEET THE REQUIREMENTS OF AASHTO M270, GRADE 36.

GUARDRAIL, GUARDRAIL POSTS, TUBING & INSERTS:

• ALL W-BEAM GUARDRAIL AND ATTACHMENT HARDWARE SHALL BE IN ACCORDANCE WITH SECTION 712.4 OF THE STANDARD SPECIFICATIONS. GUARDRAIL POSTS, STRUCTURAL TUBING, POST ATTACHMENT INSERTS, AND HARDWARE SHALL MEET THE LISTED MATERIAL AND COATING SPECIFICATIONS:

ITEM	DESCRIPTION	MATERIAL SPEC.	COATING SPEC.
POST	W6x25	AASHTO M270, GR 36	AASHTO M111
PLATE	1/2" x 7"	AASHTO M270, GR 36	AASHTO M111
TUBING	TS 8x4x3/16	ASTM A500, GR B	AASHTO M111
CHANNEL	C7x9.8	AASHTO M270, GR 36	AASHTO M111
FERRULE	TYPE 2A	1 1/4" # x 2 1/2" MIN LEN.	ASTM A108 (11L17 STEEL)
	ANCHOR	3/8" #	ASTM A510 (1018 STEEL)
WIRE	1/4" # x 8" LONG	ASTM A108 (1045 C.D. STEEL)	AASHTO M232
STUDS	1/4" #	AASHTO M291, CLASS C	AASHTO M232
NUTS	1/4" #	AASHTO M291, CLASS C	AASHTO M232
COUPLERS	TYPE 1A	1/4" # x 5" LONG	ASTM A108 (12L14 STEEL)
	ANCHOR	1/4" # x 12" LONG	AASHTO M164 (TYPE 1, HH)
BOLTS	5/8" # x ALL LEN.	AASHTO M164 (TYPE 1, HH)	AASHTO M232
NUTS	5/8" #	AASHTO M291, CLASS C	AASHTO M232
WASHERS	ALL	AASHTO M293	AASHTO M232

WELDING:

- TACK WELDING OF REINFORCEMENT IS NOT PERMITTED. REINFORCING CAGES AND LONGITUDINAL STEEL SHALL BE ADEQUATELY TIED WITH APPROVED MEANS TO PREVENT RACKING AND MISALIGNMENT.
- ALL WELDING OF FABRICATED ITEMS, AS SHOWN IN THESE PLANS SHALL BE IN ACCORDANCE WITH ALL APPLICABLE PROVISIONS OF AASHTO/AWS D1.5, 2002.

POST-TENSIONING BARS:

- POST - TENSIONING THREAD BARS SHALL BE ONE INCH DIAMETER, 150 KSI STEEL, AND SHALL CONFORM TO AASHTO M275, TYPE II. STEEL THREAD BARS SHALL BE DESIGNED TO ALLOW THE USE OF HEAVY HEX NUTS AND COUPLERS THAT THREAD ONTO THE END OF THE DEFORMATIONS. HEAVY HEX NUTS AND COUPLERS SHALL BE OF A DESIGN AND MATERIAL RECOMMENDED BY THE BAR MANUFACTURER TO DEVELOP THE FULL TENSILE STRENGTH OF THE BAR. PROPERLY DOCUMENTED CERTIFIED MILL TEST REPORTS SHALL BE PROVIDED FOR EACH HEAT OF STEEL THREAD BARS.
- ALL POST-TENSIONING THREAD BARS, NUTS, BEARING PLATES, COUPLERS, AND ANCILLARY HARDWARE SHALL BE HOT-DIPPED GALVANIZED IN ACCORDANCE WITH AASHTO M111. THE GALVANIZING PLANT SHALL ADMINISTER ADEQUATE QUALITY CONTROL MEASURES TO SAFEGUARD AGAINST HYDROGEN EMBRITTLEMENT. QUALITY CONTROL MEASURES SHALL COMPLY WITH ASTM A-143. CERTIFICATION FOR HOT-DIP GALVANIZING SHALL BE PROVIDED BY THE GALVANIZING PLANT.
- ALL POST-TENSIONING BEARING PLATES SHALL CONFORM TO AASHTO M270, GRADE 36.

SHEAR KEY GROUT:

- SHEAR KEY GROUT SHALL BE A GROUT THAT IS RECOMMENDED BY THE MANUFACTURER FOR A POURABLE GROUT APPLICATION AND THAT BASED ON THE MANUFACTURER'S TEST DATA WILL ATTAIN A MINIMUM OF 4500 PSI COMPRESSIVE STRENGTH IN 3 DAYS UNDER CONDITIONS REPRESENTATIVE OF THE CONDITIONS TO BE EXPERIENCED AT THE SITE. THE GROUT MUST BE LISTED ON THE APPROVED LIST OF GROUTS PUBLISHED BY THE WEST VIRGINIA DIVISION OF HIGHWAYS, MATERIALS CONTROL, SOIL AND TESTING DIVISION. THE CONTRACTOR SHALL PRE-TEST THE PROPOSED GROUT FOR COMPRESSIVE STRENGTH AT 3 AND 7 DAYS AND SUBMIT THE RESULTS TO THE BRIDGE PROJECT MANAGER FOR APPROVAL PRIOR TO INSTALLATION OF THE GROUT IN THE STRUCTURE. THE TESTS WILL BE BASED ON A POURABLE CONSISTENCY WITH THE SAME WATER/GROUT MIXTURE RATIO TO BE USED IN THE STRUCTURE.
- THE CONTRACTOR SHALL BE REQUIRED TO SUBMIT FOR EACH PROJECT, THE GROUT PRE-TEST RESULTS OBTAINED IN THE NOTE ABOVE. THE CONTRACTOR SHALL BE REQUIRED TO PERFORM A NEW PRE-TEST AND SUBMISSION FOR APPROVAL UNDER ANY OF THE FOLLOWING CONDITIONS:
 - A PERIOD OF 18 MONTHS HAS ELAPSED SINCE LAST PRE-APPROVAL TESTING.
 - GROUT MANUFACTURER HAS REVISED OR CHANGED THE GROUT SPECIFICATIONS.
 - THE CONTRACTOR ALTERS THE WATER/GROUT MIXTURE RATIO.
 - THE CONTRACTOR CHANGES GROUT MANUFACTURER.
- THE CONTRACTOR IS REQUIRED TO COMPLETE THE GROUT STRENGTH TABLE ON BR-B103.
- TEST PROCEDURE FOR DETERMINING THE COMPRESSIVE STRENGTH OF GROUT SHALL USE CUBE SPECIMENS IN ACCORDANCE WITH ASTM C109, AS MODIFIED BY ASTM C1107. GROUT TESTING IN ACCORDANCE WITH AASHTO T23 (STANDARD CYLINDER TEST) IS NOT ACCEPTABLE.

PROTECTIVE SURFACE TREATMENT:

- EACH PRESTRESSED CONCRETE BEAM SHALL BE TREATED BY THE MANUFACTURER AT THE FABRICATION PLANT WITH AN APPROVED CONCRETE SEALER (SILANE). AN APPROVED LIST OF CONCRETE SEALERS ARE ON FILE AT THE WEST VIRGINIA DIVISION OF HIGHWAYS, MATERIALS CONTROL, SOIL AND TESTING DIVISION. COVERAGE SHALL INCLUDE TOP AND BOTTOM OF INTERIOR BEAMS, AND TOP, BOTTOM AND EXTERIOR SIDE OF EXTERIOR BEAM. APPLICATION RATE SHALL BE PER TREATMENT MANUFACTURER'S RECOMMENDATION.
- AFTER COMPLETION OF THE SILANE TREATMENT BY FABRICATOR AND A MAXIMUM OF FIVE WORKING DAYS PRIOR TO SHIPMENT OF THE BEAMS, THE FABRICATOR SHALL BE RESPONSIBLE FOR ABRASIVE BLAST CLEANING TO CLEAN WHITE CONCRETE THE INTERIOR SIDES OF BEAMS FOR THE FULL LENGTH. CLEAN WHITE CONCRETE SHALL MEAN REMOVAL OF ALL DIRT, GREASE, OIL, AND LOOSE CONCRETE LAITANCE AND PROVIDE A ROUGHENED CONCRETE SURFACE. BLASTING MEDIUM SHALL BE APPROVED BY THE DIVISION OF HIGHWAYS.

SHOP DRAWINGS:


THE FABRICATOR SHALL BE RESPONSIBLE FOR THE PREPARATION OF SHOP DRAWINGS IN ACCORDANCE WITH THE WEST VIRGINIA DIVISION OF HIGHWAYS DOCUMENTS, DD-102 AND THE STANDARD SPECIFICATIONS. ADDITIONAL INFORMATION IS PROVIDED IN SECTION 7 OF THE BRIDGE DESIGN MANUAL. SHOP DRAWINGS SHALL INCLUDE THE FABRICATOR'S DETENSIONING PLAN.

BAR SIZE	NO. 3	NO. 4	NO. 5	NO. 6
SPLICE LEN.	21"	28"	34"	41"


THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A & B THRU BR-B42A & B, BR-B101, BR-B102A & B, BR-B103, BR-B104, BR-B105A & B AND BR-B106 AS APPLICABLE.

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS ENGINEERING DIVISION		BRIDGE NO.: S306-43-12.29 over HENRY FRANCE on CR 43 in CABELL COUNTY	
		DESIGNED BY: THB/ DRAWN BY: THB/ CHECKED BY: THB/ REVIEWED BY: THB/ DATE: SCALE:	SHEET NO. OF BRIDGE NUMBER
WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS ENGINEERING DIVISION PRESTRESSED CONCRETE BEAM DESIGN & ASSEMBLY NOTES STANDARD SHEET BR-B100		PREPARED: 10-04-13 REVISED:	WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS ENGINEERING DIVISION PRESTRESSED CONCRETE BEAM DESIGN & ASSEMBLY NOTES


PROJECT NUMBERS		DISTRICT	COUNTY	SHEET NO.	TOTAL
STATE	FEDERAL				
S306-43-12.29	N/A	02	CABELL	-	-

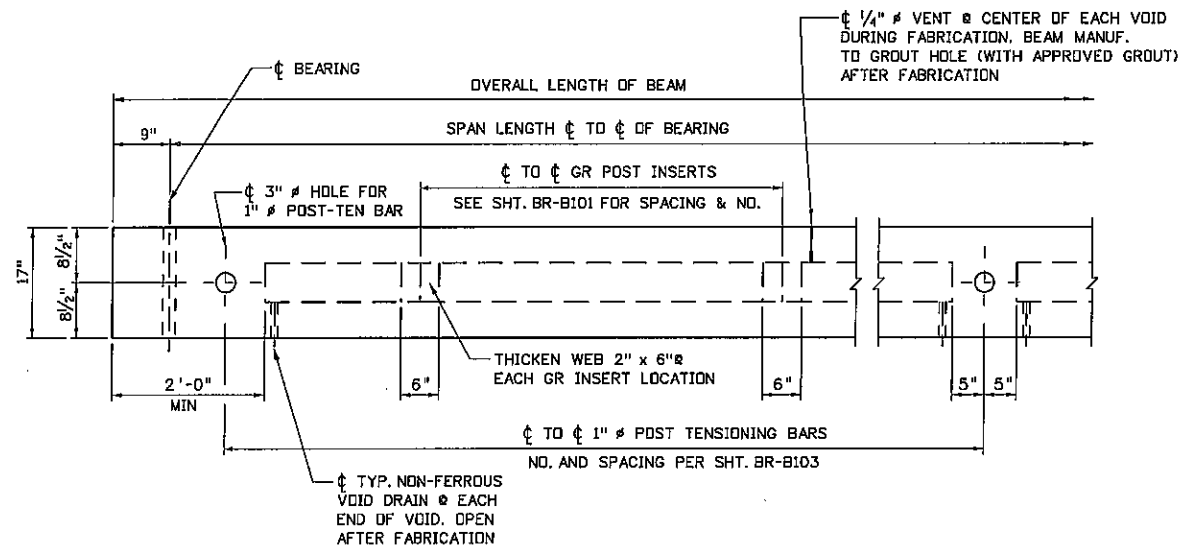


GENERAL ELEVATION VIEW

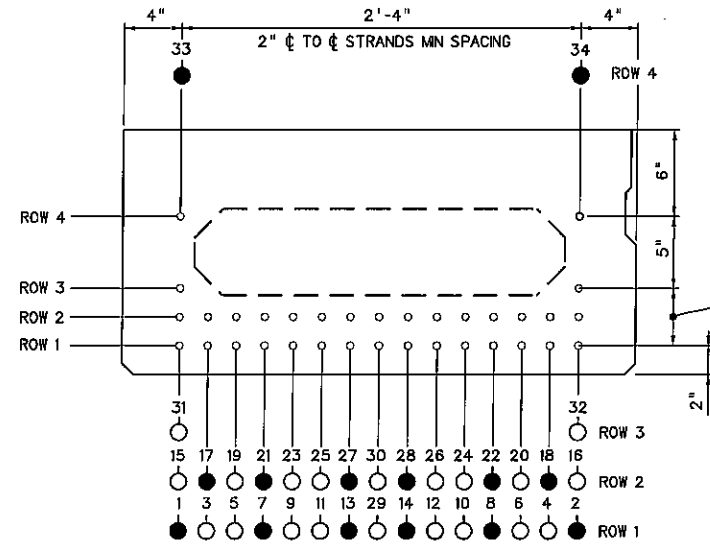


BEAM PRESTRESSING
TYPICAL BEAM END & MIDSPAN

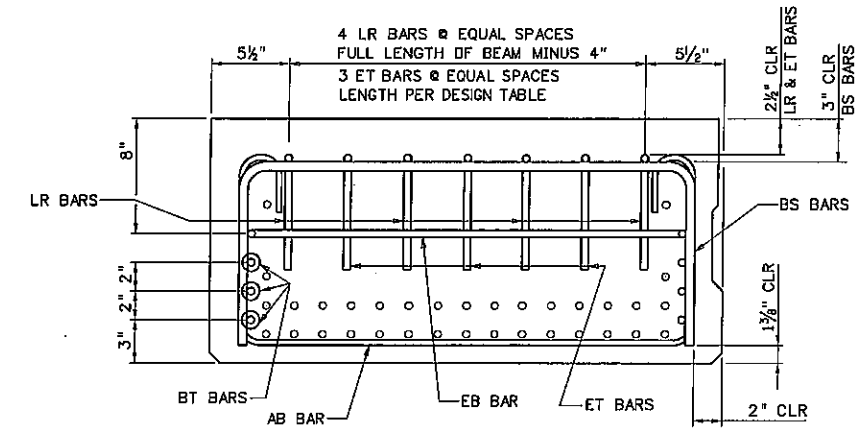


SECTION A-A

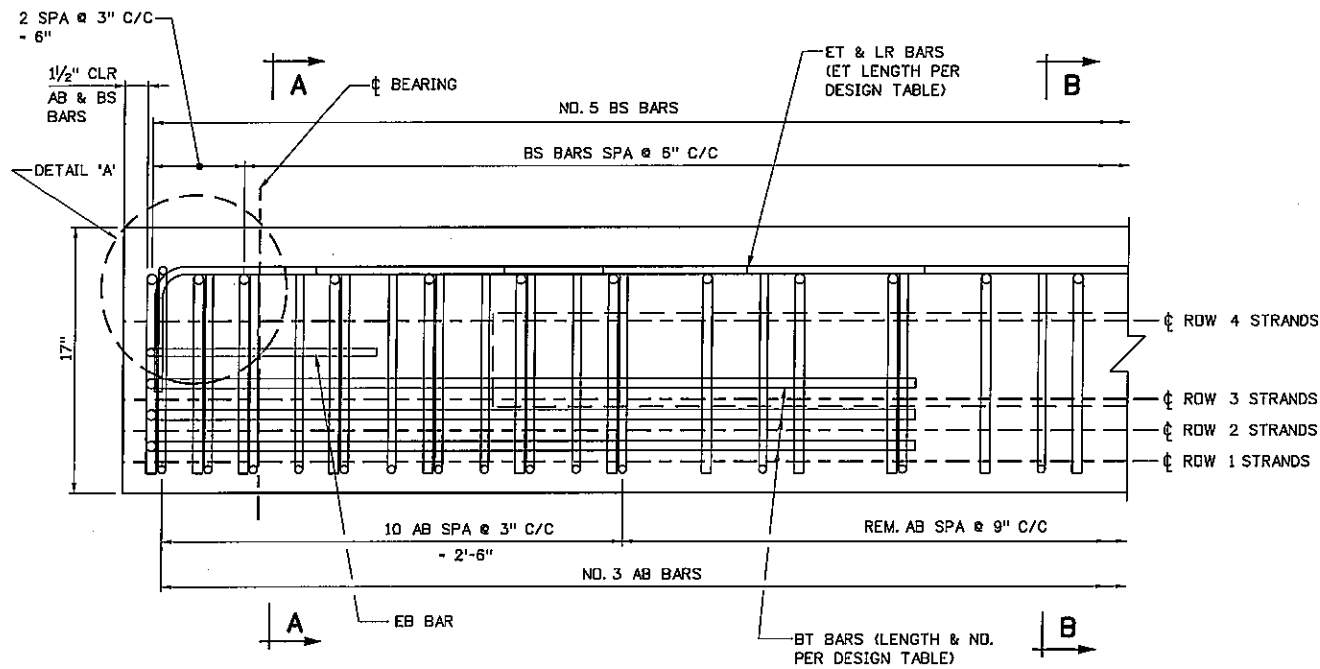


REINFORCING STEEL ELEVATION

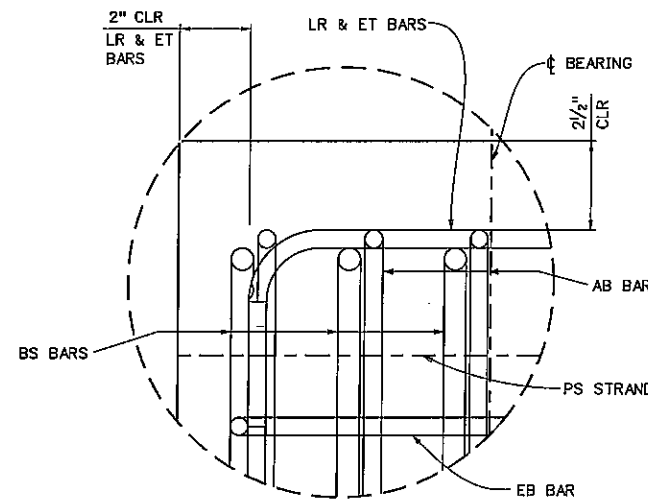

DETAIL 'A'

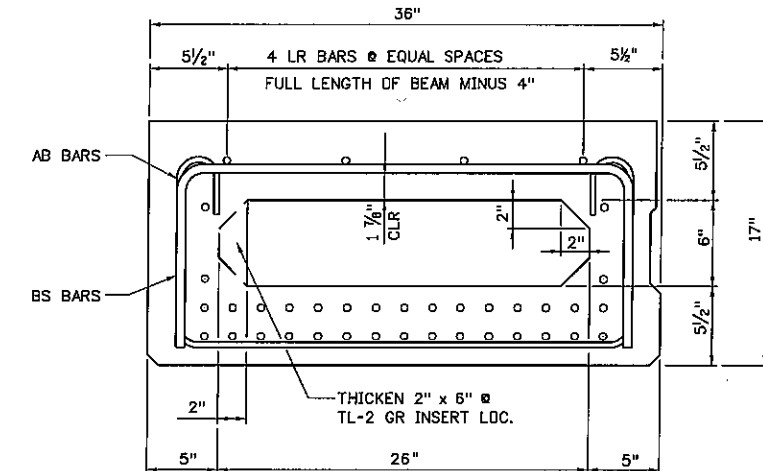

SECTION B-B

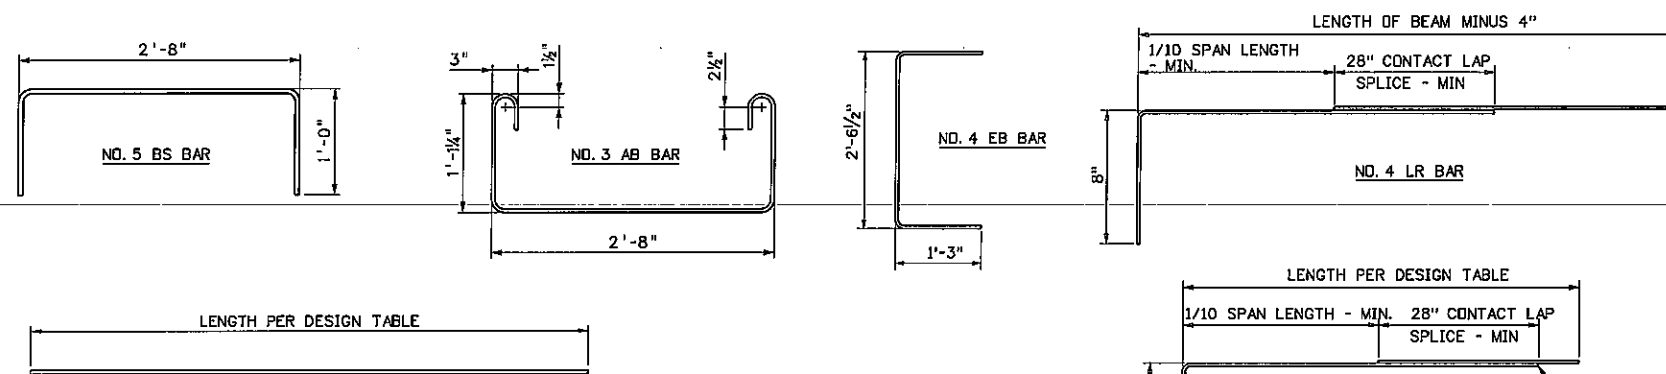

REINFORCING BAR DETAIL

NOTES:

- REFER TO SHEET BR-B102A FOR SHEAR KEY DETAILS.
- DESIGNER SHALL USE THE FOLLOWING KEY TO INDICATE STRAND AND DEBONDING PATTERN ON "BEAM PRESTRESSING VIEW", THIS SHEET.
 - ACTIVE STRAND
 - ▽ DEBOND STRAND: LENGTH FROM END OF BEAM
 - △ DEBOND STRAND: LENGTH FROM END OF BEAM
 - DEBOND STRAND: LENGTH FROM END OF BEAM
- THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17B, BR-B100, BR-B101, BR-B102A & B, BR-B103, BR-B104, BR-B105A & B AND BR-B106 AS APPLICABLE.

WHEN A POST-TEN ACCESS POCKET IS USED AS DETAILED ON SHEET BR-103 STRANDS IN ROWS 3 AND 4 SHALL BE ELIMINATED. THE BEAM SHALL BE REDESIGNED AS NECESSARY.

APPROVED: *Gregory Baile* DATE: 10-25-07
DIRECTOR, ENGINEERING DIVISION

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

17" PRESTRESSED CONCRETE
BOX BEAMS
DESIGN AND ASSEMBLY DETAILS

STANDARD SHEET BR-B17A

PREPARED: 10-04-13

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

BRIDGE NO.: S06-43-12.29
over
LONG BRANCH
OR
COUNTY ROUTE 43
in
CABELL COUNTY

17" PRESTRESSED BOX BEAM
DESIGN AND ASSEMBLY DETAILS

DESIGNED BY: TW/
DRAWN BY: BH/
CHECKED BY: THB/
REVIEWED BY: TW/
DATE:
SCALE:
SHEET OF
BRIDGE NO. -

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	-	-

DESIGN DATA FOR 17" DEPTH ADJACENT BOX BEAM

SPAN LENGTH ϕ TO ϕ BEARING		20'-0"	22'-0"	24'-0"	26'-0"	28'-0"	30'-0"	32'-0"	34'-0"	36'-0"	38'-0"	40'-0"
OVERALL LENGTH OF BEAM		21'-6"	23'-6"	25'-6"	27'-6"	29'-6"	31'-6"	33'-6"	35'-6"	37'-6"	39'-6"	41'-6"
NO. OF 270 KSI, 1/2" ϕ LOW-RELAXATION STRANDS, AREA/STRAND = 0.167 SQ. IN.		10	10	10	10	12	12	14	14	16	16	16
STRAND POSITION NUMBER	ROW 1	1,2,11,12	1,2,11,12	1,2,11,12	1,2,11,12	1,2,7,8,13,14	1,2,7,8,13,14	1,2,7,8,13,14	1,2,7,8,13,14	1,2,5,6,9,10,13,14	1,2,5,6,9,10,13,14	1,2,5,6,9,10,13,14
	ROW 2	17,18,25,26	17,18,25,26	17,18,25,26	17,18,25,26	17,18,27,28	17,18,27,28	17,18,21,22,27,28	17,18,21,22,27,28	17,18,21,22,27,28	17,18,21,22,27,28	17,18,21,22,27,28
	ROW 3	---	---	---	---	---	---	---	---	---	---	---
	ROW 4	33,34	33,34	33,34	33,34	33,34	33,34	33,34	33,34	33,34	33,34	33,34
PRESTRESSING FORCE IMMEDIATELY AFTER STRAND RELEASE, Ppt, (KIPS/BEAM)		326	326	326	326	389	389	451	451	512	512	513
EFFECTIVE PRESTRESSING FORCE AFTER ALL LOSSES, Ppe, (KIPS/BEAM)		293	293	294	294	345	346	396	397	443	445	447
REQUIRED FACTORED MOMENT ϕ STRENGTH I, Mu (FT-KIPS/BEAM)		204	231	260	269	319	349	382	415	453	491	531
FACTORED FLEXURAL RESISTANCE, Mr (FT-KIPS/BEAM)		408	408	408	408	496	496	566	566	646	646	646
TOTAL NO. DEBONDED STRANDS		---	---	---	---	---	---	---	---	---	---	---
DEBONDED STRAND POSITION NUMBER & SHIELDING LENGTH FROM EACH END	ROW 1	---	---	---	---	---	---	---	---	---	---	---
	ROW 2	---	---	---	---	---	---	---	---	---	---	---
NUMBER & LENGTH ϕ 4 ET TOP TENSION BARS ϕ EACH END		3 - ϕ 4 x 3'-6"	3 - ϕ 4 x 3'-6"	3 - ϕ 4 x 4'-0"	3 - ϕ 4 x 4'-0"	3 - ϕ 4 x 4'-0"	3 - ϕ 4 x 4'-6"	3 - ϕ 4 x 4'-6"	3 - ϕ 4 x 5'-0"	3 - ϕ 4 x 9'-0"	3 - ϕ 4 x 9'-0"	3 - ϕ 4 x 9'-6"
NUMBER & LENGTH ϕ 5 BT BOTTOM TENSION BARS ϕ EACH END		2 - ϕ 5 x 4'-0"	2 - ϕ 5 x 4'-0"	2 - ϕ 5 x 4'-6"	2 - ϕ 5 x 4'-6"	2 - ϕ 5 x 4'-6"	2 - ϕ 5 x 5'-0"	2 - ϕ 5 x 5'-0"	2 - ϕ 5 x 5'-6"	2 - ϕ 5 x 5'-6"	2 - ϕ 5 x 5'-6"	2 - ϕ 5 x 6'-0"
DESIGN CAMBER + = POSITIVE (UP) (INCHES)	ϕ RELEASE	0.13	0.14	0.16	0.17	0.28	0.30	0.40	0.42	0.59	0.62	0.63
	ϕ ERECTION	0.21	0.24	0.26	0.27	0.45	0.47	0.64	0.65	0.93	0.95	0.95
	ϕ FINAL	0.27	0.29	0.30	0.30	0.53	0.53	0.71	0.69	1.03	0.99	0.92
NUMBER & SPACING OF TL-2 GUARDRAIL INSERTS SEE NOTE 6	NO OF INSERTS REQD.											
	END OF BEAM TO ϕ OF FIRST INSERT EA. END											
	ϕ OF 1st INSERT TO ϕ 2nd INSERT EA. END											
WEIGHT OF TYPICAL BEAM INCLUDING DIAPHRAGM (TONS)		5.6	6.1	6.6	7.1	7.6	8.1	8.6	9.1	9.6	10.1	10.6

MIN. CONCRETE STRENGTH @ RELEASE = 5500 PSI
 MIN. CONCRETE STRENGTH @ 28 DAYS = 8000 PSI
 INITIAL PULL/STRAND = 33,820 LBS
 CROSS-SECTION AREA/STRAND = 0.167 SQ. IN.

NOTES

- BEAM WEIGHTS LISTED IN THE DESIGN TABLE ARE BASED ON ZERO SKEW, 2 FT. LONG ENDBLOCK AND DIAPHRAGMS SPACED @ 15 FT C/C. WEIGHTS FOR SKEWED BEAMS, LONGER ENDBLOCKS AND ADDITIONAL DIAPHRAGMS SHOULD BE ADJUSTED ACCORDINGLY.
 FOR ADDITIONAL DIAPHRAGMS, ADD 135 LBS/DIAPHRAGM.
 FOR SKEW ADD 17 LBS/DEGREE OF SKEW/END.
 FOR LONGER ENDBLOCK, ADD 163 LBS/LF/END.
- DESIGNERS SHOULD NOTE THAT DATA IN STANDARD TABLE IS BASED ON EVEN SPAN LENGTHS, A TWO LANE STRUCTURE 8 BEAMS WIDE AND ZERO SKEW. SUPERIMPOSED DEAD LOADS INCLUDE TYPE F PARAPET (321 PLF) AND A FWS OF 50 PSF. FOR NON-STANDARD BRIDGES DATA SHOULD BE VERIFIED AND IF REQUIRED NEW DESIGN DATA ENTERED INTO BLANK COLUMNS. IN NO CASE SHALL THE STANDARD DESIGN TABLE BE ALTERED.
- PREDICTED DESIGN CAMBER VALUES LISTED IN THE TABLE ARE BASED ON EMPIRICAL FORMULAS AND AS SUCH ARE APPROXIMATE. FOR MEMBERS WITH SPAN-TO-DEPTH RATIOS AT OR EXCEEDING 25, THE TOLERANCE VALUES LISTED IN APPENDIX B OF PCI MANUAL FOR QUALITY CONTROL, MNL-116, MAY NOT APPLY.
 MEASUREMENT OF CAMBER FOR COMPARISON TO PREDICTED DESIGN VALUES SHOULD BE COMPLETED WITHIN 72 HOURS OF RELEASE. ADDITIONALLY, CAMBER SHOULD BE EVALUATED UNDER CONDITIONS THAT MINIMIZE THE EFFECT OF TEMPERATURE VARIATION.

- DESIGNER, FABRICATOR, AND ERECTOR SHALL BE AWARE THAT SKEWED END BEAMS MAY TWIST OR WARP, CAUSING UNEVEN BEAM SEATING AT THE BEARINGS. THE CONTRACTOR IS REQUIRED TO CORRECT AT THE TIME OF ERECTION, BEFORE THE BEAMS ARE SECURED IN PLACE. METHOD OF CORRECTION SHALL PROVIDE AN EVEN, TOTAL BEARING AND A LEVEL TOP BEAM SURFACE. TOLERANCE, AFTER CORRECTION, SHALL BE (+/-) 1/8 INCH. THE FABRICATOR SHALL NOTIFY THE CONTRACTOR AND DESIGNER IF CORRECTIONS ARE REQUIRED PRIOR TO SHIPMENT.
- MAXIMUM BEAM SKEW SHALL BE 30 DEGREES.
- DESIGNER INPUT VALUES OF NUMBER OF INSERTS, DISTANCE FROM END OF BEAM TO ϕ FIRST INSERT, AND ϕ FIRST INSERT TO ϕ SECOND INSERT. ABOVE VALUES SHALL BE BASED ON THE REQUIRED 6'-3" GUARDRAIL POST SPACING ACROSS THE BRIDGE.
- SPECIAL STRAND NOTE FOR 17" BOX SECTION ONLY: WHEN TL-2 GUARDRAIL INSERTS ARE REQUIRED THE BOTTOM INSERT (TYPE 2A ANCHOR) CONFLICTS WITH STRAND NO. 15. STRANDS 15 AND 16 HAVE BEEN MOVED TO POSITIONS 17 AND 18. FOR UNIFORMITY PURPOSES, ALL BEAMS OF THE SAME DESIGN SHALL USE SAME STRAND PATTERN.
- THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A, BR-B100, BR-B101, BR-B102A & B, BR-B103, BR-B104, BR-B105A & B AND BR-B106 AS APPLICABLE.

APPROVED: *Gregory Bailey* DIRECTOR, DIVISION OF HIGHWAYS
 DATE: 10-25-07

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 ENGINEERING DIVISION

DESIGN TABLE FOR 17"
 PRESTRESSED BOX BEAM
 STANDARD SHEET BR-B17B

PREPARED: 10-04-13
 REVISION:


WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 ENGINEERING DIVISION

BRIDGE NO.: S306-43-12.29
 over
 LONG BRANCH
 on
 CR 43
 in
 CABELL COUNTY

DESIGNED BY: THB/
 DRAWN BY: THB/
 CHECKED BY: THW/
 REVIEWED BY: THW/
 DATE:
 SCALE:
 SHEET NO. OF
 BRIDGE NUMBER


DESIGN TABLE FOR 17"
 PRESTRESSED BOX BEAM

PUBLIC ROADS DIV.	STATE DIST. NO.	PROJECT NUMBER	COUNTY	SHEET NO.	TOTAL SHTS
W.V.	02	S306-43-12.29	CABELL	-	-

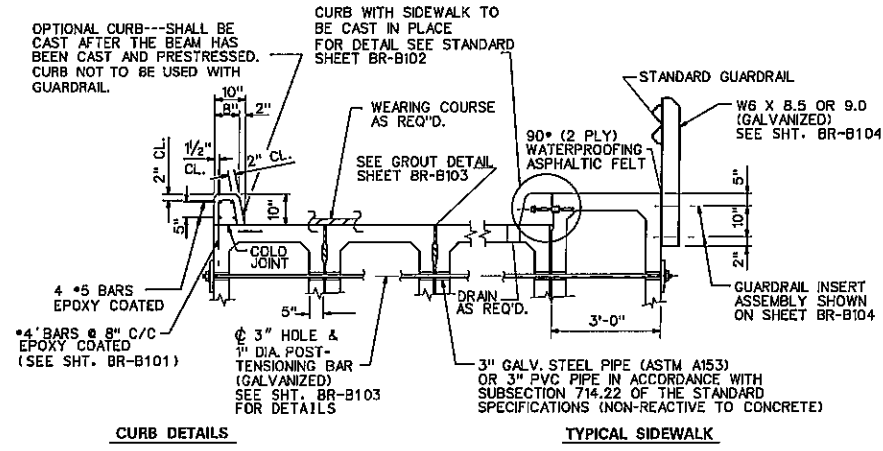


TYP. BEAM CROSS SECTION AND POST-TENSIONING BAR DETAILS


TO FACILITATE GUARDRAIL FABRICATION, STANDARD LENGTH GALVANIZED GUARDRAIL BEAMS MAY BE SAW CUT TO REQUIRED LENGTHS WITH SPLICE AND POST ATTACHMENT HOLES DRILLED AT THE REQUIRED LOCATIONS. HOLES TO BE 1" MAXIMUM DIAMETER. REMOVE ALL BURRS AFTER DRILLING. NO REAMING OF HOLES ALLOWED AFTER COMPLETION OF DRILLING OPERATIONS.

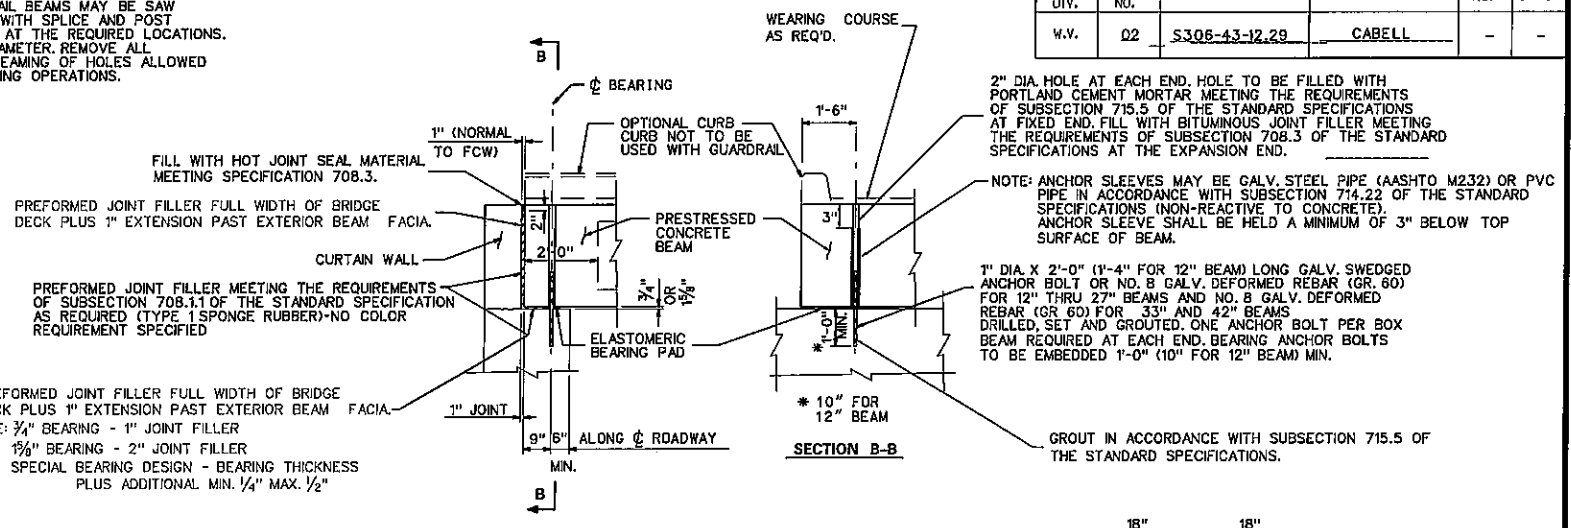


TYPICAL END BEARING DETAIL/BACKWALL (ALONG CENTER LINE ROADWAY)

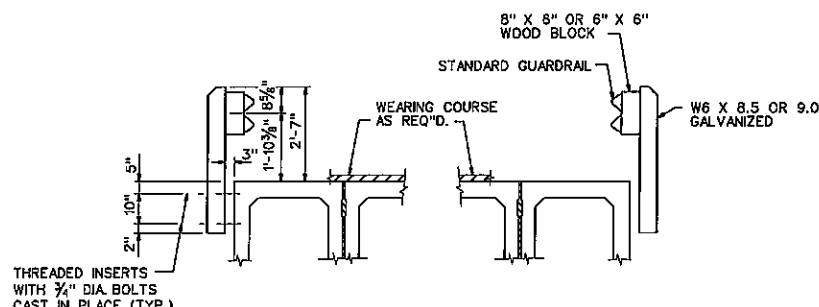


TYPICAL CROSS SECTION WITHOUT CURB

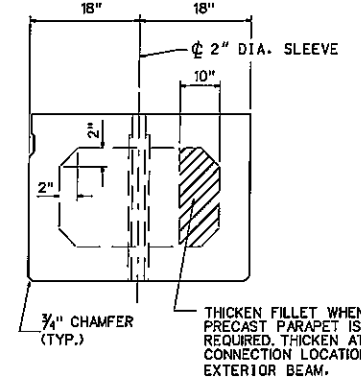

SECTION A-A (FOR 12" BEAM ONLY)

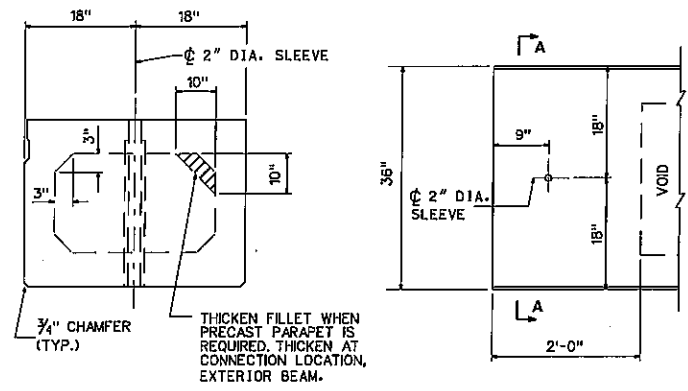

END BLOCK DETAILS

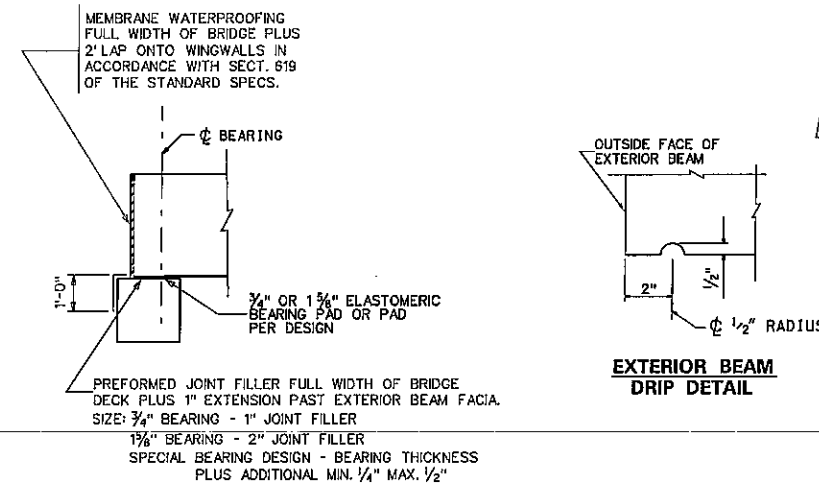

WATERPROOFING DETAIL WITHOUT BACKWALL

GOVERNING SPECIFICATIONS
 THE WEST VIRGINIA DIVISION OF HIGHWAYS STANDARD SPECIFICATIONS, ROADS AND BRIDGES, ADOPTED 1993, AS AMENDED BY THE SUPPLEMENTAL SPECIFICATIONS OF THE WEST VIRGINIA DIVISION OF HIGHWAYS, CURRENT ISSUE, THE CONTRACT PLANS AND CONTRACT DOCUMENTS ARE THE GOVERNING PROVISIONS APPLICABLE TO THE PROJECT.

THE PRESTRESSED CONCRETE BOX BEAMS SHALL CONFORM TO ALL APPLICABLE PROVISIONS OF THE SECTION 603 OF THE STANDARD SPECIFICATIONS.

ALL REINFORCING STEEL BARS SHALL BE INTERMEDIATE GRADE BILLET STEEL GRADE 60 IN ACCORDANCE WITH SUBSECTION 709.1 OF THE STANDARD SPECIFICATIONS. REINFORCING BARS SHALL BE EPOXY COATED IN ACCORDANCE WITH SECTION 711.35 OF THE STANDARD SPECIFICATIONS.

DESIGN AND FABRICATION NOTES

- ALL MEMBERS ARE DESIGNED FOR 1.25xHS20-44 (HS25) LIVE LOADING IN ACCORDANCE WITH 1992 AASHTO STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES AS AMENDED BY CURRENT INTERIM SPECIFICATIONS. THE DESIGN PROVIDES FOR A WEARING SURFACE OF 50 POUNDS PER SQUARE FOOT OF ROADWAY. THE DESIGN ALSO PROVIDES FOR AN ADDITIONAL GUARDRAIL SUPERIMPOSED DEAD LOAD OF 30 POUNDS PER LINEAR FOOT OF BEAM AND DIAPHRAGM DEAD LOAD BASED UPON NO. REQ'D. THE DESIGN IS BASED ON A TWO-LANE BRIDGE WITH A DECK WIDTH OF 33'-8" AND A ROADWAY WIDTH OF 33'-1".
- COMPRESSIVE STRENGTH OF CONCRETE AT TIME OF PRESTRESSING (f'ci) SHALL NOT BE LESS THAN : 4,000 PSI-17" THRU 33" BOX BEAMS; 5,000 PSI-42" BOX BEAM.
- COMPRESSIVE STRENGTH OF CONCRETE AT 28 DAYS (f'c) SHALL NOT BE LESS THAN : 5,000 PSI-17" THRU 33" BOX BEAMS; 6,000 PSI-42" BOX BEAM.
- PRESTRESSING STEEL SHALL BE SEVEN-WIRE UNCOATED LOW RELAXATION STRAND IN ACCORDANCE WITH ASTM A416 GRADE 270 WITH MINIMUM TENSILE STRENGTH (f's) OF 270,000 PSI, EXCEPT FOR 42" BOX BEAM, PRESTRESSING STEEL SHALL BE SEVEN-WIRE UNCOATED LOW-RELAXATION OVERSIZE (AS=0.167 SQ.IN.) IN ACCORDANCE WITH ASTM A416 GRADE 270 WITH MINIMUM TENSILE STRENGTH (f's) OF 270,000 PSI.
- CALCULATED INITIAL STRESSES SHALL NOT EXCEED THE FOLLOWING ALLOWABLE TEMPORARY STRESSES BEFORE LOSSES DUE TO CREEP AND SHRINKAGE: CONCRETE COMPRESSION - 0.60 f'ci; CONCRETE TENSION - 200 PSI OR 3-ffci; PRESTRESSING STEEL - 0.75 f's FOR LOW RELAX. STRAND.
- CALCULATED FINAL STRESSES SHALL NOT EXCEED THE FOLLOWING ALLOWABLE SERVICE LOAD STRESSES AFTER ALL LOSSES HAVE OCCURED: CONCRETE COMPRESSION - 0.40 f'ci; CONCRETE TENSION - 3-ffci; PRESTRESSING STEEL - 0.80 f'y.
- WHERE THE CALCULATED INITIAL STRESSES EXCEED THE ALLOWABLE STRESS VALUES, STRAND DEBONDING OR TOP STRANDS SHALL BE PROVIDED TO REDUCE THE CALCULATED VALUES TO BELOW THE ALLOWABLE VALUES. ADDITIONALLY, BONDED NON-PRESTRESSED REINFORCEMENT SHALL BE PROVIDED TO RESIST THE TOTAL TENSION.
- ULTIMATE LOAD CAPACITY SHALL NOT BE LESS THAN $\frac{1.30}{\phi} [DL + \frac{2}{3}(LL + I)]$ WHERE $\phi = 1.0$ FOR FACTORY PRODUCED PRECAST PRESTRESSED MEMBERS.
- ALL ANCHOR DOWELS, NON-HEADED ANCHOR BOLTS, GUARDRAIL ATTACHMENT HARDWARE, GUARDRAIL POSTS, CONNECTION PLATES AND DRAIN PLATES SHALL CONFORM TO AASHTO M183 AND SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE WITH AASHTO M111, EXCEPT WHERE NOTED. ALL CAST-IN-PLACE THREADED INSERTS SHALL BE FABRICATED FROM HEX BAR STOCK MEETING THE REQUIREMENTS OF AASHTO M183, ASTM A108 OR A576, GRADE 1020 THRU 1035 OR GRADE 12L14. ALL GUARDRAIL POST ATTACHMENT BOLTS, IN OR OUT OF CONCRETE, SHALL MEET AASHTO M184 OR ASTM A307. NUTS AS REQUIRED SHALL BE HEAVY HEX AND SHALL MEET AASHTO M291. GRADE OF NUTS SUPPLIED SHALL BE AS SHOWN IN TABLE X1.1 OF M291. NUTS MAY ALSO BE SUPPLIED TO AASHTO M292, GRADE 2H. WASHERS SHALL BE CIRCULAR CARBON STEEL MEETING THE REQUIREMENTS OF AASHTO M293. ALL BOLTS, NUTS AND WASHERS SHALL BE HOT-DIP GALVANIZED TO AASHTO M232.
- ALL WELDING TO BE ACCOMPLISHED PRIOR TO GALVANIZING, EXCEPT WHEN NOTED.
- GUARDRAIL END TERMINAL SECTIONS SHALL CONFORM TO THE REQUIREMENTS AS SET FORTH BY THE WEST VIRGINIA DEPARTMENT OF TRANSPORTATION STANDARD DETAILS BOOK VOLUME 1, CURRENT ISSUE.
- DEBONDING OF STRANDS SHALL BE ACCOMPLISHED BY TAPING OR TIGHT-FIT PLASTIC TUBING. LENGTH OF DEBONDING SHALL BE MEASURED FROM ENDS OF BEAM. DEBONDING SHALL BE ACCOMPLISHED BY SHIELDING STRANDS IN A SYMMETRICAL FASHION ABOUT THE CL OF THE BEAM. NUMBER AND LENGTHS OF DEBONDED STRANDS FOR EACH SPAN LENGTH IS GIVEN IN THE PARTICULAR BEAM'S DESIGN DATA TABLE. PLASTIC TUBING SHALL BE TAPED AT BOTH ENDS.
- WHEN ALTERNATE BEAMS ARE TO BE SUPPLIED, THEIR DESIGNS SHALL BE BASED ON LOAD FACTOR DESIGN AND ALLOWABLE STRESS DESIGN AT ALL LOAD STAGES. ADDITIONALLY, ALL BEAMS SHALL BE DESIGNED TO MINIMIZE CAMBER, BUT SHALL HAVE A POSITIVE (UPWARD) CAMBER AFTER ALL LOSSES.
- DEFINITIONS: JACKING FORCE/STRAND-MAX. FORCE IN INDIVIDUAL STRAND BEFORE ANY LOSSES HAVE OCCURED, AS DEFINED BY AASHTO SPECIFICATIONS INITIAL PRESTRESS FORCE-TOTAL PRESTRESS FORCE IN BEAM AT RELEASE AFTER 10% LOSSES DUE TO ELASTIC SHORTENING, CREEP AND SHRINKAGE HAVE BEEN DEDUCTED.
 FINAL PRESTRESS FORCE-TOTAL PRESTRESS FORCE IN BEAM AT SERVICE LOADS AFTER ALL LOSSES HAVE OCCURED.
- BRIDGE GRADE: DUE TO THE DESIGN OF THE STANDARD ELASTOMERIC BEARING PADS, BRIDGE GRADES SHALL BE LIMITED TO 5 PER CENT OR LESS WHEN USING THESE PADS. IN CASES WHERE THE GRADE MUST BE GREATER THAN 5 PER CENT, A SPECIALLY DESIGNED PAD WILL BE REQUIRED.
- DIMENSIONAL TOLERANCES SHALL BE AS SPECIFIED BY DIVISION VI, SECTION 6.4 OF THE P.C.I. "MANUAL FOR QUALITY CONTROL", 3RD EDITION.
- THIS SHEET TO BE USED WITH STANDARD SHEET BR-1A, BR-S12A, BR-S12B, BR-B17A, BR-B17B, BR-B21A, BR-B21B, BR-B27A, BR-B27B, BR-B33A, BR-B33B, BR-B42A, BR-B42B, BR-B101, BR-B102, BR-B103, AND BR-B104 AS APPLICABLE.


PREFORMED JOINT FILLER MEETING THE REQUIREMENTS OF SUBSECTION 708.1.1 OF THE STANDARD SPECIFICATIONS (TYPE 1 SPONGE RUBBER). NO COLOR REQUIREMENT SPECIFIED.

APPROVED	DIRECTOR, STRUCTURES DIVISION	DATE
WEST VIRGINIA DEPARTMENT OF TRANSPORTATION		
DIVISION OF HIGHWAYS - STRUCTURES		
PRESTRESSED CONCRETE BEAM		
DESIGN & ASSEMBLY DETAILS		
STANDARD SHEET BR-B100		

THE WEST VIRGINIA DEPARTMENT OF TRANSPORTATION	
DIVISION OF HIGHWAYS - STRUCTURES	
DESIGNED BY: THB/	DRAWN BY: JBB-DHW
CHECKED BY:	REVIEWED BY:
DATE:	SCALE: NONE
SHEET NO. OF	SHEET HIGH
BRIDGE NUMBER	
BRIDGE NO.: S306-43-12.29	
OVER LONG BRANCH	
OR CR 43	
IN CABELL COUNTY	
PRESTRESS CONCRETE BEAM	
DESIGN & ASSEMBLY DETAILS	



S:\Projects\BRIDGE\CABELL\HENRY FRANKLIN\BRIDGE\CONCRETE SLAB\10-28-03\ammyf\ammyf.dgn

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	5	-

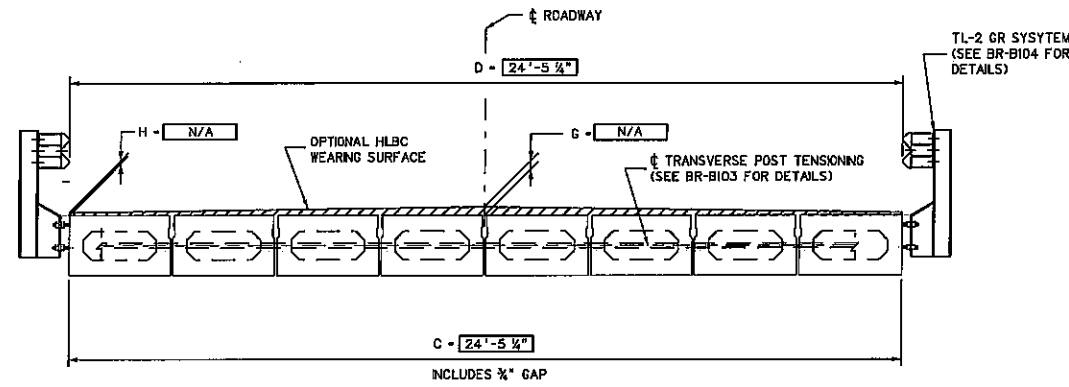

TYPICAL CROSS-SECTION WITH GUARDRAIL

CONTROL DIMENSIONS		
DESCRIPTION	CODE	VALUE
OVERALL BEAM LENGTH	A	33' - 6"
SPAN LENGTH, ϕ BEARING TO ϕ BEARING	B	32' - 0"
SUPERSTRUCTURE WIDTH - OUT TO OUT	C	24' - 5 1/4"
ROADWAY WIDTH - FACE GR/PARAPET TO FACE GR/PARAPET	D	24' - 5 1/4"
NUMBER OF BEAMS REQUIRED	—	8
BEAM SIZE (WIDTH x DEPTH)	—	17" x 36"
SKEW ANGLE (NORMAL, DEG. RFS OR DEG. LFS)	E	30 RFS
PERPENDICULAR DISTANCE FROM FACE OF BEAM TO ϕ BEARING	F	7.794'
HLBC WEARING COURSE REQUIRED (YES/NO)	—	NO
THICKNESS OF WEARING COURSE ϕ ϕ OF DECK OR ROADWAY	G	—
THICKNESS OF WEARING COURSE ϕ EDGE OF DECK OR PARAPET	H	—
TL-2 BRIDGE GUARDRAIL SYSTEM REQUIRED (YES/NO)	—	YES
FABRICATOR TO SUPPLY TL-2 BRIDGE GUARDRAIL (YES/NO)	—	YES
FABRICATOR TO INSTALL BRIDGE GUARDRAIL PRIOR TO SHIPMENT (YES/NO) (IF NO, FABRICATOR TO SHIP LOOSE)	—	YES
NUMBER OF GUARDRAIL POST INSERTS REQUIRED PER SIDE	—	6
TYPE F PARAPET REQUIRED (YES/NO)	—	NO
DRAINS REQUIRED (YES/NO)	—	NO
NUMBER OF DRAINS REQUIRED PER SIDE	—	—
10" CURB REQUIRED (YES/NO)	—	NO

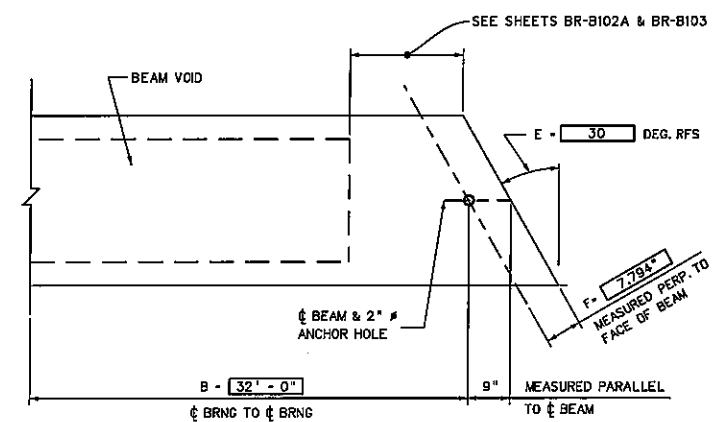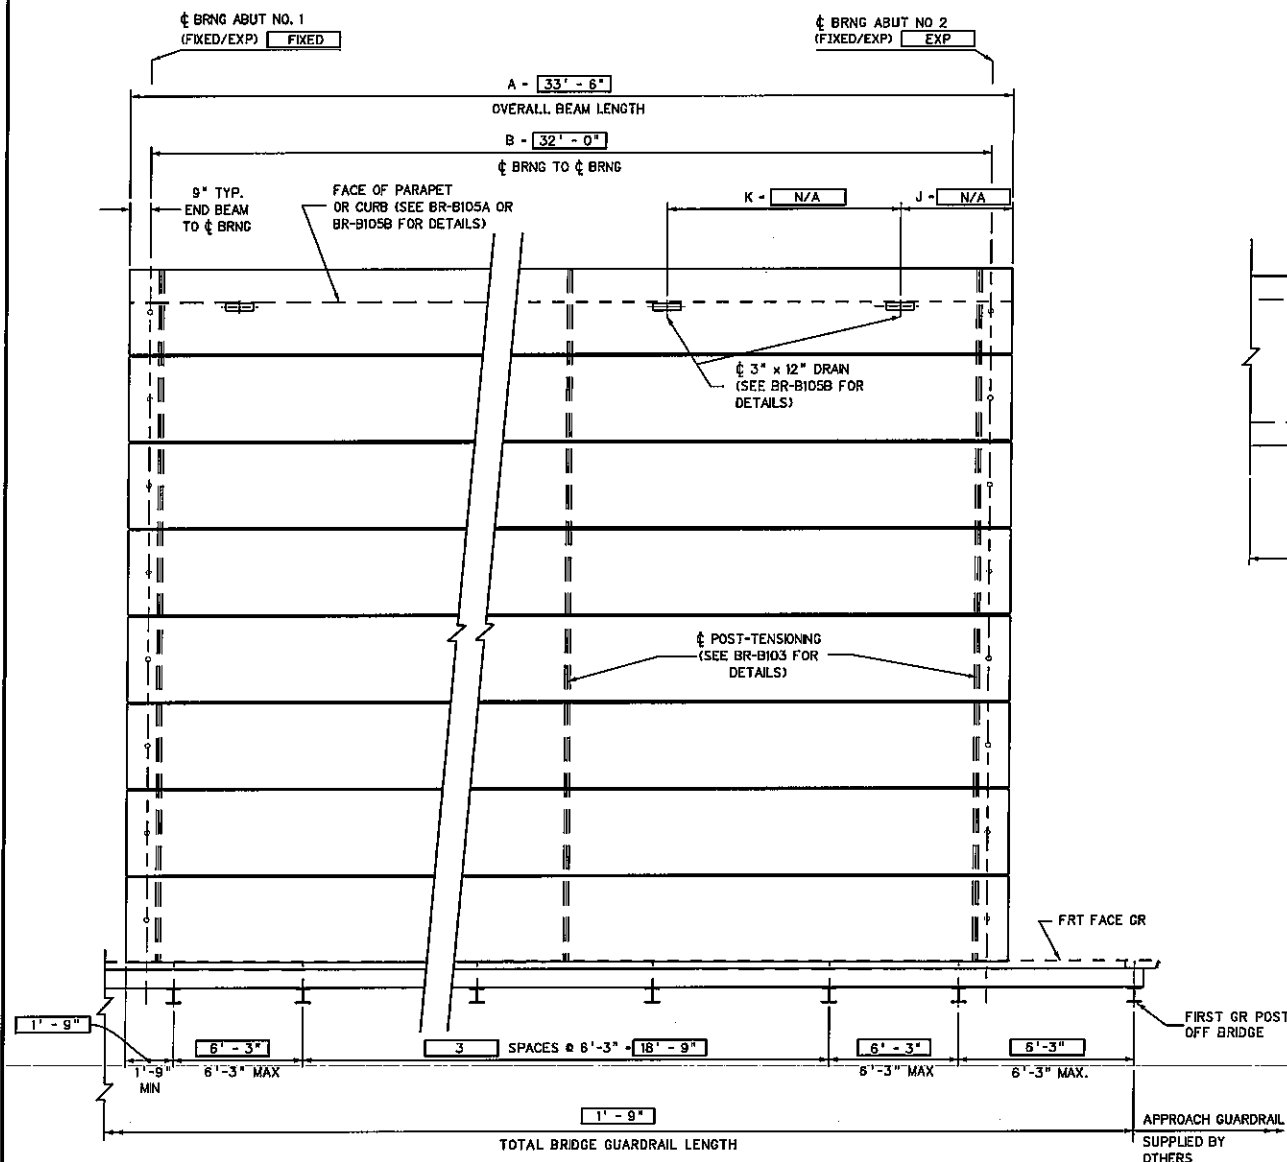

ESTIMATE OF QUANTITIES

ITEM NO.	DESCRIPTION	UNITS	QUANTITY
603016	PRESTRESSED CONCRETE BOX BEAM	LF	

DECK PLAN VIEW

- NOTES:
- WHEN BRIDGE GUARDRAIL IS TO BE SUPPLIED BY THE BEAM FABRICATOR, COST OF ALL BRIDGE GUARDRAIL ITEMS TO INCLUDE POSTS, RAIL ELEMENTS, ATTACHMENT HARDWARE, AND MISCELLANEOUS ITEMS NEEDED TO COMPLETELY INSTALL BRIDGE GUARDRAIL SHALL BE INCLUDED IN ITEM 603016 "PRESTRESSED CONCRETE BOX BEAM."
 - THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A & B THRU BR-B42A & B, BR-B100, BR-B102A & B, BR-B103, BR-B104, BR-B105A & B AND BR-B106.

APPROVED: *[Signature]* DATE: 10-25-07
DIRECTOR, ENGINEERING DIVISION

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

PREPARED: 10-04-13

DESIGN AND ASSEMBLY NOTES
STANDARD SHEET BR-B101


WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

BRIDGE NO.: S306-43-12.29
over
LONG BRANCH
on
CR 43
in
CABELL COUNTY


DESIGNED BY: THB/
DRAWN BY: THB/
CHECKED BY: TMW/
REVIEWED BY: TWI/
DATE:
SCALE:
SHEET NO. OF
BRIDGE NUMBER

PRESTRESSED CONCRETE BEAM
DESIGN & ASSEMBLY NOTES

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	-	-

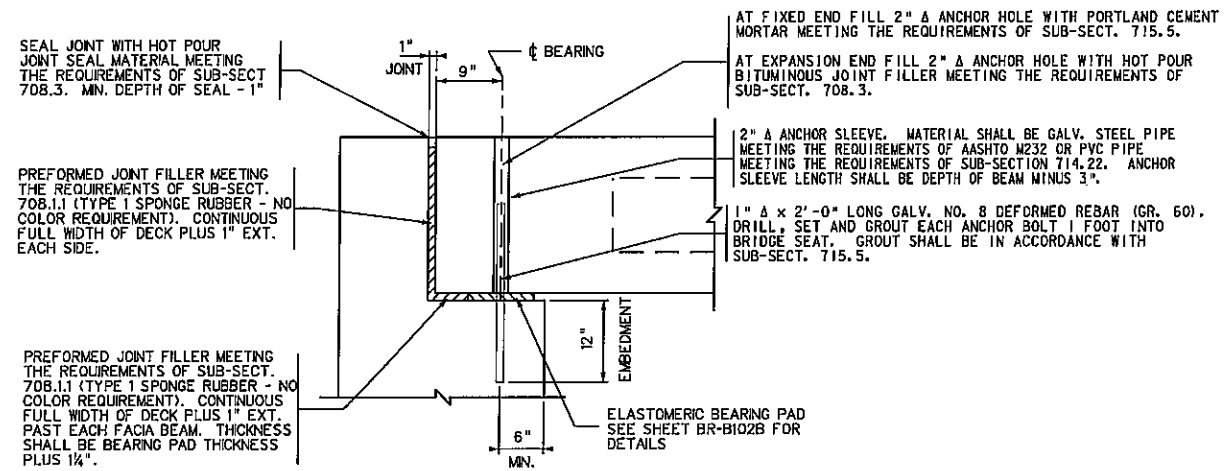


END BEARING DETAIL WITH BACKWALL

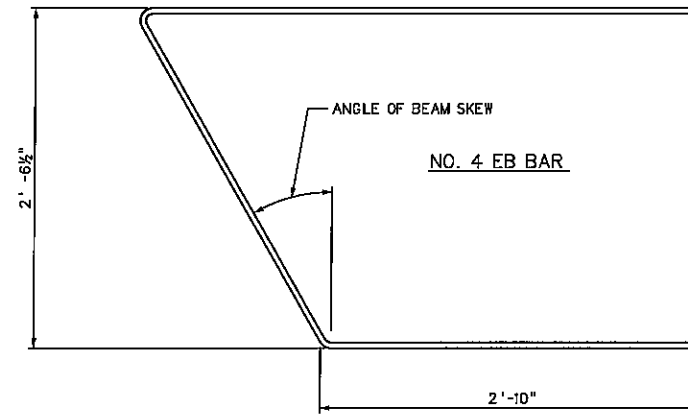


REINFORCING BAR DETAIL


SKEWED BEAMS

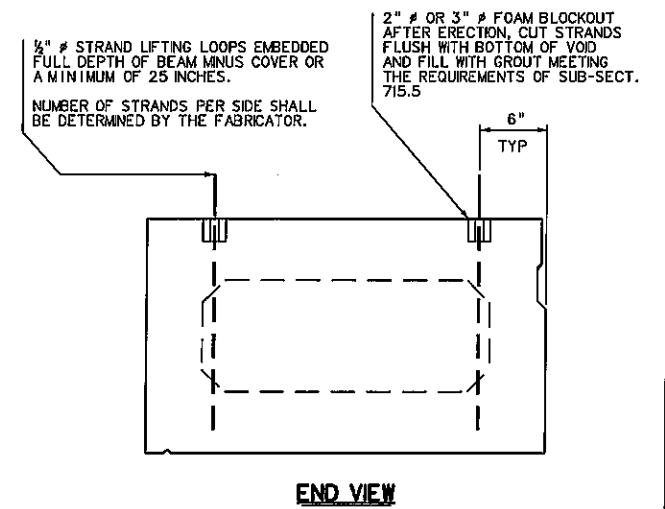

END VIEW

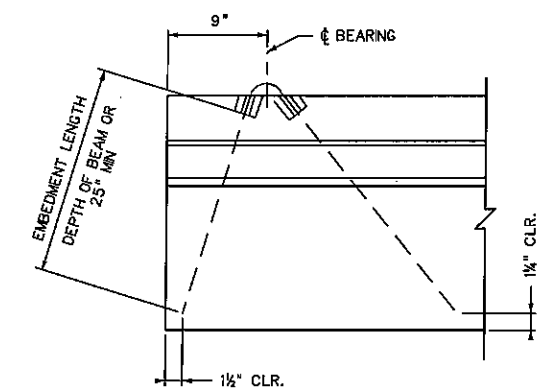


SIDE VIEW

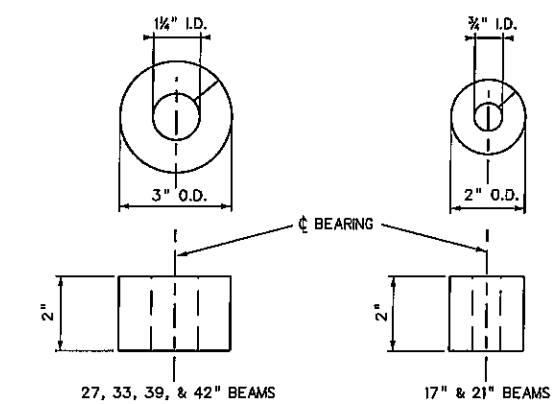


BLOCKOUT DETAILS

LIFTING DETAILS

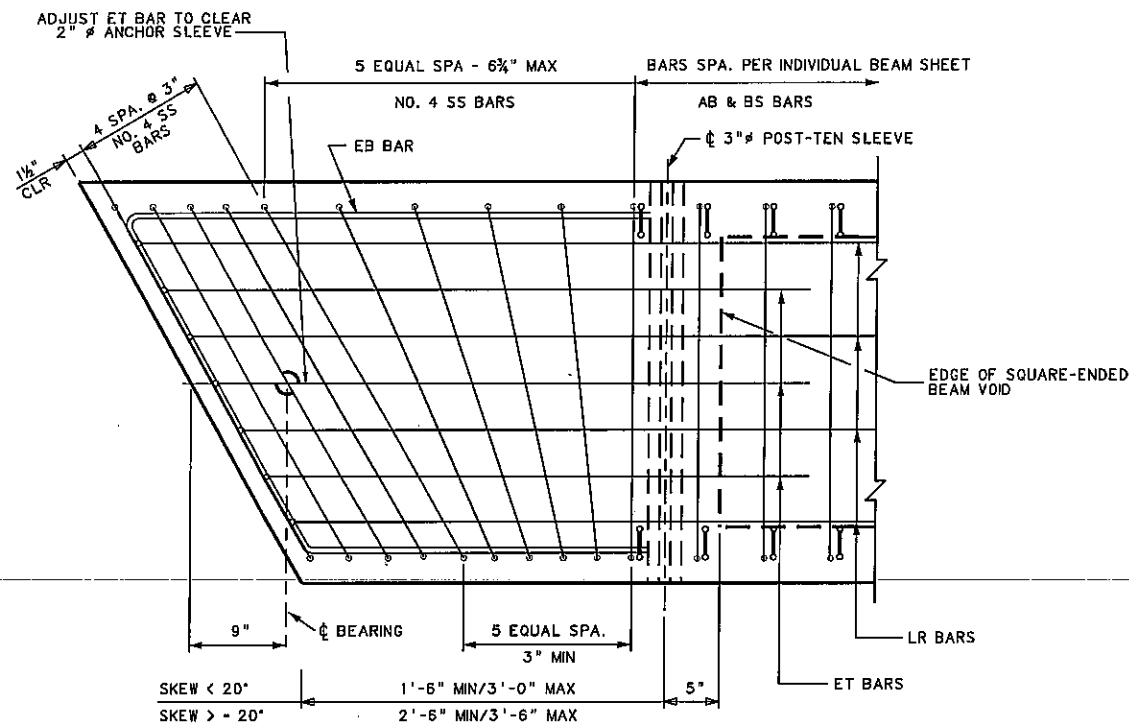

END BLOCK DETAIL - SKEWED BEAMS

WO/POST-TEN. ACCESS POCKET

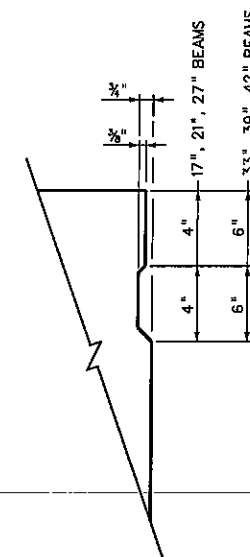


SHEAR KEY DETAIL

THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A & B THRU BR-B42A & B, BR-B100, BR-B101, BR-B102B, BR-B103, BR-B104, BR-B105A & B AND BR-B106 AS APPROPRIATE.



APPROVED: <i>Gregory Bailey</i> DIRECTOR, ENGINEERING DIVISION	DATE: 10-25-07
WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS ENGINEERING DIVISION	PREPARED: 10-04-13
PRESTRESSED CONCRETE BEAM SKEWED END REINFORCING MISC.DESIGN AND ASSEMBLY DETAILS	REVISIONS:
STANDARD SHEET BR-B102A	

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS ENGINEERING DIVISION	
BRIDGE NO.: S306-43-12.29	DESIGNED BY: THB/
over LONG BRANCH	DRAWN BY: THB/
on CR 43	CHECKED BY: TM/
in CABELL COUNTY	REVIEWED BY: TW/
PRESTRESSED CONCRETE BEAM SKEWED END REINFORCING MISC.DESIGN AND ASSEMBLY DETAILS	DATE:
	SCALE:
	SHEET OF
	BRIDGE NO.


STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	-	-

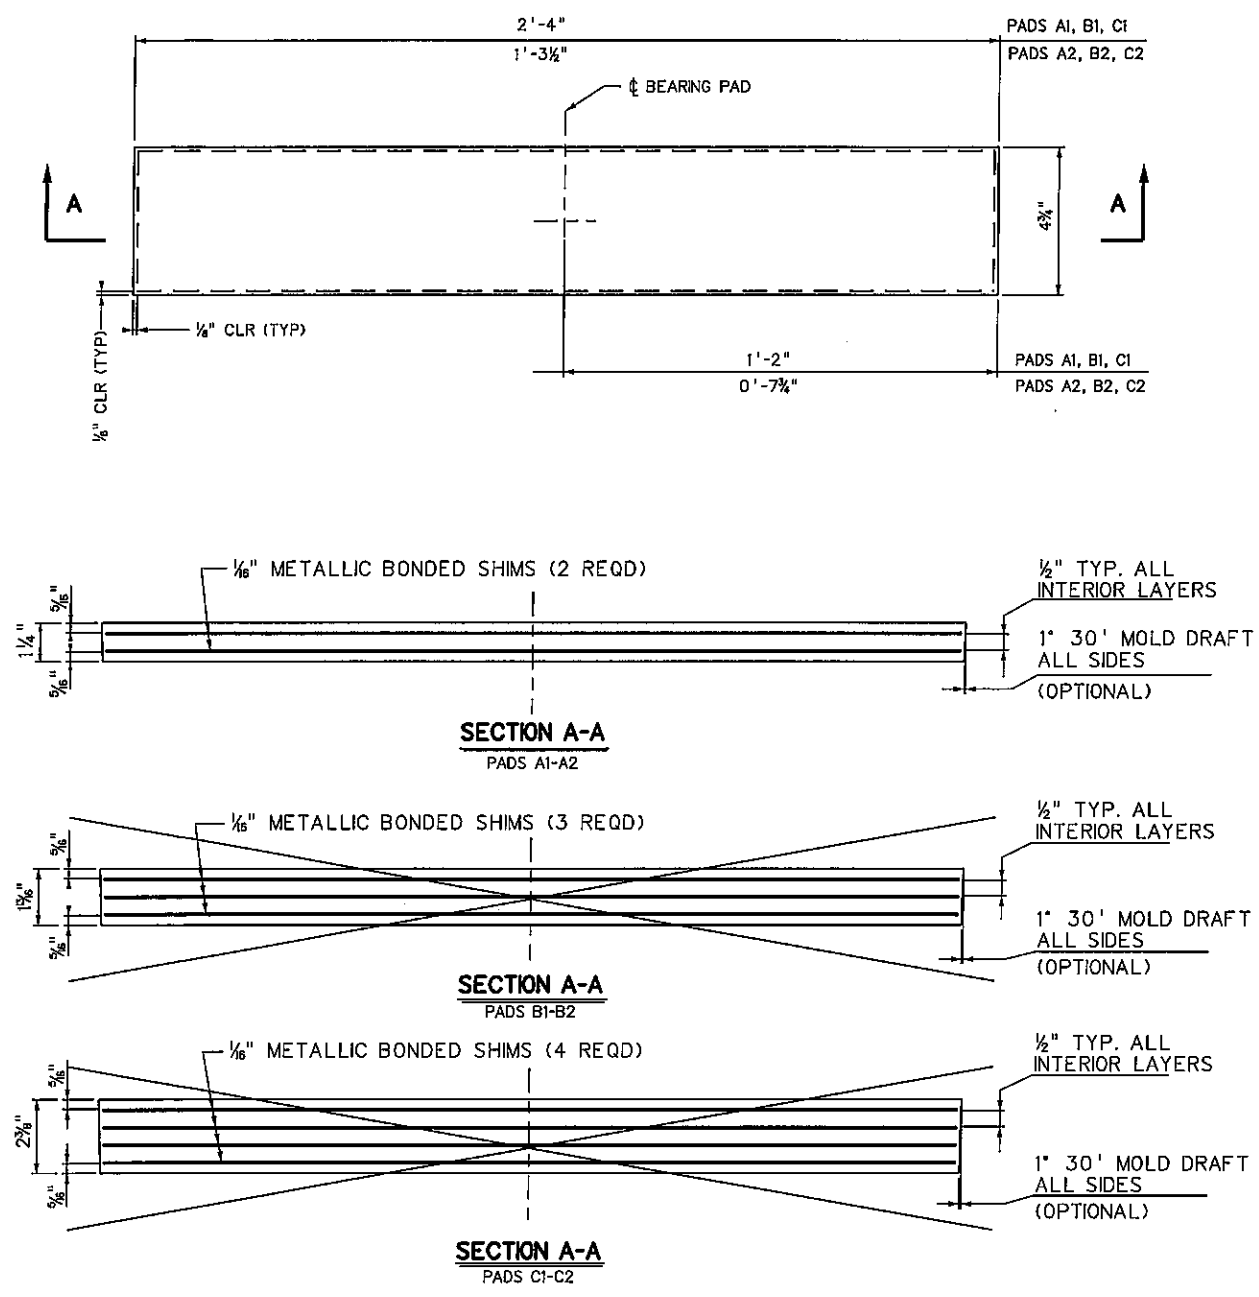

PREFORMED JOINT FILLER MEETING THE REQUIREMENTS OF SUB-SECT. 708.1.1 (TYPE 1 SPONGE RUBBER - NO COLOR REQUIREMENTS). THICKNESS SHALL BE BEARING PAD THICKNESS PLUS 1/4". (TYPICAL)

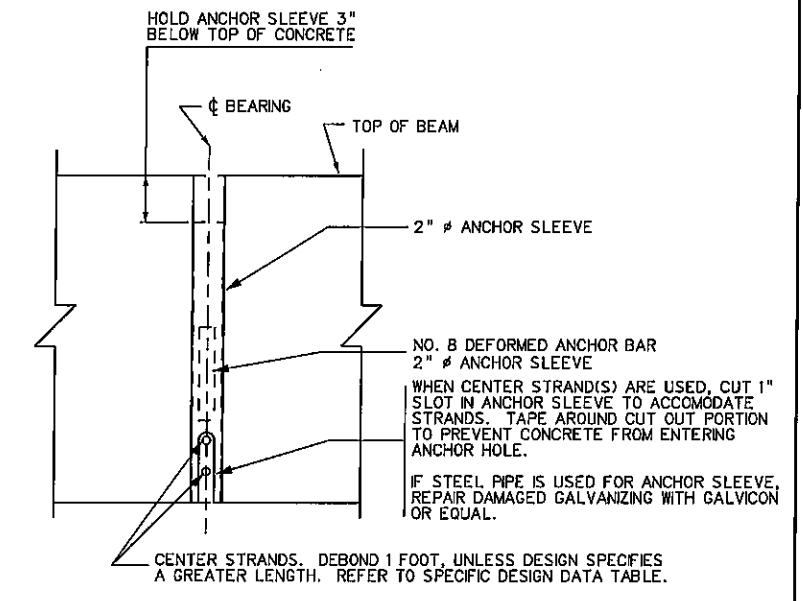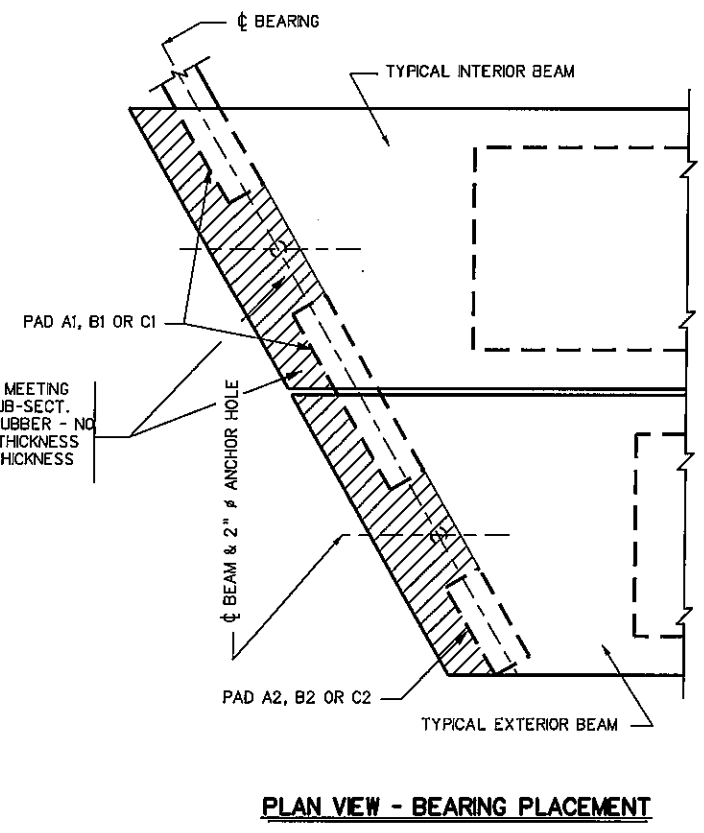


ANCHOR SLEEVE DETAIL

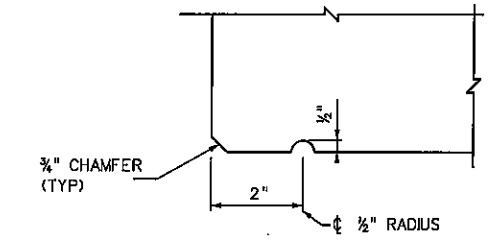

DRIP GROOVE DETAIL
EXTERIOR BEAMS

FOAM BLOCKOUT RECD. AFTER ERECTION FILL VOID WITH GROUT MEETING THE REQUIREMENTS OF SUB-SECT. 715.5

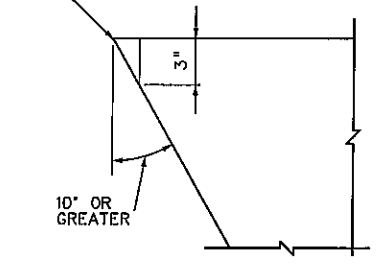

SKEW BLOCKOUT DETAIL

PAD	LENGTH	WIDTH	HEIGHT	NO. SHIMS	SHM SIZE	SPAN RANGES	MAXIMUM REACTION	MAXIMUM MOVEMENT ONE DIRECTION
A1	4 3/4"	28"	1 1/4"	2	1/16" x 4 1/2" x 2'-3 3/4"	20' - 38'	55 KIPS	0.39"
B1	4 3/4"	28"	1 1/4"	3	1/16" x 4 1/2" x 2'-3 3/4"	40' - 78'	75 KIPS	0.80"
C1	4 3/4"	28"	2 3/4"	4	1/16" x 4 1/2" x 2'-3 3/4"	80' - 100'	89 KIPS	1.02"
A2	4 3/4"	15 1/2"	1 1/4"	2	1/16" x 4 1/2" x 1'-3 3/4"	20' - 38'	28 KIPS	0.39"
B2	4 3/4"	15 1/2"	1 1/4"	3	1/16" x 4 1/2" x 1'-3 3/4"	40' - 78'	38 KIPS	0.80"
C2	4 3/4"	15 1/2"	2 3/4"	4	1/16" x 4 1/2" x 1'-3 3/4"	80' - 100'	45 KIPS	1.02"

NOTES:

- ELASTOMERIC BEARING PADS ARE DESIGNED IN ACCORDANCE WITH DESIGN METHOD B CONTAINED IN SECTION 14 OF THE AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS. FABRICATION SHALL BE IN ACCORDANCE WITH SECTION 18 OF THE AASHTO LRFD BRIDGE CONSTRUCTION SPECIFICATIONS.
- ALL BEARINGS ARE DESIGNED FOR A LOW TEMPERATURE ZONE-C AND SHALL HAVE A DUROMETER HARDNESS OF 60. METALLIC REINFORCEMENT SHALL HAVE A MINIMUM YIELD STRENGTH OF 36 KSI.
- BEARING PADS ARE DESIGNED FOR ZERO BRIDGE GRADE. FOR BRIDGE GRADES GREATER THAN 5 %, PADS SHALL BE SPECIFICALLY DESIGNED FOR THE GRADE. AS AN ALTERNATE, CAST-IN-PLACE BEVELED SOLE PLATES MAY BE USED.
- DESIGNER, FABRICATOR AND ERECTOR SHALL BE AWARE THAT SKEWED END BEAMS MAY TWIST OR WARP, CAUSING UNEVEN BEAM SEATING AT THE BEARINGS. THE CONTRACTOR IS REQUIRED TO CORRECT AT THE TIME OF ERECTION, BEFORE THE BEAMS ARE SECURED IN PLACE. METHOD OF CORRECTION SHALL PROVIDE AN EVEN, TOTAL BEARING AND A LEVEL TOP BEAM SURFACE. TOLERANCE AFTER CORRECTION SHALL BE ± 1/8 INCH. THE FABRICATOR SHALL NOTIFY THE CONTRACTOR AND DESIGNER IF CORRECTIONS ARE REQUIRED PRIOR TO SHIPMENT.
- FOR BEAMS WITH STEPPED ENDS USE PADS A2, B2, OR C2 ON BOTH SIDES OF EACH BEAM.
- ELASTOMERIC BEARING PADS SHALL BE INCLUDED IN THE PRICE OF THE BEAMS.
- THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A & B THRU BR-B42A & B, BR-B100, BR-B101, BR-B102A, BR-B103, BR-B104, BR-B105A & B AND BR-106 AS APPROPRIATE.

APPROVED: *Gregory Bailey* DATE: 10-25-07
DIRECTOR, ENGINEERING DIVISION

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

PREPARED: 10-04-13
REVISOR:

PRESTRESSED CONCRETE BEAM
ELASTOMERIC BEARING PAD DETAILS
MISC. DESIGN AND ASSEMBLY DETAILS

STANDARD SHEET BR-B102B








WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

BRIDGE NO.: S306-43-12.29
OVER
LONG BRANCH
ON
CR 43
in
CABELL COUNTY

DESIGNED BY: THB/
DRAWN BY: THB/
CHECKED BY: TM/
REVIEWED BY: THB7
DATE:
SCALE:
SHEET OF
BRIDGE NO.

PRESTRESSED CONCRETE BEAM
ELASTOMERIC BEARING PAD DETAILS
MISC. DESIGN AND ASSEMBLY DETAILS

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	8	-

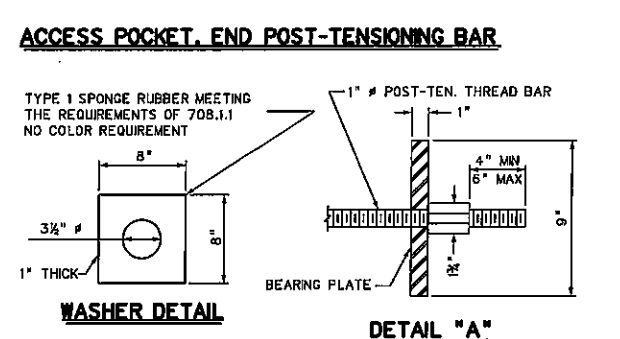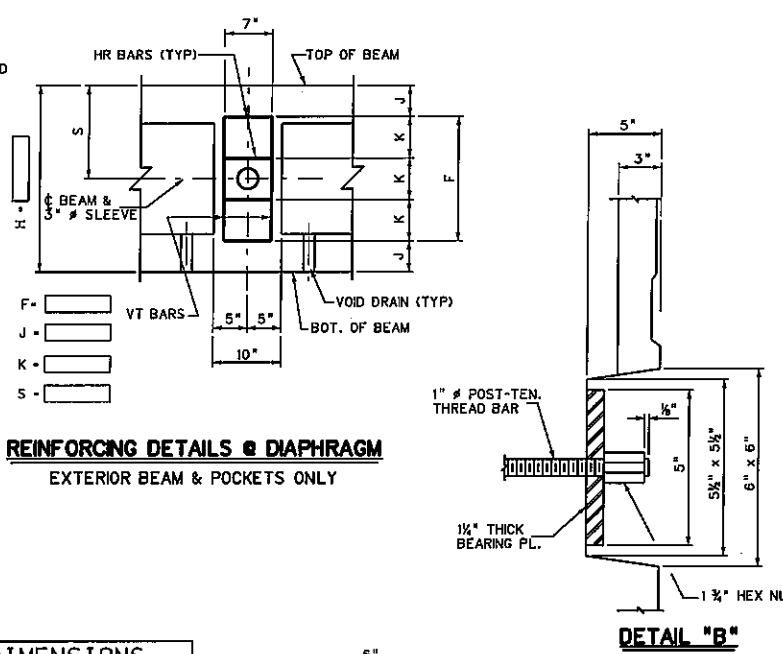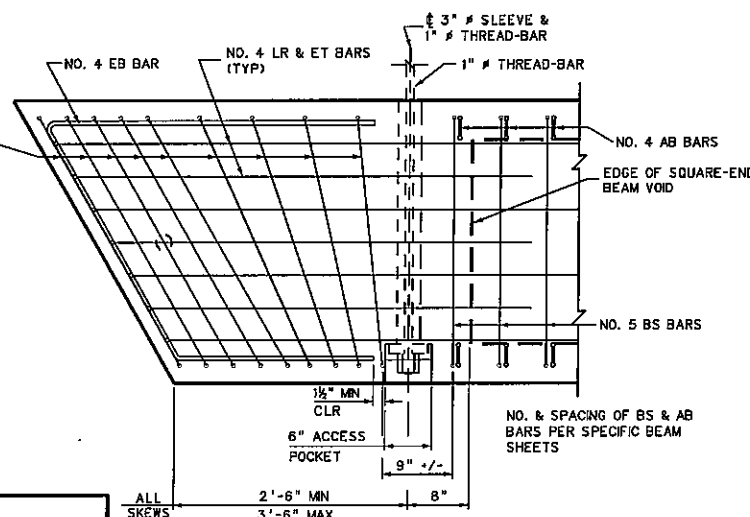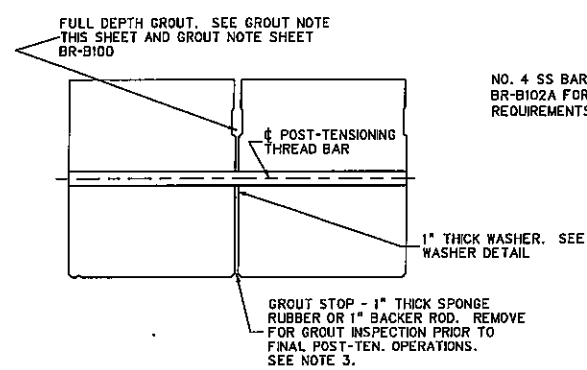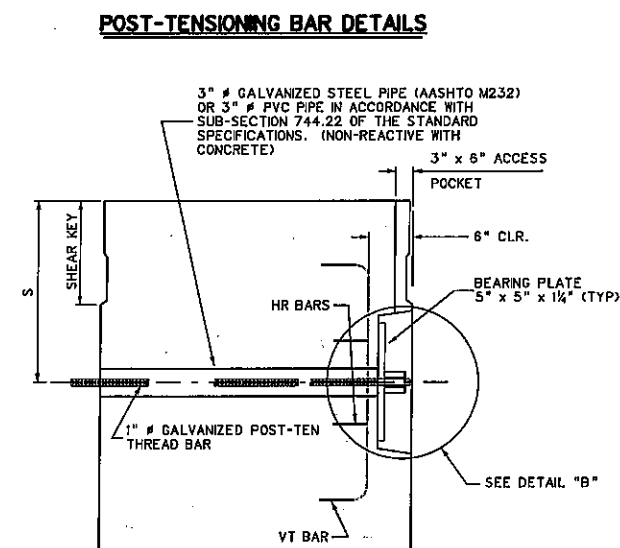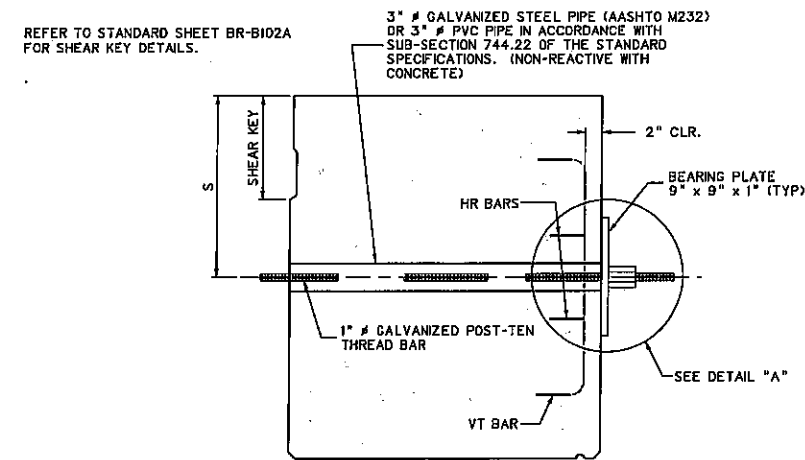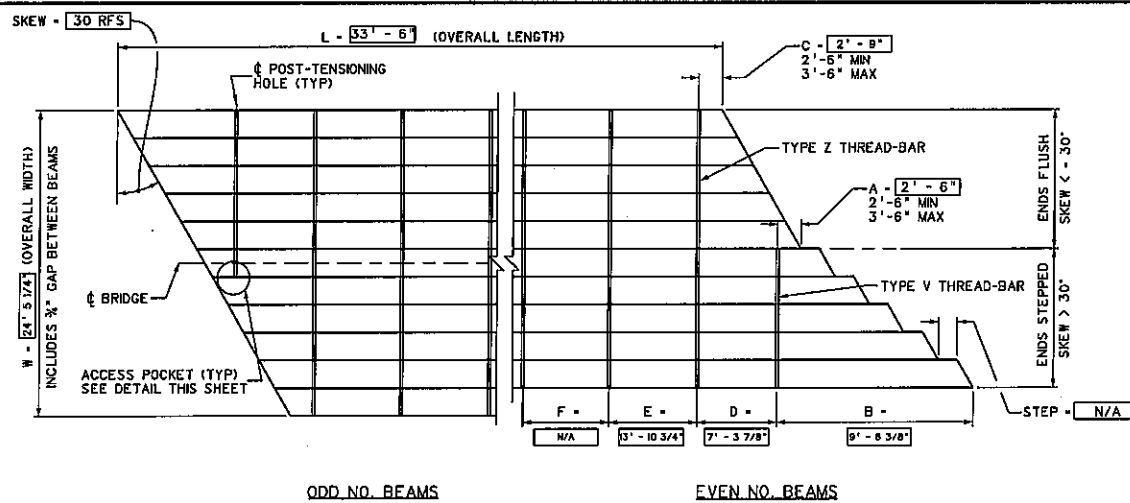

- PROCEDURE NOTES**
- INSTALL ONE INCH THICK WASHER AND GROUT STOP BY GLUING TO ONE SIDE, FOR THE ENTIRE LENGTH OF EACH BEAM PRIOR TO SETTING BEAMS. GLUE SHALL BE AN APPROVED CONSTRUCTION TYPE GLUE OR EPOXY ADHESIVE. GROUT STOP MAY BE INSTALLED AFTER BEAMS ARE SET.
 - GLUE A 1/2" x 2" x 2" PIECE OF PRESSURE TREATED PLYWOOD AT EACH THREAD-BAR LOCATION TO INSURE THAT A 1/2" GAP IS OBTAINED. PLYWOOD SPACERS TO BE OFFSET APPROXIMATELY 2 FEET FROM THE THREAD-BAR HOLE AND CENTERED ON THE HOLE DEPTH. PLYWOOD SPACERS ARE REQUIRED ON ONLY ONE BEAM EDGE FACE OF ABUTTING BEAMS. AFTER THE BEAMS ARE SET AND THE THREAD-BARS INSTALLED, PULL THE ENTIRE SUPERSTRUCTURE TOGETHER BY APPLYING A POST-TENSIONING FORCE OF APPROXIMATELY 3000 POUNDS. AT THIS STAGE THE GAP BETWEEN BEAMS SHALL BE A UNIFORM 1/2" WITH ALL SWEEP REMOVED. RECORD THE ACTUAL FORCE APPLIED.
 - FILL THE GAP BETWEEN BEAMS AND SHEAR KEY FULL DEPTH WITH THE PRE-APPROVED, PRE-TESTED GROUT MIXTURE. FROM EACH BATCH, PREPARE JOB CONTROL GROUT CUBES FOR THREE AND SEVEN DAY TESTS. THESE JOB CONTROL SAMPLES WILL BE USED TO DETERMINE WHEN THE GROUT HAS ATTAINED A MINIMUM COMPRESSIVE STRENGTH OF 4500 PSI. A MINIMUM OF THREE SPECIMENS PER TEST SHALL BE OBTAINED, AND THE AVERAGE OF THE TEST RESULTS USED. ACCEPTANCE SAMPLING AND TESTING OF THE GROUT IS THE RESPONSIBILITY OF THE CONTRACTOR; HOWEVER, A REPRESENTATIVE OF THE WDOH SHALL WITNESS ALL OF THE ACCEPTANCE SAMPLING AND TESTING.

TEST PROCEDURE SHALL BE ASTM C109 AS MODIFIED BY ASTM C107. IN NO INSTANCE SHALL THE CONTRACTOR PROCEED WITH POST-TENSIONING OR OTHER BEAM ERECTION PROCEDURES UNTIL THE REQUIRED MINIMUM GROUT STRENGTH IS ATTAINED AND VERIFIED BY THE ENGINEER. IN THE EVENT THAT THE MINIMUM GROUT STRENGTH IS NOT ATTAINED, THE ENGINEER SHALL BE NOTIFIED AND CORRECTIVE ACTION TAKEN AT THE DIRECTION OF THE ENGINEER. SEE SHEAR KEY GROUT NOTE, SHEET BR-B100 FOR ADDITIONAL REQUIREMENTS.

AFTER THE GROUT HAS REACHED AN INITIAL SET CONDITION AND PRIOR TO ANY FINAL POST-TENSIONING PROCEDURES, THE CONTRACTOR SHALL REMOVE THE GROUT STOP AND INSPECT THE GROUT FOR VOIDS OR OTHER IRREGULARITIES. ANY VOIDS DEEPER THAN 2" FROM THE BOTTOM SHALL BE REGROUTED IN A MANNER ACCEPTABLE TO THE ENGINEER.
 - AFTER GROUT AS BEEN PLACED AND REACHED IT'S MINIMUM COMPRESSIVE STRENGTH OF 4500 PSI AND HAS CURED A MINIMUM OF 3 DAYS, APPLY 50% OF THE FINAL POST-TENSIONING FORCE TO ALL THREAD-BARS, WORKING BEAM ENDS TO MIDSPAN. AFTER ALL THREAD-BARS HAVE BEEN TENSIONED TO 50%, APPLY THE REMAINING PERCENTAGE OF FINAL POST-TENSIONING FORCE, WORKING IN THE SAME SEQUENCE AS THE FIRST STAGE OF FINAL TENSIONING.
 - MEASURE AND RECORD, IN THE ELONGATION TABLE, THIS SHEET, THE ACTUAL TOTAL ELONGATION OF EACH THREAD-BAR. COMPARE THE MEASURED ELONGATION TO THE CALCULATED ELONGATION. A SIGNIFICANT DIFFERENCE BETWEEN MEASURED AND CALCULATED ELONGATIONS COULD INDICATE IMPROPER JACKING TECHNIQUES, FAULTY MATERIALS, FAULTY JACKS, OR IMPROPERLY CALIBRATED JACKS. IF THE DIFFERENCE IS GREATER THAN 15%, THEN THE JACK SHALL BE RE-CALIBRATED AND THE JACKING TECHNIQUES EVALUATED. IF, AFTER THE ABOVE STEPS ARE TAKEN, THE PERCENTAGE DIFFERENCE IS GREATER THAN 10%, THEN THE ENGINEER SHALL BE NOTIFIED AND CORRECTIVE ACTION TAKEN AT THE DIRECTION OF THE ENGINEER. ALL COSTS INVOLVED IN CORRECTION SHALL BE AT THE CONTRACTORS EXPENSE.
 - USING SAW, TRIM EXCESS THREAD-BAR LEAVING 4" TO 6" PAST THE NUT. DO NOT TRIM THREAD-BARS BY TORCH CUTTING. TOUCH-UP TRIMMED ENDS WITH GALVICON OR EQUAL.
 - INSTALL ANCHOR DOWELS AS DETAILED ON STANDARD SHEETS BR-B101 AND BR-B102A.

FINAL POST-TENSIONING FORCE
TYPE Z BARS - 80 KIPS
TYPE V BARS - 40 KIPS

POST-TENSIONING BAR LAYOUT SCHEDULE

SPAN	1
SKEW	30 RFS
L	33' - 6"
W	24'-5 1/4"
A	2' - 6"
B	9'-6 3/8"
C	2' - 9"
D	7'-3 7/8"
E	13'-10 3/4"
F	N/A
STEP	N/A

DIMENSIONS

BEAM SIZE	REINFORCEMENT DIM	BAR SPACING	BAR DIST	
H	F	J	K	S
IN.	IN.	IN.	IN.	IN.
17	12	2 1/2	4	8 1/2
21	12	4 1/2	4	10 1/2
27	18	4 1/2	6	13 1/2
33	24	4 1/2	8	16 1/2
39	30	4 1/2	10	19 1/2
42	33	4 1/2	11	21

GROUT STRENGTH TABLE

	3 DAY (PSI)	7 DAY (PSI)
PRE-TEST STRENGTH		
JOB CONTROL STRENGTH		
GROUT TYPE & MANUFACTURER		

POST-TENSIONING BAR LENGTH

BAR	FORMULA	LENGTH
V(EVEN)	W-3'	
Z	W-3'	
V(ODD)	W-4'-6"	

ELONGATION (INCHES)

BAR	CODE	CALC.	MEASURED													
			NO. 1	NO. 2	NO. 3	NO. 4	NO. 5	NO. 6	NO. 7	NO. 8	NO. 9	NO. 10				
Z	⊗															
V	⊗															

CALCULATED ⊗ - WFTJ / 24.8
CALCULATED ⊙ - WFTJ / 99.2
ODD NO. BEAMS CALCULATED ⊙ - (WFTJ) * 3 / 99.2

- SPECIAL WARNING NOTES**
- DO NOT STAND IN LINE WITH THE POST-TENSIONING BAR DURING TENSIONING PROCEDURES.
 - NUTS, COUPLERS AND EXTENSION RODS USED IN THE POST-TENSIONING WORK SHALL BE THE MATERIAL APPROVED BY THE MANUFACTURER OF THE HIGH STRENGTH POST-TENSIONING RODS. IN NO CASE SHALL THE CONTRACTOR USE NON-APPROVED MATERIAL OR MATERIAL FROM TWO DIFFERENT SOURCES.

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

PRESTRESSED CONCRETE BEAM
TRANSVERSE POST-TENSIONING DETAILS
STANDARD SHEET BR-B103

DESIGNED BY: THB/
DRAWN BY: THB/
CHECKED BY: TM/
REVIEWED BY: TW/
DATE:
SCALE:
SHEET NO. OF
BRIDGE NUMBER












WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

BRIDGE NO.: S306-43-12.29
over
LONG BRANCH
on
CR 43
in
CABELL COUNTY

PRESTRESSED CONCRETE BEAM
TRANSVERSE POST-TENSIONING DETAILS

DESIGNED BY: THB/
DRAWN BY: THB/
CHECKED BY: TM/
REVIEWED BY: TW/
DATE:
SCALE:
SHEET NO. OF
BRIDGE NUMBER

STATE PROJECT NUMBER	FEDERAL PROJECT NUMBER	STATE DIST. NO.	COUNTY	SHEET NO.	TOTAL SHEETS
S306-43-12.29	N/A	02	CABELL	-	-

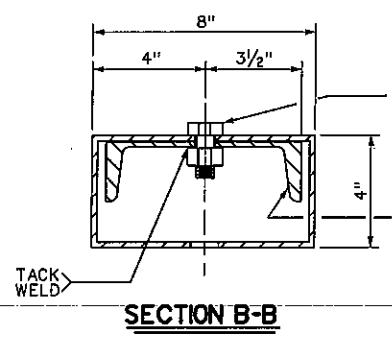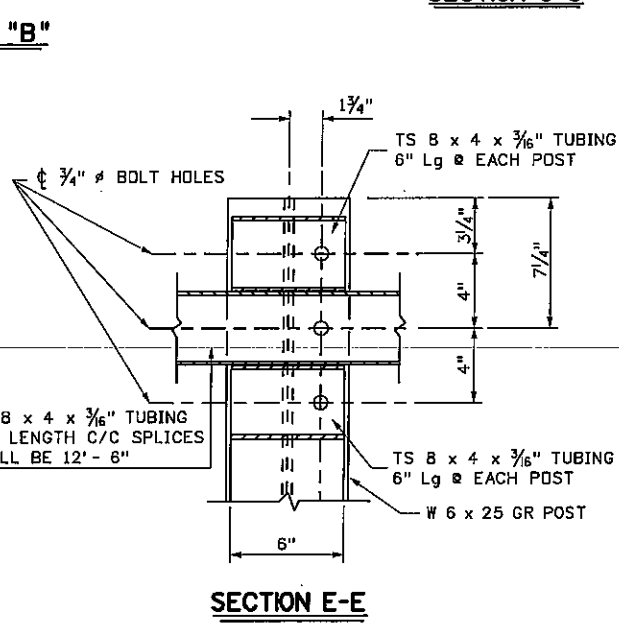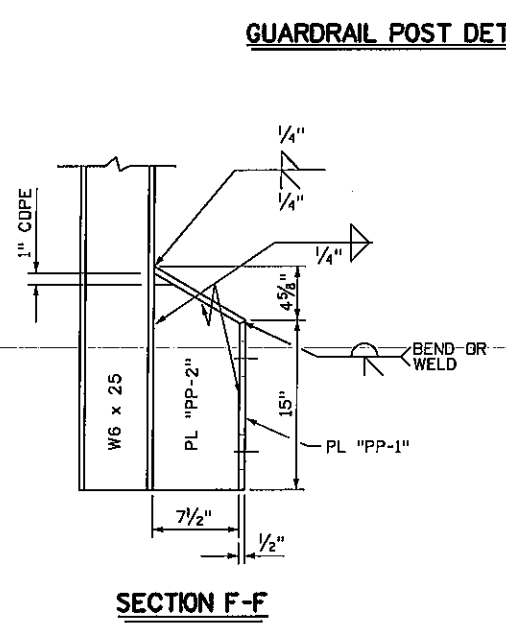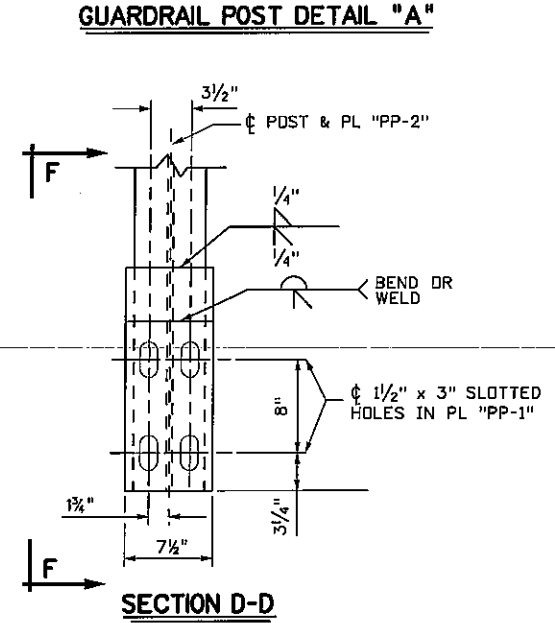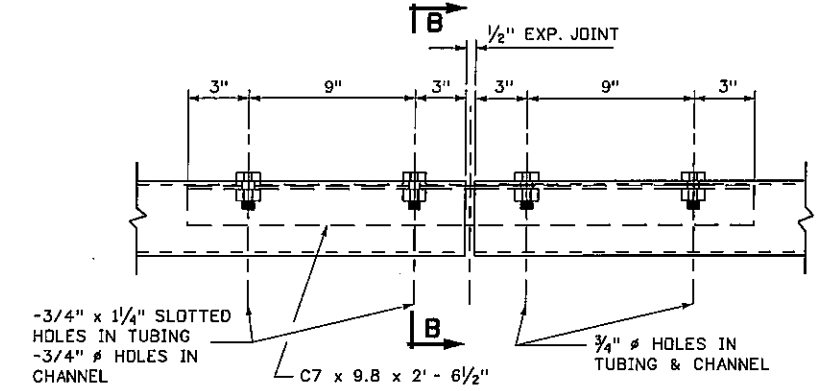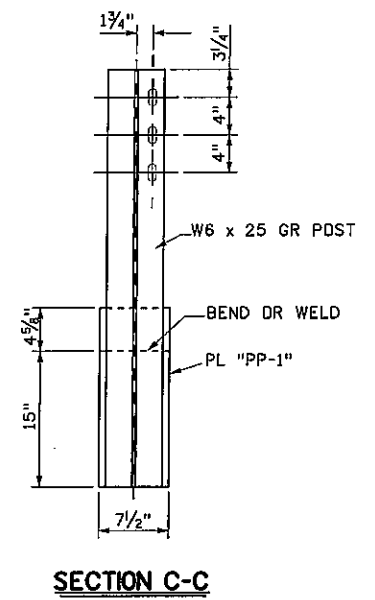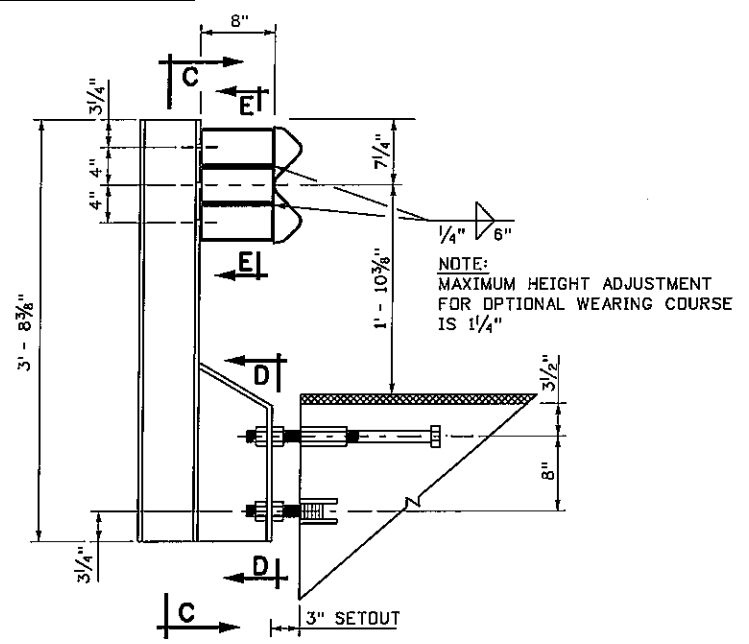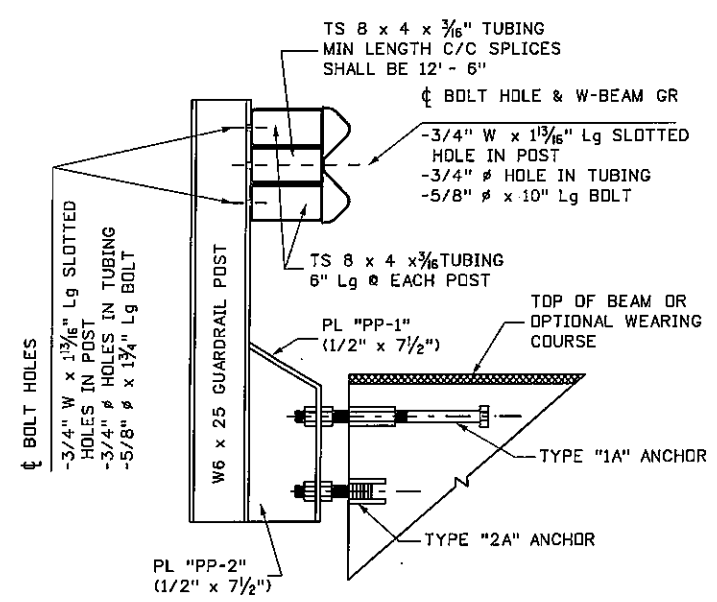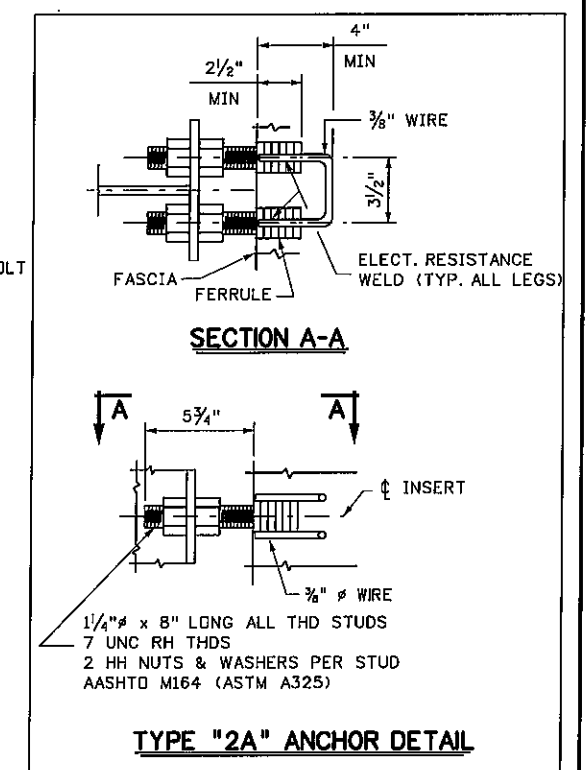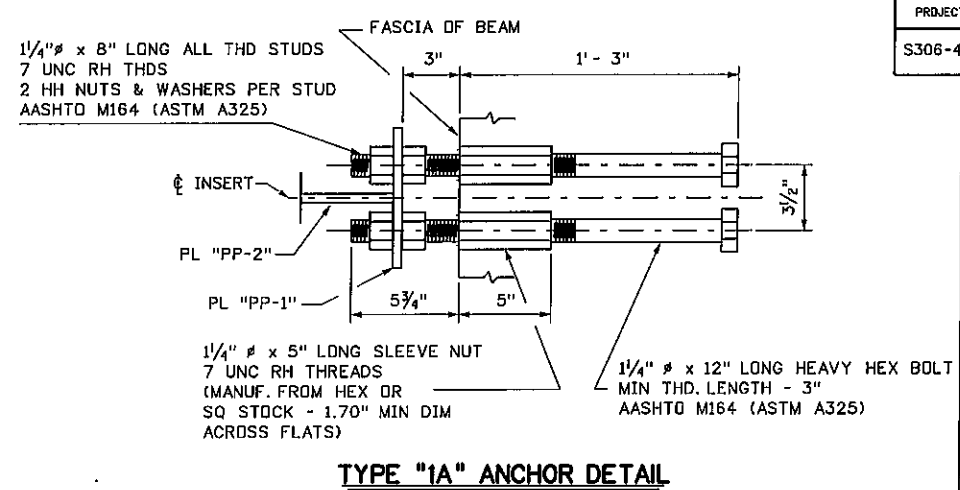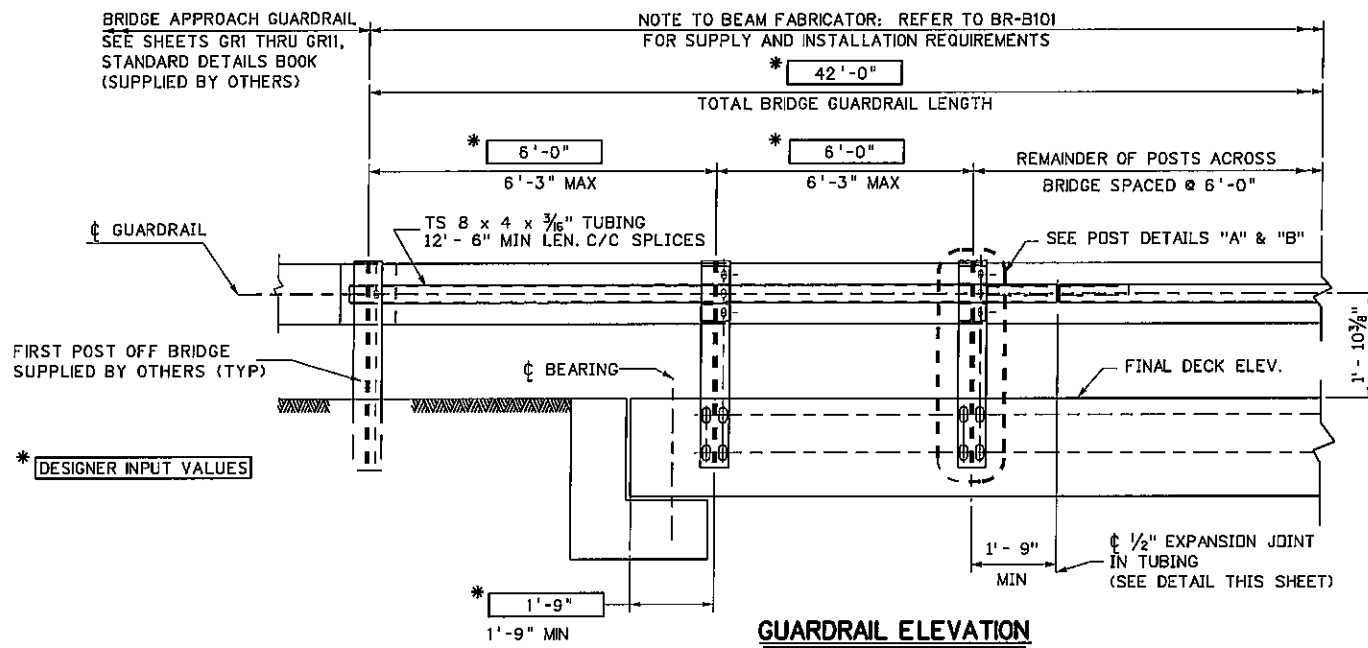

5/8" x 1/2" Lg BOLT W/WASHER ON TOP
NUTS SHD TACK WELDED TO CHANNEL
BOLTS SNUG TIGHT (TYPICAL)

THIS SHEET SHALL BE USED IN CONJUNCTION WITH STANDARD SHEETS BR-B17A & B THRU BR-B42A & B, BR-B100, BR-B101, BR-B102A & B, AND BR-B103 AS APPLICABLE.

APPROVED: *[Signature]* DATE: 10-25-07
DIRECTOR, ENGINEERING DIVISION

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

PREPARED: 10-04-13

REVIEWED:

PRESTRESSED CONCRETE BEAM
TYPE TL-2 GUARDRAIL SYSTEM
DESIGN & ASSEMBLY DETAILS
STANDARD SHEET BR-B104

WEST VIRGINIA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
ENGINEERING DIVISION

BRIDGE NO.: S306-43-12.29
OVER
LONG BRANCH
ON
CR 43
IN
CABELL COUNTY


DESIGNED BY: THB/
DRAWN BY: THB/
CHECKED BY: TM/
REVIEWED BY:
DATE:
SCALE:
SHEET NO. OF
BRIDGE NUMBER

PRESTRESSED CONCRETE BEAM
TYPE TL-2 GUARDRAIL SYSTEM
DESIGN & ASSEMBLY DETAILS

Public Roads Div.	State Dist. No.	State Project No.	Federal Project No.	Fiscal Year	County	Sheet No.	Total Sheets
V.	02	S306-43-12.29	N/A	2014	CABELL		

N=487727.6533
 E=1584846.8390
 STA=3+16.19
 OFF=0.03' (0.010m)

N=487704.5617
 E=1584868.9925
 STA=3+48.19
 OFF=0.03' (0.010m)

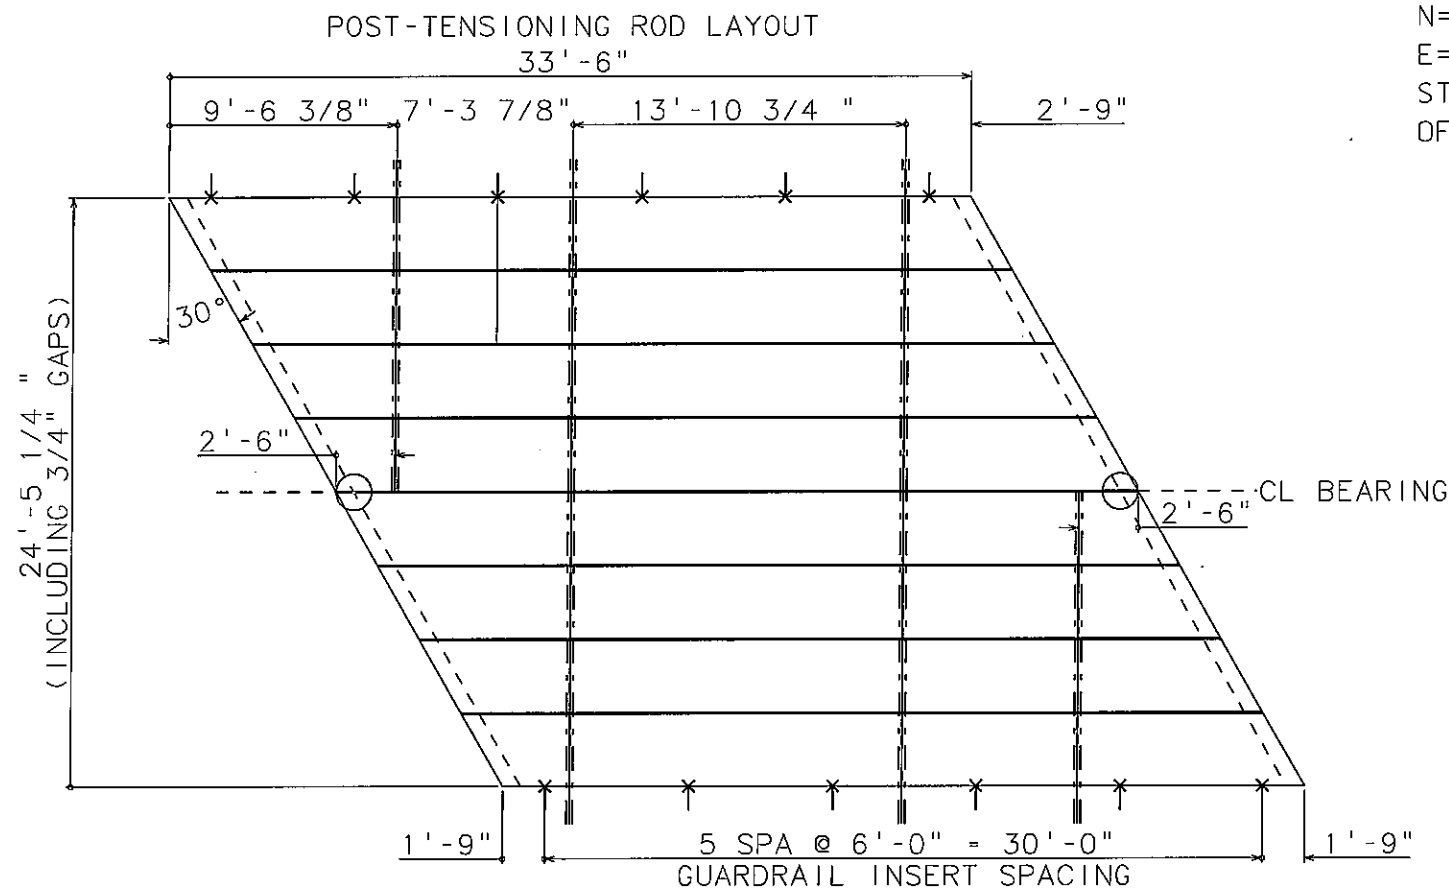

BEAM, GUARDRAIL & POST-TENSIONING ROD LAYOUT

DESIGNED	DATE
---	---
DRAWN	

CHECKED	

CHECKED	

REVISION NUMBER	SHEET NUMBER	REVISION	DATE	BY
THE WEST VIRGINIA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS BRIDGE NO.: S06-43-12.29 over LONG BRANCH on COUNTY ROUTE 43 in CABELL COUNTY				
				SHEET
				OF
				BRIDGE NO.

S:\Projects\0606\0606\CABELL\0606\BRIDGE\0606\0606.dwg