

VENDOR

State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

Request for Quotation

669C0012

PAGE	
1	

ADDRESS CORRESPONDENCE TO ATTENTION OF MICHAEL AUSTIN 304-558-2402

ALL STATE AGENCIES
AND POLITICAL SUBDIVISIONS
VARIOUS LOCALES AS INDICATED
BY ORDER

*709045414 304-424-7353 KELLY PAVING INC PO BOX 366

WILLIAMSTOWN WV 26187

DATE PRIN	TED	TER	MS OF SAI	Ε	SHIP VIA	F.O.B.	FREIGHT TERMS
11/10/							
BID OPENING DATE:		11/26/	2008		BID O	PENING TIME	01:30PM
LINE	QUAN	NTITY	UOP	CAT. NO	ITEM NUMBER	UNIT PRICE	AMOUNT
	0.000.000.000			,,, ,			
0001			. :		7/5 /7		
0001			.		745-67		
	WINTER	GRADE	RTTII	MTNOII	S PATCHING MIXTUR	F	
		-1111				<u>-</u>	
		ĺ					
				OPE	N END CONTRACT		
	TO DEO	VIDE A		200	MATERIALO AND EGI	TRAFFIT NECTOR	
					MATERIALS AND EQU BITUMINOUS PATCH		\RY
					IED) IN THE ESTIM		- e
					ATTACHED	WIED MOWILLIEF	
			l				
	EXHIBI	Г 3					
	1 7 5 5	- 0011	3407	 11	T	== ====================================	
`	LIFE OF	- CUNII	1		IS CONTRACT BECOM! D EXTENDS FOR A PI		
	VFAR OF	S IINTT			ASONABLE TIME" THI		
					NEW CONTRACT OR RI		
	DRIGINA				E "REASONABLE TIME		.L
				(12)	MONTHS. DURING	THIS "REASONAB	l l
					ERMINATE THIS CONT		
				3 THE	DIRECTOR OF PURCH	HASING 30 DAYS	
	WRITTEN	A MOIT	-E.				
	UNIESS	SPECIE	TC PE	ET VOS	IONS ARE STIPULATE	EN ELGEMNEDE	
							2009 NOV 25 A 10: 17
j	PRICING	SET H	EREI	N ARE	FIRM FOR THE LIFE	E OF THE	1000 per 200 per 100 p
	CONTRAC	T.					erakonyo mixiii OW
]	RENEWAL	.: THIS	CONT	RACT	MAY BE RENEWED UP	PON THE MUTUAL	
					SPENDING UNIT AND FOR OF PURCHASING		
					RATION DATE. SUCH		,
	CAIS IN		1115		TOTAL PRIE. SUCE	I KENEWAL SHAL	L
			/				
IGNATURE (1) //	. , 9	ارامست	<u> </u>	SEE REVI	ERSE SIDE FOR TERMS AND CONDIT ITELEPHONE		-
Cheen	lu W	rugher			(304)4	24-7353 DAT	11/26/08
_{TLE} Assistant	Vice-P	res. Fin	์ 55–0	58361	4	ADDRESS CHANG	SES TO BE NOTED ABOVE
	I		<u> </u>	~ ~ ~ O T	*	<u> </u>	



State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

Ö

669C0012

MICHAEL AUSTIN 304-558-2402

ADDRESS CORRESPONDENCE TO ATTENTION OF

***709045414** 304-424-7353 KELLY PAVING INC PO BOX 366

WILLIAMSTOWN WV 26187

DATE PRIN	<u>) ((0,000) (0.00000000000000</u>	TER	MS OF SAL	E	SHIP VIA		FO.B.	FREIGHT TERMS
11/10/ BID OPENING DATE		11/2//	2000					
		11/26/		CAT.		OPENIN	G TIME	01:30PM
LINE	QUAN	1111A	UOP	NO.	ITEM NUMBER	L	INIT PRICE	AMOUNT
	BE IN	ACCORD	ANCE	WITH	THE TERMS AND CO	NDITIO	NS OF THE	
	ORIGIN	AL CON	TRACT	AND	SHALL BE LIMITED	TO TWI) (2) DNE	
	(1) YE							
						<u> </u>	*	***
	CANCEL	LATION	: THE	DIRE	CTOR OF PURCHASI	NG RES	ERVES THE	
	RIGHT	TO CAN	CEL T	HIS C	ONTRACT IMMEDIAT	ELY UPO	ON WRITTE	N .
	NOTICE	_TO TH	E VEN	DOR I	F THE COMMODITIE	S AND/	OR SERVIC	ES
	SUPPLI	ED ARE	OF A	N INF	ERIOR QUALITY OR	רסא סם	T CONFORM	
	IO IHE	SPECI	FICAT	IONS	OF THE BID AND C	ONTRAC	r HEREIN.	
	ODEN M	ADVET	C1 A41C	Tu				
	ALITHOD	17E A	CLAUS	E. IH	E DIRECTOR OF PU NIT TO PURCHASE	RUHASIN	IG MAY	
					LING OF A REQUIS			
	FCTIMA'	, MILLO TE. TT	EMC C	DECIE	IED ON THIS CONT	DACT EC	JK CUSI	
					EMERGENCIES DUE			ĺ
	CAUSES	(INCL	DING	BUT	NOT LIMITED TO D	FLAVS 1	N TRANS-	
	PORTAT	ION OR	AN U	NANTI	CIPATED INCREASE	IN THE	VOLUME	
	OF WOR		.					74
	QUANTI	TIES:	TNAUC	ITIES	LISTED IN THE R	EQUISIT	ION ARE	
	APPROX:	IMATIO	INO SI	LY, B	ASED ON ESTIMATE	S SUPPL	IED BY	3
	THE ST	ATE SP	ENDIN	S UNI	T. IT IS UNDERS	TOOD AN	ID AGREED	
	THAT TH	IE CON	FRACT	SHAL	L COVER THE QUAN	TITIES	ACTUALLY	
	ORDEREI) FOR I	DELIA	RY D	JRING THE TERM O	F THE C	CONTRACT,	-
	WHETHE	K MOKE	OR LE	ESS T	AN THE QUANTITI	ES SHOW	IN.	
	ODDEDIA	IC BBO	· E DUDE		TUDING UNITE(C) C			
	MBILLEY	I CTATE	こしつがに	FDACT	ENDING UNIT(S) S ORDER (FORM NUM	MALL IS	5UE A	
	THE VEN	IDUB EU	IB CUM	MODI	TIES COVERED BY	BEK WV-	NTDACT	
	THE OR	GTNAI	COPY	OF T	HE WV-39 SHALL B	L MVIIC	NIKACI. D to tue	
	VENDOR	AS AU	HORTZ	OTTA	FOR SHIPMENT,	A SECON	D COBA	
	MAILED	TO THE	PURC	CHASI	G DIVISION, AND	A THTR	D COPY	
	RETAINE	D BY	HE SF	PENDI	IG UNIT.			
				İ				
	BANKRUF				ENT THE VENDOR/C			
	FOR BAN	KRUPT	Y PRO	TECT	ON, THIS CONTRA	CT IS A	UTOMATI-	
				SEE DEV	ERSE SIDE FOR TERMS AND CON	NITIONO		
IGNATURE //	1 , .	\ \ \	<u> 19</u>	SEE HEV	TELEPHONE	UITIONS	DATE	
ITLE CK	ulu b) Janl	/m/		TELEPHONE (304	1)424-7	353	11/26/08
Assistant	Vice-P	res.	່ 55−0	58361	.4	AD	DRESS CHANGI	S TO BE NOTED ABOVE



State of West Virginia
Department of Administration
Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

Request for Quotation

\$ H P

Ť

669C0012

PAGE

ADDRESS CORRESPONDENCE TO ATTENTION OF:

MICHAEL AUSTIN 304-558-2402

V ENDOR

*709045414 304-424-7353 KELLY PAVING INC PO BOX 366

WILLIAMSTOWN WV 26187

DATE PRIN	TED	TER	MS OF SAL	E		SHIP VIA		F.O.B.	FREIGHT TERMS
11/10/	2008								
BID OPENING DATE:		11/26/	2008	,	·	BID	OP	PENING TIME	01:30PM
LINE	QUAI	YTITY	UOP	CAT. NO:	ITE	M NUMBER		UNIT PRICE	AMOUNT
	CALLY ORDER.		ND VO	ID, A	ND IS	TERMINATE	D W	ITHOUT FURTHE	R
	SHALL CONDIT DOCUME AGREEM	SUPERS IONS W NTS SU ENTS O	EDE A HICH CH AS R MAI	NY AN MAY A PRIC NTENA	D ALL S PPEAR (E LISTS	SUBSEQUEN ON ANY AT S, ORDER (REEMENTS,	T T TAC FOR	IIS CONTRACT TERMS AND THED PRINTED RMS, SALES ICLUDING ANY	
	REV. 0	4/11/2	001						
1	EXHIBI	T 10		7 10000					
			1		REC	QUISITION	NO		••
	ADDEND	UM ACK	NOWLE	DGEME	NT				
	ADDEND	UM(S)	AND H	AVE M	ADE THE		RY	OWING CHECKED REVISIONS TO	
	ADDEND	UM NO.	's:						
	NO. 1	• • • • •	••						·
	NO. 2	•••••	• •			•			
	NO. 3	• • • • • •	••	THE PERSON NAMED IN COLUMN					
	NO. 4	• • • • • •	• •	[
	NO. 5	• • • • • •	• •						
	I UNDE	RSTAND	THAT	1				RECEIPT OF T	1
SIGNATURE // /	7 -		7	SEE REV	ERSE SIDE F	OR TERMS AND CO			-
11/2	alu V	Vans		,		(304)4	424	-7353 DAT	11/26/08
Assistant	Vice-F	res.	55	-0583	614			ADDRESS CHANG	ES TO BE NOTED ABOVE



State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

P

T

AFO NUMBER
669C0012

PAGE

ADDRESS CORRESPONDENCE TO ATTENTION OF

MICHAEL AUSTIN 304-558-2402

VENDOR

*709045414 304-424-7353 KELLY PAVING INC PO BOX 366

WILLIAMSTOWN WV 26187

13 (30 (260000000000000000000000000000000000000		INS OF SAL	-E	SHIPVIA		F.U.8,	FREIGHT TERMS
BID OPENING DATE:		33 /0/ /	2000		<u> </u>	<u></u>		
B1000000000000000000000000000000000000		11/26/	<u> </u>	- AX-	RID	UF	PENING TIME	01:30PM
LINE	QUAN	ITITY	UOP	CAT. NO	ITEM NUMBER		UNIT PRICE	AMOUNT
				A production of the factor				
	ADDEND	um(s)	MAV D	E CAII	SE FOR REJECTIO	M C	E DIDC	
1	HUULNU	Unts	PAT D	E CAU	SE FOR REJECTIO	ואן ט	it ping.	
ļ,	VENDUB	MIIST	CLEAD	I V IIN	DERSTAND THAT A	NIV	VEDBAI	
					ASSUMED TO BE			
					ETWEEN VENDOR'S			
i 1					L IS NOT BINDIN		ONLY THE	
					WRITING AND ADD			/
					FFICIAL ADDENDU			
1] -	2	
					20			
					lotaart	ر ساله	D. Janken I.	
i e	(ĺ		İ	. S	IGN	IATURE	
					77 11 D	.	-	-
,					Kelly Pa	VII	ig, Inc.	
					С	OMP	ANY	
					November.	26	2000	
					November	. 20	, 2008	• • •
					D	ATE		
			İ		·			,
						'		
F	REV. 1	1/96						<u> </u>
			ŀ					,
								,
				NOT	ICE			ļ
Į.	A SIGNE	ED BID	MUST	BE S	JBMITTED TO:			
	-		_,,					
		I .			INISTRATION		•	
		JRCHAS		TATZ	אר			ļ
		JILDIN	1	TON C	INCCT CAA*			
					TREET, EAST			
	C)	IAKLES	IUN,	w	5305-0130			
	דעם פיד) CHOIL	ם כם	UTATA	THIS INFORMATION		ON THE EACE !	,
					INIS INFURMATION (ON COLUMN CO			ur
	HE EN	/ C L U P C	UK II	ᆙᄝᄞ	HAT NUI BE CUI	A 2 T	DEKED:	5
				/				
			1	SEE REV	ERSE SIDE FOR TERMS AND CO			
SIGNATURE	1 ,	7	7	- Carrier and the second second second second second second second second second second second second second se	TELEPHONE	. 7 %	_7252	ATE 11/26/09
TITLE Charles	Charles Waster (304)4					+44	-1333	11/26/08
		// FEI	N ·			I	4 B B B B B B B B B B B B B B B B B B B	IGES TO BE NOTED ABOVE



MODZE

State of West Virginia Department of Administration Purchasing Division 2019 Washington Street East Post Office Box 50130 Charleston, WV 25305-0130

Request for Quotation

ŏ

669C0012

5

ADDRESS CORRESPONDENCE TO ATTENTION OF

MICHAEL AUSTIN 304-558-2402

*709045414 PO BOX 366

304-424-7353 KELLY PAVING INC

WILLIAMSTOWN WV 26187

DATE PRIN	TED	TEF	IMS OF SAL	Ε	SHIP	VIA	FOB.	FREIGHTTERN	//S
11/10/	2008								
BID OPENING DATE		11/26/	2008			BID	OPENING TIME	01:30PM	
LINE	QUAN	ПТҮ	UOP	CAT. NO	ITEM NU	IMBER	UNITPRICE	AMOUNT	
	SEALED	BID							- Trivitado
	BUYER:				33				
	RFQ. NO	D.:			669C(0012			
	BID OPE	ENING	DATE:		November	<u>26, 20</u> 0	28		
	BID OP	ENING	TIME:		1:30 PM				
	nov.								T P WARREST LINE
	PLEASE TO CONT	PROVI TACT Y	DE A OU RE	FAX N GARDI	UMBER IN NG YOUR E	CASE IT	IS NECESSARY		Ì
					(740)373	-6505			
	CONTACT	r pers	[PRINT CL	.EARLY):		,	-
			Mark	<u>H.</u>	laverty				
		1 1986/000							
	*****	THIS	IS T	HE EN	D OF RFQ	669C0	012 ***** TO	DTAL:	
		!							-
							•		
								7000	
	,		9/	SEE REV	ERSE SIDE FOR T		DITIONS		
SIGNATURE TITLE	lu W	Tayle			****	(304)	424-7353	DATE 11/26/08	
Assistant	Vice-P	res.	55	-0583	614		ADDRESS CH	IANGES TO BE NOTED ABOY	VE

1. SPECIFICATIONS

The following sections of the West Virginia Department of Transportation, Division of Highways' Standard Specifications Roads and Bridges, adopted 2000 and the current Supplemental Specifications, shall apply to the administration of this Contract: Sections 101, 102.4, 102.5, 105.1, 105.3, 105.4, 105.10, 105.11, 105.12, 105.13, 106.3, 106.4, 106.5, 106.6, 106.7, 106.9, 107.1, 107.2, 107.3, 107.14, 107.19, 107.20, 108.8, 109.1, 109.2 and 109.20.

The requirements of the West Virginia Department of Transportation, Division of Highways', Standard Specifications Section 109.20, PRICE ADJUSTMENT FOR LOAD LIMIT VIOLATIONS shall apply to all material supplied under this contract. This will include material loaded by the vendor into Division of Highways owned and/or rented trucks.

"Contractor" and "Vendor" used in the above specifications of this contract are interchangeable. Contractor shall mean Vendor and Vendor shall mean Contractor.

West Virginia Department of Transportation, Division of Highways' Standard Specifications Roads and Bridges, adopted 2000 and the current Supplemental Specifications may be obtained from:

West Virginia Division of Highways Engineering Division, Technical Section State Capitol Complex Building 5, Room A-650 Charleston, West Virginia 25305-0430

DESCRIPTION

The patching material shall be composed of a suitable aggregate plant mixed with a liquid asphalt material and chemical additives. The asphalt material with additives shall be capable of coating the aggregate without stripping. The material shall maintain adhesive qualities for all moisture conditions in the patched areas, except those having standing water.

MATERIALS

AGGREGATE

The coarse aggregate shall be a clean material consisting of crushed stone, crushed gravel or slag, meeting the requirements of the Division of Highways' Standard Specifications subsections 703.1, 703.2 and 703.3 respectively. Fine aggregate shall meet the requirements of the Division of Highways' Standard Specifications meet the requirements of the Division of Highways' Standard Specifications subsection 702.3. The gradation of the final mixture shall be the same as the Vendor's currently approved plant mix formula for Type 1 Hot-Mix Asphalt Wearing Course when Standard Winter Grade Bituminous Patching Mix is being produced.

When Modified Winter Grade Bituminous Patching Mix is being produced, the aggregate gradation shall be as recommended by the supplier of the liquid asphalt with additives. Allowable standard aggregate sizes shall be #8, #89, #9, or a blend of these sizes.

The gradation shall be determined in accordance with AASHTO T-27 and T-11.

The aggregate fraction of the final mixture shall meet the crushed particle requirements of Subsection 703.2.2 of the Division of Highways' Standard Specifications. Questionable aggregates shall be tested as per MP 703.00.21, except the No. 8 sieve will be used.

ASPHALT MATERIAL

1. Standard Winter Grade Bituminous Patching Mix

The asphalt material shall conform to the requirement of the West Virginia Division of Highways' Standard Specifications, Subsection 705.1. Tests conducted by the supplier shall be presented to the respective Division of Highways District Materials Engineers/Supervisors for review prior to production of Standard Winter Grade Bituminous Patching Mix. This liquid asphalt shall also contain a minimum of 2.5% chemical anti-stripping additive.

or,

2. <u>Modified Winter Grade Bituminous Patching Mix</u>

The asphalt material shall be liquid asphalt with a chemical anti-stripping additives conforming to the requirements of AASHTO M82 or as modified to meet the requirements of the asphalt supplier. The asphalt shall contain a minimum of 2.5% chemical anti-stripping additive.

Results from the following test methods and any additional tests conducted by the supplier shall be presented to the respective Division of Highways District Materials Engineer/Supervisor for review prior to production of Modified Winter Grade Bituminous Patching Mix.

Modified Asphalt Test

- (1) Flash Point °C (°F)-AASHTO T79
- (2) Kinematic Viscosity in cSt at 60°C (140°F)
 Requirement 350 to 500 cSt-AASHTO T201

- (3) Water (%)-Requirement-0.2% maximum-AASHTO T55
- (4) Distillate Test-AASHTO T78

% To 225°C (437°F) % To 260°C (500°F) % To 315°C (600°F) Residue (%) at 360°C(680°F)

Residue Tests

- (5) Ductility at 25°C(77°F)-AASHTO T51
- (6) Solubility Test-AASHTO T44

COMPOSITION OF MIXTURE

The aggregates and asphalt material shall be combined in such proportions that the composition by weight of the finished mix shall meet the requirements of the plant mix formula.

The aggregate fraction of the mixture shall be evaluated in accordance with AASHTO T-27 and T-11, and shall meet the requirements of the plant mix formula range. Any material failing to meet specification requirements on any sieve shall not be approved.

The asphalt fraction of the Standard Winter Grade Bituminous Patching Mix shall be a minimum of 5.0% when low-absorptive aggregates (<1.5%) are used and a minimum of 6.0% when high-absorptive aggregates (>1.5%) are used.

For Modified Winter Grade Bituminous Patching Mix the minimum amount of asphalt shall be as indicated in the table below. The amount of asphalt for all Winter Grade Bituminous Patching Mixtures shall be sufficient to thoroughly coat the aggregate particles and provide enough adhesion to hold the compacted particles together under traffic conditions when properly placed and to assure that the aggregate particles remain sufficiently coated after stockpiling.

Minimum Asphalt C	ontent for Mod	ified Patching Mix	
Aggregate Type	#8	#89 or Blend of #8 & #9	#9
% Asphalt ^{Note-1}	5.0%	5.5%	6.0%

Note-1: Add a minimum additional 1.0% asphalt to the above values for mixtures containing high-absorptive aggregates (>1.5%)

PLANT MIX FORMULA

The plant mix formula for Modified Winter Grade Bituminous Patching Mix shall be in accordance with the recommendations of the supplier of the liquid asphalt with additives. The plant mix formula composition report, which shall include the percentage of chemical anti-stripping additive, shall be forwarded to the District Materials Supervisor/Engineer before the mix is produced.

A plant mix formula for Standard Winter Grade Bituminous Patching Mix shall be developed in accordance with MP 401.02.22, and as modified by the Marshall Test Procedure described in AASHTO T-245 for cutback asphalts. Initial submission of the proposed plant mix formula for Standard Winter Grade Bituminous Patching Mix will not be considered unless accompanied by sufficient test data developed by supplier to indicate that the formula being proposed can be met. As a minimum, this test data shall include: three separate gradations of samples taken from the hot bin, or separate gradations from cold bins or storage facility, the percentage of each material to be used and the calculated combined gradation. The test data submitted shall have been developed from material that is to be used in the proposed mix. Additional data which shall be submitted includes that described in MP 401.02.22. This data will not be required to meet the limits given in the design property tables. The air void content for Standard Winter Grade Bituminous Patching Material shall be 4-7 percent.

The proposed plant mix formula for Standard Winter Grade Bituminous Patching Mix shall be documented on Department Form T400 and together with plant calibration test data set forth above shall be forwarded to the District Materials Engineer/Supervisor. The percentage of chemical anti-stripping additive shall be included in the documentation. The T400 shall then be transmitted to the Materials Control and Testing Division for final review and revision.

CHANGES IN PLANT MIX FORMULA

Should the contractor at any time propose to change the source of aggregate in the mix, the definite asphalt content or change the source of the bituminous material, the provisions of the Division of Highways' Standard Specifications subsection 401.4.2 shall apply.

QUALITY CONTROL TESTING

Quality control is the responsibility of the contractor. Quality control testing shall include daily asphalt content and gradation analysis of the design aggregate structure during production. Since the aggregate and asphalt material are required to be measured separately and accurately to the proportions of the plant mix formula, the asphalt content may be determined by calculating the percentage by total weight of mix. However, all standard methods of determining the asphalt content of the mixture that are allowed for hot-mix asphalt under Section 401 of the Division of Highways' Standard Specifications are acceptable. The ignition oven test method (AASHTO T308) would require an asphalt content correction factor, however, due to the low flash point of most asphalts used in Winter Grade Bituminous Patching Mix, this test method is not recommended. If the AASHTO T164 solvent extraction test method is used, a non-chlorinated solvent may be substituted for the standard specified solvent, and the test method may be modified as per the recommendations of the solvent supplier.

In addition, for each day of production, the completed mix shall be tested for aggregate coating as follows. Obtain a 100 – 150 gram sample and allow it to cure to normal laboratory temperature. Place the sample in a glass jar of sufficient size that the loose sample will protrude to a level of no more than half of its capacity. Cover the sample with water to approximately three-quarters of the capacity of the jar. Place a tight fitting cover on the jar and allow it to stand for a period of 20 to 24 hours at normal laboratory temperature. The sample jar shall then be vigorously agitated for a period of 30 seconds. Pour the water from the jar, remove the sample, and spread it on a flat light-colored surface (nonstick laboratory paper is recommended). Allow the sample to air dry and visually examine it for stripping of the asphalt film from the aggregate. Estimate the amount of coated aggregate. Any thin brownish, translucent areas are to be considered fully coated with an asphalt film. Document the results of this test. The mixture shall be considered acceptable if at least 95% of the aggregate is coated. Insufficient coating may require reworking of the mixture and/or an additional amount of anti-stripping additive.

ACCEPTANCE OF THE MIXTURE

Acceptance of Winter Grade Bituminous Patching Mix shall be the responsibility of the Division. This shall be accomplished by monitoring the contractor's quality control testing and reviewing all test data relevant to the mixture.

In addition, if the completed mixture shows signs of stripping, the Division shall choose to either monitor the contractor's quality control aggregate coating test or conduct their own test and visually estimate the amount of coated particles. Document the results of this test. Although this is a visual estimation, the contractor should be immediately notified if the Division's test results are below 95%. A low coating percentage should be an indicator for the Division to closely monitor the mixture after stockpiling. All Division testing of Winter Grade Bituminous Patching Mix shall be performed by the District Materials Section.

After the mixture is stockpiled on the Division's lot, it shall be visually evaluated for any appearance of excessive non-fully coated aggregate particles. If considered necessary, the Division shall evaluate the mixture in accordance with ASTM D2489 (based on two-sample average) to determine if at least 97% of the coarse aggregate particles are fully coated. This evaluation shall take place within the first week after stockpiling. If the mixture is less than 97% coated, the contractor will be required to provide new material or remove the existing stockpile material from the Division's lot, rework it to an acceptable condition with additional asphalt and/or chemical anti-stripping additive as needed, and return it to the Division's lot.

PREPARATION OF MIXTURE

The aggregate shall be heated to insure that it is surface dry at the time of mixing, however, the aggregate shall not be heated in excess of 180°F.

The asphaltic binder shall not be heated to a temperature greater than 165°F. Care shall be taken to prevent local overheating. The aggregate and asphalt material shall be measured separately and accurately to the proportions in which they are to be mixed. After the aggregate and binder have been combined, they shall be thoroughly mixed until the particles of aggregate are coated. At no time shall the finished mixture be at a temperature greater than 175°F.

Temperatures for Modified Winter Grade Bituminous Patching Mix may vary as per asphalt supplier's recommendations.

WORKABILITY

The mixture shall be stockpiled on the vendor's site for 14 days or until the internal mix temperature is within 10°F of ambient temperature without stripping and when taken from a stockpile, shall be capable of being shoveled, raked, spread and compacted.

At the end of the stockpiling period on the contractor's yard, the mixture shall be tested in accordance with ASTM D2489 (based on two-sample average). The total amount of non-fully coated particles shall not exceed 3%. The contractor shall provide these test results to the Division on a standard worksheet provided by the District Materials Section.

If the material fails to conform to the requirements of the specifications the contractor may rework the existing material or provide new material.

STORAGE

The mix shall be maintained on the contractor's property in stockpiles not exceeding a height of four (4) feet until the internal mix temperature is within 10° of the ambient temperature. In addition, the top of all stockpiles shall be leveled to eliminate any peaked areas.

All Winter Grade Bituminous Patching Mix shall contain sufficient asphalt that is capable of coating the aggregate without stripping. After stockpiling on the Division's lot, the mixture shall have a maximum of 5% non-fully coated particles after the first week and up to 90 days from delivery when evaluated in accordance with ASTM D2489 (based on two-sample average). This coating determination may be based on the Division's visual inspection if coating is not a problem, or based on Division testing when the amount of non-fully coated particles appears questionable. If stripping occurs the contractor will be required to provide new material or remove the existing stockpile material from the Division's lot, rework it to an acceptable condition with additional asphalt and/or chemical anti-stripping additive as needed, and return it to the Division's lot.

2. <u>BIDDING INSTRUCTIONS</u>

The purpose of this contract is to provide for the delivery of WINTER GRADE BITUMINOUS PATCHING MIXTURE (Standard or Modified) to the various locations and in the estimated quantities set out in the bid schedule.

Actual quantities to be delivered to each location will be specified in a State Contract Purchase Order (SCO) which will be issued by the Division of Highways at the time delivery is required.

Vendors may bid to deliver the estimated quantities of either or both types of material at any or all of the designated delivery sites.

Any qualification of bids or any modification of the specifications or conditions governing the bids may be cause for their rejection.

3. CONTRACT AWARD

The Division of Highways will consider Vendor's performance history in the award of this Purchase Order Contract.

Qualified Vendors who submit a valid bid "F.O.B. Division Storage Site" will be awarded a contract for those locations for which their bid is low for Standard Winter Grade Bituminous Patching Material and for which their bid is low for Modified Winter Grade Bituminous Patching Material.

In the event a Vendor fails to conform to the requirements set out in this contract document, the State Contract Purchase Order or the governing specifications, the Purchase Order Contract may be cancelled and awarded to the next low bidder.

4. SAMPLING AND TESTING

Upon award of contract, the Vendor shall inform the Division of the location of Vendor's storage sites so that materials may be sampled and tested prior to shipment. Information shall be directed to the respective Division of Highways District Materials Engineers/Supervisors.

5. <u>WEIGHING MATERIALS DELIVERED BY TRUCK</u>

Material delivered by truck shall be weighed in accordance with Section 401.9.3 of the West Virginia Department of Transportation, Division of Highways' Standard Specifications.

6. <u>SUPPLYING OTHER ORGANIZATIONAL ENTITIES</u>

County Courts, Municipalities, School Boards, other political subdivisions and governmental entities, etc., may have a need for these materials, and Vendors may wish to supply that need. Accordingly, bidders may wish to extend their contract prices to these other entities. If the bidder wishes to supply these other entities, but with prices different from those quoted for the Highway Department,

the bidder shall include a set of bid schedules clearly and unambiguously marked for the express use of entities other than the Division of Highways. Failure by the bidder to include a set of bid schedules for other entities will be taken to mean that the bid schedules extended to the Division of Highways will also be extended to these other entities.

In the event any Vendor does not wish to extend the prices, terms and conditions of this bid and subsequent contract to other entities of the State, he must so indicate in a clear and unambiguous manner in his bid. This indication does not prejudice the award of the contract. If a Vendor does not indicate his refusal to extend the prices, terms and conditions of his bid to other entities of the State he is bound to extend them upon issuance of a purchase order by these other entities.

Other organizational entities using this provision of the contract shall do so without any involvement of the Division of Highways; that is, the entity shall make its own purchase arrangements with the Vendor and shall make its own arrangement for payment.

7. BASIS OF PAYMENT

The quantity, determined in accordance with Section Number 5, will be paid for at the delivered price per ton, which price and payment shall be full compensation for furnishing and handling all the material incorporated in the mixture and delivering the mixture to a designated storage site.

8. PRODUCTION SCHEDULE

Vendor should produce material within two weeks of receipt of SCO.

9. VENDOR'S INVOICES

Vendor's invoices must be submitted in original and one copy containing the following:

- a. Division of Highway's State Contract Purchase Order Number, and this Contract Number.
- b. Total quantity and unit price with the total cost of the material furnished.

Note: Under no circumstance will the West Virginia Division of Highways accept, or pay for, quantities of material in excess of the quantity stated on the State Contract Purchase Order.

10. PURCHASING CARD ACCEPTANCE

The State of West Virginia currently utilizes a VISA Purchasing Card Program which is issued through a bank. The successful vendors must accept the State of West Virginia VISA Purchasing Card for payment of all orders placed by State DOT agency for orders as a condition of award.

NOTE: Vendor should type Bid Schedule

11. 11. BIDDING SCHEDULE

WINTER GRADE BITUMINOUS PATCHING MIXTURE

DISTRICT 1

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Clay	C.R 11	75	No Bid	
Kanawha	Elkview	50	· · · · · · · · · · · · · · · · · · ·	
Kanawha	Chelyan	35		
Kanawha	St. Albans	50	9-1*Add	-
Mason	Point Pleasant	100		V- negati
Putnam	Red House	75		
Putnam	Hurricane	75	***	
I-79 Sec. 6	Amma	20		
I-77 Sec. 3	Sissonsville	45		975

Bid Schedule available for download on Purchasing's Web site at www.state.wv.us/admin/purchase

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Cabell	Barboursville	250	No Bid	
Lincoln	West Hamlin	75		
Lincoln	Yawkey	15		
Lincoln	Harts	25		
Logan	Chapmanville & Corridor G	80	47.000	
Logan	Wilkinson HQ	60	· · · · · · · · · · · · · · · · · · ·	
Logan	Man Substation	40		
Mingo	Millers Creek HQ	50		Administration of the second o
Wayne	Wayne	100		
Wayne	Pritchard	100		production of the second
Wayne	Crum	75		
I-64	Huntington	40		

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Calhoun	Millstone	200	No Bid	-
Jackson	Ripley	300		
Pleasants	St. Marys (Colin-Anderson Lot	.) 75		
Ritchie	Ellenboro	75		
Roane	Spencer	225		
Roane	WV 36 Left Hand	75		
Wirt	Elizabeth	75		
Wood	WV 95, Parkersburg	300		
Corridor D	Greenwood	12		
I-77	Mill Run Road	35		
I-77 Sec. 2	Medina	20		

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	ODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Doddridge	Smithburg	100	No Bid	***********
Harrison	Gore	300		
Marion	Fairmont	100		
Marion	Mannington	100		
Monongalia	Sabraton	150	AMOUT MATERIAL TO A SECOND SEC	APPER TO A STATE OF THE STATE O
Monongalia	Pentress	75		
Preston	Albright	100		
Preston	Bruceton	50		porter a manufacture of
Preston	Terra Alta	50		
Preston	Fellowsville	50		
Preston	Aurora	50		
Taylor	Pruntytown	200		
APD-50	Tunnel Hill	50		
I-68	Coopers Rock	50		
I-79	Lost Creek Yard	100		
I-79	Goshen Road	50	•	was a second and a second a second and cond and cond and a second and a second and

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Berkeley	Martinsburg & I-81	300	No Bid	
Grant	Petersburg	75	And the state of t	
Grant	Mt. Storm	50		
Hampshire	Romney	50		
Hampshire	Capon Bridge	30		
Hampshire	Slanesville	50		
Hardy	Moorefield	75		***************************************
Hardy	Baker	75		
Jefferson	Charles Town	100		
Mineral	New Creek	75		1000
Mineral	Sky Line	. 50		
Mineral	Short Gap	50		
Morgan	Berkeley Springs	250	9-88-19-1	

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Brooke	Wellsburg	200		89.95
Hancock	New Manchester	220		90.95
Marshall	Cameron	700	-0-	102.95
Marshall	Glen Dale	1300	0-	92.95
Ohio	Triadelphia	150		94.95
Tyler	Centerville	100		102.95
Tyler	Sistersville	100	-0-	101.95
Wetzel	Hundred	100		102.95
Wetzel	New Martinsville	150	- 0-	96.95
Wetzel	Pine Grove	100	-0-	102.95
I-70	Woodland (Elm Grove)) 50		94.95

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Barbour	Philippi	70	No Bid	
Braxton	Laurel Court	150	-	
Gilmer	Glenville HQ	60	*	
Lewis	Weston	100	Parts.	
Upshur	Buckhannon	75		
Webster	Cherry Falls	25		
Webster	Cowen	25	·	· -
Webster	Hacker Valley	25		
I-79 Sec. 4	Burnsville	25		
I-79 Sec. 5	Coon Knob	25		

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Pendleton	Franklin	100	No Bid	
Pocahontas	Marlinton	25		
Randolph	Elkins	100		
Tucker	Parsons	60		

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Fayette	Oak Hill	60	_No Bid	
Fayette	Lookout	100		
Fayette	Falls View	25	<u></u>	
Greenbrier	Lewisburg	125		
Greenbrier	Crawley	100		
Greenbrier	I-64, Harts Run	15		
Monroe	Union	175		
Monroe	Peterstown	100		
Nicholas	Summersville	175		
Summers	Summers Co. HQ	75		

WINTER GRADE BITUMINOUS PATCHING MIXTURE

COUNTY	DELIVERY SITE	ESTIMATED NEEDS (TONS)	STANDARD DELIVERED PRICE PER TON FOB DIV. STORAGE SITE	MODIFIED DELIVERED PRICE PER TON FOB DIV. STORAGE SITE
Mercer	Mercer Co. HQ	100	No Bid	

DISTRICT ADDRESSES

District One 1334 Smith Street

Charleston, West Virginia 25301-1492

District Six 1 DOT Drive

Moundsville, West Virginia 26041-1605


District Two 801 Madison Avenue Huntington, West Virginia 25712-0880

District Seven 255 Depot Street Weston, West Virginia 26452-1228

District Three 624 Depot Street Parkersburg, West Virginia 26102-0308 District Eight US 219 North Elkins, West Virginia 26241-1516

District Four I-79 & Meadowbrook Road Clarksburg, West Virginia 26302-2570 District Nine 103 1/2 Church Street Lewisburg, West Virginia 24901

District Five US Route 50 Post Office Box 99 Burlington, West Virginia 26710-0099 District Ten 270 Hardwood Lane Princeton, West Virginia 24740-2737

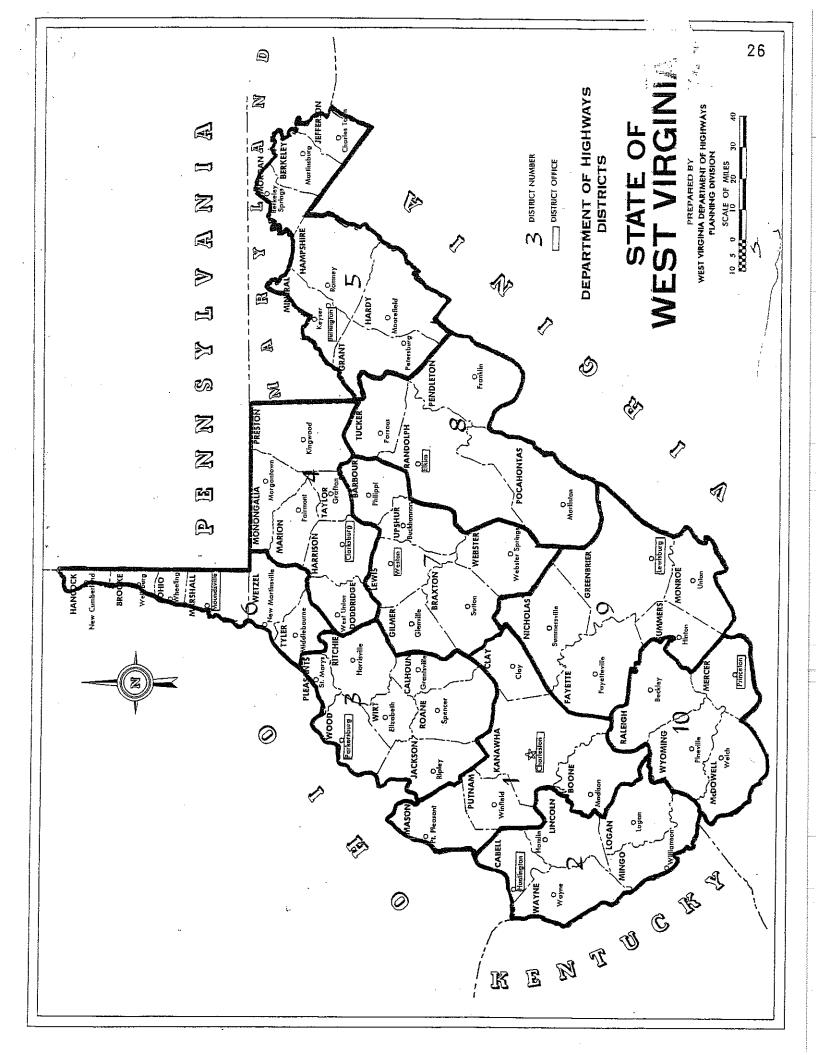

VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1.	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the data of this continuously in Vest Virginia for four (4).
	ing the date of this certification; or , Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or , Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; or ,
2	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
	Application is made for 2.5% resident vendor preference for the reason checked: Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; or,
4. 	Application is made for 5% resident vendor preference for the reason checked: Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; or,
	Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; or,
	Application is made for 3.5% resident vendor preference who is a veteran for the reason checked: Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.
requiren against	inderstands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the nents for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency cted from any unpaid balance on the contract or purchase order.
authorize the requ	nission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and es the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid ired business taxes, provided that such information does not contain the amounts of taxes paid nor any other information by the Tax Commissioner to be confidential.
and acc	penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true curate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate is during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.
Bidder:	Kelly Paving, Inc. Signed: Charles W Vuntary

Title: Assistant Vice-President

November 26, 2008

Date:

^{*}Check any combination of preference consideration(s) indicated above, which you are entitled to receive.

STATE OF WEST VIRGINIA Purchasing Division

PURCHASING AFFIDAVIT

VENDOR OWING A DEBT TO THE STATE:

West Virginia Code §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

West Virginia Code §21-1D-5 provides that: Any solicitation for a public improvement construction contract shall require each vendor that submits a bid for the work to submit at the same time an affidavit that the vendor has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the West Virginia Code. A public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the West Virginia Code and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the West Virginia Code may take place before their work on the public improvement is begun.

ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.

LICENSING:

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendors should visit www.state.wv.us/admin/purchase/privacy for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and is in compliance with the requirements as stated.

Vendor's Name: <u>Kelly Paving</u> , <u>Inc</u> .				
Authorized Signature: Authorized Signature:	Date: _	November	26, 2	008
Purchasing Affidavit (Revised 07/01/08)				