



The following documentation is an electronically-submitted vendor response to an advertised solicitation from the *West Virginia Purchasing Bulletin* within the Vendor Self-Service portal at ***wvOASIS.gov***. As part of the State of West Virginia's procurement process, and to maintain the transparency of the bid-opening process, this documentation submitted online is publicly posted by the West Virginia Purchasing Division at ***WVPurchasing.gov*** with any other vendor responses to this solicitation submitted to the Purchasing Division in hard copy format.

Header 1

List View

General Information

Contact

Default Values

Discount

Document Information

Procurement Folder: 313410

SO Doc Code: CRFQ

Procurement Type: Central Master Agreement

SO Dept: 0310

Vendor ID: 000000177068

SO Doc ID: DNR1700000043

Legal Name: BRIDGEPORT EQUIPMENT & TOOL

Published Date: 4/5/17

Alias/DBA: BET LTD

Close Date: 4/12/17

Total Bid: \$109,875.38

Close Time: 13:30

Response Date: 04/12/2017

Status: Closed

Response Time: 12:09

Solicitation Description: Addendum #2 OpenEnd Contract for tractors with front loaders

Total of Header Attachments: 1

Total of All Attachments: 1



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Solicitation Response

Proc Folder : 313410

Solicitation Description : Addendum #2 OpenEnd Contract for tractors with front loaders

Proc Type : Central Master Agreement

Date issued	Solicitation Closes	Solicitation Response	Version
	2017-04-12 13:30:00	SR 0310 ESR04121700000004943	1

VENDOR

000000177068

BRIDGEPORT EQUIPMENT & TOOL

BET LTD

Solicitation Number: CRFQ 0310 DNR1700000043

Total Bid : \$109,875.38

Response Date: 2017-04-12

Response Time: 12:09:48

Comments:

FOR INFORMATION CONTACT THE BUYER

Brittany E Ingraham

(304) 558-2157

brittany.e.ingraham@wv.gov

Signature on File

FEIN #

DATE

All offers subject to all terms and conditions contained in this solicitation

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
1	Agricultural tractors	2.00000	EA	\$48,188.690000	\$96,377.38

Comm Code	Manufacturer	Specification	Model #
25101901			

Extended Description : Per the specifications in 3.1.1.

Comments: BIDDING TWO (2) NEW, JOHN DEERE 5075M CAB TRACTOR'S. 2017 MODEL YEARS.

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Ln Total Or Contract Amount
2	Front end loader	2.00000	EA	\$6,749.000000	\$13,498.00

Comm Code	Manufacturer	Specification	Model #
22101501			

Extended Description : Per the specifications in 3.1.2.

Comments: BIDDING TWO (2) JOHN DEERE H260 FRONT LOADERS - MECHANICAL SELF LEVELING - 2017 YEAR MODEL - WITH 73 INCH FRONT BUCKET.



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Request for Quotation
13 — Equipment

Proc Folder: 313410

Doc Description: Wildlife-Open-End Contract for tractors with front loaders

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2017-03-23	2017-04-12 13:30:00	CRFQ 0310 DNR1700000043	1

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV

25305

US

VENDOR

Vendor Name, Address and Telephone Number:

BRIDGEPORT EQUIPMENT AND TOOL
1504 OAKHURST DRIVE
CHARLESTON, WV 25314
304-659-2917

FOR INFORMATION CONTACT THE BUYER

Brittany E Ingraham

(304) 558-2157

brittany.e.ingraham@wv.gov

Signature X

Ronald A. Gardner

FEIN #

34-1800484

DATE

4/12/2017

All offers subject to all terms and conditions contained in this solicitation

ADDITIONAL INFORMATION:

Request for Quotation

The West Virginia Purchasing Division is soliciting bids on behalf of the West Virginia Division of Natural Resources to establish an open-end contract for all tractors per the bid requirements, specifications, terms, and conditions attached to this solicitation.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	Agricultural tractors	2.00000	EA	\$48188.69	\$96377.38

Comm Code	Manufacturer	Specification	Model #
25101901	JOHN DEERE	AS PER SPECIFICATION	5075M CAB TRACTOR

Extended Description :

Per the specifications in 3.1.1.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	Front end loader	2.00000	EA	\$6749.00	\$13498.00

Comm Code	Manufacturer	Specification	Model #
22101501	JOHN DEERE	AS PER SPECIFICATION	H260 SELF LEVELING LOADER

Extended Description :

Per the specifications in 3.1.2.

DNR1700000043	Document Phase Final	Document Description Wildlife-Open-End Contract for tractors with front loaders	Page 3 of 3
----------------------	---------------------------------------	--	------------------------------

ADDITIONAL TERMS AND CONDITIONS

See attached document(s) for additional Terms and Conditions



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Request for Quotation
13 — Equipment

Proc Folder: 313410

Doc Description: Addendum #1 OpenEnd Contract for tractors with front loaders

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2017-04-03	2017-04-12 13:30:00	CRFQ 0310 DNR1700000043	2

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV 25305

US

VENDOR

Vendor Name, Address and Telephone Number:

BRIDGEPORT EQUIPMENT AND TOOL

1504 oakhurst drive

CHARLESTON, WV 25314

304-659-2917

FOR INFORMATION CONTACT THE BUYER

Brittany E Ingraham

(304) 558-2157

brittany.e.ingraham@wv.gov

Signature X

FEIN #

34-1800484

DATE

4/12/2017

All offers subject to all terms and conditions contained in this solicitation

ADDITIONAL INFORMATION:

Addendum

Addendum No.01 issued to publish and distribute the attached information to the vendor community.

Request for Quotation

The West Virginia Purchasing Division is soliciting bids on behalf of the West Virginia Division of Natural Resources to establish an open-end contract for all tractors per the bid requirements, specifications, terms, and conditions attached to this solicitation.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	Agricultural tractors	2.00000	EA	\$48188.69	\$96377.38

Comm Code	Manufacturer	Specification	Model #
25101901	JOHN DEERE	AS PER SPECIFICATION	5075M

Extended Description :

Per the specifications in 3.1.1.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	Front end loader	2.00000	EA	\$6749.00	\$13498.00

Comm Code	Manufacturer	Specification	Model #
22101501	JOHN DEERE	AS PER SPECIFICATION	H260

Extended Description :

Per the specifications in 3.1.2.

SOLICITATION NUMBER: CRFQ DNR1700000043
Addendum Number: No.01

The purpose of this addendum is to modify the solicitation identified as DEP16402 ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- ☐ Modify bid opening date and time
- ☒ Modify specifications of product or service being sought
- ☐ Attachment of vendor questions and responses
- ☐ Attachment of pre-bid sign-in sheet
- ☐ Correction of error
- ☐ Other

Description of Modification to Solicitation:

This addendum is issued to modify the following specifications:

- 1. (WAS) 3.1.1.4 Must have a minimum of seventy-four (74) gross engine horsepower
(IS NOW) 3.1.1.4 Must have a minimum of seventy (70) gross engine horsepower.
- 2. (WAS) 3.1.1.5 Must have a minimum sixty (60) Power Take Off horsepower.
(IS NOW) 3.1.1.5 Must have a minimum of fifty-five (55) Power Take Off horsepower.
- 3. (WAS) 3.1.1.10 Must have an electric remote switch which operates the three-point hitch typically located on or near the rear fender.
(IS NOW) 3.1.1.10 Must have a remote switch which operates the three-point hitch typically located on or near the rear fender.

No other changes.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

- 1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
- 2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: DEP16402

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:

(Check the box next to each addendum received)

<input checked="" type="checkbox"/> Addendum No. 1	<input type="checkbox"/> Addendum No. 6
<input type="checkbox"/> Addendum No. 2	<input type="checkbox"/> Addendum No. 7
<input type="checkbox"/> Addendum No. 3	<input type="checkbox"/> Addendum No. 8
<input type="checkbox"/> Addendum No. 4	<input type="checkbox"/> Addendum No. 9
<input type="checkbox"/> Addendum No. 5	<input type="checkbox"/> Addendum No. 10

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

BRIDGEPORT EQUIPMENT AND TOOL

Company

Ronald A. Gardner

Authorized Signature

4/12/2017

Date

NOTE: This addendum acknowledgement should be submitted with the bid to expedite document processing.



Purchasing Division
2019 Washington Street East
Post Office Box 50130
Charleston, WV 25305-0130

State of West Virginia
Request for Quotation
13 — Equipment

Proc Folder: 313410

Doc Description: Addendum #2 OpenEnd Contract for tractors with front loaders

Proc Type: Central Master Agreement

Date Issued	Solicitation Closes	Solicitation No	Version
2017-04-05	2017-04-12 13:30:00	CRFQ 0310 DNR1700000043	3

BID RECEIVING LOCATION

BID CLERK

DEPARTMENT OF ADMINISTRATION

PURCHASING DIVISION

2019 WASHINGTON ST E

CHARLESTON

WV 25305

US

VENDOR

Vendor Name, Address and Telephone Number:

BRIDGEPORT EQUIPMENT AND TOOL
1504 OAKHURST DRIVE
CHARLESTON, WV 25314
304-659-2917

FOR INFORMATION CONTACT THE BUYER

Brittany E Ingraham

(304) 558-2157

brittany.e.ingraham@wv.gov

Signature X

FEIN # 34-1800484

DATE 4/12/2017

All offers subject to all terms and conditions contained in this solicitation

ADDITIONAL INFORMATION:

Addendum

Addendum No.02 issued to publish and distribute the attached information to the vendor community.

Request for Quotation

The West Virginia Purchasing Division is soliciting bids on behalf of the West Virginia Division of Natural Resources to establish an open-end contract for all tractors per the bid requirements, specifications, terms, and conditions attached to this solicitation.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
1	Agricultural tractors	2.00000	EA	\$48188.69	\$96377.38

Comm Code	Manufacturer	Specification	Model #
25101901	JOHN DEERE	AS SPECIFIED	5075M

Extended Description :

Per the specifications in 3.1.1.

INVOICE TO		SHIP TO	
DIVISION OF NATURAL RESOURCES WILDLIFE RESOURCES SECTION ELKINS OPERATIONS CENTER PO BOX 67		STATE OF WEST VIRGINIA VARIOUS LOCATIONS AS INDICATED BY ORDER	
ELKINS	WV26241	No City	WV 99999
US		US	

Line	Comm Ln Desc	Qty	Unit Issue	Unit Price	Total Price
2	Front end loader	2.00000	EA	\$6749.00	\$13498.00

Comm Code	Manufacturer	Specification	Model #
22101501	JOHN DEERE	AS PER SPECIFICATION	H260

Extended Description :

Per the specifications in 3.1.2.

SOLICITATION NUMBER: CRFQ DNR1700000043
Addendum Number: No.02

The purpose of this addendum is to modify the solicitation identified as ("Solicitation") to reflect the change(s) identified and described below.

Applicable Addendum Category:

- ☐ | Modify bid opening date and time
- ☒ | Modify specifications of product or service being sought
- ☐ | Attachment of vendor questions and responses
- ☐ | Attachment of pre-bid sign-in sheet
- ☐ | Correction of error
- ☐ | Other

Description of Modification to Solicitation:

This addendum is issued to modify the solicitation per the attached documentation.

Additional Documentation: Documentation related to this Addendum (if any) has been included herewith as Attachment A and is specifically incorporated herein by reference.

Terms and Conditions:

1. All provisions of the Solicitation and other addenda not modified herein shall remain in full force and effect.
2. Vendor should acknowledge receipt of all addenda issued for this Solicitation by completing an Addendum Acknowledgment, a copy of which is included herewith. Failure to acknowledge addenda may result in bid disqualification. The addendum acknowledgement should be submitted with the bid to expedite document processing.

ATTACHMENT A

Addendum issued to reflect the following change to Specifications Section: 4.2

(Did Read)

- 4.2 Pricing Pages:** Vendor should complete the Pricing Pages by completing the attached pricing page. Vendor should complete the Pricing Pages in their entirety as failure to do so may result in Vendor's bids being disqualified. The Pricing Pages contain a list of the Contract Items and estimated purchase volume. The estimated purchase volume for each item represents the approximate volume of anticipated purchases only. No future use of the Contract or any individual item is guaranteed or implied. Items listed are estimates only and will be used for bid evaluation purposes only. Actual quantities may be more or less.

Vendor should electronically enter the information into the Pricing Pages through wvOASIS, if available, or as an electronic document. In most cases, the Vendor can request an electronic copy of the Pricing Pages for bid purposes may download from the wvOASIS Vendor Self-Serve website.

Vendor should type or electronically enter the information into the Exhibit A Pricing Page to prevent errors in the evaluation.

- 4.1.1** If the Vendor is submitting an Equivalent Brand this information including Model Number must be submitted with their bid submission using Exhibit "A" Pricing Page. Any product brochures to support vendor's product should be submitted with vendor's submitted bid response. This information may be required before award of contract.

- 4.2.1** Vendor's who wish to respond to a Centralized Request for Quotation (CRFQ) online may submit information through the State's wvOASIS Vendor Self Service (VSS). Vendors should download the Exhibit "A": Pricing Page that is attached separately to the CRFQ and published to the VSS. **Vendors must complete this form with their pricing information including Brand, Model and Year equipment being bid and include it as an attachment to their online response.** If unable to respond online Vendor must submit the Exhibit "A" Pricing Pages in their entirety with your bid prior to the scheduled bid opening date and time.

(Now Reads)

- 4.2 Pricing Pages:** Vendor should complete the Pricing Pages in their entirety as failure to do so may result in Vendor's bids being disqualified.

The Pricing Pages contain a list of the Contract Items and estimated purchase volume. The estimated purchase volume for each item represents the approximate volume of

anticipated purchases only. No future use of the Contract or any individual item is guaranteed or implied. Items listed are estimates only and will be used for bid evaluation purposes only. Actual quantities may be more or less.

Vendor should electronically enter the information into the Pricing Pages through wvOASIS, if available, or as an electronic document. In most cases, the Vendor can request an electronic copy of the Pricing Pages for bid purposes by sending an email request to the following address: Brittany.E.Ingraham@WV.Gov or may download from the wvOASIS Vendor Self-Serve website.

Vendor should type or electronically enter the information into the Exhibit A Pricing Page to prevent errors in the evaluation.

- 4.2.1 Vendor's who wish to respond to a Centralized Request for Quotation (CRFQ) online may submit information through the State's wvOASIS Vendor Self Service (VSS).

Vendors should download the Exhibit "A" Pricing Page that is attached separately to the CRFQ and published to the VSS. **Vendor must identify Brand, Model and Year of equipment being bid and include it with their submitted bid response.**

Any product brochures to support vendor's product should be submitted with vendor's bid response. These brochures and any supporting documentation may be required before award of contract.

ADDENDUM ACKNOWLEDGEMENT FORM
SOLICITATION NO.: _____

Instructions: Please acknowledge receipt of all addenda issued with this solicitation by completing this addendum acknowledgment form. Check the box next to each addendum received and sign below. Failure to acknowledge addenda may result in bid disqualification.

Acknowledgment: I hereby acknowledge receipt of the following addenda and have made the necessary revisions to my proposal, plans and/or specification, etc.

Addendum Numbers Received:


(Check the box next to each addendum received)

<input type="checkbox"/> Addendum No. 1	<input type="checkbox"/> Addendum No. 6
<input checked="" type="checkbox"/> Addendum No. 2	<input type="checkbox"/> Addendum No. 7
<input type="checkbox"/> Addendum No. 3	<input type="checkbox"/> Addendum No. 8
<input type="checkbox"/> Addendum No. 4	<input type="checkbox"/> Addendum No. 9
<input type="checkbox"/> Addendum No. 5	<input type="checkbox"/> Addendum No. 10

I understand that failure to confirm the receipt of addenda may be cause for rejection of this bid. I further understand that any verbal representation made or assumed to be made during any oral discussion held between Vendor's representatives and any state personnel is not binding. Only the information issued in writing and added to the specifications by an official addendum is binding.

BRIDGEPORT EQUIPMENT AND TOOL

Company



Authorized Signature

4/12/2017

Date

NOTE: This addendum acknowledgment should be submitted with the bid to expedite document processing.


Revised 6/8/2012

DESIGNATED CONTACT: Vendor appoints the individual identified in this Section as the Contract Administrator and the initial point of contact for matters relating to this Contract.

RONALD A. GARDNER SALES
 (Name, Title)
 RONALD A. GARDNER SALES
 (Printed Name and Title)
 1504 OAKHURST DRIVE CHARLESTON, WV 25314
 (Address)
 304-659-2917 304-659-3276
 (Phone Number) / (Fax Number) rgardner@bridgeportequip.com
 (email address)

CERTIFICATION AND SIGNATURE: By signing below, or submitting documentation through wvOASIS, I certify that I have reviewed this Solicitation in its entirety; that I understand the requirements, terms and conditions, and other information contained herein; that this bid, offer or proposal constitutes an offer to the State that cannot be unilaterally withdrawn; that the product or service proposed meets the mandatory requirements contained in the Solicitation for that product or service, unless otherwise stated herein; that the Vendor accepts the terms and conditions contained in the Solicitation, unless otherwise stated herein; that I am submitting this bid, offer or proposal for review and consideration; that I am authorized by the vendor to execute and submit this bid, offer, or proposal, or any documents related thereto on vendor's behalf; that I am authorized to bind the vendor in a contractual relationship; and that to the best of my knowledge, the vendor has properly registered with any State agency that may require registration.

BRIDGEPORT EQUIPMENT AND TOOL

(Company)
 RONALD A. GARDNER SALES
 (Authorized Signature) (Representative Name, Title)
 RONALD A GARDNER SALES
 (Printed Name and Title of Authorized Representative)
 4/12/2017
 (Date)
 304-659-2917 304-659-3276
 (Phone Number) (Fax Number)

REQUEST FOR QUOTATION

West Virginia Division of Natural Resources-Wildlife Resources Section
Open-End Contract for Tractors with Front Loaders

- 8.3 Reports:** Vendor shall provide quarterly reports and annual summaries to the Agency showing the Agency's items purchased, quantities of items purchased, and total dollar value of the items purchased. Vendor shall also provide reports, upon request, showing the items purchased during the term of this Contract, the quantity purchased for each of those items, and the total value of purchases for each of those items. Failure to supply such reports may be grounds for cancellation of this Contract.
- 8.4 Contract Manager:** During its performance of this Contract, Vendor must designate and maintain a primary contract manager responsible for overseeing Vendor's responsibilities under this Contract. The Contract manager must be available during normal business hours to address any customer service or other issues related to this Contract. Vendor should list its Contract manager and his or her contact information below.

Contract Manager: RONALD A. GARDNER

Telephone Number: 304-659-2917

Fax Number: 304-659-3271

Email Address: rgardner@bridgeportequip.com

Exhibit "A" Pricing Page
West Virginia Division of Natural Resources-Wildlife Resources Section
Open-End Contract for All for Tractors with Front Loaders

Description	Make and Model	Unit of Measure	Estimated Quantity	Unit Price	Extended Cost
2016 or Current year model: John Deere Model 5075M tractor or Equal	2017 JOHN DEERE 5075M CAB TRACTOR	Each	2	\$48188.69	\$96377.38
John Deere H260 MSL Front-End Loader or Equal	2017 JOHN DEERE H260 SELF-LEVELING FRONT LOADER	Each	2	\$ 6749.00	\$13498.00
TOTAL BID AMOUNT (INCLUDES SHIPPING CHARGES):					\$109875.38

g an or Equal Product, vendor must identify Make and Model at time of submitting Bid Response. Vendor should provide Product Brochures indicating within the ns that are equal. The estimated purchase volume for each item represent the approximate volume of anticipated purchases only.

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

MANDATE: Under W. Va. Code §5A-3-10a, no contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and: (1) the debt owed is an amount greater than one thousand dollars in the aggregate; or (2) the debtor is in employer default.

EXCEPTION: The prohibition listed above does not apply where a vendor has contested any tax administered pursuant to chapter eleven of the W. Va. Code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Employer default" means having an outstanding balance or liability to the old fund or to the uninsured employers' fund or being in policy default, as defined in W. Va. Code § 23-2c-2, failure to maintain mandatory workers' compensation coverage, or failure to fully meet its obligations as a workers' compensation self-insured employer. An employer is not in employer default if it has entered into a repayment agreement with the Insurance Commissioner and remains in compliance with the obligations under the repayment agreement.

"Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceeds five percent of the total contract amount.

AFFIRMATION: By signing this form, the vendor's authorized signer affirms and acknowledges under penalty of law for false swearing (W. Va. Code §61-5-3) that neither vendor nor any related party owe a debt as defined above and that neither vendor nor any related party are in employer default as defined above, unless the debt or employer default is permitted under the exception above.

WITNESS THE FOLLOWING SIGNATURE:

Vendor's Name: BRIDGEPORT EQUIPMENT AND TOOL


Authorized Signature: Ronald A. Gardner Date: 4/12/2017

State of WV

County of Ritchie, to-wit:

Taken, subscribed, and sworn to before me this 12 day of April, 2017.

My Commission expires March 10, 2019.

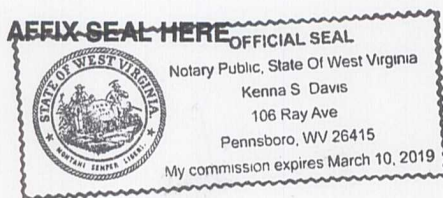

NOTARY PUBLIC

Kenna S. Davis

Purchasing Affidavit (Revised 08/01/2015)

VENDOR PREFERENCE CERTIFICATE

Certification and application is hereby made for Preference in accordance with **West Virginia Code**, §5A-3-37. (Does not apply to construction contracts). **West Virginia Code**, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the **West Virginia Code**. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Vendor Preference, if applicable.

1. Application is made for 2.5% vendor preference for the reason checked:

- ☐ Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
- ☐ Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification;
- ☐ Bidder is a resident vendor partnership, association, or corporation with at least eighty percent of ownership interest of bidder held by another entity that meets the applicable four year residency requirement; **or**,
- ☐ Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or**,

2. Application is made for 2.5% vendor preference for the reason checked:

- ☐ Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,

3. Application is made for 2.5% vendor preference for the reason checked:

- ☒ Bidder is a nonresident vendor that employs a minimum of one hundred state residents, or a nonresident vendor which has an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia and employs a minimum of one hundred state residents, and for purposes of producing or distributing the commodities or completing the project which is the subject of the bidder's bid and continuously over the entire term of the project, on average at least seventy-five percent of the bidder's employees or the bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years and the vendor's bid; **or**,

4. Application is made for 5% vendor preference for the reason checked:

- ☐ Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or**,

5. Application is made for 3.5% vendor preference who is a veteran for the reason checked:

- ☐ Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or**,

6. Application is made for 3.5% vendor preference who is a veteran for the reason checked:

- ☐ Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

7. Application is made for preference as a non-resident small, women- and minority-owned business, in accordance with West Virginia Code §5A-3-59 and West Virginia Code of State Rules.

- ☐ Bidder has been or expects to be approved prior to contract award by the Purchasing Division as a certified small, women- and minority-owned business.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) rescind the contract or purchase order; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: BRIDGEPORT EQUIPMENT AND TOOL

Signed: Ronald A. Gardner

Date: 4/12/2017

Title: SALES

*Check any combination of preference consideration(s) indicated above, which you are entitled to receive.



JOHN DEERE

Quote Summary

Prepared For:

Wvdnr Wildlife Resources
Rts219/250 S. Ward Rd
Po Box 67
Elkins, WV 26241
Business: 304-537-0245

Prepared By:

Ronald Gardner
Bridgeport Equipment & Tool
435 W. Myles Avenue
Pennsboro, WV 26415
Phone: 304-659-2917
rgardner@bridgeportequip.com

Quote Id: 15101978
Created On: 11 April 2017
Last Modified On: 12 April 2017
Expiration Date: 18 April 2017

Equipment Summary	Selling Price	Qty	Extended
JOHN DEERE 5075M Utility Tractor	\$ 48,188.69 X	1 =	\$ 48,188.69
JOHN DEERE H260 Standard Loader	\$ 6,749.00 X	1 =	\$ 6,749.00
Equipment Total			\$ 54,937.69

Quote Summary

Equipment Total	\$ 54,937.69
SubTotal	\$ 54,937.69
Total	\$ 54,937.69
Down Payment	(0.00)
Rental Applied	(0.00)
Balance Due	\$ 54,937.69

PLEASE NOTE: PRICE SHOWN IS PER UNIT.

PRICING FOR TWO (2) UNITS - \$109,875.38

Salesperson : X

Ronald A. Gardner

Accepted By : X

Confidential

**JOHN DEERE**

Selling Equipment

Quote Id: 15101978

Customer: WVDNR WILDLIFE RESOURCES

JOHN DEERE 5075M Utility Tractor

Hours:

Stock Number:

Code	Description	Qty
191CLV	5075M Utility Tractor	1

Standard Options - Per Unit

0409	English Operator's Manual and Decal Kit	1
1380	16F/16R PowrReverser Transmission - 540/540E	1
2055	Standard Cab	1
2110	Standard Mechanical Suspension Seat	1
2410	Instructional Seat with Seatbelt	1
3020	Vertical Exhaust	1
3330	Triple Stackable Rear Deluxe Valve with Lever Controls	1
3420	Dual Stackable Mid Valve with Joystick Control	1
3820	Shiftable 540 / 540E Rear PTO	1
4030	Electrohydraulic (EH) with remote Left-hand (LH) fender control	1
5121	16.9 - 30 in. 6PR R1 Bias (Goodyear)	1
5999	No Rear Tire Brand Preference	1
6040	MFWD (4-Wheel Drive)	1
6111	11.2-24 6PR R1 (Goodyear) Bias	1
6799	No Front Tire Brand Preference	1
8300	Cold Weather Package - Coolant Heater	1
8912	Loader Preparation Package	1

Dealer Attachments

1

Other Charges

Freight	1
Setup	1
TIRE BALLAST	1
DELIVERY	1

Confidential



JOHN DEERE

Selling Equipment

Quote Id: 15101978

Customer: WVDNR WILDLIFE RESOURCES

JOHN DEERE H260 Standard Loader

Hours:

Stock Number:

Code	Description	Qty	
04B1P	H260 Standard Loader	1	
Standard Options - Per Unit			
0202	United States	1	
0500	Less package	1	
1995	Less mounting frame	1	
2522	H260 Mechanical self-leveling (MSL) farm loader - Two-function	1	
3551	Two-function hoses and parts	1	
4550	Two-function mid-mount quick-couplers	1	
5995	Less hood guard	1	NOTE: HOOD GUARD INCLUDED IN LOADER PREPARATION PACKAGE FOR TRACTOR.
6020	Large ballast box	1	
7610	Global carrier	1	
8210	1850-mm (73-in.) global materials bucket	1	
Other Charges			
	Freight	1	
	Setup	1	

JOHN DEERE 5075M**OFFICIAL TEST**

Nebraska Test number

Factory observed

ENGINE

Manufacturer

John Deere PowerTech 3029

Engine family

EJDXL03.0208

Aspiration

Turbocharged and Air-to-Air Aftercooled

Cylinders/Displacement, cu. in. (L)

179 cu in. In-Line, 3 / 2.9 L

Fuel tank capacity, US Gal. (L) (Open; Cab)

Standard

113; 136 L
30; 36 gal.

Optional

177 (with optional mid tank) L
47 (with optional mid tank) gal.

Underhood muffler

Yes

PERFORMANCE

Advertised PTO hp (kW) @ Rated rpm

43.0 @ 2100 per SAE kW 57.7 PTO hp

Advertised Engine hp (kW) @ Rated speed

55.0 @ 2200 rpm per ISO 97/68/EC kW
73.8 @ 2200 rpm per ISO 97/68/EC
engine hp

Maximum Torque (PTO) @ rpm, lb-ft (Nm)

300 @ 1400

Maximum Torque Rise % (PTO) @ Eng rpm

26 @ 1400

TRANSMISSION

Std. Transmission; Forward/Reverse

16F/16R PowrReverser ✓

Opt. Transmission; Forward/Reverse

12F/4R SyncShuttle Plus, 32F/16R
PowrReverser Plus

Reverser	Left Hand, Mechanical
On-the-Go Shifting (Yes/No/Partial)	Partial
Clutch; Wet/Dry	Wet
Creeper	16F/16R PowrReverser

POWER TAKE-OFF (PTO)

Standard	Independent 540/540 Economy
Optional	540/540E/1000
PTO Speeds @ Engine rpm	1000 @ 2100 rpm rpm
PTO Actuation	Electrohydraulic

HYDRAULICS

Type	Gear
Pump Rated Output, GPM (L/min.)	---
Standard	69.6 L/min 18.4 gpm
Rated Flow @ One SCV, GPM (L/min.)	14.6 gpm 55.4 L/min
Maximum Operating Pressure, psi (kPa)	2900 psi 20000 kPa
Maximum Hydraulic Power, hp (kW)	22.3 hp 16.6 kW
Hitch Draft Control Load Sense Type	Mechanical or Electrohydraulic
Remote Control Valves Available	up to 3
Hitch Category (SAE Designation)	2; convertible to 1
Hitch Lift Cap. lb (kg) @24 in. Bhnd Lift Pt.	---
Standard	4793 lb 2174 kg
Optional	5935 lb 2692 kg

Sensing type	Lower Link
Joystick SCV control	Optional

FINAL DRIVE

Type	Inboard Planetary
Differential controls	Electrohydraulic
Availability	---
Front	No
Front & Rear	No
Engage On-the-Go Rear Differential Lock	Yes
Axle Type	Flanged
Brakes, Type and Control	Hydraulic Wet Disc

OPERATOR STATION

Rollover Protective Structure, OOS	---
Rigid - Foldable - Telescopic	Foldable, 2-Post
Platform - Flat/Straddle	Flat
Gearshift Location - Console/Floor	Floor
Cab	---
Doors	2
Platform - Flat/Straddle	Flat
dB(A) Rating	80
Seat Suspension System	Mechanical (opt. Air Ride)

2WD DIMENSIONS

Wheelbase, in. (mm)	2301.24 mm 90.6 in.
---------------------	---------------------

Front Tread Range, in. (mm)	1463 - 2098 mm 57.6 - 82.6 in.
Rear Tread Range, in. (mm)	1348 - 2054 mm 53.1 - 80.9 in.
Minimum Rear Tread Setting, in. (mm)	1348 mm 53.1 in.
Front Axle Clearance, in. (mm)	477.5 mm 18.8 in.
Turning Radius w/Brakes, ft (m)	3.51 m 11.2 ft
Turning Radius w/o Brakes, ft (m)	3.90 m 12.8 ft
Approx. Ship Wgt, lb (kg) Open; Cab	3357; 3765 kg 7400; 8300 lb

MFWD DIMENSIONS

Wheelbase, in. (mm)	2301.24 mm 90.6 in.
Front Tread Range, in. (mm)	1340 - 1904 mm 52.8 - 75.0 in.
Front Axle Clearance, in. (mm)	401.3 mm 15.8 in.
Turning Radius w/Brakes, ft (m)	3.9 m 12.8 ft
Turning Radius w/o Brakes, ft (m)	4.4 m 14.4 ft
Limited Slip Differential	Yes
Approx. Ship Wgt, lb (kg) Open; Cab	3583; 3992 kg 6400; 7800 lb

STANDARD TIRES

2WD	---
Front	11LL-15 In. 8PR F3 (Truck Type) Bias (Firestone)
Rear	16.9-30 In. 6PR R1 Bias (Firestone)
MFWD	---
Front	12.4R24 (320/85R24) R1W Radial (Michelin) or R1 Radial (Goodyear)
Rear	18.4R30 (460/85R30) R1 Radial (Goodyear)

Heavy base tractor weight for stability

A heavy tractor means more down force to keep implements in the ground. More weight also leads to improved traction and performance in the field. Because the 5M is made with heavy and durable cast steel, it weighs enough to power through those tough jobs.

The compactness of the 5M Series in regards to wheelbase, weight, and total height tractor makes this tractor suited for a variety of different applications and is the perfect choice for all types of farms.

A heavy tractor also means better stability when performing loader work. Transport full bucket loads faster and lift bales higher with a stronger and more stable base.



Tractor weight package

Model	5075M*	5085M	5100M	5115M
Two-wheel drive (2WD) open operator station (OOS) (lb; kg)	7400; 3357	7300; 3310	7500; 3400	N/A
2WD cab (lb; kg)	8300; 3765	8200; 3720	8400; 3810	N/A
Mechanical front-wheel drive (MFWD) OOS (lb; kg)	7900; 3583	7800; 3540	8000; 3630	8000; 3630
MFWD cab (lb; kg)	8800; 3992	8700; 3950	8900; 4040	8900; 4040
With H260 mechanical self-leveling (MSL) OOS	~8307 lb	~8307 lb	~8307 lb	~8307 lb
With H260 MSL cab	~9805 lb	~9805 lb	~9805 lb	~9805 lb

*FT4 5075M has diesel oxidation catalyst/diesel particulate filter (DOC/DPF)

Provide feedback about this page (JavaScript:open_win

Last Updated: 06-Jul-2016

('http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html?'

referrer=http://dlrdoc.deere.com/sales/salesmanual/en_NA/tractors/2017/feature/differentials_axles_frame_and_chassis/5m/heavy_tractor_weight.html'))

[Home \(http://dlrdoc.deere.com/sales/salesmanual/index.html\)](http://dlrdoc.deere.com/sales/salesmanual/index.html) | [Feedback \(http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html\)](http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html) |

[Help \(http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html\)](http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html) | [Privacy & Data](#)

(http://www.deere.com/privacy_and_data/privacy_and_data_us.page) | [Legal \(http://www.deere.com/en_US/footer/legal.page\)](http://www.deere.com/en_US/footer/legal.page)

Product features are based on published information at the time of publication and are subject to change without notice. All trademarked terms, including John Deere, the leaping deer symbol and the colors green and yellow used herein are the property of Deere & Company, unless otherwise noted. Availability of products, product features, and other content on this site may vary by model and geographic region.

Engine horsepower and torque information for non-Deere engines are provided by the engine manufacturer for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's Web site for additional information.

Copyright © 2017 Deere & Company. All Rights Reserved.

Standard cab

There are two cab trim levels offered on 5M Tractors, standard cab and premium cab. The salt-and-pepper fabric used on the seat brightens the space. A mechanical suspension or air suspension seat can be ordered with any cab trim level.

The cabs are assembled to the tractor chassis as a complete unit and mounted on composite isolators. This system of assembly and mounting is similar to the successful mounting methods of the larger-horsepower tractors in the John Deere Ag tractor family. The ceiling control panel is located on the upper right side and the AC components are located on the upper-rear corners of the cab, where visibility is not as critical. The cab's side windows open forward for excellent ventilation, and right- and left-side doors open wide for easy entry and exit. For excellent rear visibility, the fuel tank is located below the left-hand side of the platform. The rear window opens to 70 degrees, providing further visibility to the operator when hooking up implements. An interior rearview mirror provides additional visibility. A tilt-and-telescoping steering column provides a custom fit for each operator. The clean, uncluttered interior design with flat platform maximizes operator space. A conveniently located beverage holder provides space for the operator's drink of choice.

Excellent overall visibility in all applications with a swing-out rear window (with a grab handle) opens to a full 70 degrees for easier implement hookup and visibility. A front windshield wiper with washer ensures the operator can see the surroundings of the tractor. There is a convenient three-pin power outlet for monitor, controllers, and other operating necessities. Four sets of mounting bosses and a removable rear access plug for monitor or controller harnesses also make using a monitor easy. A rear seven-pin electrical outlet socket for implement electrical requirements and a 90-amp alternator handles increased electrical requirements. To handle increased powertrain and hydraulic requirements in severe conditions, a hydraulic oil cooler is standard.

Cab fenders are designed to provide plenty of tire clearance, even with the largest wheel-tire combinations.

Additional features are as follows:

- Rollover protective structure (ROPS)-certified structure for operator protection
- Tempered safety glass in case of breakage
- Left and right outside mirrors available (optional)
- Roof-mounted amber turn-signal/flashing warning lights for road transport—two front and two rear
- Two fender-mounted taillights for road transport
- Two large, cleated steps on each side

Provide feedback about this page (JavaScript:open_win

Last Updated: 09-Jun-2016

('http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html?'

referrer=http://dlrdoc.deere.com/sales/salesmanual/en_NA/tractors/2017/feature/operator_station_and_controls/5m/standard_cab_5075m.html'))

[Home \(http://dlrdoc.deere.com/sales/salesmanual/index.html\)](http://dlrdoc.deere.com/sales/salesmanual/index.html) | [Feedback](#)

[http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html\)](http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html) | [Help](#)



[http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html\)](http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html) | [Privacy & Data](#)

[http://www.deere.com/privacy_and_data/privacy_and_data_us.page\)](http://www.deere.com/privacy_and_data/privacy_and_data_us.page) | [Legal \(http://www.deere.com/en_US/footer/legal.page\)](http://www.deere.com/en_US/footer/legal.page)

Product features are based on published information at the time of publication and are subject to change without notice. All trademarked terms, including John Deere, the leaping deer symbol and the colors green and yellow used herein are the property of Deere & Company, unless otherwise noted. Availability of products, product features, and other content on this site may vary by model and geographic region.

Engine horsepower and torque information for non-Deere engines are provided by the engine manufacturer for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's Web site for additional information.



Copyright © 2017 Deere & Company. All Rights Reserved.

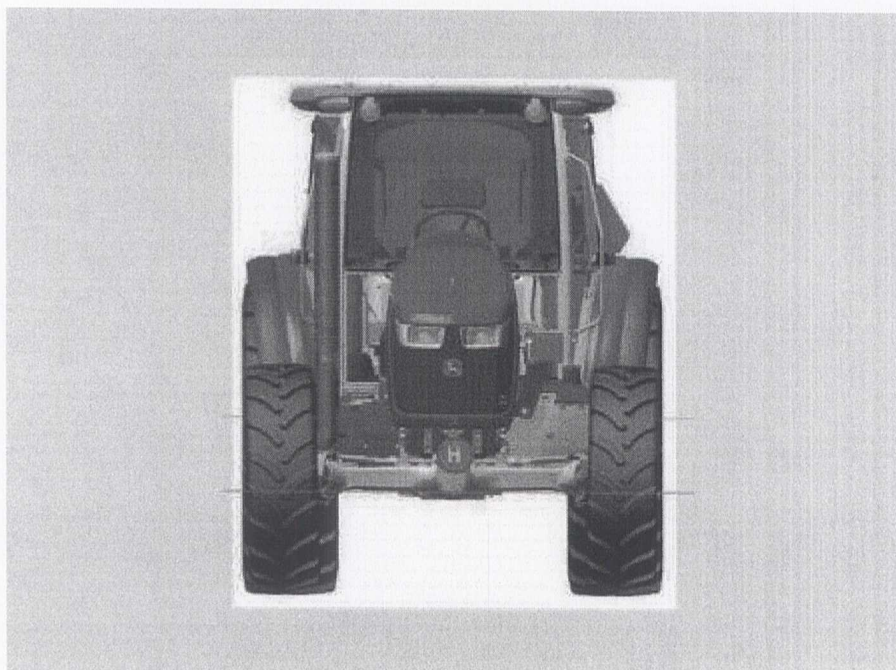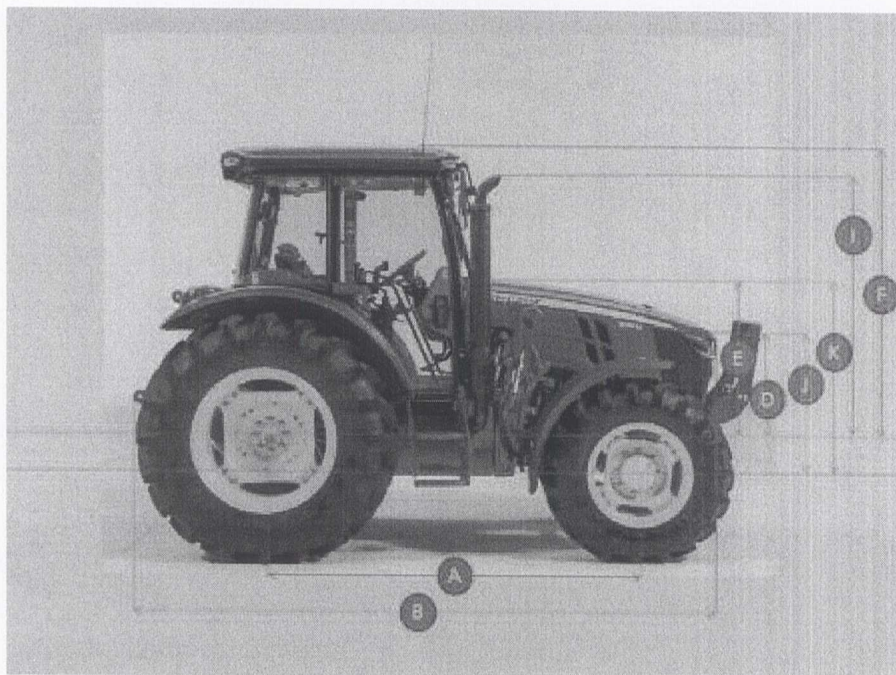
5M Cab Tractor dimensions**Cab tractor dimensions**



	5075M	5085M	5100M	5115M
	Cab	Cab	Cab	Cab
	Mechanical front-wheel drive (MFWD)	MFWD	MFWD	MFWD
Standard tires				
Front	12.4R24 R1 Radial	11.2-24 8PR R1	12.4R24 R1	12.4R24 R1
Rear	18.4R30 R1 Radial	16.9-30 6PR R1	18.4R30 R1	18.4R30 R1
Dimensions, in. (mm)				
A - Standard wheelbase	90.6 (2300)	92.5 (2350)	92.5 (2350)	92.5 (2350)
B - Overall length - Includes draft links—less front weight support	159.6 (4054)	161 (4089)	161 (4089)	161 (4089)
C - Overall width - minimum, outside edge of tires	85.6 (2174)	85.6 (2174)	85.6 (2174)	85.6 (2174)

Height from rear-axle centerline, in. (mm)				
D - To top of hood at front	N/A	26.0 (660)	26.0 (660)	26.0 (660)
E - To top of hood at rear	N/A	40.7 (1035)	40.7 (1035)	40.7 (1035)
F - To top of cab	72.3 (1837)	73.9 (1877)	73.9 (1877)	73.9 (1877)
G - To top of drawbar	10.6 (270)	N/A	N/A	N/A
Drawbar thickness	1.45 (36.8)	1.45 (36.8)	1.45 (36.8)	1.45 (36.8)
H - Bottom of MFWD axle	12.8 (324)	12.8 (324)	12.8 (324)	12.8 (324)
I - To top of exhaust	62.9 (1598)	N/A	N/A	N/A
Height from rear-axle centerline, in. (mm)				
J - To top of hood at front	N/A	38.5 (979)	38.5 (979)	38.5 (979)
K - To top of hood at rear	N/A	53.3 (1354)	53.3 (1354)	53.3 (1354)
Turn radius (ft)				
With brakes	10.4	12.8	12.8	12.8
Without brakes	11.4	14.4	14.4	14.4
Approximate shipping weight, lb (kg)				
Cab, MFWD, R1 tires	8300 (3765)	8700 (3950)	8900 (4040)	8900 (4040)

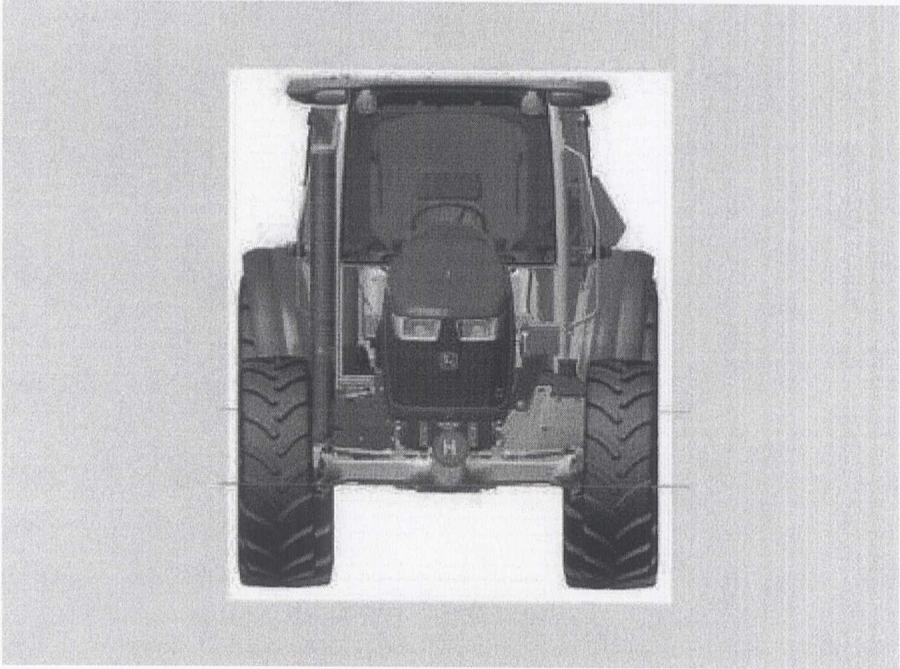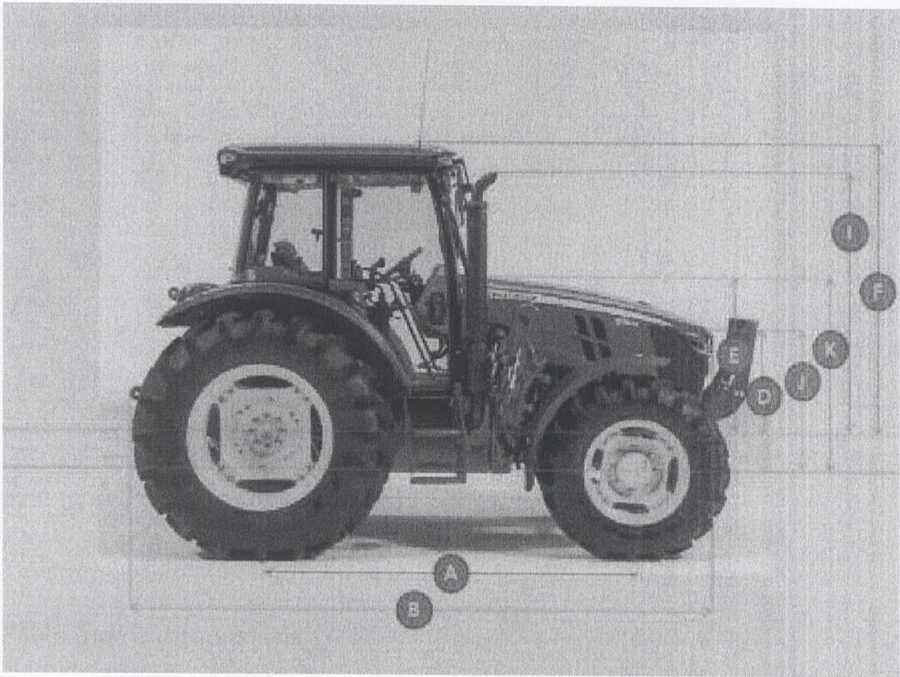

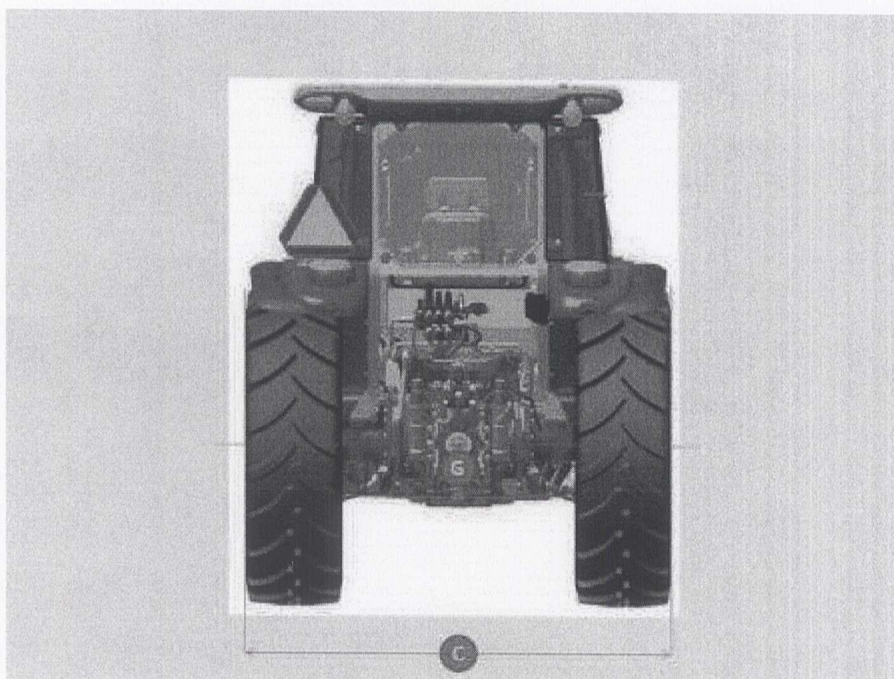

	5075M	5085M	5100M
	Cab	Cab	Cab
	Two-wheel drive (2WD)	2WD	2WD
Standard tires			
Front	N/A	7.5-16 F2	11L-15 8PR F2
Rear	16.9-30 in. R1	16.9-30 in. R1	18.4R30 R1
Dimensions, in. (mm)			
A - Standard wheelbase	90.6 (2300)	92.5 (2350)	92.5 (2350)
B - Overall length - Includes draft links —less front weight support	159.6 (4054)	161 (4089)	161 (4089)
Including draft links—less front weight support	150	155.5	155.5
C - Overall width - minimum, outside edge of tires	85.6 (2174)	74.0 (1880)	74.0 (1880)

Height from rear axle centerline, in. (mm)			
D - To top of hood at front	N/A	26.0 (660)	26.0 (660)
E - To top of hood at rear	N/A	40.7 (1035)	40.7 (1035)
F - To top of cab	72.3 (1837)	73.9 (1877)	73.9 (1877)
G - To top of drawbar	10.6 (270)		
Drawbar thickness	1.45 (36.8)	1.45 (36.8)	1.45 (36.8)
H - Bottom of front axle	12.8 (324)	12.8 (324)	12.8 (324)
I - To top of exhaust	62.9 (1598)	N/A	N/A
Height from front-axle centerline, in. (mm)			
J - To top of hood at front	N/A	38.5 (979)	38.5 (979)
K - To top of hood at rear	N/A	53.3 (1354)	53.3 (1354)
Turn radius (ft)			
With brakes	11.2	11.2	11.2
Without brakes	12.8	12.8	12.8
Approximate shipping weight, lb (kg)			
Cab, 2WD, R1 tires	7800 (3992)	8200 (3720)	8400 (3810)

[Home \(http://dlrdoc.deere.com/sales/salesmanual/index.html\)](http://dlrdoc.deere.com/sales/salesmanual/index.html) | [Feedback \(http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html\)](http://dlrdoc.deere.com/sales/salesmanual/feedback_form.html) | [Help \(http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html\)](http://dlrdoc.deere.com/sales/salesmanual/en_NA/marketing_tools/help_videos_mt.html) | [Privacy & Data \(http://www.deere.com/privacy_and_data/privacy_and_data_us.page\)](http://www.deere.com/privacy_and_data/privacy_and_data_us.page) | [Legal \(http://www.deere.com/en_US/footer/legal.page\)](http://www.deere.com/en_US/footer/legal.page)

Product features are based on published information at the time of publication and are subject to change without notice. All trademarked terms, including John Deere, the leaping deer symbol and the colors green and yellow used herein are the property of Deere & Company, unless otherwise noted. Availability of products, product features, and other content on this site may vary by model and geographic region. Engine horsepower and torque information for non-Deere engines are provided by the engine manufacturer for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's Web site for additional information.

Copyright © 2017 Deere & Company. All Rights Reserved.

JOHN DEERE H260 MSL ON 5085M/5100M/5115M**TECHNICAL DRAWING**

Technical drawing

[View diagram](#)**TRACTOR**

Model	5085M/5100M/5115M
Front tire	12.4R24
Rear tire	16.9R30
Front axle configuration	MFWD w/ Limited Slip Differential
Wheelbase	2300 mm 90.6 in.
Pump capacity	70 L/min 18.5 gpm
Rated pressure	195 bar 2828 psi

LOADER

Leveling configuration	Mechanical Self Leveling (MSL)
Bucket used	Materials 1850 mm Materials 73 in.
Bucket weight	228 kg 503 lb
Lift capacity at full height	---
Measured at pivot (U)	1390 kg 3064 lb
Measured at 800 mm ahead of pivot (V)	1501 kg 3309 lb
Lift capacity at 59 in. (1500 mm)	---
Measured at pivot (W)	1927 kg 4248 lb
Measured at 800 mm ahead of pivot (X)	1854 kg 4087 lb

Boom breakout force	---
Measured at pivot (Y)	2506 kgf 5525 lbf
Measured at 800 mm ahead of pivot (Z)	2201 kgf 4852 lbf
Bucket rollback force capacity	---
At maximum height (VV)	1592 kgf 3510 lbf
At 59-in. (1500-mm) lift height (XX)	2884 kgf 6358 lbf
At ground-level line (ZZ)	2884 kgf 6358 lbf
Dimensions	---
Maximum lift height (A)	3501 mm 137.8 in.
At full height - bucket level(B)	3307 mm 130.2 in.
At full height - bucket dumped (C)	2462 mm 96.9 in.
Overall length (I+F), ft (m)	4.9 m 15.9 ft
Digging depth (H)	123 mm 4.8 in.
Reach	---
At maximum height (D)	1048 mm 41.3 in.
At ground level - bucket level (F)	2650 mm 100.8 in.
Bucket angle	---
Dump angle, degrees (E)	-73 degree (angle)
Rollback angle, degrees (G)	44 degree (angle)

Dump angle, ground	-99 degree (angle)
Cycle times	---
Loader raise, seconds	3.7 seconds
Loader lower, seconds	2.8 seconds
Bucket dump, seconds	2.2 seconds
Bucket rollback, seconds	2.2 seconds