



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER
DRS090622

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
SHELLY MURRAY 304-558-8801

VENDOR

RFQ COPY  
 TYPE NAME/ADDRESS HERE

**LESLIE EQUIPMENT CO.**  
 19 GOFF CROSSING DRIVE  
 CROSS LANES, WV 25313

SHIP TO

DIV OF REHABILITATION SERVICES  
 WV REHABILITATION CENTER  
 ATTENTION: RECEIVING  
 INSTITUTE, WV  
 25112 766-4621

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
12/23/2008				

BID OPENING DATE: 01/29/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UQP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		070-48-50-001		
<p>THE WV PURCHASING DIVISION, FOR THE AGENCY, THE WV DIVISION OF REHABILITATION SERVICES, IS SOLICITING BIDS FOR ONE SKID STEER LOADER WITH ATTACHMENTS AND THREE UTILITY VEHICLES PER THE ATTACHED SPECIFICATIONS.</p> <p>TECHNICAL QUESTIONS MUST BE SUBMITTED IN WRITING TO SHELLY MURRAY IN THE WV PURCHASING DIVISION VIA MAIL AT THE ADDRESS SHOWN AT THE TOP OF THIS RFQ, VIA FAX AT 304-558-4115, OR VIA EMAIL AT SHELLY.L.MURRAY@WV.GOV. DEADLINE FOR ALL TECHNICAL QUESTIONS IS 01/13/2009 AT THE CLOSE OF BUSINESS.</p> <p>ALL TECHNICAL QUESTIONS RECEIVED, IF ANY, WILL BE ANSWERED BY ADDENDUM AFTER THE DEADLINE.</p> <p>QUESTIONS CONCERNING THE ACTUAL PROCESS BY WHICH A VENDOR MAY SUBMIT A BID TO THE STATE OF WV ARE NOT CONSIDERED TO BE TECHNICAL QUESTIONS AND MAY BE SUBMITTED AT ANY TIME PRIOR TO THE RFQ OPENING DATE AND IN ANY FORMAT.</p>						
<p>CANCELLATION: THE DIRECTOR OF PURCHASING RESERVES THE RIGHT TO CANCEL THIS CONTRACT IMMEDIATELY UPON WRITTEN NOTICE TO THE VENDOR IF THE COMMODITIES AND/OR SERVICES SUPPLIED ARE OF AN INFERIOR QUALITY OR DO NOT CONFORM TO THE SPECIFICATIONS OF THE BID AND CONTRACT HEREIN.</p>						

2009 JAN 29 PM 1:01  
 WV PURCHASING DIVISION

SEE REVERSE SIDE FOR TERMS AND CONDITIONS			
SIGNATURE	TELEPHONE	DATE	
<i>John C. Brown</i>	(304) 204-1818	01-28-2009	
TITLE	FAX	ADDRESS CHANGES TO BE NOTED ABOVE	
Branch Manager	55 049 3180		

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER  
 DRS090622

PAGE  
 2

ADDRESS CORRESPONDENCE TO ATTENTION OF:  
 SHELLY MURRAY  
 304-558-8801

VENDOR

RFQ COPY

TYPE NAME/ADDRESS HERE  
**LESLIE EQUIPMENT CO.**  
**19 GOFF CROSSING DRIVE**  
**CROSS LANES, WV 25313**

SHIP TO

DIV OF REHABILITATION SERVICES  
 WV REHABILITATION CENTER  
 ATTENTION: RECEIVING  
 INSTITUTE, WV  
 25112 766-4621

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
12/23/2008				

BID OPENING DATE:	01/29/2009	BID OPENING TIME	01:30PM
-------------------	------------	------------------	---------

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p><b>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THIS CONTRACT IS AUTOMATICALLY NULL AND VOID, AND IS TERMINATED WITHOUT FURTHER ORDER.</b></p> <p style="text-align: center;"><b>NOTICE</b></p> <p><b>A SIGNED BID MUST BE SUBMITTED TO:</b></p> <p style="padding-left: 40px;">DEPARTMENT OF ADMINISTRATION            PURCHASING DIVISION            BUILDING 15            2019 WASHINGTON STREET, EAST            CHARLESTON, WV 25305-0130</p> <p><b>THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:</b></p> <p><b>SEALED BID</b></p> <p>BUYER: SHELLY MURRAY / FILE 31</p> <p>RFQ. NO.: DRS090622</p> <p>BID OPENING DATE: 01/29/2009</p> <p>BID OPENING TIME: 1:30 PM</p> <p><b>PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID:</b></p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
<i>John C. Brown</i>	(304) 204-1818	01-28-2009
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
Branch Manager	55 049 3180	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER
DRS090622

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF:
SHELLY MURRAY 304-558-8801

RFQ COPY  
 TYPE NAME/ADDRESS HERE

**LESLIE EQUIPMENT CO.  
 19 GOFF CROSSING DRIVE  
 CROSS LANES, WV 25313**

DIV OF REHABILITATION SERVICES  
 WV REHABILITATION CENTER  
 ATTENTION: RECEIVING

INSTITUTE, WV  
 25112 766-4621

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
01/15/2009				

BID OPENING DATE: 01/29/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
ADDENDUM NO. 1						
THIS ADDENDUM IS ISSUED TO ADDRESS THE QUESTIONS RAISE PRIOR TO THE QUESTION SUBMISSION DEADLINE OF 1/13/2009.						
ATTACHMENT: QUESTIONS AND RESPONSES						
0001	1	LS		070-48-50-001		
VEHICLES, UTILITY						
EXHIBIT 10						
REQUISITION NO.: DRS090622						
ADDENDUM ACKNOWLEDGEMENT						
I HEREBY ACKNOWLEDGE RECEIPT OF THE FOLLOWING CHECKED ADDENDUM(S) AND HAVE MADE THE NECESSARY REVISIONS TO MY PROPOSAL, PLANS AND/OR SPECIFICATION, ETC.						
ADDENDUM NO.'S:						
NO. 1 ..... ✓						
NO. 2 ..... ✓						
NO. 3 ..... ✓						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>John C. Brown</i>	TELEPHONE (304) 204-1818	DATE 01-28-2009
TITLE Branch Manager	FEIN 55 049 3180	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER
DRS090622

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF
SHELLY MURRAY 304-558-8801

VENDOR

RFQ COPY  
 TYPE NAME/ADDRESS HERE


**LESLIE EQUIPMENT CO.**  
**19 GOFF CROSSING DRIVE**  
**CROSS LANES, WV 25313**

SHIP TO

DIV OF REHABILITATION SERVICES  
 WV REHABILITATION CENTER  
 ATTENTION: RECEIVING  
 INSTITUTE, WV  
 25112 766-4621

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
01/15/2009				

BID OPENING DATE: 01/29/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
	NO. 4 .....					
	NO. 5 .....					
<p>I UNDERSTAND THAT FAILURE TO CONFIRM THE RECEIPT OF THE ADDENDUM(S) MAY BE CAUSE FOR REJECTION OF BIDS.</p> <p>VENDOR MUST CLEARLY UNDERSTAND THAT ANY VERBAL REPRESENTATION MADE OR ASSUMED TO BE MADE DURING ANY ORAL DISCUSSION HELD BETWEEN VENDOR'S REPRESENTATIVES AND ANY STATE PERSONNEL IS NOT BINDING. ONLY THE INFORMATION ISSUED IN WRITING AND ADDED TO THE SPECIFICATIONS BY AN OFFICIAL ADDENDUM IS BINDING.</p> <p style="text-align: center;">             .....            SIGNATURE            Leslie Equipment Company .....            COMPANY            .January 28, 2009.....            DATE         </p> <p>REV. 11/96</p> <p>----- END OF ADDENDUM NO. 1 -----</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
	(304) 204-1818	01/28/2009
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
Branch Manager	55 049 3180	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia  
 Department of Administration  
 Purchasing Division  
 2019 Washington Street East  
 Post Office Box 50130  
 Charleston, WV 25305-0130

# Request for Quotation

RFQ NUMBER
DRS090622

PAGE
3

ADDRESS CORRESPONDENCE TO ATTENTION OF
SHELLY MURRAY 304-558-8801

RFQ COPY  
 TYPE NAME/ADDRESS HERE

**LESLIE EQUIPMENT CO.  
 19 GOFF CROSSING DRIVE  
 CROSS LANES, WV 25313**

DIV OF REHABILITATION SERVICES  
 WV REHABILITATION CENTER  
 ATTENTION: RECEIVING

INSTITUTE, WV  
 25112 766-4621

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
12/23/2008				

BID OPENING DATE: 01/29/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UCP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
CONTACT PERSON (PLEASE PRINT CLEARLY): <i>CECIL HORNE</i>						
***** THIS IS THE END OF RFQ DRS090622 ***** TOTAL:						<u>\$32,370.00</u>

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>John C. Brown</i>	TELEPHONE (304) 204-1818	DATE 01-28-2009
TITLE Branch Manager	FEIN 55 049 3180	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

**RFQ # DRS090622  
ADDENDUM # 1**

Question:

Do you require a bucket for the Skid Steer, and if so what size?

Response:

Yes, a bucket is required. The bucket size must be 60" wide, Caterpillar Model # 152-0231, or equal. Bucket must have full length skid bars and hardened steel base and side cutting edges.

Question:

Is there a particular tire size for the Skid Steer?

Response:

No, Vendor shall provide appropriate tires so that the skid steer loader does not exceed 84" in height including the tires.

Question:

A Caterpillar 216B2 has been specified of which we are a dealer that is a registered vendor with the state of WV. However, they have also specified a utility vehicle in the same RFQ that we cannot provide a bid for since all equivalent brands are handled by their respective dealers.

As a result, we feel the current RFQ structure is putting our firm at an unfair competitive disadvantage. Would it be possible to separate the RFQ into two RFQ's, one for the skid steer loader and one for the utility vehicle?

Response:

No, per the second paragraph of page 5 of the original RFQ, the State reserves the right to make multiple awards. Vendors may provide bids on those items they are able to provide, and "no bid" those items they cannot provide.

**REQUEST FOR QUOTATION  
DRS090622**

**I. PURPOSE**

To provide three (3) Utility Vehicles and one (1) Skid Steer Loader to the WV Division of Rehabilitation Services, Rehabilitation Complex, Institute, WV.

**II. DELIVERY**

Machines must be completely pre-serviced with oil, lubricants, and coolant. All prescribed precautions pertaining to first operations and break-in of the unit are to be provided to the agency upon delivery.

The machines shall be completely assembled, adjusted with all equipment including standard and extra equipment installed and ready for continuous operation. The Skid Steer Loader is not required to have the trencher, backhoe, or pallet fork attached to the machine at time of delivery.

Machines shall be delivered within 45 days of receipt of order. Vendor should indicate expected delivery time on their bid.

**III. OPERATION AND SERVICE MANUALS**

Successful vendor shall provide all available Operation and Service Manuals, Booklets, and Pamphlets for Operator Procedures and Preventive Maintenance for the machines provided.

**IV. WARRANTY**

All machines shall have a minimum one year full parts and labor warranty. The successful vendor must have available labor and materials to repair or replace any defective parts, components and materials found to be defective during the term of the warranty period.

**V. SPECIFICATIONS OF QUOTED UNITS/BASIS OF AWARD**

The machines furnished shall be of the latest improved model in current production as offered to commercial trade. All machines shall be new.

Vendor shall provide all pertinent manufacturer literature for any alternate bid. Detailed component specifications, product literature, component models, required for specification compliance determination by the Evaluators should be provided with the bid. Vendors should complete the attached list of equipment, providing the manufacturer, model number, estimated delivery, and confirmation of attached literature and return with their bid. The State reserves the right to waive minor deviations from the RFQ specifications if found to be in the best interest of the State to do so.

Award shall be made to the lowest bidder meeting specifications. The State reserves the right to make multiple awards if found to be in the best interest of the State.

**VI. SKID STEER LOADER SPECIFICATIONS (qty 1) (ITEM 1)  
and ATTACHMENTS (qty 1 each)**

1. Caterpillar 216B Series 2 Skid Steer Loader, or equal
2. Must include and meet the following minimum Electrical specifications:
  - a) 12 volt Electrical System
  - b) 65 ampere Alternator
  - c) Ignition Key Start/Stop Switch
  - d) Lights: Gauge Backlighting, Two Rear Tail Lights, Two Adjustable Front and Rear Halogen Lights, Dome Light
3. Must include and meet the following minimum Operator Environment specifications:
  - a) Gauges: Fuel Level, Hour Meter
  - b) Operator Warning System Indicators: Air Filter Restriction, Alternator Output, Armrest Raised/Operator Out of Seat, Engine Coolant Temperature, Engine Oil Pressure, Glow Plug Activation, Hydraulic Filter Restriction, Hydraulic Oil Temperature, Parking Brake Engaged
  - c) Vinyl Seat
  - d) Control Interlock System, when operator leaves seat or armrest raised Hydraulic System Disables, Hydrostatic Transmission Disables, Parking Brake Engages
  - e) ROPS Cab, Open, Tilt Up
  - f) FOPS, Level 1
  - g) Top and Rear Windows
  - h) Deluxe Headliner
  - i) Floor Mat
  - j) Interior Rear View Mirror
  - k) 12 volt Electric Socket



- l) Horn
- m) Pull Down Ergonomic Contoured Armrest

4. Must include and meet the following minimum Power Train specifications:

- a) Cat C2.2 Interim Tier 4 Compliant Diesel Engine
- b) Air Cleaner, Dual Element, Radial Seal
- c) SOSSM Sampling Valves, Engine Oil and Hydraulic Oil
- d) Filters: Spin on, Hydraulic
- e) Filter: Bayonet-type, Fuel and Water Separator
- f) Tilt Up Radiator/Hydraulic Oil Cooler
- g) Standard Muffler
- h) Spring Applied, Hydraulically Released, Wet Multi Disc Parking Brakes
- i) Hydrostatic Transmission
- j) Four Wheel Chain Drive

5. Must include and meet the following minimum Other specifications:

- a) Engine Enclosure, Lockable
- b) Extended Life Antifreeze, -36 degree C (-33 degree F)
- c) Machine Tie Down Points (4)
- d) Support, Lift Arm
- e) Hydraulic Oil Level Sight Gauge
- f) Radiator Coolant Level Sight Gauge
- g) Radiator, Expansion Bottle
- h) Cat ToughGuard Hose, or equal
- i) Auxiliary, Hydraulics, Continuous Flow
- j) Heavy Duty, Flat Faced Quick Disconnects
- k) Split D-Ring to Route Work Tool Hoses Along Side of Left Lift Arm
- l) Electrical Outlet, Beacon, or equal
- m) Belly Pan Cleanout
- n) Quick Coupler, Mechanical
- o) Seat Belt, 2"
- p) Enclosed ROPS (C2): C1 plus Heater, Cab Door, Side Windows, Cab Debris Barrier
- q) Control Package 2: Proportional Auxiliary Hydraulics Basic

6. Must include and meet the following minimum Optional Equipment specifications:

- a) Engine Block Heater, 120V
- b) Backup Alarm

7. Trencher- Must include and meet the following minimum specifications:

- a) Model T9B, Part # 241-4253 Standard, or equal
- b) Minimum 8" Trench Width

- c) Direct Drive standard flow auxiliary hydraulics
- d) Hard-faced medium carbon alloy steel cupped teeth
- e) Formed skid shoe

8. Backhoe – Must include and meet the following minimum specifications:

- a) Model BH150, Part # 253-1482, or equal
- b) In-cab operation allows operator to dig, excavate, side-shift, and reposition the machine and backhoe without leaving the seat

9. Pallet Fork Carriage – Must include and meet the following minimum specifications:

- a) Model 149-1411, or equal
- b) Maximum 42" fork tine length
- c) Minimum 4" fork tine width
- d) Notched, rail-type carriage allows fork tines to be changed and locked into place
- e) Heavy Duty Load Backrest must not obscure ability to see fork tips

## **VII. UTILITY VEHICLE SPECIFICATIONS (qty 3) (ITEM 2)**

**Must include and meet the following specifications:**

- 1. Bobcat 2100 4x2, or equal
- 2. Minimum 13hp Gas, Air Cooled Engine
- 3. Minimum 800 lb bed load capacity
- 4. Minimum 1,200 lb total vehicle rated capacity
- 5. Maximum 19 mph travel speed
- 6. Minimum 48" Flat Bed
- 7. Standard Emissions
- 8. Standard Road Light Package – to include tail lights, brake lights and horn
- 9. Full Cab Enclosure – to include Seat Belt Kit, Cab Mounting Kit, Fan/Defogger, Safety Glass Windshield with Wiper, locking doors, canopy, and sliding side windows

10. Road Tires with Black Rims
11. 2" Rear Receiver Hitch
12. Parking Brake

**COST SHEET  
DRS090622**

Item	Qty	Description	Unit Price	Extended Price
1	1	Skid Steer Loader	\$ <u>19,600.00</u>	\$ <u>19,600.00</u>
	1	Trencher	\$ <u>4,175.00</u>	\$ <u>4,175.00</u>
	1	Back Hoe	\$ <u>7,845.00</u>	\$ <u>7,845.00</u>
	1	Pallett Fork Carriage	\$ <u>750.00</u>	\$ <u>750.00</u>
2	3	Utility Vehicle	\$ <u>No Bid</u>	\$ <u>No Bid</u>

The above items' Unit Prices shall be inclusive of first year warranty per Section IV of the specifications.

GRAND TOTAL \$ 32,370.00

Unit Pricing shall be all-inclusive. No separate reimbursement will be made to the vendor for shipping or any other expense. Shipping shall be FOB Destination.

**Bidders should complete and return with their bid:****Skid Steer Loader:**

Manufacturer: John Deere  
 Model: 313  
 Literature Attached: Yes  No   
 Estimated Delivery: 60 - 90 days

**Trencher:**

Manufacturer: Worksite Pro (John Deere)  
 Model: TR36B  
 Literature Attached: Yes  No   
 Estimated Delivery: 60 - 90 days

**Back Hoe:**

Manufacturer: Worksite Pro (John Deere)  
 Model: BH7  
 Literature Attached: Yes  No   
 Estimated Delivery: 60 - 90 days

**Pallet Fork Carriage:**

Manufacturer: Arrow  
 Model: 42: Rail Type  
 Literature Attached: Yes  No   
 Estimated Delivery: In stock

**Utility Vehicle:**

Manufacturer: No Bid  
 Model: \_\_\_\_\_  
 Literature Attached: Yes \_\_\_\_\_ No \_\_\_\_\_  
 Estimated Delivery: \_\_\_\_\_

State of West Virginia  
**VENDOR PREFERENCE CERTIFICATE**

Certification and application\* is hereby made for Preference in accordance with *West Virginia Code*, §5A-3-37. (Does not apply to construction contracts). *West Virginia Code*, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the *West Virginia Code*. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

**1. Application is made for 2.5% resident vendor preference for the reason checked:**

- \_\_\_\_ Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,  
 \_\_\_\_ Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; or 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,  
 \_\_\_\_ Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or**,

**2. Application is made for 2.5% resident vendor preference for the reason checked:**

- \_\_\_\_ Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,

**3. Application is made for 2.5% resident vendor preference for the reason checked:**

- \_\_\_\_ Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,

**4. Application is made for 5% resident vendor preference for the reason checked:**

- \_\_\_\_ Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or**,

**5. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**

- \_\_\_\_ Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or**,

**6. Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**

- \_\_\_\_ Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

**Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.**

Bidder: Leslie Equipment Company

Signed: 

Date: 1-28-09

Title: Branch Manager

\*Check any combination of preference consideration(s) indicated above, which you are entitled to receive.

STATE OF WEST VIRGINIA  
Purchasing Division

## PURCHASING AFFIDAVIT

### VENDOR OWING A DEBT TO THE STATE:

**West Virginia Code §5A-3-10a** provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

### PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

**West Virginia Code §21-1D-5** provides that: Any solicitation for a public improvement construction contract shall require each vendor that submits a bid for the work to submit at the same time an affidavit that the vendor has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the West Virginia Code. A public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the West Virginia Code and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the West Virginia Code may take place before their work on the public improvement is begun.

### ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.

### LICENSING:


Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

### CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendors should visit [www.state.wv.us/admin/purchase/privacy](http://www.state.wv.us/admin/purchase/privacy) for the Notice of Agency Confidentiality Policies.

Under penalty of law for false swearing (West Virginia Code §61-5-3), it is hereby certified that the vendor acknowledges the information in this said affidavit and is in compliance with the requirements as stated.

Vendor's Name: Leslie Equipment Company

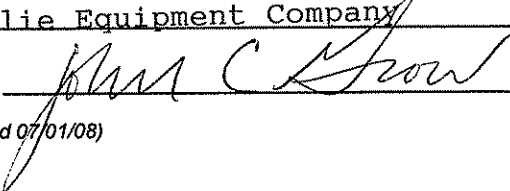Authorized Signature:  Date: 01/28/2009



**JOHN DEERE**

19 Goff Crossing Drive  
Cross Lanes, WV 25313  
Telephone: (304) 204-1818  
Fax: (304) 204-1811

DEPT. OF ADMINISTRATION  
WV PURCHASING DIVISION  
2019 WASHINGTON ST. EAST  
P O BOX 50130  
CHARLESTON, WV 25305-0130

**INVITATION TO BID: RFQ NUMBER DRS090622  
1 SKID STEER LOADER & ATTACHMENTS**

### **QUOTATION**

ONE NEW JOHN DEERE MODEL 313 SKID STEER LOADER  
EQUIPPED WITH:  
10X16.5 8 PR SKS HAULER HEAVY DUTY TIRES  
STANDARD BASE HYDRAULICS  
2 IN. SEAT BELT WITH SHOULDER HARNESS  
STANDARD FOOT CONTROLS  
BACK UP ALARM  
BLOCK HEATER KIT  
CAB ENCLOSURE  
DELUXE WIRE HARNESS  
HEATER/DEFROSTER KIT  
HORN  
POWER QUIK-TATCH  
REAR COUNTERWEIGHT 2 EA. 100 LB. WEIGHTS & MOUNTING HARDWARE  
MECHANICAL SUSPENSION SEAT  
60 IN. CONSTRUCTION BUCKET 14.3 CU. FT. WITH EDGE

**BID PRICE:**

**\$ 19,600.00**



ONE NEW WORKSITE MODEL TR36B TRENCHER  
16-19 GPM MOTOR KIT  
CHAIN: 36 IN. X 8 IN. WIDE STANDARD CUP EVERY STATION

**BID PRICE:** **\$ 4,175.00**

ONE NEW ARROW 42 IN. RAIL TYPE PALLET FORK

**BID PRICE:** **\$ 750.00**


ONE NEW WORKSITE MODEL PRO BH7 BACKHOE  
MOUNTING KIT WITH TIE DOWN YOKES  
13 IN. BACKHOE BUCKET 3 TEETH

**BID PRICE:** **\$ 7,845.00**

**NOTE:** THE PRICES DO NOT INCLUDE ANY STATE SALES TAX, IF APPLICABLE.  
IF TAX EXEMPT, TAX EXEMPTION CERTIFICATE IS REQUIRED.

THIS QUOTATION IS GOOD FOR THIRTY DAYS.

AVAILABILITY: 60 – 90 DAYS

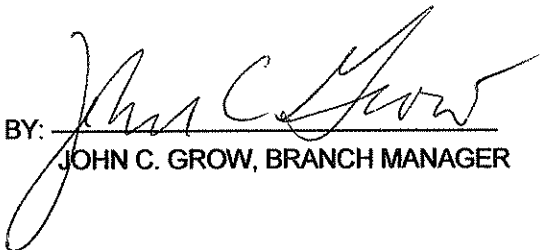BY:   
JOHN C. GROW, BRANCH MANAGER

SALES REPRESENTATIVE: CECIL C. HORNE




JOHN DEERE



# BACKHOES

BH7 | BH8 | BH9 | BH11

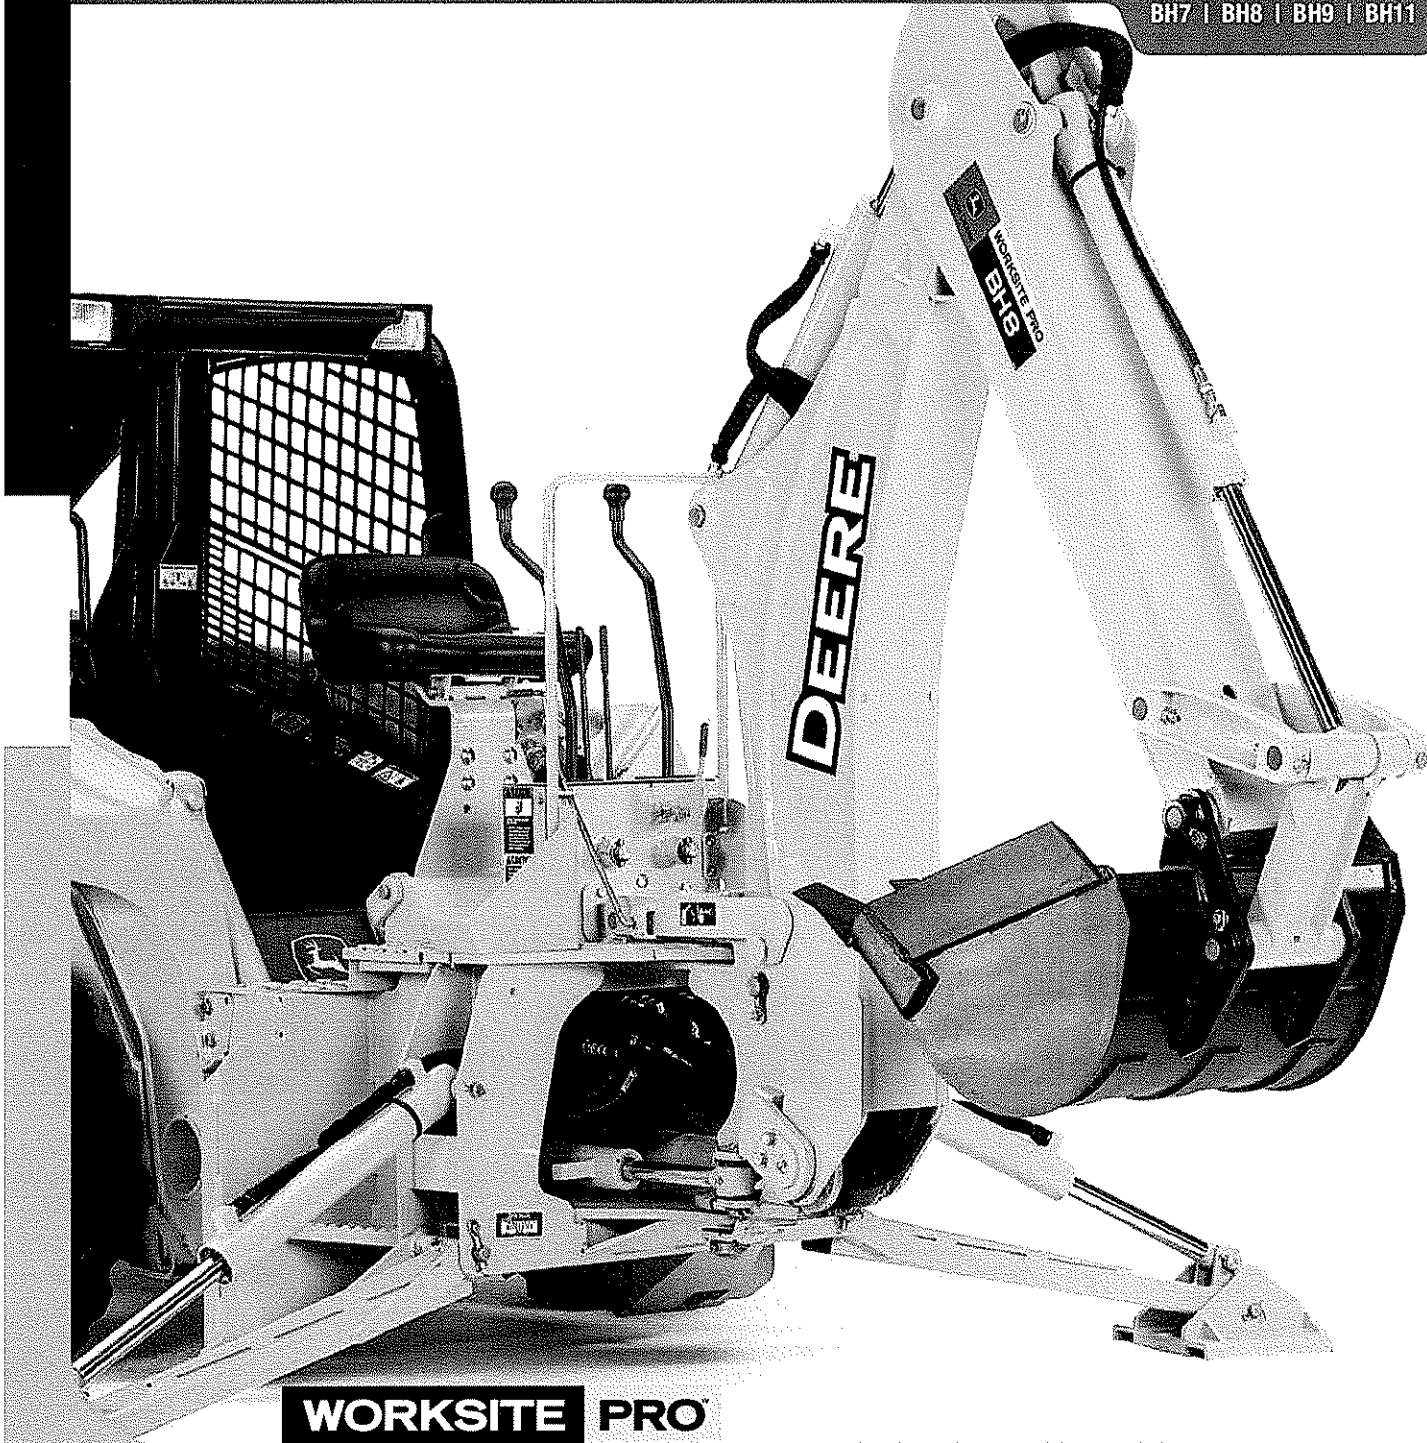

**WORKSITE PRO**

COMMERCIAL WORKSITE PRODUCTS

# BACKHOES

## SPECIFICATIONS

# BH7 / BH8 / BH9 / BH11

- Powerful Worksite Pro™ backhoes offer a combination of productivity, ease of operation, and unmatched durability.
- One-hundred-eighty-degree swing allows maximum efficiency in confined areas.
- For extreme digging conditions, heavy-duty buckets are available with tapered sides for greater dump-and-fill performance. Large teeth and tooth shanks add durability.
- Optional quick-couplers are also utilized on Deere 17-, 27-, and 35-Series Compact Excavators.
- Low-profile console offers excellent visibility.
- Operator station is easy to enter and exit, thanks to a convenient grab rail and open design. Seat with fore-and-aft adjustment and large footrests with non-slip surfaces also ensure comfortable operation for extended periods.
- Metered hydraulic spools and centralized two-lever control of boom lift, swing, dipperstick, and bucket allow precise control of backhoe movement.
- All Worksite Pro backhoes are equipped with a connect-under-pressure male coupler.
- Single lever locks the boom in place for secure transport. Can be engaged or disengaged from the seat.
- Worksite Pro backhoes are optimized to work with John Deere skid steers and compact track loaders. They're backed by a one-year warranty and one-of-a-kind parts and service. See your local John Deere skid steer dealer for details.

	BH7	BH8	BH9	BH11
<b>Transport Height</b> .....	81 in. (2057 mm)	90 in. (2286 mm)	94 in. (2388 mm)	115 in. (2921 mm)
<b>Overall Transport Length:</b>				
313 .....	166 in. (4216 mm)	N/A	N/A	N/A
315, 317, 320, and CT322 .....	172 in. (4369 mm)	179 in. (4547 mm)	184 in. (4674 mm)	189 in. (4801 mm)
325, 328, 332, and CT332 .....	N/A	193 in. (4902 mm)	198 in. (5029 mm)	203 in. (5156 mm)
<b>Digging Depth:</b>				
Maximum .....	94 in. (2388 mm)	107 in. (2718 mm)	117 in. (2972 mm)	134 in. (3404 mm)
2-ft. (0.6 m) Flat Bottom .....	92 in. (2337 mm)	105 in. (2667 mm)	115 in. (2921 mm)	132 in. (3353 mm)
8-ft. (2.3 m) Flat Bottom .....	66 in. (1676 mm)	84 in. (2134 mm)	98 in. (2489 mm)	115 in. (2921 mm)
Straight Wall .....	47 in. (1194 mm)	60 in. (1524 mm)	68 in. (1727 mm)	92 in. (2337 mm)
<b>Reach From Swing Pivot</b> .....	124 in. (3150 mm)	142 in. (3607 mm)	155 in. (3937 mm)	173 in. (4394 mm)
<b>Loading Height</b> .....	79 in. (2007 mm)	88 in. (2235 mm)	95 in. (2413 mm)	107 in. (2718 mm)
<b>Loading Reach</b> .....	43 in. (1092 mm)	46 in. (1168 mm)	61 in. (1549 mm)	68 in. (1727 mm)
<b>Stabilizer Spread:</b>				
Transport .....	61 in. (1549 mm)	54 in. (1372 mm)	64 in. (1626 mm)	64 in. (1626 mm)
Operating .....	89 in. (2261 mm)	99 in. (2515 mm)	116 in. (2946 mm)	116 in. (2946 mm)
<b>Bucket Rotation</b> .....	180 deg.	180 deg.	180 deg.	180 deg.
<b>Swing Arc</b> .....	180 deg.	180 deg.	180 deg.	180 deg.
<b>Attachment Weight:</b>				
With 16-in. (406 mm) Bucket .....	1,220 lb. (553 kg)	N/A	N/A	N/A
With 18-in. (457 mm) Bucket .....	N/A	1,610 lb. (732 kg)	1,796 lb. (816 kg)	2,061 lb. (937 kg)
<b>Craning Capacity</b> .....	595 lb. (270 kg)	820 lb. (372 kg)	905 lb. (410 kg)	985 lb. (447 kg)
<b>Digging Force</b>				
Using Bucket Cylinder .....	2,840 lb. (1288 kg)	3,730 lb. (1692 kg)	6,000 lb. (2721 kg)	6,200 lb. (2812 kg)
Using Dipperstick Cylinder .....	2,005 lb. (909 kg)	2,435 lb. (1104 kg)	3,250 lb. (1474 kg)	4,000 lb. (1814 kg)
<b>Backhoe System Relief Setting</b> .....	2,075 psi (14 306 kPa)	2,425 psi (16 720 kPa)	2,425 psi (16 720 kPa)	2,425 psi (16 720 kPa)

### BH7 BUCKETS AND CAPACITIES

<b>Standard Pin-On Buckets:</b>	9 in. (228 mm)	13 in. (330 mm)	16 in. (406 mm)
Heaped Capacity .....	0.64 cu. ft. (0.018 m³)	1.04 cu. ft. (0.029 m³)	1.33 cu. ft. (0.038 m³)
Weight .....	46 lb. (21 kg)	52 lb. (24 kg)	57 lb. (26 kg)
<b>Optional Heavy-Duty Quick-Coupler Buckets:</b> <th>9 in. (228 mm)</th> <th>12 in. (305 mm)</th> <th>16 in. (406 mm)</th>	9 in. (228 mm)	12 in. (305 mm)	16 in. (406 mm)
Heaped Capacity .....	0.606 cu. ft. (0.017 m³)	0.855 cu. ft. (0.024 m³)	1.194 cu. ft. (0.034 m³)
Weight .....	83 lb. (38 kg)	87 lb. (39 kg)	99 lb. (45 kg)

### BH8, BH9, and BH11 BUCKETS AND CAPACITIES

<b>Heavy-Duty Pin-On Buckets:</b>	14 in. (356 mm)	18 in. (457 mm)	24 in. (610 mm)	36 in. (914 mm)
Heaped Capacity .....	1.74 cu. ft. (0.049 m³)	2.68 cu. ft. (0.076 m³)	3.71 cu. ft. (0.105 m³)	5.76 cu. ft. (0.163 m³)
Weight .....	106 lb. (48 kg)	126 lb. (57 kg)	146 lb. (66 kg)	195 lb. (88 kg)
<b>Heavy-Duty Quick-Coupler Buckets:</b> <th>12 in. (305 mm)</th> <th>18 in. (457 mm)</th> <th>24 in. (610 mm)</th> <td></td>	12 in. (305 mm)	18 in. (457 mm)	24 in. (610 mm)	
Heaped Capacity .....	1.33 cu. ft. (0.038 m³)	2.33 cu. ft. (0.066 m³)	3.29 cu. ft. (0.093 m³)	
Weight .....	124 lb. (56 kg)	152 lb. (69 kg)	175 lb. (80 kg)	

# WORKSITE PRO



This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design, and price of products described in this literature without notice.



NOTHING RUNS LIKE A DEERE™

DKABHCWP L1110 In U.S.A. (08-01)




JOHN DEERE



# TRENCHERS

TR36B | TR48B | TR60B

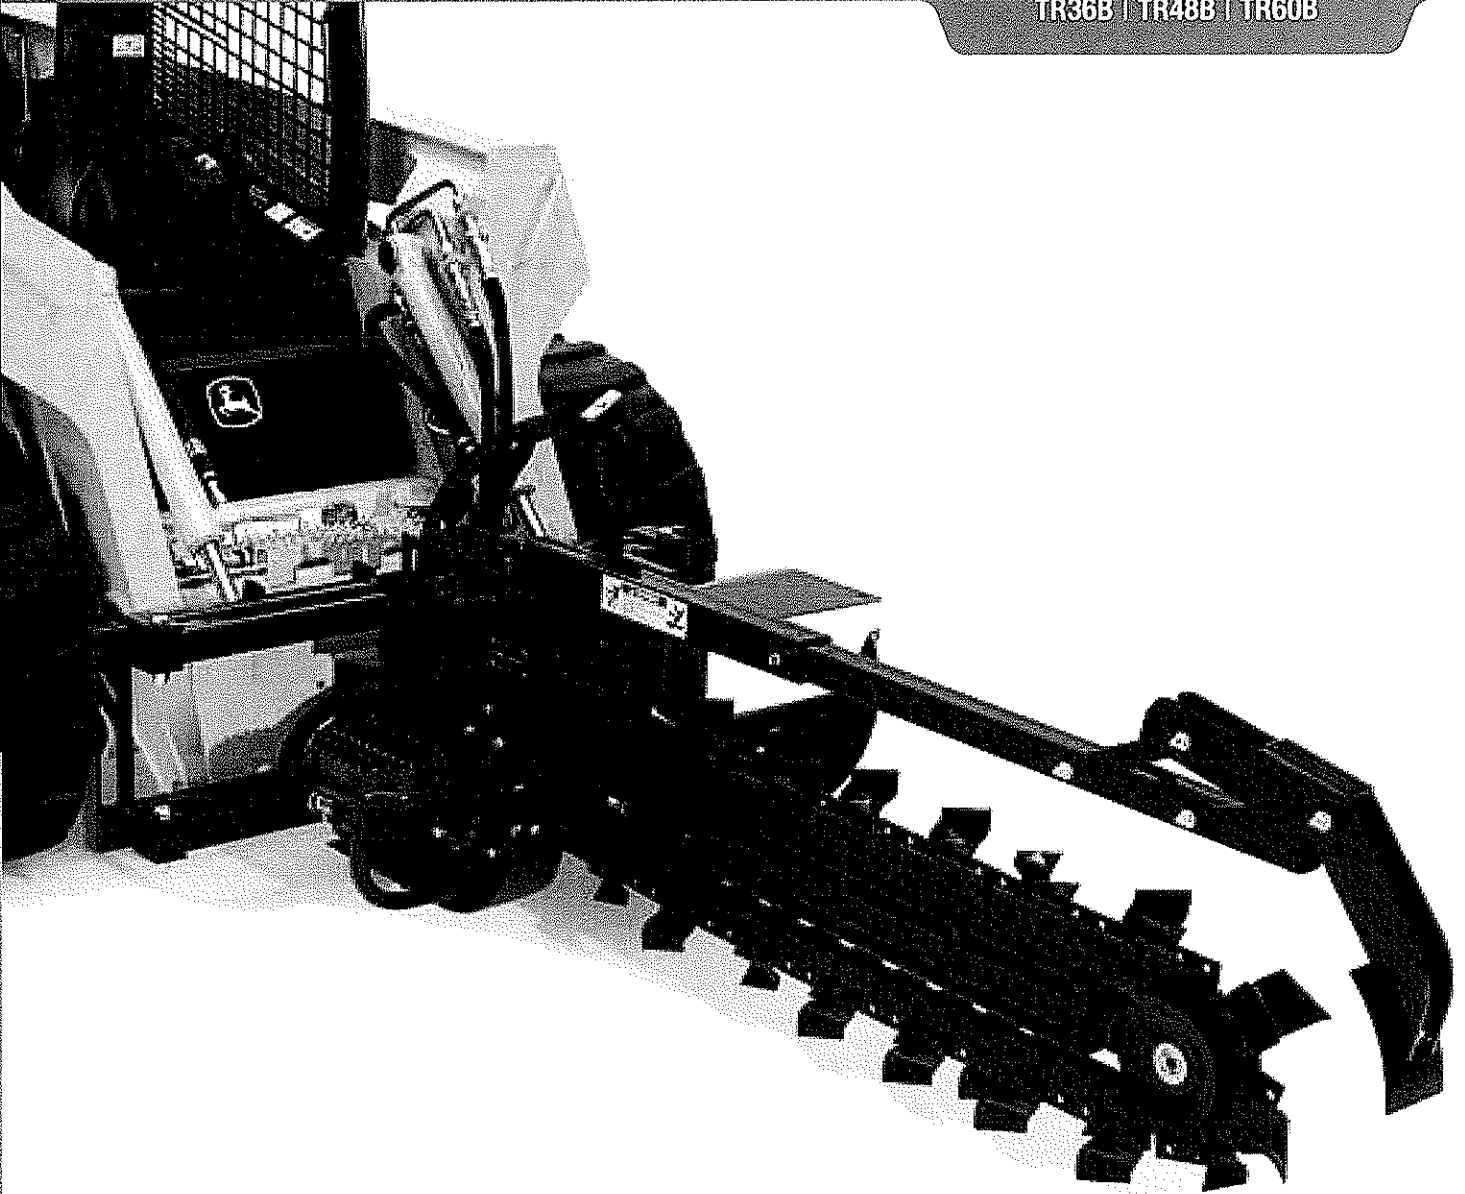

**WORKSITE PRO**

COMMERCIAL WORKSITE PRODUCTS

# TRENCHERS

## SPECIFICATIONS

# TR36B / TR48B / TR60B

- Worksite Pro Trenchers are designed for reliable, cost-effective production with Worksite Pro warranty and parts and service support in mind.
- Manual side shift conveniently allows trenching close to structures.
- A built-in skid shoe and indicators assist the operator in maintaining digging control.
- Axle design and rugged wheel motor offer extreme durability.
- Trenchers are built for easy maintenance with maintenance-free, double-sealed nose wheel bearings, and a heavy-duty planetary drive system that eliminates the need for unreliable chain reduction.
- Well-thought-out spring-loaded boom reduces shocks to the hydraulic motor, skid steer, and operator.
- Trencher design allows easy access into and out of skid steer.
- To further increase productivity, a standard heavy-duty crumber allows removal of loose soil.
- Like all Worksite Pro attachments, these trenchers are optimized to work with John Deere 300-Series Skid Steers and CTLs, and are compatible with most competitive models. See your local John Deere skid steer dealer for details.

	TR36B	TR48B	TR60B
<b>Hydraulic Oil Flow</b> .....	16–44 gpm (60–167 L/min.)	16–44 gpm (60–167 L/min.)	27–44 gpm (102–167 L/min.)
<b>Maximum Continuous Operating Pressure</b> .....	3,300 psi (232 kg/cm <sup>2</sup> )	3,300 psi (232 kg/cm <sup>2</sup> )	3,300 psi (232 kg/cm <sup>2</sup> )
<b>Chain Type</b> .....	50,000 lb. (2270 kg) rated double standard anti-back flex	50,000 lb. (2270 kg) rated double standard anti-back flex	50,000 lb. (2270 kg) rated double standard anti-back flex
<b>Chain Pitch</b> .....	2 in. (51 mm)	2 in. (51 mm)	2 in. (51 mm)
<b>Boom Size</b> .....	36 in. (914 mm)	48 in. (1220 mm)	60 in. (1524 mm)
<b>Trench Width (standard)</b> .....	6 in. (152 mm)	6 in. (152 mm)	6 in. (152 mm)
<b>Spoil Auger Diameter (standard)</b> .....	14 in. (355 mm)	14 in. (355 mm)	14 in. (355 mm)
<b>Weight</b> .....	1,130 lb. (516 kg)	1,180 lb. (535 kg)	1,335 lb. (606 kg)
<b>Vehicle Compatibility</b> .....	317, 320, 325, 328, 332, CT322, CT332	317, 320, 325, 328, 332, CT322, CT332	325, 328, 332, CT332
<b>Overall Length</b> .....	73 in. (1854 mm)	86 in. (2184 mm)	99 in. (2515 mm)

www.JohnDeere.com

## WORKSITE PRO™



This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design, and price of products described in this literature without notice.




NOTHING RUNS LIKE A DEERE™

DKATRCWP Litho in U.S.A. (06-03)



# PALLET FORKS

RAIL STYLE | PIN STYLE  
HEAVY-DUTY PIN STYLE

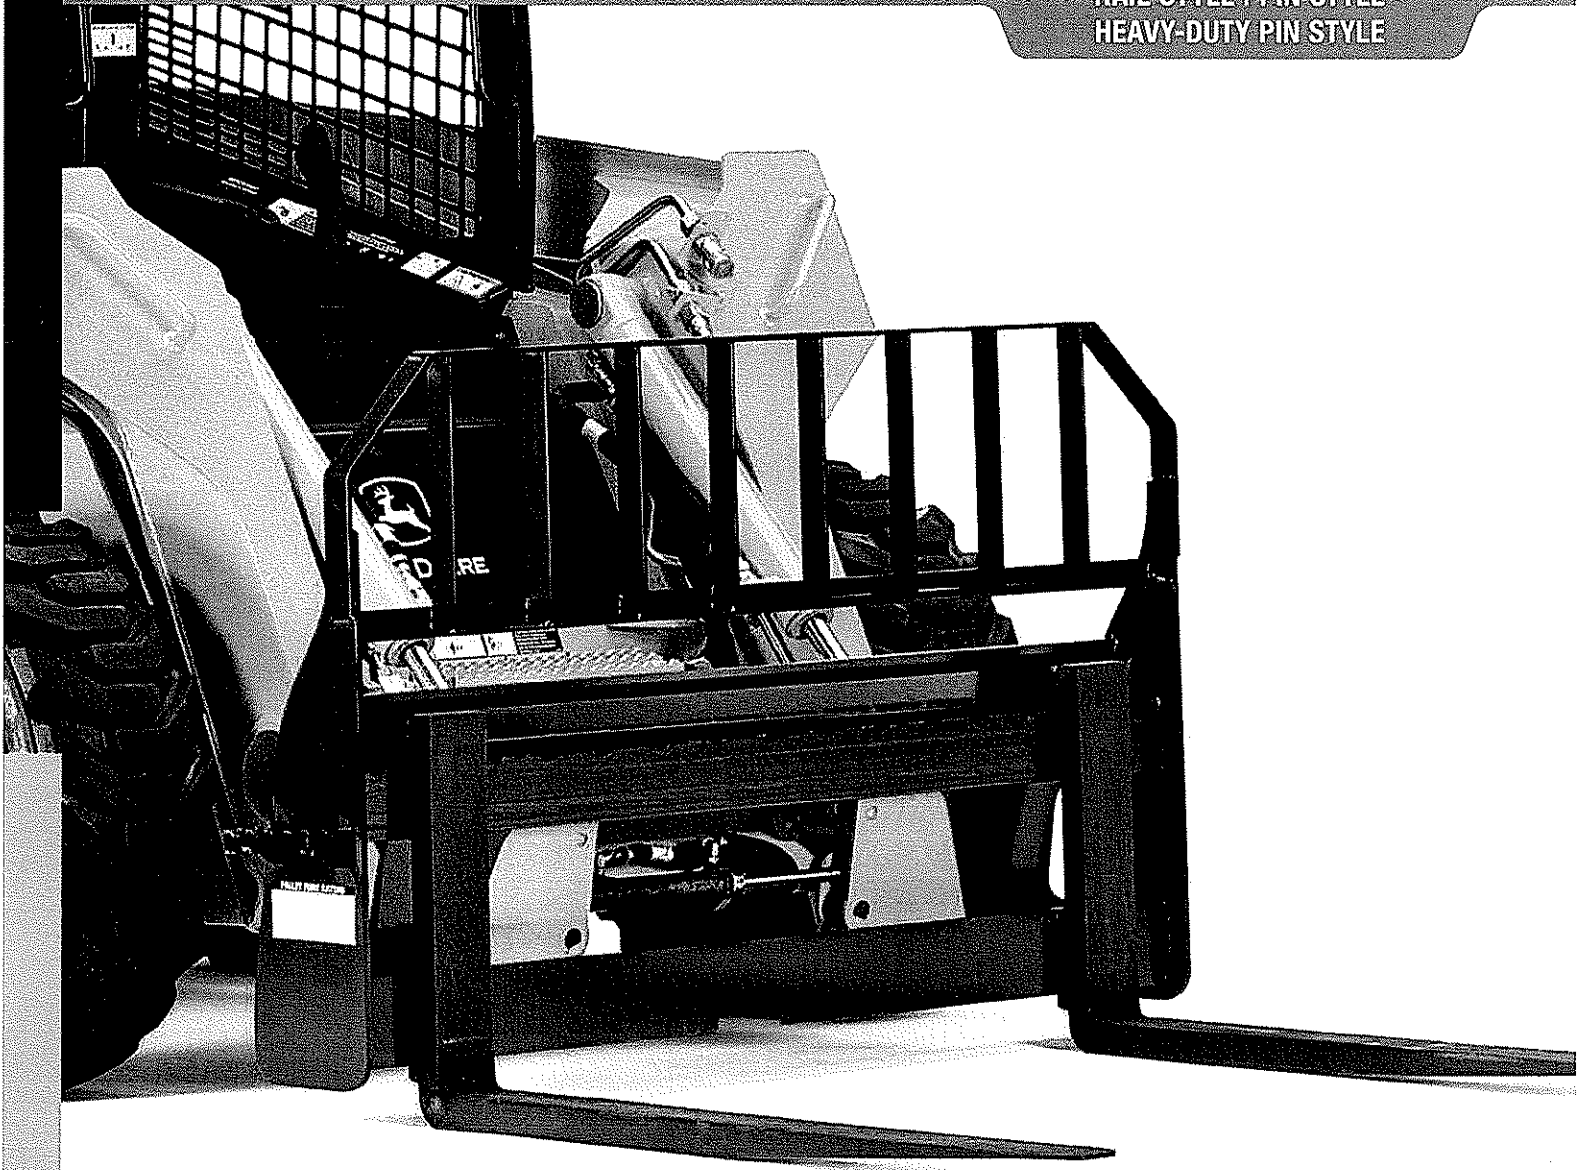

**WORKSITE PRO**

COMMERCIAL WORKSITE PRODUCTS

# PALLET FORKS

## SPECIFICATIONS

# STANDARD-DUTY PIN/RAIL / HEAVY-DUTY RAIL

- Quik-Tatch™ system allows quick and easy mounting in seconds.
- Standard pin- and rail-style pallet forks are available in 42- and 48-in. lengths; heavy-duty rail-style in 48-in. length.
- Both styles offer a step on each side of the pallet fork frame for easy entry into and exit from the skid steer.
- Pin-style allows the forks to "float" with the contour of the ground and features an unlimited number of tine positions, a single-piece backrest, and unrestricted visibility to the fork tips.
- Rail-style holds the forks in a rigid position.
- Rail-style features a single-piece backrest and unrestricted visibility to the fork tips. Standard-duty forks can be positioned 8–40 in. (203–1016 mm) wide in 4-in. (102 mm) increments. Heavy-duty forks can be positioned 8–60 in. (203–1524 mm) wide in 4-in. (102 mm) increments.
- Ten-degree back angle maximizes pallet fork break-out force.

	STANDARD-DUTY PIN/RAIL-STYLE	HEAVY-DUTY RAIL-STYLE
<b>Frame width with steps</b> .....	53.3 in. (1353 mm)	67.8 in. (1723 mm)
<b>Frame width less steps</b> .....	45.3 in. (1149 mm)	60.0 in. (1524 mm)
<b>Frame height</b> .....	39 in. (986.5 mm)	38.5 in. (977 mm)
<b>Overall length – frame and fork</b>		
42 in. (1067 mm) .....	49.3 in. (1251 mm)	
48 in. (1219 mm) .....	55.3 in. (1403 mm)	57.5 in. (1460 mm)
<b>Fork thickness</b> .....	1.4 in. (35 mm)	1.78 in. (45 mm)
<b>Individual fork rating</b> .....	2,094 lb. @ 19.7 in. (950 kg @ 500 mm)	3,100 lb. @ 24.0 in. (1406 kg @ 609 mm)
<b>Overall weight – frame and fork</b>		
42-in. (1067 mm) rail .....	397 lb. (180 kg)	
48-in. (1219 mm) rail .....	407 lb. (184 kg)	602 in. (273 kg)
42-in. (1067 mm) pin .....	381 lb. (172 kg)	
48-in. (1219 mm) pin .....	391 lb. (177 kg)	

www.johndeere.com

## WORKSITE PRO

This literature has been compiled for worldwide circulation. While general information, pictures, and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options, and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specifications, design, and price of products described in this literature without notice.



NOTHING RUNS LIKE A DEERE™