



**State of West Virginia
Department of Administration
Purchasing Division**

NOTICE

Due to the size of this bid, it was impractical to scan every page for online viewing. We have made an attempt to scan and publish all pertinent bid information. However, it is important to note that some pages were necessarily omitted.

If you would like to review the bid in its entirety, please contact the buyer. Thank you.



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DNR209199

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
KRISTA FERRELL 804-558-2596

VENDOR
 *709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

SHIP TO
 DIVISION OF NATURAL RESOURCES
 BABCOCK STATE PARK
 ATTN: PARK SUPERINTENDENT
 HC 35, BOX 150
 CLIFFTOP, WV 25831 438-5662

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 09/01/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		650-38		
				<p>PLAYGROUND EQUIPMENT FOR BABCOCK STATE PARK</p> <p>REQUEST FOR QUOTATION (RFQ)</p> <p>THE WEST VIRGINIA STATE PURCHASING DIVISION FOR THE AGENCY, THE WEST VIRGINIA DIVISION OF NATURAL RESOURCES, IS SOLICITING BIDS TO PROVIDE THE AGENCY WITH PLAYGROUND EQUIPMENT FOR BABCOCK STATE PARK LOCATED IN CLIFFTOP, WEST VIRGINIA PER THE ATTACHED SPECIFICATIONS.</p> <p>NO INSTALLATION IS REQUIRED.</p> <p>A MANDATORY PRE-BID WILL BE HELD ON AUGUST 10, 2009 AT 1:30 PM AT THE PARK'S HEADQUARTERS IN CLIFFTOP, WV. ALL INTERESTED PARTIES ARE REQUIRED TO ATTEND THIS MEETING FAILURE TO ATTEND THE MANDATORY PRE-BID SHALL RESULT IN DISQUALIFICATION OF THE BID. NO ONE PERSON MAY REPRESENT MORE THAN ONE BIDDER.</p> <p>AN ATTENDANCE SHEET WILL BE MADE AVAILABLE FOR ALL POTENTIAL BIDDERS TO COMPLETE. THIS WILL SERVE AS THE OFFICIAL DOCUMENT VERIFYING ATTENDANCE AT THE MANDATORY PRE-BID. FAILURE TO PROVIDE YOUR COMPANY AND REPRESENTATIVE NAME ON THE ATTENDANCE SHEET WILL RESULT IN DISQUALIFICATION OF THE BID. THE STATE WILL NOT ACCEPT ANY OTHER DOCUMENTATION TO VERIFY ATTENDANCE. THE BIDDER IS RESPONSIBLE FOR ENSURING THEY HAVE</p>		

RECEIVED
 2009 SEP -1 A 10:53
 PURCHASING DIVISION
 STATE OF WV

SIGNATURE		SEE REVERSE SIDE FOR TERMS AND CONDITIONS	
		TELEPHONE	DATE
TITLE JERRY GROVES VICE PRESIDENT		800-848-7556	AUGUST 27, 2009
FERN 31-1262459		ADDRESS CHANGES TO BE NOTED ABOVE	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

GENERAL TERMS & CONDITIONS
REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

1. Awards will be made in the best interest of the State of West Virginia.
2. The State may accept or reject in part, or in whole, any bid.
3. All quotations are governed by the *West Virginia Code* and the *Legislative Rules* of the Purchasing Division.
4. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125 fee.
5. All services performed or goods delivered under State Purchase Order/Contracts are to be continued for the term of the Purchase Order/Contracts, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods, this Purchase Order/Contract becomes void and of no effect after June 30.
6. Payment may only be made after the delivery and acceptance of goods or services.
7. Interest may be paid for late payment in accordance with the *West Virginia Code*.
8. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
9. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
10. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
11. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern all rights and duties under the Contract, including without limitation the validity of this Purchase Order/Contract.
12. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
13. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, the State may deem this contract null and void, and terminate such contract without further order.
14. **HIPAA BUSINESS ASSOCIATE ADDENDUM:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, and available online at the Purchasing Division's web site (<http://www.state.wv.us/admin/purchase/vrc/hipaa.htm>) is hereby made part of the agreement. Provided that, the Agency meets the definition of a Cover Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.
15. **WEST VIRGINIA ALCOHOL & DRUG-FREE WORKPLACE ACT:** If this Contract constitutes a public improvement construction contract as set forth in Article 1D, Chapter 21 of the West Virginia Code ("The West Virginia Alcohol and Drug-Free Workplace Act"), then the following language shall hereby become part of this Contract: "The contractor and its subcontractors shall implement and maintain a written drug-free workplace policy in compliance with the West Virginia Alcohol and Drug-Free Workplace Act, as set forth in Article 1D, Chapter 21 of the West Virginia Code. The contractor and its subcontractors shall provide a sworn statement in writing, under the penalties of perjury, that they maintain a valid drug-free work place policy in compliance with the West Virginia and Drug-Free Workplace Act. It is understood and agreed that this Contract shall be cancelled by the awarding authority if the Contractor: 1) Fails to implement its drug-free workplace policy; 2) Fails to provide information regarding implementation of the contractor's drug-free workplace policy at the request of the public authority; or 3) Provides to the public authority false information regarding the contractor's drug-free workplace policy."

INSTRUCTIONS TO BIDDERS

1. Use the quotation forms provided by the Purchasing Division.
2. **SPECIFICATIONS:** Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Complete all sections of the quotation form.
4. Unit prices shall prevail in case of discrepancy.
5. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
6. **BID SUBMISSION:** All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications: Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130, Charleston, WV 25305-0130



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209199

PAGE
 2

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 BABCOCK STATE PARK
 ATTN: PARK SUPERINTENDENT
 HC 35, BOX 150
 CLIFFTOP, WV 25831 438-5662

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 09/01/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>COMPLETED THE INFORMATION REQUIRED ON THE ATTENDANCE SHEET. THE PURCHASING DIVISION AND THE STATE AGENCY WILL NOT ASSUME ANY RESPONSIBILITY FOR A BIDDER-S FAILURE TO COMPLETE THE PRE-BID ATTENDANCE SHEET. IN ADDITION, WE REQUEST THAT ALL POTENTIAL BIDDERS INCLUDE THEIR E-MAIL ADDRESS AND FAX NUMBER.</p> <p>ALL POTENTIAL BIDDERS ARE REQUESTED TO ARRIVE PRIOR TO THE STARTING TIME FOR THE PRE-BID. BIDDERS WHO ARRIVE LATE, BUT PRIOR TO THE DISMISSAL OF THE TECHNICAL PORTION OF THE PRE-BID WILL BE PERMITTED TO SIGN IN. BIDDERS WHO ARRIVE AFTER CONCLUSION OF THE TECHNICAL PORTION OF THE PRE-BID, BUT DURING ANY SUBSEQUENT PART OF THE PRE-BID WILL NOT BE PERMITTED TO SIGN THE ATTENDANCE SHEET.</p> <p>TECHNICAL QUESTIONS CONCERNING THIS SOLICITATION MUST BE SUBMITTED IN WRITING TO KRISTA FERRELL IN THE WEST VIRGINIA STATE PURCHASING DIVISION VIA MAIL AT THE ADDRESS SHOWN IN THE BODY OF THIS RFQ, VIA FAX AT 304-558-4115, OR VIA EMAIL AT KRISTA.S.FERRELL@WV.GOV. DEADLINE FOR ALL TECHNICAL QUESTIONS IS 08/14/2009 AT THE CLOSE OF BUSINESS. ALL TECHNICAL QUESTIONS RECEIVED, IF ANY, WILL BE ADDRESSED BY ADDENDUM AFTER THE DEADLINE HAS LAPSED.</p> <p>QUESTIONS CONCERNING THE PROCESS BY WHICH A VENDOR MAY SUBMIT A BID TO THE STATE OF WEST VIRGINIA ARE NOT CONSIDERED TO BE TECHNICAL QUESTIONS AND MAY BE SUBMITTED AT ANY TIME PRIOR TO THE BID OPENING AND IN ANY FORMAT.</p> <p>EXHIBIT 10</p> <p>REQUISITION NO.:</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Jerry Groves</i>	TELEPHONE 800-848-7556	DATE AUGUST 27, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262459	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209199

PAGE
 3

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 804-558-2596

PRIORITY


*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227


SHIP TO

DIVISION OF NATURAL RESOURCES
 BABCOCK STATE PARK
 ATTN: PARK SUPERINTENDENT
 HC 35, BOX 150
 CLIFFTOP, WV
 25831 438-5662

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 09/01/2009 BID OPENING TIME: 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
ADDENDUM ACKNOWLEDGEMENT						
I HEREBY ACKNOWLEDGE RECEIPT OF THE FOLLOWING CHECKED ADDENDUM(S) AND HAVE MADE THE NECESSARY REVISIONS TO MY PROPOSAL, PLANS AND/OR SPECIFICATION, ETC.						
ADDENDUM NO.'S:						
NO. 1						
NO. 2						
NO. 3						
NO. 4						
NO. 5						
I UNDERSTAND THAT FAILURE TO CONFIRM THE RECEIPT OF THE ADDENDUM(S) MAY BE CAUSE FOR REJECTION OF BIDS.						
VENDOR MUST CLEARLY UNDERSTAND THAT ANY VERBAL REPRESENTATION MADE OR ASSUMED TO BE MADE DURING ANY ORAL DISCUSSION HELD BETWEEN VENDOR'S REPRESENTATIVES AND ANY STATE PERSONNEL IS NOT BINDING. ONLY THE INFORMATION ISSUED IN WRITING AND ADDED TO THE SPECIFICATIONS BY AN OFFICIAL ADDENDUM IS BINDING.						
				 SIGNATURE JERRY GROVES, VICE PRESIDENT SERVICE SUPPLY LTD., INC. COMPANY		

SEE REVERSE SIDE FOR TERMS AND CONDITIONS		
SIGNATURE 	TELEPHONE 800-848-7556	DATE AUGUST 27, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262459	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209199

PAGE
 4

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 804-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 BABCOCK STATE PARK
 ATTN: PARK SUPERINTENDENT
 HC 35, BOX 150
 CLIFFTOP, WV 25831 438-5662

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 09/01/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				DATE	AUGUST 27, 2009	
REV. 11/96						
THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE INFORMATION FOR ANY ALTERNATES MAY BE GROUNDS FOR REJECTION OF THE BID. THE STATE RESERVES THE RIGHT TO WAIVE MINOR IRREGULARITIES IN BIDS OR SPECIFICATIONS IN ACCORDANCE WITH SECTION 148-1-4(F) OF THE WEST VIRGINIA LEGISLATIVE RULES AND REGULATIONS.						
BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THE STATE MAY DEEM THE CONTRACT NULL AND VOID, AND TERMINATE SUCH CONTRACT WITHOUT FURTHER ORDER.						
NOTICE						
A SIGNED BID MUST BE SUBMITTED TO:						
DEPARTMENT OF ADMINISTRATION PURCHASING DIVISION BUILDING 15 2019 WASHINGTON STREET, EAST CHARLESTON, WV 25305-0130						
THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Jerry Groves</i>	TELEPHONE 800-848-7556	DATE AUGUST 27, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262459	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
 DNR209199

PAGE
 5

ADDRESS CORRESPONDENCE TO ATTENTION OF
 KRISTA FERRELL
 304-558-2596

*709022058 800-848-7556
 SERVICE SUPPLY LTD
 1524 SOUTH HAMILTON RD
 COLUMBUS OH 43227

DIVISION OF NATURAL RESOURCES
 BABCOCK STATE PARK
 ATTN: PARK SUPERINTENDENT
 HC 35, BOX 150
 CLIFFTOP, WV 25831 438-5662

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B	FREIGHT TERMS
07/30/2009				

BID OPENING DATE: 09/01/2009 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED: SEALED BID BUYER: KRISTA FERRELL-FILE 21 RFQ. NO.: DNR209199 BID OPENING DATE: 09/01/2009 BID OPENING TIME: 1:30 PM PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID: 614-863-0113 ----- CONTACT PERSON (PLEASE PRINT CLEARLY): PAM MELTON ----- ***** THIS IS THE END OF RFQ DNR209199 ***** TOTAL: <u>\$87,390.32</u>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE <i>Jerry Groves</i>	TELEPHONE 800-848-7556	DATE AUGUST 27, 2009
TITLE JERRY GROVES VICE PRESIDENT	FEIN 31-1262459	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

WVDNR209199
Babcock State Park Playground Specifications

To supply playground equipment to offer play activities for children ages five (5) to twelve (12) at Babcock State Park, Clifftop, West Virginia. Playground equipment will be purchased for three separate areas in the park. Park personnel will install all playground equipment. F.O.B. Destination. Freight and/or delivery charges are to be included in the price of the goods. Delivery should be made within thirty (30) days of purchase order award. The award may be split if it is in the best interest of the West Virginia Division of Natural Resource

CAMPGROUND AREA PLAYGROUND

PowerScope meadow place play structure, Item #G85172, or equal. Structure must have the same type of play events including the minimum number in the specified Item; and uprights and support bars must be constructed of galvanized steel.

PrimeTime swing frame, Item #12583, or equal. Swing frame must have a minimum 3 ½" OD; must have an arched style top rail; must be a minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime swing add-a-bay, Item #12584, or equal. Frame must have a minimum 3 ½" OD; must have an arched style top rail; must be minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime 3 ½" enclosed tot swing with galvanized chain, Item #8696, or equal.

PrimeTime 3 ½" belt seat with galvanized chain, Item #8910, or equal.

Geo-textile fabric or equal. Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

Engineered wood fiber @ 8" compacted depth or equal. Material must be recently harvested and debarked; free of chemical treatments and additives; free of soil, twigs, leaves and other contaminants.

One (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacturer's guidelines.

MANNS CREEK PICNIC AREA PLAYGROUND

WVDNR209199
Babcock State Park Playground Specifications

PlayworldSystems challengers play structure, Item #350-0704, or equal. Structure must have at least the same type of play events including the minimum number in the specified Item and the uprights and support bars must be constructed of galvanized steel.

PrimeTime swing frame, Item #12583, or equal. Swing frame must have a minimum 3 ½" OD; must have an arched style top rail; must be a minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime swing-a-bay, Item #12584, or equal. Frame must have a minimum 3 ½" OD; must have an arched style top rail; must be minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime 3 ½" belt seat with galvanized chain, Item #8910, or equal.

PrimeTime 3 ½" enclosed tot swing with galvanized chain, Item #8696, or equal.

Geo-textile fabric or equal. Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

Engineered wood fiber @ 8" compacted depth or equal. Material must be recently harvested and debarked; free of chemical treatments and additives; free of soil, twigs, leaves and other contaminants.

One (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacturer's guidelines.

SUGAR CAMP RUN PICNIC AREA PLAYGROUND

PowerScape meadow place play structure, Item #G85172, or equal. Structure must have the same type of play events including the minimum number in the specified Item; and uprights and support bars must be constructed of galvanized steel.

PrimeTime swing frame, Item #12583, or equal. Swing frame must have a minimum 3 ½" OD; must have an arched style top rail; must be a minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime Swing add-a bay Item #12584, or equal. Frame must have a minimum 3 ½" OD; must have an arched style top rail; must be minimum 8' installed height; must be constructed of galvanized steel; and must accommodate two swing units.

PrimeTime 3 ½" belt seat with galvanized chain, Item #8910, or equal.

WVDNR209199
Babcock State Park Playground Specifications

PrimeTime 3 ½" enclosed tot swing with galvanized chain, Item #8696, or equal.

Geo-textile fabric or equal. Fabric must provide a water permeable separation between the earth and the wood fiber and at least 150 gallons per square foot per minute.

Engineered wood fiber @ 8" compacted depth or equal. Material must be recently harvested and debarked; free of chemical treatments and additives; free of soil, twigs, leaves and other contaminants.

One (1) day of supervision by successful vendor. Park personnel will install all playground equipment and this will provide oversight to ensure that all equipment is assembled and installed properly according to manufacturer's guidelines.

WVDNR209199
Babcock State Park Playground Specifications

All playground equipment and engineered wood fiber must meet the following requirements:

- Compliance with U.S. Consumer Product Safety Commission, Handbook for Public Playground Safety.
- Compliance with ASTM Standard F 1487.
- Compliance with Architectural and Transportation Barriers Compliance Board, Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Play Areas.

Vendors must submit the following attachments:

- Complete manufacturer's parts specifications and warranties.
- Layout drawing to scale of the proposed play structure or equipment.
- ASTM and CPSC Statement of Compliance

Warranties:

- All equipment and engineered wood fiber must be guaranteed to be free of defects in workmanship and material for a minimum of one year from date of acceptance. However, if manufacturer warranty periods are longer than the required minimum one year warranty, those warranties shall apply.

Color scheme of equipment must be coordinated with Babcock State Park. Color of Items will be selected from manufacturer's standard colors.

A mandatory pre-bid conference will be held on, August 10, 2009, at Babcock State Park Headquarters at 1:30 p.m. A failure to attend the mandatory pre-bid conference will result in bid disqualification. An individual may not represent more than one firm at the pre-bid conference.

WVDNR209199
Babcock State Park Playground Specifications

Pricing Sheet:

Vendors must provide unit prices for all line items. Failure to provide unit prices will result in the disqualification of the vendor's bid.

WVDNR209199
Babcock State Park
PLAYGROUND EQUIPMENT SHEET

Please complete the below information concerning the brand(s) of equipment being bid in relation to this project. If bidding "or equal" brands, please attach manufacturer's literature documenting that it meets the mandatory requirements stated in the specifications. Vendors should note the areas of the provided manufacturer's literature that adheres to the mandatory requirements outlined in the Request For Quotation.

Item No.	Equipment	Manufacturer	Item
1	Campground Area Playground PowerScape meadow place play structure, Item #G85172, or equal.	LANDSCAPE STRUCTURES INC.	37192-1-1
2	Campground Area Playground Primetime swing frame, Item #12583, or equal.	LANDSCAPE STRUCTURES INC.	1000050C
3	Campground Area Playground Primetime swing add-a-bay, Item #12584, or equal.	LANDSCAPE STRUCTURES INC.	111579C
4	Campground Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	LANDSCAPE STRUCTURES INC.	111579C
5	Campground Area Playground PrimeTime 3½" belt seat with galvanized chain, Item #8910, or equal.	LANDSCAPE STRUCTURES INC.	100050C
6	Campground Area Playground geo-textile fabric or equal.	ZEAGER BROS.	DL6
7	Campground Area Playground engineered wood fiber @ 8" compacted depth or equal.	ZEAGER BROS.	W-CY
8	Campground Area Playground one (1) day of supervision by successful vendor.	DYNAMIC INSTALLATIONS	(1) DAY SUPERVISION
9	Manns Creek Picnic Area Playground PlayworldSystems challengers play structure, Item #350-0704, or equal.	LANDSCAPE STRUCTURES INC.	37192-2-1
10	Manns Creek Picnic Area Playground PrimeTime swing frame, Item #12583, or equal.	LANDSCAPE STRUCTURES INC.	100050C

WVDNR209199
Babcock State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Item
11	Manns Creek Picnic Area Playground PrimeTime swing add-a-bay, Item #12584, or equal.	LANDSCAPE STRUCTURES INC.	111579C
12	Manns Creek Picnic Area Playground PrimeTime 3½" belt seat with galvanized chain, Item #8910, or equal.	LANDSCAPE STRUCTURES INC.	100050C
13	Manns Creek Picnic Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	LANDSCAPE STRUCTURES INC.	111579C
14	Manns Creek Picnic Area Playground geo-textile fabric or equal.	ZEAGER BROS.	DL6
15	Manns Creek Picnic Area Playground engineered wood fiber @ 8" compacted depth or equal.	ZEAGER BROS.	W-CY
16	Manns Creek Picnic Area Playground one (1) day of supervision by successful vendor.	DYNAMIC INSTALLATIONS	(1) DAY SUPERVISION
17	Sugar Camp Run Picnic Area Playground PowerScape meadow place play structure , Item #g85172, or equal.	LANDSCAPE STRUCTURES INC.	37192-1-1
18	Sugar Camp Run Picnic Area Playground Primetime swing frame, Item #21583, or equal.	LANDSCAPE STRUCTURES INC.	100050C
19	Sugar Camp Run Picnic Area Playground Primetime swing add-a-bay, Item #21584, or equal.	LANDSCAPE STRUCTURES INC.	111579C
20	Sugar Camp Run Picnic Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	LANDSCAPE STRUCTURES INC.	111579C

WVDNR209199
Babcock State Park
PLAYGROUND EQUIPMENT SHEET

Item No.	Equipment	Manufacturer	Item
21	Sugar Camp Run Picnic Area Playground PrimeTime 3½" belt seat with galvanized chain, Item #8910, or equal.	LANDSCAPE STRUCTURES INC.	100050C
22	Sugar Camp Run Picnic Area Playground geo-textile fabric or equal.	ZEAGER BROS.	DL6
23	Sugar Camp Run Picnic Area Playground engineered wood fiber @ 8" compacted depth or equal.	ZEAGER BROS.	W-CY
24	Sugar Camp Run Picnic Area Playground one (1) day of supervision by successful vendor.	DYNAMIC INSTALLATION	(1) DAY SUPERVISION

**Babcock State Park Playground Equipment
PRICING SHEET**

Item No.	Quantity	Description	Unit Price	Amount
1	1	Campground Area Playground PowerScape meadow place play structure, Item #G85172, or equal.	23,186.00	23,186.00
2	1	Campground Area Playground Primetime swing frame, Item #12583, or equal.	1,768.00	1,768.00
3	1	Campground Area Playground Primetime swing add-a-bay, Item #12584, or equal.	1,095.00	1,095.00
4	1	Campground Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	174.00	174.00
5	3	Campground Area Playground PrimeTime 3½" belt seat with galvanized chain, Item #8910, or equal.	57.00	171.00
6	3,432 square feet	Campground Area Playground geo-textile fabric square foot roll or equal.	PLEASE NOTE: Bidders must include a unit price. This item cannot be bid Lump Sum. 1 square foot x price = per unit price. .16	549.12
7	3,432 square feet	Campground Area Playground engineered wood fiber @ 8" compacted depth or equal.	PLEASE NOTE: Bidders must include a unit price. This item cannot be bid Lump Sum. 1 square foot x price = per unit price. .86	2,951.52
8	1	Campground Area Playground one (1) day of supervision by successful vendor.	850.00	850.00
9	1	Manns Creek Picnic Area Playground PlayworldSystems challengers play structure, Item #350-0704, or equal.	19,444.00	19,444.00


**Babcock State Park Playground Equipment
PRICING SHEET**

Item No.	Quantity	Description	Unit Price	Amount
10	1	Manns Creek Picnic Area Playground PrimeTime swing frame, Item #12583, or equal.	1,768.00	1,768.00
11	1	Manns Creek Picnic Area Playground PrimeTime swing add-a-bay, Item #12584, or equal.	1,095.00	1,095.00
12	3	Manns Creek Picnic Area Playground PrimeTime 3½" belt seat with galvanized chain, Item # 8910, or equal.	57.00	171.00
13	1	Manns Creek Picnic Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	174.00	174.00
14	3,192 square feet	Manns Creek Picnic Area Playground geo-textile fabric or equal.	PLEASE NOTE: Bidders must include a unit price. This Item cannot be bid Lump Sum. 1 square foot x price = per unit price. .16	510.72
15	3,192 square feet	Manns Creek Picnic Area Playground engineered wood fiber @ 8" compacted depth or equal.	PLEASE NOTE: Bidders must include a unit price. This Item cannot be bid Lump Sum. 1 square foot x price = per unit price. .86	2,745.12
16	1	Manns Creek Picnic Area Playground one (1) day of supervision by successful vendor.	850.00	850.00
17	1	Sugar Camp Run Picnic Area Playground PowerScape meadow place play structure , Item #g85172, or equal.	23,186.00	23,186.00
18	1	Sugar Camp Run Picnic Area Playground Primetime swing frame, Item #21583, or equal.	1,768.00	1,768.00

WVDNR209199
Babcock State Park Playground Equipment
PRICING SHEET


Item No.	Quantity	Description	Unit Price	Amount
19	1	Sugar Camp Run Picnic Area Playground Primetime swing add-a-bay, Item #21584, or equal.	1,095.00	1,095.00
20	1	Sugar Camp Run Picnic Area Playground PrimeTime 3½" enclosed tot swing with galvanized chain, Item #8696, or equal.	174.00	174.00
21	3	Sugar Camp Run Picnic Area Playground PrimeTime 3½" belt seat with galvanized chain, Item #8910, or equal.	57.00	171.00
22	2,592 square feet	Sugar Camp Run Picnic Area Playground geo-textile fabric or equal.	PLEASE NOTE: Bidders must include a unit price. This Item cannot be bid Lump Sum. 1 square foot x price = per unit price. .16	414.72
23	2,592 square feet	Sugar Camp Run Picnic Area Playground engineered wood fiber @ 8" compacted depth or equal.	PLEASE NOTE: Bidders must include a unit price. This Item cannot be bid Lump Sum. 1 square foot x price = per unit price. .86	2,229.12
24	1	Sugar Camp Run Picnic Area Playground one (1) day of supervision by successful vendor.	850.00	850.00
		TOTALS		87,390.32

MEADOW PLACE MODEL VIEW

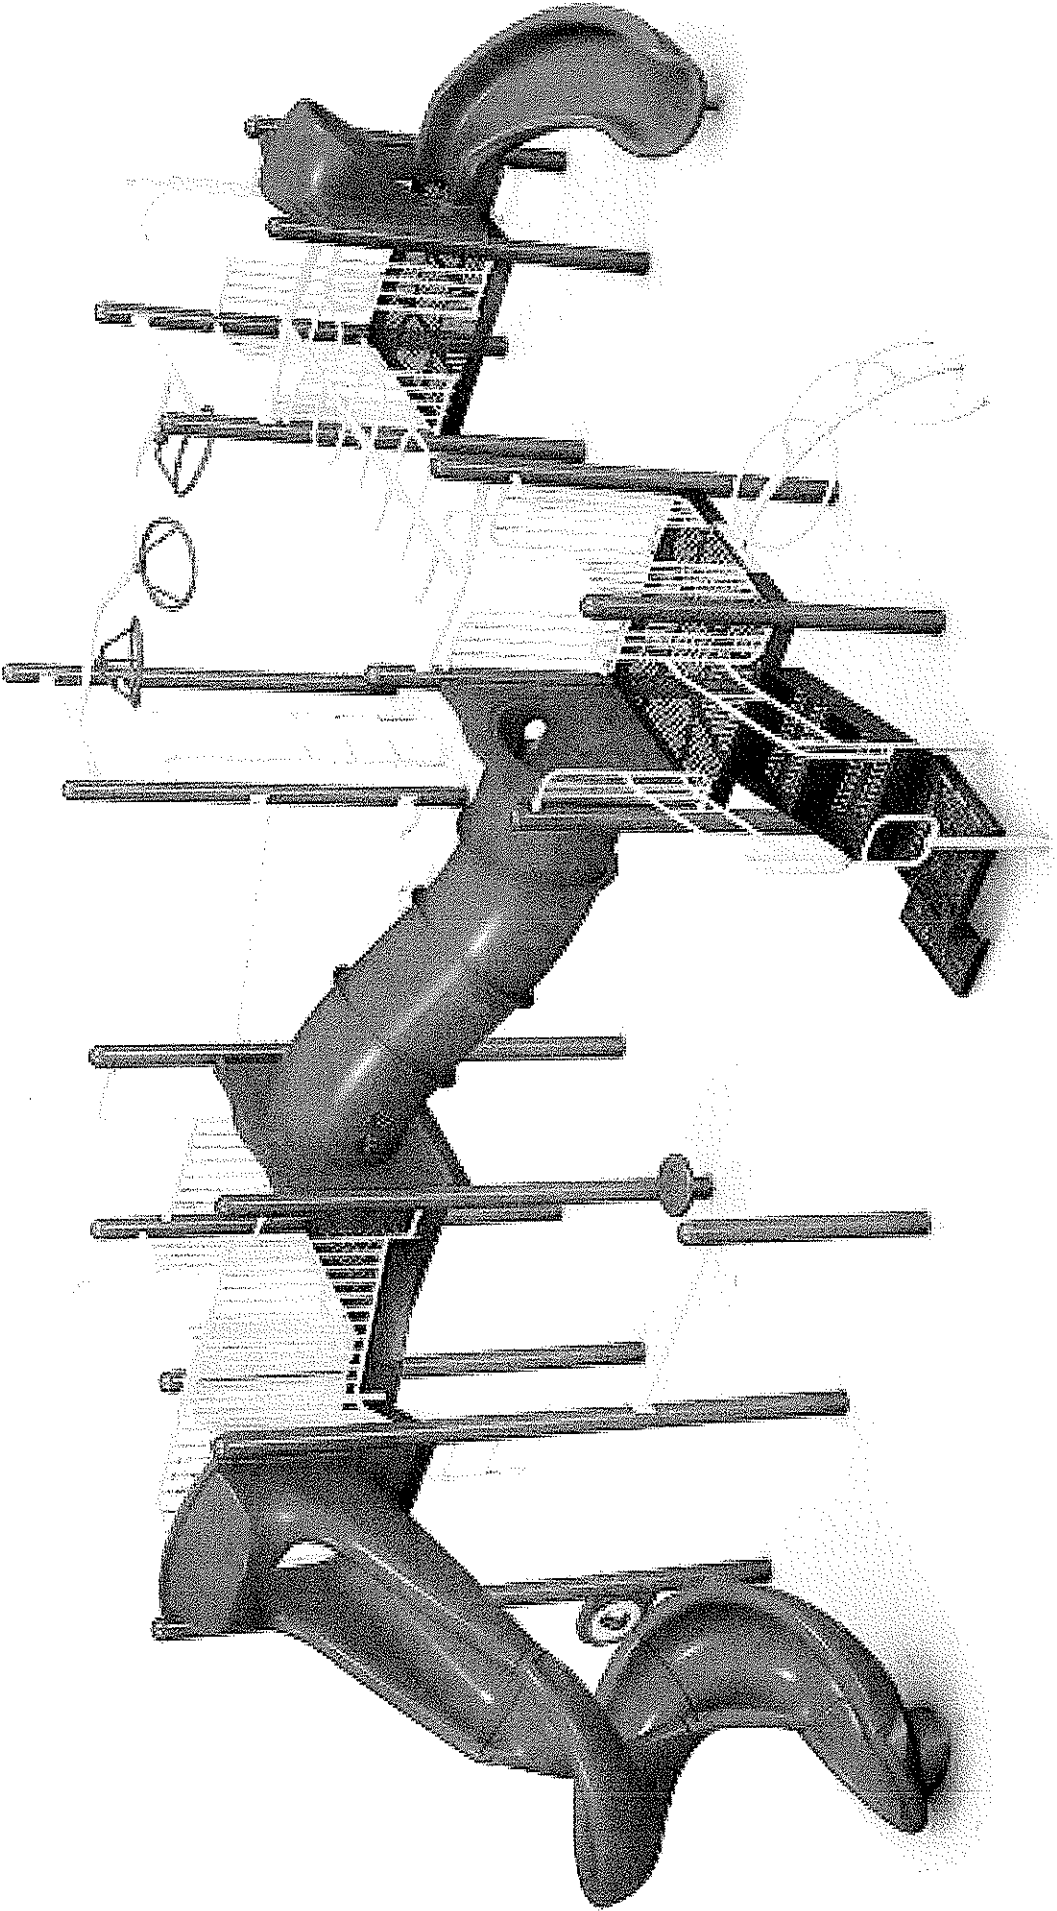


MEADOW PLACE TOP VIEW


Wilderslide

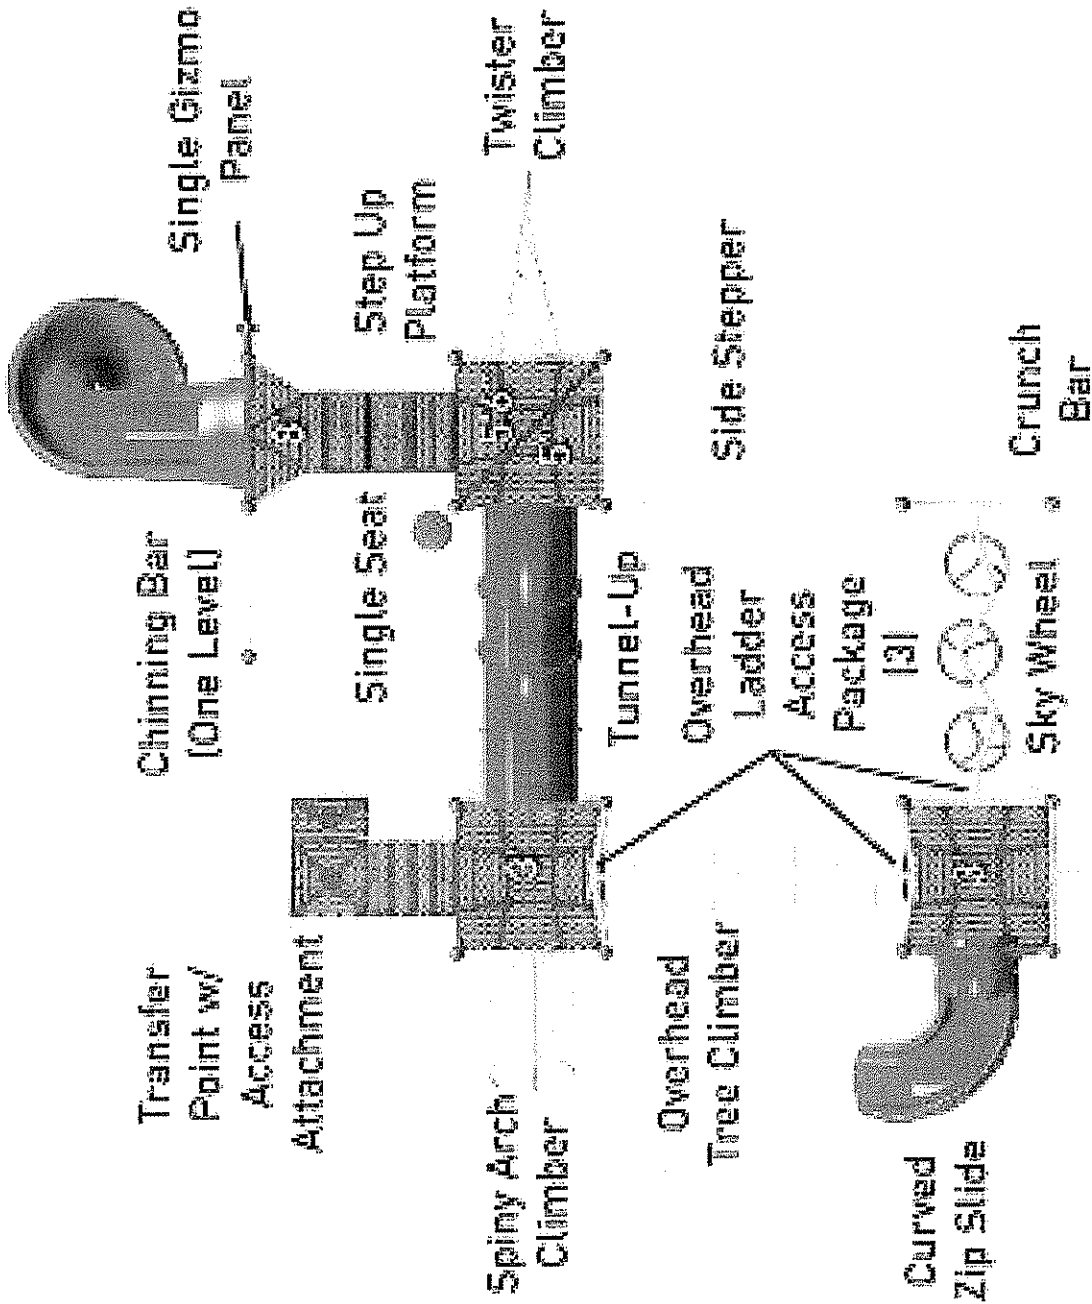


PRIME TIME SWING FRAME 12583

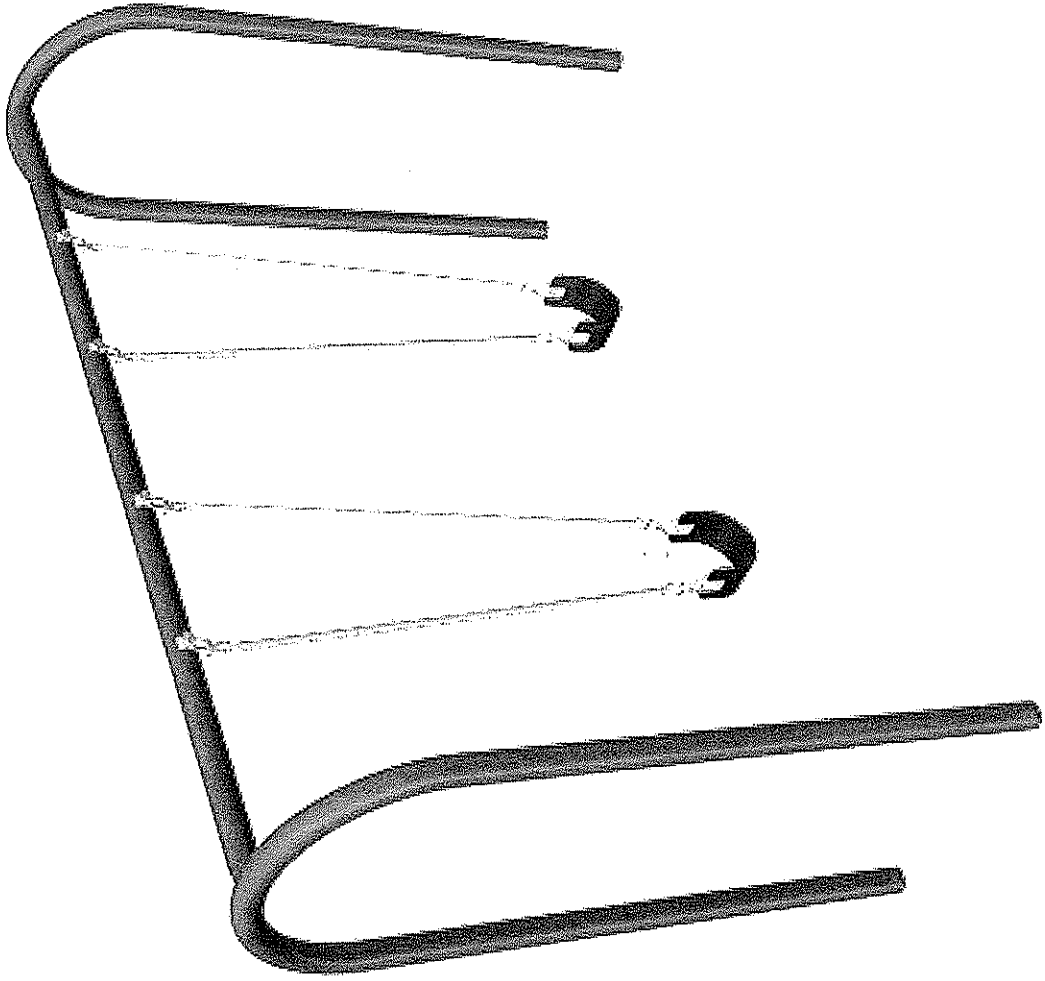

PLAYWORLD SYSTEMS CHALLENGERS
#350-0704 MODEL VIEW

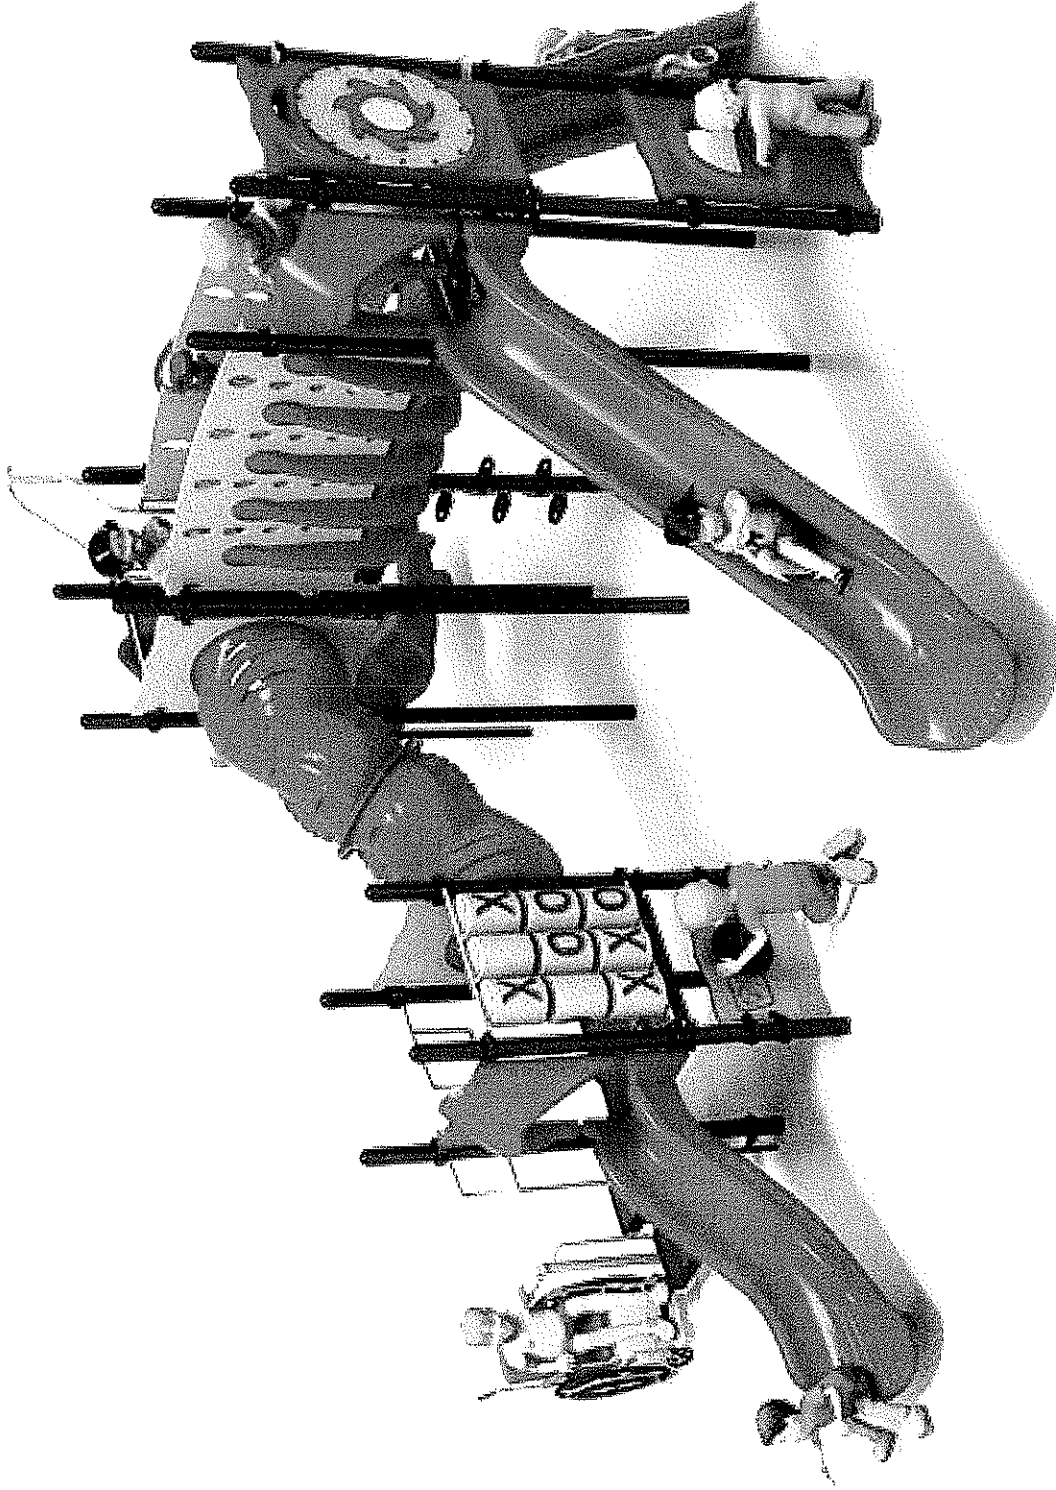

PLAYWORLD SYSTEMS CHALLENGERS
#350-0704 TOP VIEW

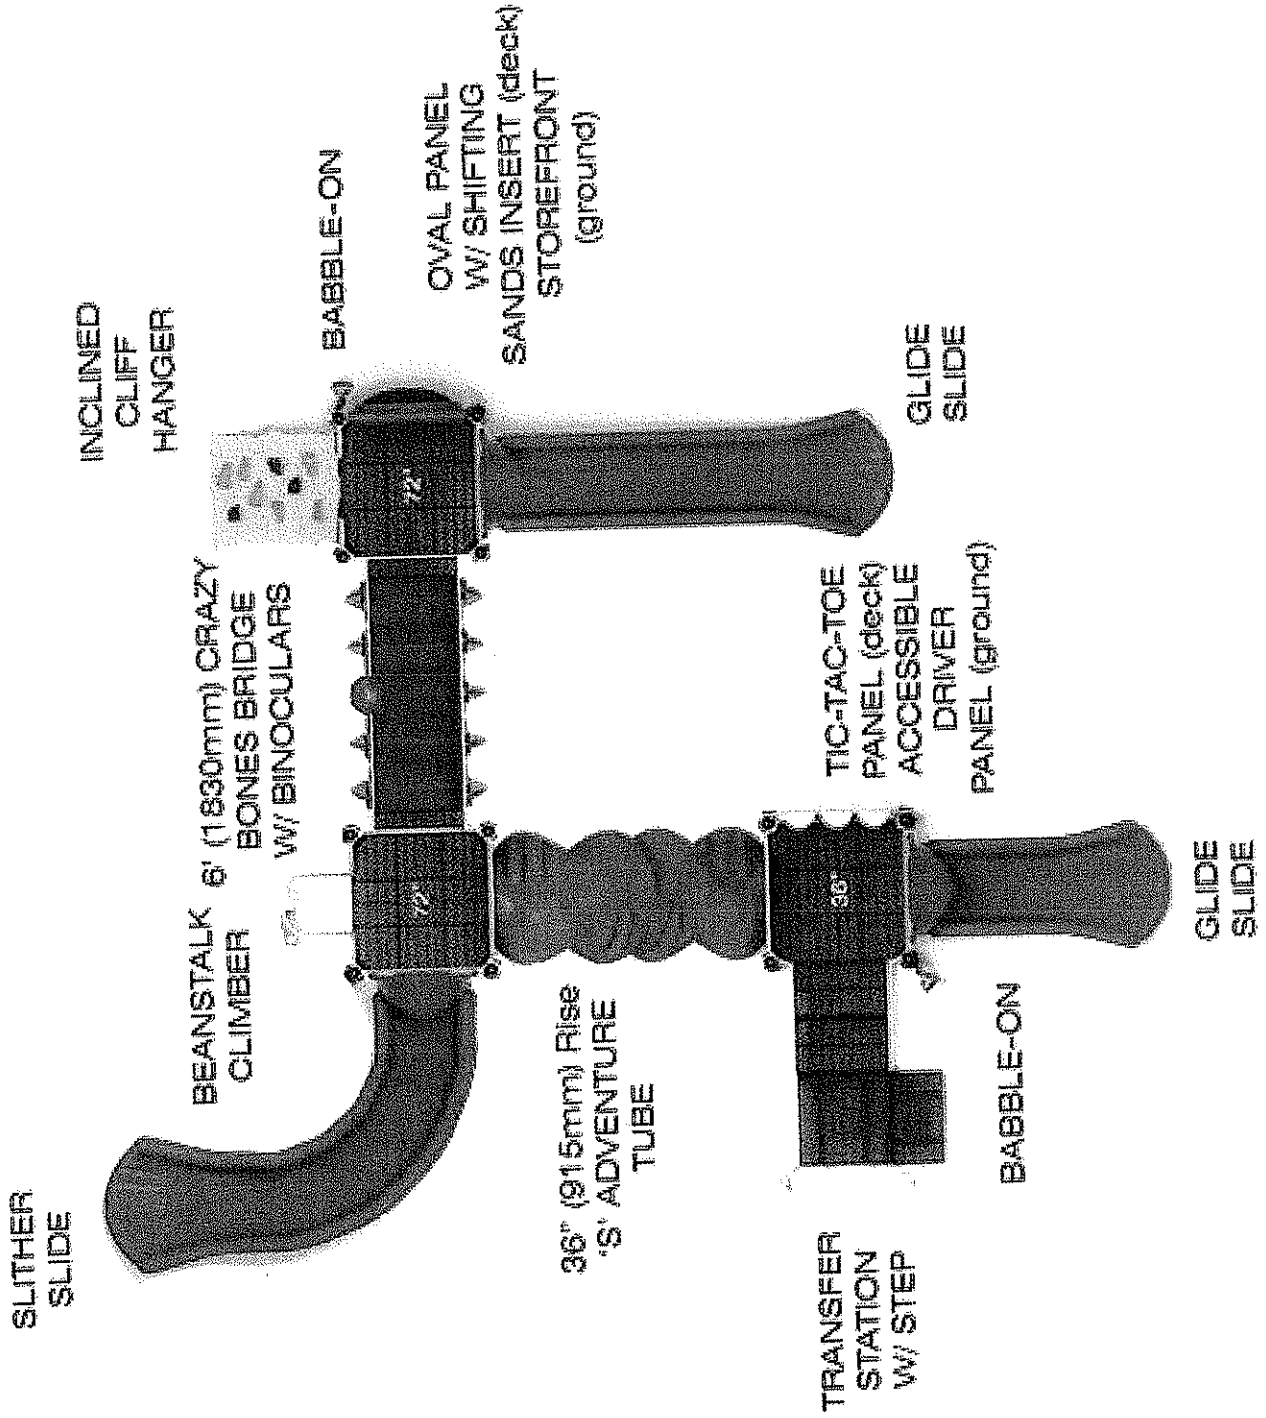

State of West Virginia VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with *West Virginia Code*, §5A-3-37. (Does not apply to construction contracts). *West Virginia Code*, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the *West Virginia Code*. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
 Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or** 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or**,
 Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or**,
2. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,
3. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or**,
4. **Application is made for 5% resident vendor preference for the reason checked:**
 Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or**,
5. **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**
 Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or**,
6. **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**
 Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: SERVICE SUPPLY LTD., INC.

Signed: 

Date: AUGUST 27, 2009

Title: JERRY GROVES, VICE PRESIDENT

*Check any combination of preference consideration(s) indicated above, which you are entitled to receive.

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

VENDOR OWING A DEBT TO THE STATE:

West Virginia Code §5A-3-10a provides that: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

PUBLIC IMPROVEMENT CONTRACTS & DRUG-FREE WORKPLACE ACT:

If this is a solicitation for a public improvement construction contract, the vendor, by its signature below, affirms that it has a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code*. The vendor **must** make said affirmation with its bid submission. Further, public improvement construction contract may not be awarded to a vendor who does not have a written plan for a drug-free workplace policy in compliance with Article 1D, Chapter 21 of the *West Virginia Code* and who has not submitted that plan to the appropriate contracting authority in timely fashion. For a vendor who is a subcontractor, compliance with Section 5, Article 1D, Chapter 21 of the *West Virginia Code* may take place before their work on the public improvement is begun.

ANTITRUST:

In submitting a bid to any agency for the state of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the state of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the state of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the state of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.

I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership or person or entity submitting a bid for the same materials, supplies, equipment or services and is in all respects fair and without collusion or fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.

LICENSING:

Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, West Virginia Insurance Commission, or any other state agencies or political subdivision. Furthermore, the vendor must provide all necessary releases to obtain information to enable the Director or spending unit to verify that the vendor is licensed and in good standing with the above entities.

CONFIDENTIALITY:

The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.

Under penalty of law for false swearing (*West Virginia Code* §61-5-3), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

Vendor's Name: SERVICE SUPPLY LTD., INC.

Authorized Signature:  Date: AUGUST 27, 2009
JERRY GROVES, VICE PRESIDENT

CONTRACTOR LICENSE

Authorized by the
West Virginia Contractor Licensing Board

Number:

WV013333

Classification:

SPECIALTY


SERVICE SUPPLY LTD INC
DBA SERVICE SUPPLY LTD INC
1524 S HAMILTON RD
COLUMBUS, OH 43227-2493


Date Issued

JANUARY 24, 2009

Expiration Date

JANUARY 24, 2010


Authorized Company Signature


Chair, West Virginia Contractor
Licensing Board



WEST VIRGINIA
CONTRACTOR
LICENSING
BOARD

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and binding contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



**WORKERS COMPENSATION
AND
EMPLOYERS LIABILITY POLICY**

INFORMATION PAGE WC 00 00 01 (A)

RENEWAL OF POLICY NUMBER: WC10102907-04
POLICY NUMBER: WC10102907-05

INSURER: BRICKSTREET MUTUAL INSURANCE COMPANY

- 1. **INSURED:**
SERVICE SUPPLY LTD INC
1524 SOUTH HAMILTON ROAD
COLUMBUS, OH 43227
- PRODUCER:**
BRICKSTREET MUTUAL INSURANCE
COMPANY
400 QUARRIER STREET
CHARLESTON, WV 25301-2010

Insured is a(n) CORPORATION

Other work places and identification numbers are shown in the schedule(s) attached.

2. The policy period is from 11/30/2008 to 11/30/2009 12:01 A.M. at the insured's mailing address.

3. **A. WORKERS COMPENSATION INSURANCE:** Part One of the policy applies to the Workers Compensation Law of the state(s) listed here:
WEST VIRGINIA

B. EMPLOYERS LIABILITY INSURANCE: Part Two of the policy applies to work in each state listed in item 3.A. The limits of our liability under Part Two are:

Bodily Injury by Accident:	\$100,000	Each Accident
Bodily Injury by Disease:	\$500,000	Policy Limit
Bodily Injury by Disease:	\$100,000	Each Employee

C. OTHER STATES INSURANCE: Part Three of the policy applies to the states, if any, listed here:

See West Virginia Limited Other States Insurance Endorsement WC 99 03 05

D. This policy includes these endorsements and schedules:

SEE LIST OF ENDORSEMENTS - EXTENSION OF INFORMATION PAGE

4. The premium for this policy will be determined by our Manuals of Rules, Classifications, Rates and Rating Plans. All required information is subject to verification and change by audit to be made in accordance with Part Five of the Policy.

DATE OF ISSUE: 12/29/2008
ISSUING OFFICE: Charleston, WV
PRODUCER: BRICKSTREET MUTUAL INSURANCE COMPANY

Certificate of Premium Payment

This certifies the employer listed below has paid into the Ohio State Insurance Fund as required by law. Therefore, the employer is entitled to the rights and benefits of the fund for the period specified. For more information, call 1-800-OHIOBWC.

This certificate must be conspicuously posted.

Policy No. and Employer

Period Specified Below

406937

01/01/2009 Thru 08/31/2009

SERVICE SUPPLY LTD., INC.
1524 S HAMILTON RD
COLUMBUS, OH 43227-2429



ohiobwc.com

Marsha P. Ryan
Administrator

You can reproduce this certificate as needed.

Ohio Bureau of Workers' Compensation

Alcohol Testing

Effective Oct. 13, 2004, Section 4123.54 of the Ohio Revised Code requires notice of rebuttable presumption. Rebuttable presumption means an employee may dispute or prove untrue the presumption (or belief) that alcohol or a controlled substance not prescribed by the employee's physician is the proximate cause (main reason) of the work-related injury.

The burden of proof is on the employee to prove the presence of alcohol or a controlled substance was not the proximate cause of the work-related injury. An employee who tests positive or refuses to submit to chemical testing may be disqualified for compensation and benefits under the Workers' Compensation Act.

Ohio | Bureau of Workers' Compensation

You must post this language with the certificate of premium payment.



Ohio Bureau of Workers' Compensation

Governor: Ted Strickland
Administrator/CEO: Marsha P. Ryan

Focus on
[Ohio Employers](#)

- [Accident/Injury Info »](#)
- [Claim Info »](#)
- [Claim Payment »](#)
- [Claim Reference Info »](#)
- [Coverage look-up](#)
- [Employer Services »](#)
- [Quick Pay](#)
- [Safety Services »](#)
- [Self-Insured »](#)
- [Forms](#)
- [Section Map](#)

Live support available
Monday through Friday
7:30 a.m. - 5:30 p.m.
[Click here to get help!](#)

[log on](#)

[?](#) [help](#) [print](#) [search](#) [glossary](#) [cc](#)

Service: State construction contractor search results

Policy number: 406937-0
Company name: SERVICE SUPPLY LTD., INC.
Construction contractor status: APPROVED
Construction contractor status date: 5/4/2007 12:00:00 AM

[search again](#)

Note: BWC has designed this database for those responsible for ensuring that a construction subcontractor has a drug-free program that complies with the governor's executive order requiring a drug-free workplace. A contractor or subcontractor in an APPROVED status has agreed to implement a drug-free workplace program which makes the company compliant with the governor's executive order. Therefore, you can print this page for your records.

Click the Help tab in the upper-right hand corner for more status definitions.



ACORD™ CERTIFICATE OF LIABILITY INSURANCE

PRODUCER Phone: 6168783351
 The Campbell Group
 PO Box 1788
 Grand Rapids MI 49501

Fax: 8008473229

SERVICE SUPPLY LTD.

DATE (MM/DD/YYYY)

12/10/2008

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURED
 Service Supply Ltd Inc
 1524 S Hamilton Road
 Columbus OH 43227

IN BUSINESS FOR FUN AND SAFETY

INSURERS AFFORDING COVERAGE

INSURER A: Continental Casualty Co
 INSURER B: American Casualty Co of Reading
 INSURER C:
 INSURER D:
 INSURER E:

NAIC #

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR ADD'L LTR INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS
B	GENERAL LIABILITY <input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO. JECT <input type="checkbox"/> LOC	2088184534	12/10/2008	12/10/2009	EACH OCCURRENCE \$1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$100,000 MED EXP (Any one person) \$5,000 PERSONAL & ADV INJURY \$1,000,000 GENERAL AGGREGATE \$2,000,000 PRODUCTS - COMP/OP AGG \$2,000,000
A	AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> HIRED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS	2088184498	12/10/2008	12/10/2009	COMBINED SINGLE LIMIT (Ea accident) \$1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ AUTO ONLY - EA ACCIDENT \$ OTHER THAN AUTO ONLY: EA ACC \$ AGG \$
A	EXCESS/UMBRELLA LIABILITY <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE DEDUCTIBLE <input checked="" type="checkbox"/> RETENTION \$10,000	2088184453	12/10/2008	12/10/2009	EACH OCCURRENCE \$2,000,000 AGGREGATE \$2,000,000 \$ \$ \$ WC STATUTORY LIMITS OTH-ER E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$
B	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? If yes, describe under SPECIAL PROVISIONS below				
B	OTHER Installation Floater	2088184534	12/10/2008	12/10/2009	\$120,000


DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS

CERTIFICATE HOLDER

Service Supply Ltd Inc
 1524 South Hamilton Road
 Columbus OH 43227

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE


IMPORTANT

If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

DISCLAIMER

The Certificate of Insurance on the reverse side of this form does not constitute a contract between the issuing insurer(s), authorized representative or producer, and the certificate holder, nor does it affirmatively or negatively amend, extend or alter the coverage afforded by the policies listed thereon.



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
06/02/2009

PRODUCER
Aon Risk Services Central, Inc.
Minneapolis MN Office
8300 Norman Center Drive
Suite 1000
Minneapolis MN 55437 USA

PHONE: (952) 656-8000 FAX: (312) 381-0536

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.

INSURED
Landscape Structures, Inc.,
Basics, Inc., Skatewave, a
Division of Landscape Structures, Inc.
601 7th Street South
DeLano MN 55328 USA

INSURERS AFFORDING COVERAGE		NAIC #
INSURER A:	ACE American Insurance Company	22667
INSURER B:	National Union Fire Ins Co of Pittsburgh	19445
INSURER C:		
INSURER D:		
INSURER E:		

Holder Identifier:

SIR applies per terms and conditions of the policy

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

LIMITS SHOWN ARE AS REQUESTED

INSR LTR	ADD'L INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YYYY)	POLICY EXPIRATION DATE (MM/DD/YYYY)	LIMITS		
A		GENERAL LIABILITY	PMIG23860971002 GL & Products Liability	06/01/2009	06/01/2010	EACH OCCURRENCE	\$2,000,000	
		<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY				DAMAGE TO RENTED PREMISES (Ea occurrence)	\$50,000	
		CLAIMS MADE <input checked="" type="checkbox"/> OCCUR				MED EXP (Any one person)	Excluded	
		<input checked="" type="checkbox"/> BFPD Incl.				PERSONAL & ADV INJURY	\$2,000,000	
		<input checked="" type="checkbox"/> Bkt Contractual Incl				GENERAL AGGREGATE	\$4,000,000	
		GEN'L AGGREGATE LIMIT APPLIES PER:				PRODUCTS - COMP/OP AGG	\$4,000,000	
		<input type="checkbox"/> POLICY				<input checked="" type="checkbox"/> PRO-JECT	<input type="checkbox"/> LOC	
		AUTOMOBILE LIABILITY				COMBINED SINGLE LIMIT (Ea accident)		
		<input type="checkbox"/> ANY AUTO				<input type="checkbox"/> ALL OWNED AUTOS	BODILY INJURY (Per person)	
		<input type="checkbox"/> SCHEDULED AUTOS				<input type="checkbox"/> HIRED AUTOS	BODILY INJURY (Per accident)	
<input type="checkbox"/> NON OWNED AUTOS		PROPERTY DAMAGE (Per accident)						
GARAGE LIABILITY		AUTO ONLY - EA ACCIDENT						
<input type="checkbox"/> ANY AUTO		OTHER THAN EA ACC AUTO ONLY: AGG						
B		EXCESS / UMBRELLA LIABILITY	BE1058477	06/01/2009	06/01/2010	EACH OCCURRENCE	\$5,000,000	
		<input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE				AGGREGATE	\$5,000,000	
		<input type="checkbox"/> DEDUCTIBLE						
<input type="checkbox"/> RETENTION \$10,000								
WORKERS COMPENSATION AND EMPLOYERS' LIABILITY		Y/N				WC STATUTORY LIMITS	OTHER	
ANY PROPRIETOR / PARTNER / EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH)						E.L. EACH ACCIDENT		
If yes, describe under SPECIAL PROVISIONS below						E.L. DISEASE-EA EMPLOYEE		
OTHER						E.L. DISEASE-POLICY LIMIT		

Certificate No : 570034779361

DESCRIPTION OF OPERATIONS/LOCATIONS/VEHICLES/EXCLUSIONS ADDED BY ENDORSEMENT/SPECIAL PROVISIONS
Broad Form Vendors Endorsement

CERTIFICATE HOLDER
Service Supply Ltd., Inc.
1524 South Hamilton Road
Columbus OH 43227 USA

CANCELLATION
SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER, ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE *Aon Risk Services Central, Inc.*

CONTRACTOR LICENSE

Authorized by the
West Virginia Contractor Licensing Board

Number:
WV040115

Classification:

GENERAL BUILDING

DYNAMIC INSTALLATIONS INC
DBA DYNAMIC INSTALLATIONS INC
10093 ALSPACH RD
CANAL WINCHESTER, OH 43110

Date Issued

Expiration Date

JANUARY 22, 2008	JANUARY 22, 2010
------------------	------------------



**WEST VIRGINIA
CONTRACTOR
LICENSING
BOARD**

Authorized Company Signature

Michael A. Carl
Chair, West Virginia Contractor
Licensing Board

This license, or a copy thereof, must be posted in a conspicuous place at every construction site where work is being performed. This license number must appear in all advertisements, on all bid submissions and on all fully executed and pending contracts. This license cannot be assigned or transferred by licensee. Issued under provisions of West Virginia Code, Chapter 21, Article 11.



Bureau of Workers' Compensation

30 W. Spring St.
Columbus, OH 43215

Certificate of Premium Payment

This certifies the employer listed below has paid into the Ohio State Insurance Fund as required by law. Therefore, the employer is entitled to the rights and benefits of the fund for the period specified. For more information, call 1-800-OHIOBWC.

This certificate must be conspicuously posted.

Policy No. and Employer

Period Specified Below

1208203

1/1/2009 Thru 8/31/2009

DYNAMIC INSTALLATIONS INC
PO BOX 349
CARROLL, OH



ohiobwc.com

Maude P. Reardon
Administrator

You can reproduce this certificate as needed.

Ohio Bureau of Workers' Compensation

Required Posting

Effective Oct. 13, 2004, Section 4123.54 of the Ohio Revised Code requires notice of rebuttable presumption. Rebuttable presumption means an employee may dispute or prove untrue the presumption (or belief) that alcohol or a controlled substance not prescribed by the employee's physician is the proximate cause (main reason) of the work-related injury.

The burden of proof is on the employee to prove the presence of alcohol or a controlled substance was not the proximate cause of the work-related injury. An employee who tests positive or refuses to submit to chemical testing may be disqualified for compensation and benefits under the Workers' Compensation Act.



Bureau of Workers' Compensation

You must post this language with the certificate of premium payment.

ACORD CERTIFICATE OF LIABILITY INSURANCE

OP ID PL
DYNAINS

DATE (MM/DD/YYYY)
05/07/09

PRODUCER Benchmark Insurance, LLC P O Box 2700 Westerville OH 43086-2700 Phone: 614-891-7791 Fax: 614-891-5801	THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW.	
	INSURERS AFFORDING COVERAGE	NAIC #
INSURED Dynamic Installations, Inc. Anthony Shadwick P.O. Box 349 Carroll OH 43112	INSURER A: Frankenmuth Mutual Insurance	013986
	INSURER B: Nautilus Insurance Company	
	INSURER C:	
	INSURER D:	
	INSURER E:	

COVERAGES

THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. AGGREGATE LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	INSRD	TYPE OF INSURANCE	POLICY NUMBER	POLICY EFFECTIVE DATE (MM/DD/YY)	POLICY EXPIRATION DATE (MM/DD/YY)	LIMITS	
B		GENERAL LIABILITY	BN897495	04/10/09	04/10/10	EACH OCCURRENCE	\$ 2,000,000
		<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY				DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 100,000
		<input type="checkbox"/> CLAIMS MADE <input checked="" type="checkbox"/> OCCUR				MED EXP (Any one person)	\$ 5,000
						PERSONAL & ADV INJURY	\$ 2,000,000
						GENERAL AGGREGATE	\$ 4,000,000
						PRODUCTS - COMP/OP AGG	\$ 4,000,000
						GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC	
A		AUTOMOBILE LIABILITY	BA 3029468	05/11/09	05/11/10	COMBINED SINGLE LIMIT (Ea accident)	\$ 1,000,000
		<input checked="" type="checkbox"/> ANY AUTO				BODILY INJURY (Per person)	\$
		<input type="checkbox"/> ALL OWNED AUTOS				BODILY INJURY (Per accident)	\$
		<input type="checkbox"/> SCHEDULED AUTOS				PROPERTY DAMAGE (Per accident)	\$
		<input type="checkbox"/> HIRED AUTOS					
		<input type="checkbox"/> NON-OWNED AUTOS					
		GARAGE LIABILITY				AUTO ONLY - EA ACCIDENT	\$
		<input type="checkbox"/> ANY AUTO				OTHER THAN EA ACC	\$
		EXCESS/UMBRELLA LIABILITY				AGG	\$
		<input type="checkbox"/> OCCUR <input type="checkbox"/> CLAIMS MADE				EACH OCCURRENCE	\$
		<input type="checkbox"/> DEDUCTIBLE				AGGREGATE	\$
		RETENTION \$					\$
		WORKERS COMPENSATION AND EMPLOYERS' LIABILITY				WC STATUTORY LIMITS	OTHER
		ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED?				E.L. EACH ACCIDENT	\$
		If yes, describe under SPECIAL PROVISIONS below				E.L. DISEASE - EA EMPLOYEE	\$
		OTHER				E.L. DISEASE - POLICY LIMIT	\$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES / EXCLUSIONS ADDED BY ENDORSEMENT / SPECIAL PROVISIONS

CERTIFICATE HOLDER

SERVICES

Service Supply Limited
1524 S. Hamilton Road
Columbus OH 43242

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, THE ISSUING INSURER WILL ENDEAVOR TO MAIL 30 DAYS WRITTEN NOTICE TO THE CERTIFICATE HOLDER NAMED TO THE LEFT, BUT FAILURE TO DO SO SHALL IMPOSE NO OBLIGATION OR LIABILITY OF ANY KIND UPON THE INSURER. ITS AGENTS OR REPRESENTATIVES.

AUTHORIZED REPRESENTATIVE

David C. Kotary

**LANDSCAPE
STRUCTURES INC**

This Certificate Approves

Dynamic Installations, Inc.


As having met the high standards necessary to become a

Certified Installer

of equipment provided by Landscape Structures Inc.


6-1-98

Date



Official Validation

SERVICE SUPPLY LTD., INC.



1524 SOUTH HAMILTON ROAD - COLUMBUS, OHIO 43227 - TELEPHONE 614 / 861 - 3681
FAX 614/863-0113

June 1, 2005

Service Supply Ltd., Inc. - founded in 1959 in Columbus, Ohio. We originally had offices in the Bryson Building in Columbus, Ohio, and have been in our present facilities, 1524 South Hamilton Road, Columbus, Ohio since 1967.

Ralph Groves, my brother, founded Service Supply Ltd., Inc. and was president until his death in 1973.

Our employees at this time are:

Mary G. Groves (wife) President (1960)
Jerry Groves (son) Vice President (1969)
Janet Kletecka (daughter) Board of Directors (1974)
Alan Kletecka (son-in law) Sales Manager (1973)
Ben Groves (husband) Secretary-Treasurer (1961)
Donna Hetzner - Secretary (1999)
Linda Groves (daughter-in-law) Secretary (1977)
Linda Kroonemeyer - Secretary (1986)
Medrith Mollenkamp - Secretary (1988)
Connie Triplett - Secretary (2003)

We have five (5) sales persons located in various areas of Ohio, Indiana and West Virginia that are on straight commission basis. Some of these sales persons also offer other lines that are related to the same market that we service. This gives us a total of seven (7) sales persons on the road.

Service Supply Ltd., Inc. originally sold items pertaining to Traffic and Highway Safety such as paint strippers, traffic paint, signs, and sign posts. We expanded into the park and recreation market and then into the school market which includes all grade 1-12 and colleges. We also call on the private sector where our site amenities, signs, and play structures are popular. Our early childcare play equipment is designed for institutional and corporate facilities that have become involved in day care centers.

A partial list of our suppliers and their principals, addresses, phone numbers, and products to follow:

- Landscape Structures, Inc., Barb and Steve King, Route #3, 601 7th Street, South, Delano, MN 55328
612-479-2546 PLAYGROUND EQUIPMENT
- Wabash Valley Manufacturing, Inc., Jerry Shilling, P. O. Box 5, Silver Lake, IN 46982
219-352-2102 SITE AMENITIES (expanded metal)
- DuMor, Inc., Steve Richard, P. O. Box 142, Mifflintown, PA 17059
717-436-2106 SITE AMENITIES (wood)
- American Aluminum Seating, Inc., Bob Palmer, P. O. Box 1468, Marshalltown, IA 50158
515-753-5366 PORTABLE BLEACHERS, STADIUM GRANDSTANDS
- Interkal LLC, Richard Patterson, P. O. Box 2107, Kalamazoo, MI 49003
616-349-1521 TELESCOPIC GYM BLEACHERS

We are listed in D&B; any late payments that may be listed on these reports are the result of problems in delivery of total order, which in turn holds up payment to the manufacturer. This would only appear if it were a very large order, which would involve telescopic bleachers.

Our bank, which we have been with since 1959, is National City Bank, Bexley Office, 2594 East Main Street, Bexley, OH 43209- phone 614-238-7100.

Our accountant is Schwartz, Adleman, Kellerman & Marks, (Mr. Sam Schwartz) 145 North Reynoldsburg-New Albany Road, Blacklick, OH 43004-9701. Phone number is 614-866-1600.

Our legal counsel is the firm of Kahn, Kleinman, Yanowitz & Arnson (contact for Service Supply is Mr. Neil Kurit, The Tower at Erieview, Suite 2600, 1301 East Ninth Street, Cleveland, OH 44114-1824. Neil Kurit's phone number is 216-736-3452.

Should you have any questions, please feel free to call me Toll Free -
in Ohio call 800-282-1900 - Indiana and West Virginia call 800-848-7556.

Very truly yours,

SERVICE SUPPLY LTD., INC.

Jerry Groves

**Jerry Groves
Vice President**

JG/dlh

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT OF THE BOARD OF DIRECTORS

December 12, 1988

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following actions by this unanimous written consent:

RESOLVED: That the following persons be, and they hereby are, elected to the offices of the Corporation set opposite their respective names, each to serve in such capacity until his or her successor is duly elected and qualified:

Mary G. Groves	President
Jerry L. Groves	Vice President
Oscar B. Groves	Secretary/Treasurer
Alan Kletecka	Sales Manager

RESOLVED: That the officers of the Corporation select a bank to be the official depository of the Corporation and that the corporate resolutions required by such institution be, and they same hereby are, adopted by the Corporation as part of this resolution and that any one of the officers be, and they hereby are, authorized to execute, acknowledge, and deliver in the name and on behalf of the Corporation, any and all agreements, documents and certificates, and to do and perform all such acts and things as may be deemed by them necessary or appropriate to effectuate the purpose of this resolution;

RESOLVED FURTHER: That said bank be, and it hereby is, authorized to pay out the funds of the Corporation on deposit with it from time to time upon checks, drafts or other withdrawal orders drawn upon it and signed in the name of the Corporation by any one of the following persons:

Oscar B. Groves
Mary G. Groves

whether the checks, drafts or other withdrawal orders are payable to cash, bearer, the orders of any third party, the order of the signing officers or employees of the Corporation, or to the order

of any other officer or employee of the Corporation in either his or her individual or official capacity; and

- RESOLVED FURTHER: That the Secretary of the Corporation be, and hereby is, authorized to furnish to said institution a certified copy of this resolution and that this resolution remain in full force and effect until a certified copy of a resolution amending, modifying, replacing, or rescinding this resolution has been furnished to the bank; and
- RESOLVED FURTHER: That any one of the officers be, and they hereby are, authorized to execute and deliver any and all notes, agreements, documents or papers of any type or nature whatsoever to consummate the purpose of the foregoing resolution.
- RESOLVED: That any one of the officers be, and they hereby are, authorized to pay all fees and expenses incident to and necessary for the organization of the Corporation.
- RESOLVED: That any of the officers of the Corporation be, and they hereby are, authorized, directed and empowered to file or cause to be filed a Notification of Exemption on Form 3-O with the Ohio Division of Securities within sixty (60) days from the date of the original subscription to the shares of the Corporation.



Oscar B. Groves



Mary G. Groves



Jerry Groves



Janet Kletecka

"Directors"

SERVICE SUPPLY LTD., INC.

ACTION BY UNANIMOUS WRITTEN CONSENT
OF THE BOARD OF DIRECTORS

January 2, 1989

Pursuant to Section 1701.54 of the Ohio Revised Code, the undersigned, being all of the members of the Board of Directors of SERVICE SUPPLY LTD., INC. (the "Corporation"), do hereby take and adopt the following action by this unanimous written consent:

RESOLVED: That the following persons are authorized to sign any bids on behalf of the Corporation:

Oscar B. Groves
Mary G. Groves
Alan Kletecka
Jerry L. Groves
Janet Kletecka

Oscar B. Groves
Oscar B. Groves

Mary G. Groves
Mary G. Groves

Janet Kletecka
Janet Kletecka

Jerry L. Groves
Jerry L. Groves

"Directors"



2009 Play Equipment Warranty

You have our word.

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuff™-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTur® against material or manufacturing defects when properly installed. Corocord® cable on Spacenet™ climbers against breakage.

10-Year Limited Warranty for all CoolToppers™ structural steel frames and Mobius climbers™ against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppers® fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat™ hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion, natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgment of Order and will be free of defects in manufacturing and material. Seller further warrants:

All the warranties commence on date of Seller's invoice. Should any failure to conform to the above express warranties appear within the applicable warranty period, Seller shall, upon being notified in writing promptly after discovery of the defect and within the applicable warranty period, correct such nonconformity either by repairing any defective part or parts, or by making available a replacement part within 60 days of written notification. Seller shall deliver the repaired or replacement part or parts to the site free of charge, but will not be responsible for providing labor or the cost of labor for the removal of the defective part or parts and the installation of any replacement part or parts. Replacement parts will be warranted for the balance of the original warranty.

THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE.

The remedies hereby provided shall be the exclusive and sole remedies of the purchaser. Seller shall not be liable for any direct, indirect, special, incidental or consequential damages.

Seller neither assumes nor authorizes any employee, representative or any other person to assume for Seller any other liability in connection with the sale or use of the structures sold, and there are no oral agreements or warranties collateral to or affecting this agreement. The warranty stated above is valid only if the structures and or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc.; have been subjected to normal use for the purpose for which the goods were designed; have not been subject to misuse, negligence, vandalism, or accident; have not been subjected to addition or substitution of parts; and have not been modified, altered, or repaired by persons other than Seller or Seller's designees in any respect which, in the judgement of Seller, affects the condition or operation of the structures. To make a claim, send your written statement of claim, along with the original job number or invoice number to: Landscape Structures Inc. 601 7th Street South, Delano, Minnesota, 55328-8605

Signed:

Chairman

Date: 01/01/09

QUOTE SHEET

Quote No: 37192-1-1

Date: 08-14-09
 By: MDC

Rep Organization: SERVICE SUPPLY
 Contact Person: PAM MELTON

Project Title: BABCOCK STATE PARK
 Location: CLIFFTOP, WV
 Style: Playbooster Posts: Aluminum
 Age: 5-12 Unless Otherwise Noted.

Phone No:
 Bury Type: Direct Bury

QTY	NO.	DESCRIPTION
POSTS		
3	111404Z	180 STEEL POST D.B.
2	111404A	148 ALUM. POST D.B.
1	111404B	140 ALUM. POST D.B.
3	111404C	132 ALUM. POST D.B.
6	111404E	116 ALUM. POST D.B.
3	111404F	108 ALUM. POST D.B.
DECKS		
1	152911A	CURVED TRANSFER MOD LEFT
1	121949A	KICK PLATE FOR 8 RISE - TRI DK
3	111228A	SQUARE TENDERDECK
2	122197A	TRIANGULAR TENDERDECK 90 DEG
ENCLOSURES		
2	125921A	TURBO TWISTER PIPE BARRIER
PERMALENE PANELS		
1	127440A	TRAIL TRACKER PANEL [GROUND LEVE
SLIDES		
1	124863A	SLIDEWINDER2 32 DECK
1	123763A	TURBO TWISTER TUNNEL SLIDE DB
CLIMBERS		
1	126194A	FISH NET CLIMBER
1	148434A	LOOP POLE W/PERM 32 DECK
1	146812A	SKY RAIL CLIMBER 64 DECK D.B.
1	116249C	VERTICAL LADDER 56 DECK
1	123284A	WIGGLE LADDER W/PERM 32 DECK D.B
MORE FUN		
1	111357A	CHINNING BAR
1	166809A	E-POD/SEAT
1	120902A	HAND HOLD/LEG LIFT
OVERHEAD EVENTS		

Page: 2

Date: 08-14-09

Project Title: BABCOCK STATE PARK

Quote No: 37192-1-

1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

1 119806A 2 SINGLE BEAM LOOP HORIZONTAL 12

1 123824A TRIPLE RING FLING

TUNNELS

1 129042A 30DIA CRAWL TUNNEL 24 DECK DIFFE

ATTACHMENTS/CONNECTORS

1 152907C DECK LINK W/BARRIERS (3 STEPS)

Weight & Cost of Playstructure Items

Concrete: 56.10 cu-ft, Footings: 34

Labor: 57.50 Man-Hours

INDEPENDENT COMPONENTS

INDEPENDENT SWINGS

1 100050C ARCH SWING DB ONLY UNCOATED

Two Belt Seats.

1 111579C ARCH SWING ADD BAY DB ONLY SCT

One Belt Seat. One Full Bucket Seat.

Weight & Cost of Independent Items

Concrete: 11.25 cu-ft, Footings: 6

Labor: 12.00 Man-Hours

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 67.35 cu-ft, Footings: 40

Labor: 69.50 Man-Hours

Total Safety Zone Square Footage = 0 sq ft

Estimated Man-Hours do not include site preparation.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.

Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed _____ Date _____

QUOTE SHEET

Quote No: 37192-2-1

Date: 08-14-09
 By: MDC

Rep Organization: SERVICE SUPPLY
 Contact Person: PAM MELTON

Project Title: BABCOCK STATE PARK
 Location: CLIFFTOP, WV
 Style: Playbooster Posts: Aluminum
 Age: 5-12 Unless Otherwise Noted.

Phone No:
 Bury Type: Direct Bury

QTY NO. DESCRIPTION

POSTS

- 8 111404A 148 ALUM. POST D.B.
- 4 111404D 124 ALUM. POST D.B.

DECKS

- 1 152911C CURVED TRANSFER MOD RIGHT
- 3 111228A SQUARE TENDERDECK

PERMALENE PANELS

- 1 123319A HOURGLASS [ABOVE DECK]
- 1 127439A NAVIGATOR PANEL [GROUND LEVEL]
- 1 115254A STORE FRONT PANEL
- 1 115231A TIC-TAC-TOE PANEL ABOVE DECK

SLIDES

- 1 123337A SINGLE POLY SLIDE 48 DECK
- 1 124863F SLIDEWINDER2 72 DECK
- 1 131437A WAVE POLY SLIDE 72 DECK

BRIDGES

- 1 147424A CLATTERBRIDGE 84 W/BARRIERS

CLIMBERS

- 1 148434B LOOP POLE W/PERM 72 DECK
- 1 145624D VERTICAL ASCENT 72 DECK

MORE FUN

- 2 111363A TALK TUBE (NO POST)
- 1 111362A TALK TUBE 40' TUBING KIT

TUNNELS

- 1 129042A 30DIA CRAWL TUNNEL 24 DECK DIFFE

Weight & Cost of Playstructure Items
 Concrete: 34.80 cu-ft, Footings: 21
 Labor: 47.00 Man-Hours

INDEPENDENT COMPONENTS

Page: 2

Date: 08-14-09

Project Title: BABCOCK STATE PARK

Quote No: 37192-2-

1

Style: Playbooster

Posts: Aluminum

Bury Type: Direct Bury

INDEPENDENT SWINGS

- 1 100050C ARCH SWING DB ONLY UNCOATED
Two Belt Seats.
- 1 111579C ARCH SWING ADD BAY DB ONLY SCT
One Belt Seat. One Molded Seat.

Weight & Cost of Independent Items
Concrete: 11.25 cu-ft, Footings: 6
Labor: 12.00 Man-Hours

Weight & Cost of Equipment

Estimated requirements for Equipment.

Concrete: 46.05 cu-ft, Footings: 27
Labor: 59.00 Man-Hours

Total Safety Zone Square Footage = 0 sq ft

Estimated Man-Hours do not include site preparation.

This quote is valid for 90 days. Purchase orders submitted with an expired quote are subject to price changes.

Custom freight quotes are valid for 30. Expired custom freight quotes are subject to changes.

Signed _____ Date _____

Material Specifications
Quote: 37192-1-1.QSd
8/19/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts. Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available. Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI
Tensile Strength (min): 55,000 PSI
% Elongation in 2 inches: 25
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI
Tensile Strength (min): 38,000 PSI
% Elongation in 2 inches: 10
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI
Yield Strength: 28,000 PSI
Elongation: 7% in 2 inches
Shear Strength: 29,000 PSI
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

111404Z

Posts For Decks 182"/96" Deck (44" Bury), (Available for Direct Bury Only)

Post: See PlayBooster (PB) General Specifications.

111404A

Posts For Decks 148"/72" Deck

Post: See PlayBooster (PB) General Specifications.

111404B

Posts For Decks 140"/64" Deck

Post: See PlayBooster (PB) General Specifications.

111404C

Posts For Decks 132"/56" Deck

Post: See PlayBooster (PB) General Specifications.

111404E

Posts For Decks 116"/40" Deck

Post: See PlayBooster (PB) General Specifications.

111404F

Posts For Decks 108"/32" Deck

Post: See PlayBooster (PB) General Specifications.

152911A

Transfer Modules, Brown Deck Only To 32" Deck, Curved, Right or Left Step

Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 29" per (2) sides. Finish: TenderTuff, brown in color.

Step Sections/Top Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 3/8" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Panels: Solid color Permalene, color specified.

Deck Support: Weldment comprised of 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 3/8" O.D. x 5" long CRS rod. Finish: Powdercoat, brown in color.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.080" - .095") and 1 3/4" x 1 3/4" x 1/8" HR angle. Finish: Powdercoat, brown in color.

Railings: Weldment comprised of 1.125" O.D. x 11 GA. (.120") steel tubing with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

121949A

Kick Plate 8" Rise, 90* Tri-Deck

Kick Plate: Fabricated from 11 GA (.120") HR flat steel. Finish: TenderTuff, brown in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

122197A

Decks 90* Triangular Tenderdeck

Triangular Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 37 3/4". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

125921A

Pipe Barriers Pipe Barrier (For TurboTwister Tunnel Slide)

Pipe Barrier: Weldment comprised of 5/8" solid steel vertical rails, 1 1/8" O.D. x 11 GA (.120") steel horizontal rails with 203 or 303 stainless steel welded inserts with 5/8" internal threads, 1 1/2" x 1 1/2" x 29 1/2" angle iron. Barrier measures 33 7/8" wide x 39 13/16" high. Finish: TenderTuff, color specified.

Pipe Bolt Assembly: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" wall and 5/8" threaded rod. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

127440A

Reach Panels Trail Tracker

Permalene Panel: Two color panel measures 34" wide x 13" high, color specified.

Angle: Fabricated from formed 11 GA (.120") HRPO sheet steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Access Clamp: Weldment comprised of 1/4" flat steel and 1/4" x 1 3/4" wide steel clamp. Finish: Powdercoat, color specified.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

124863A

SlideWinder2 32" Deck

Slide Sections: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Mid-Support: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing and 3/16" x 1 1/4" zinc plated steel strap. Finish: Powdercoat, color specified.

Support Base (SM): Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 3" x 8" mounting plate. Finish: Powdercoat, color specified.

Exit Footer: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" x 7 1/2" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

123763A

Turbo Twister Tunnel Slide, 96" Deck, Use 182" Steel Posts Only, Order Separately, (Available for Direct Bury Only)

Tunnel Section: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Attachment Blocks: U.V. stabilized high-density polyethylene, color specified.

Mid-Support: Weldment comprised of 2.375" O.D. RS-40 (.130" - .140") galvanized steel tubing and 3/16" x 1 1/4" zinc plated steel strap. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 4" x 11 3/4" mounting plate. Finish: Powdercoat, color specified.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Rail Spacer: Fabricated from 1.3125" O.D. x 16 GA (.065") steel tubing. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Post Assembly: Top caps shall be placed at each end of the 47 1/2" post. For mechanical properties see PlayBooster (PB) General Specifications.

126194A

CableCore Climbing Cable Fish Net Climber, 16"-32" Deck

CableCore Cable: Made from 3/16" 7-19 galvanized aircraft cable. Coated with U.V. stabilized polyvinyl chloride (PVC) measuring 1" in diameter, red in color.

Hub/Cover: Formed from 12 GA (.105") HRPO low carbon sheet steel. Finish: Powdercoat, color specified.

30" Cable: Made from 3/16" 7-19 galvanized aircraft cable. Coated with U.V. stabilized polyvinyl chloride (PVC), red in color.

Footer: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, red in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

Beam: Weldment comprised of formed 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" wide steel clamps. Finish: Powdercoat, color specified.

148434A

Loop Poles 32" - 48" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

146812A

Sky Rail Climber, 64" and 72" Decks, (64" Available for Direct Bury Only) -

Sky Rail: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing per ASTM A500, 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing per ASTM A500, 1.029" O.D. RS-20 (.070" - .080") galvanized steel tubing per ASTM A500, 3/16" x 1 1/4" x 2" angle and 1/4" x 2 1/2" HR flat steel. Finish: Powdercoat, color specified.

Footer: Fabricated from 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

116249C

Vertical Ladders, Deck To Ground Vertical Ladder, 56" Deck

Vertical Ladder: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing, 1.029" O.D. RS-20 (.070" - .080") and 3/16" x 2" wide steel flat plates. Finish: TenderTuff, color specified.

Footer: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in

design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

123284A

Wiggle Ladders 32" Deck

Chain: 4/0 Chain zinc plated. Finish: TenderTuff, color specified.

Rail: Fabricated from 13/16" diameter x 27 15/16" long CRS solid bar stock with both ends tapped 3/8". Finish: TenderTuff, color specified.

Support: Fabricated from 1.315" O.D. RS-20 (.080" - .090") galvanized steel tubing.

Handhold Panel: Solid color Permalene, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111357A

Chinning Bar, (1) Aluminum Post

Rail: Weldment comprised of 1.125" O.D. x 11 GA (.120") steel tubing with 203 or 303 stainless steel 5/8" threaded inserts. Finish: TenderTuff, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Post: See PlayBooster (PB) General Specifications.

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

166809A

E-POD

E-Pod Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Pod Casting: Fabricated from sand cast alloy 356 in accordance with ASTM B26. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

120902A

Handhold/Leg Lift, TenderTuff-coated Brown

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

Hand Hold: Weldment comprised of formed 7/8" O.D. x 11 GA (.120") and 1/4" x 1 3/4" steel half clamps. Finish: TenderTuff, brown in color.

119806A

Single Beam Loop Horizontal Ladder, 123" Module, Max. 32" Decks

Loop Ladder: Weldment comprised of 2.875" O.D. RS-40 (.160" - .170") galvanized steel tubing, 2.375" O.D. RS-40 (.130" - .140") galvanized steel tubing, 1.315" O.D. RS-20 (.080" - .090") zinc plated steel and 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

123824A

Triple Ring Fling 24" or 32" Deck to Ground

Ring Swing Out: Fabricated and formed from 1.125" O.D. x 11 GA (.120") black tubing. Finish: TenderTuff, color specified.

Beam: Weldment comprised of 2.875" O.D. RS-40 (.160" - .170") galvanized steel tubing, 1.250" diameter grade 304 stainless steel shaft and 1/4" HRPO flat steel. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see

specific product installation/specifications).

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

129042A

Offset Crawl Tunnel, 24" Deck Height Difference

Permalene Panels: Solid color panel measures 35 5/8" wide x 41" high, & 35 5/8" wide x 47 7/8" high, color specified.

Foot Strip: Solid color Permalene, green in color.

Tunnel Section: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Attachment Blocks: U.V. stabilized high-density polyethylene, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

152907C

Deck Links 3-Steps, w/Barrier

SteelX Panels: Zinc plated 7 GA (.179") HR flat steel. Finish: Powdercoat, color specified.

Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 1/4" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Barrier: Weldment comprised of 1.125" O.D. x 11 Ga. (.120" wall) steel tubing, 5/8" O.D. steel bar with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in

design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius

climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.

Material Specifications
Quote: 37192-2-1.QSd
8/19/2009

General Specifications: Material: All materials shall be structurally sound and suitable for safe play. Durability shall be ensured on all steel parts by the use of time-tested coatings such as zinc plating, galvanizing, ProShield finish, TenderTuff coating, etc. Colors shall be specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F879 unless otherwise indicated (see specific product installation/specifications). All primary fasteners shall include a locking patch-type material that will meet the minimum torque requirements of IFI-125. Manufacturer to provide special tools for pinned tamperproof fasteners.

TenderTuff Coating: Metal components to be TenderTuff-coated shall be thoroughly cleaned in a hot phosphatizing pressure washer, then primed with a water-based thermosetting solution. Primed parts shall be preheated prior to dipping in UV-stabilized, liquid polyvinyl chloride (PVC), then salt cured at approximately 400 degrees. The finished coating shall be approximately .080" thick at an 85 durometer hardness and have a matte finish. Four standard colors are available (brown only for HealthBeat). Not applicable for Evos.

ProShield Finish: All metal components with ProShield finish shall be thoroughly cleaned and phosphatized through a five-stage power washer. Parts are then thoroughly dried, preheated and processed through a set of automatic powder spray guns where a minimum .002" of epoxy primer is applied. The parts are allowed to cool and then pass through a second set of automatic powder spray guns. A minimum .004" of architectural-grade Super-Durable polyester TGIC powder is applied. The parts are oven-cured at 400 degrees F metal temperature for 10-minutes. The average ProShield film thickness is .006".

ProShield is formulated and tested per the following ASTM standards. Each color must meet or exceed the ratings listed below:

- Hardness (D3363) rating 2H
- Impact (D2794) rating minimum 80 inch-pounds
- Salt Fog Resistance (B117 and D1654) 4,000 hours and rating 7 or greater
- UV Exposure (G154, 340 bulb) 3,000 hours, rating delta E of 2, and 90 percent gloss retention
- Adhesion (D3359, Method B) rating 5B

The Paint Line shall employ a "checkered" adhesion test daily.

Eighteen standard colors are available.

Decks: All Tenderdecks shall be of modular design and have 5/16" diameter holes on the standing surface. There shall be a minimum of (4) slots in each face to accommodate face mounting of components. Tenderdecks shall be manufactured from a single piece of low carbon 12 GA (.105") sheet steel conforming to ASTM specification A-569. The sheet shall be perforated then flanged formed and reinforced as necessary to ensure structural integrity. The unit shall then be TenderTuff-coated brown only. Tenderdecks shall be designed

so that all sides are flush with the outside edge of the supporting posts.
Not applicable for Evos, Weevos or HealthBeat.

Rotationally Molded Polyethylene Parts: These parts shall be molded using prime compounded linear low-density polyethylene with a tensile strength of 2500 psi per ASTM D638 and with color and UV-stabilizing additives. Wall thickness varies by product from .187" (3/16") to .312" (5/16"). Five standard colors are available (Black only for HealthBeat).

Permalene Parts: These parts shall be manufactured from 3/4" high-density polyethylene that has been specially formulated for optimum UV stability and color retention. Products shall meet or exceed density of .960 G/cc per ASTM D1505, tensile strength of 2400 PSI per ASTM D638. Five standard solid colors are available. Some Permalene parts are available in a two-color product with (2) .100" thick exterior layers over a .550" interior core of a contrasting color. Eight standard two-color options are available.
Not applicable for Evos or HealthBeat.

Footings: Unless otherwise specified, the bury on all footings shall be 34" below Finished Grade (FG) on all in-ground play events/posts. Other types of anchoring are available upon request.

Hardware Packages: All shipments shall include individual component-specific hardware packages. Each hardware package shall be labeled with the part number, description, a component diagram showing the appropriate component, package weight, a bar code linking the hardware package to the job number, assembler's name, date and time the package was assembled, work center number, and work order number.

Installation Documentation: All shipments shall include a notebook or packet of order-specific, step-by-step instructions for assembly of each component, including equipment assembly diagrams, estimated hours for assembly, footing dimensions, concrete quantity for direct bury components, fall height information, area required information and detailed material specifications.

Packing List: All shipments shall include a packing list for each skid/container, specifying the part numbers and quantities on each skid or within each container.

Packaging: PlayBooster posts shall be individually packaged in sturdy, water-resistant, mar-resistant cardboard boxes. Other components shall be individually wrapped or bulk wrapped to provide protection during shipment. Small parts and hardware packages will be placed in crates for shipment. The components and crates are then shrink-wrapped to skids (pallets) to ensure secure shipping.

Maintenance Kit: An order-specific maintenance kit shall be provided for each structure order. The kit will include a notebook or packet with a second set of installation documents and order-specific maintenance documentation with recommendations on how often to inspect, what to look for and what to do to keep the equipment in like-new condition. The kit also includes touch-up primer, appropriate

color touch-up paint, sandpaper, appropriate color touch-up PVC, graffiti remover and additional installation tools for the tamperproof fasteners.

(PB) General Specifications: Posts: Post length shall vary depending upon the intended use and shall be a minimum of 42" above the deck height. All posts shall be powdercoated to specified color. All posts shall have a "finished grade marker" positioned on the post identifying the 34" bury line required for correct installation and the top of the loose fill protective surfacing. Top caps for posts shall be aluminum die cast from 369.1 alloy and powdercoated to match the post color. All caps shall be factory installed and secured in place with (3) self sealing rivets. A molded low-density polyethylene cap, with drain holes, shall be pressed onto the bottom end of the post to increase the footing area.

Steel Posts: All steel PlayBooster posts are manufactured from 5" O.D. tubing with a wall thickness of .120" and shall be galvanized after rolling and shall have both the I.D. and the cut ends sprayed with a corrosion resistant coating.

Steel Post Mechanical Properties:

Yield Strength (min): 50,000 PSI
Tensile Strength (min): 55,000 PSI
% Elongation in 2 inches: 25
Modulus of Elasticity: 29.5 x 1,000,000 PSI

Aluminum Posts: All aluminum PlayBooster posts are manufactured from 6005-T5 extruded tubing conforming to ASTM B-221. Posts shall have a 5" outside diameter with a .125" wall thickness.

Aluminum Post Mechanical Properties:

Yield Strength (min): 35,000 PSI
Tensile Strength (min): 38,000 PSI
% Elongation in 2 inches: 10
Modulus of Elasticity: 10 x 1,000,000 PSI

Arch Posts: Aluminum arch posts shall be manufactured from 6005-T5 alloy. The arch shall be formed to a 21" center line radius to complement the 42" center to center module. The arch shall be of one continuous piece construction. There shall be no welds or additional pieces mechanically fastened to manufacture the arch. Each arch shall be designed to provide a minimum of 90 1/2" clear span from the deck to the inside of the arch at the radius peak. Arches shall be powdercoated to a specified color.

Clamps: All clamps, unless otherwise noted, shall be die cast using a 369.1 aluminum alloy and have the following mechanical properties:

Ultimate Tensile: 47,000 PSI
Yield Strength: 28,000 PSI
Elongation: 7% in 2 inches
Shear Strength: 29,000 PSI
Endurance Limit: 20,000 PSI

Each functional clamp assembly shall have an appropriate number of half clamps and shall be fastened to mating parts with (2) 3/8" x 1 1/8" pinned button head cap screws (SST) and (2) stainless steel (SST) recessed "T" nuts. A 1/4"

aluminum drive rivet w/stainless steel pin is used to ensure a secure fit to the post.

PlayBooster clamps have three functional applications and shall be named as follows:

- 1.) Offset hanger clamp assembly.
- 2.) Deck hanger clamp assembly.
- 3.) Hanger clamp assembly.

Material Specifications:

111404A

Posts For Decks 148"/72" Deck

Post: See PlayBooster (PB) General Specifications.

111404D

Posts For Decks 124"/48" Deck

Post: See PlayBooster (PB) General Specifications.

152911C

Transfer Modules, Brown Deck Only To 48" Deck, Curved, Right or Left Step

Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes and measures 29" per (2) sides. Finish: TenderTuff, brown in color.

Step Sections/Top Step Section: Formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is 24 3/8" wide x 14" deep and is perforated with 5/16" diameter holes. Finish: TenderTuff, brown in color.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Panels: Solid color Permalene, color specified.

Deck Support: Weldment comprised of 3 1/2" O.D. RS-20 (.125") galvanized steel tubing and 3/8" O.D. x 5" long CRS rod. Finish: Powdercoat, brown in color.

Step Support: Weldment comprised of 1.660" O.D. RS-20 (.080" - .095") and 1 3/4" x 1 3/4" x 1/8" HR angle. Finish: Powdercoat, brown in color.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Railings: Weldment comprised of 1.125" O.D. x 11 GA. (.120") steel tubing with 203 or 303 stainless steel 3/8" threaded inserts. Finish: TenderTuff, color specified.

111228A

Decks Square Tenderdeck, Brown Only

Square Deck: Flange formed from 12 GA (.105") sheet steel conforming to ASTM A569. Standing surface is perforated with 5/16" diameter holes. Deck face has (4) slotted holes for face mounting components. The finished size measures 2 5/8" x 47" x 47". Finish: TenderTuff, brown in color.

Deck Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

123319A

Hour Glass Panel

Permalene Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified.

Hour Glass: Vacuum formed, clear polycarbonate.

Hour Glass Beads: #40 stainless steel beads.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

127439A

Reach Panels Navigator

Permalene Panel: Two color panel measures 34" wide x 13" high, color specified.

Hub: Solid color Permalene, color specified.

Angle: Fabricated from formed 11 GA (.120") HRPO sheet steel. Finish: Powdercoat, color specified.

Wheel: 12" diameter cast 319.1 aluminum alloy. Shaft-303 stainless steel. Finish: TenderTuff, color specified.

Wheel Bracket: Weldment comprised of formed 3/16" plate and 5/8" O.D. shaft. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Access Clamp: Weldment comprised of 1/4" flat steel and 1/4" x 1 3/4" wide steel clamp. Finish: Powdercoat, color specified.

Half Clamp: Cast aluminum. Finish: Powdercoat, color specified.

115254A

Storefront Panel, (Ground Level Only)

Store Panel: Permalene solid color. Panel measures 35 1/2" wide x 37" high, color specified.

Bracket: Formed 11 GA (.120") 5052 aluminum angle. Finish: Powdercoat, color matched to panel.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

115231A

Tic-Tac-Toe Panel, Tan Discs Only

Permalene Panel: Solid color panel measures 35 5/8" wide x 41" high, color specified.

Tic Tac Toe Blocks: Rotationally molded from U.V. stabilized linear low density polyethylene, yellow in color with brown molded-in symbols.

Tic Tac Toe Bracket: Formed from .125" thick 5052 aluminum. Finish: Powdercoat, color specified.

Shafts: Fabricated from 1/2" diameter 203 stainless steel with ends tapped 5/16" 18UNC-2B.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long. Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

123337A

Single Poly Slide 40" - 48" Deck

Slide: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Hood: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: Extruded from 1.125" O.D. x .312" W. 6061-T6 aluminum. Finish: Powdercoat, color specified.

Exit Support: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

124863F

SlideWinder2 72" Deck

Slide Sections: Rotationally molded from U.V. stabilized linear low density polyethylene, color specified.

Rail: 1 1/8" O.D. 6061-T6 aluminum extrusion with 5/16" walls. Finish: Powdercoat, color specified.

Mid-Support: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing and 3/16" x 1 1/4" zinc plated steel strap. Finish: Powdercoat,

color specified.

Support Base (SM): Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") galvanized steel tubing and 1/4" x 3" x 8" mounting plate. Finish: Powdercoat, color specified.

Exit Footer: Weldment comprised of 2.375" O.D. RS-20 (.095" - .105") galvanized steel tubing and 1/4" x 3" x 7 1/2" mounting plate. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

147424A

Clatterbridges, Corocord Cable Support System 84" Module, Brown Planks Only, w/Barrier for 24"-72" Decks

PLANK: Weldment comprised from 12 GA. (.105") HRPO plate with 5/16" diameter perforated holes and threaded stainless steel inserts, plank measures 11 7/16" x 46 7/8" long. Finish: TenderTuff, brown in color.

ATTACHMENT BRACKET: Fabricated from 11 GA. (.120") HRPO plate. Finish: TenderTuff, brown in color.

MOUNTING BRACKET: Weldment comprised from 1/2" HRPO sheet steel, (2) 1/4" x 1 3/4" steel half clamps and 7/8" diameter 304L stainless steel tube. Finish: Powdercoat, brown in color.

COVER PLATE: Fabricated from 12 GA. (.105") HRPO plate. Finish: Powdercoat brown.

CABLE: Cable completely made of six-stranded and tempered Corocord-rope. The steel wire cores of the six strands are heated and coated with polyamide; edge ropes are reinforced with additional steel wire core. Corocord-membrane reinforced with 4 textile layers (2340).

Barrier: Weldment comprised of 1.900" O.D. RS-20 (.090" - .100") galvanized steel tubing beam, 1.029" O.D. RS-20 (.070" - .080") galvanized steel tubing and 7 GA. (.179") HRPO sheet steel. Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

148434B

Loop Poles 56" - 72" Deck

Loop Pole: Weldment comprised of 1.900" O.D. RS-20 (.090"-.100") galvanized steel tubing, and 1.315" O.D. RS-20 (.080"-.090") galvanized steel tubing. Finish: Powdercoat, color specified.

Handhold Panel: Solid color Permalene, color specified.

Spacer Tube: Fabricated from 6061-T6 aluminum 1 1/8" O.D. x 1 1/4". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

145624D

Vertical Ascent Climber 72" Deck

Panels: Solid color Permalene, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. Finish: Powdercoat, color specified.

Clamps: Cast aluminum. Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Made from Polyester Resin. Handholds measure approx. 5 3/4" long x 2 1/4" wide x 1 3/4" high.

111363A

Talk Tubes, Deck Mount, No Posts Ground Level, One Only

Talk Tube: Weldment comprised of 1.660" O.D. RS-20 (.085" - .095") and 3/16" HRPO bracket. Finish: Powdercoat, color specified.

Talk Tube Cover: Solid color Permalene, Tan in color.

Bug Screen: 18 x 16 Weave .011 Ga. charcoal fiberglass screen.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

111362A

Talk Tube Tubing Kit

Talk Tube Hose: Made from HDPE conduit, grey in color.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

129042A

Offset Crawl Tunnel, 24" Deck Height Difference

Permalene Panels: Solid color panel measures 35 5/8" wide x 41" high, & 35 5/8" wide x 47 7/8" high, color specified.

Foot Strip: Solid color Permalene, green in color.

Tunnel Section: Rotationally molded from U.V. stabilized linear low-density polyethylene, color specified.

Attachment Blocks: U.V. stabilized high-density polyethylene, color specified.

Angled Panel Bracket: Weldment comprised of .190" thick 5052 aluminum formed angle with (2) 6061-T6 aluminum threaded tubes 1 1/8" O.D. x 1 1/2" long.
Finish: Powdercoat, color specified.

Spacer Tube: Made from 6061-T6 aluminum 7/8" O.D. x 1 11/16". Finish: Powdercoat, color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

Offset Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat, color specified.

100050C

Arch Belt Swings Arch Belt Swing, 2-Place, Uncoated Chain

Arch Posts: See PlayBooster (PB) General Specifications.

Swing Beam: Weldment comprised of tee clamps and 5" O.D. extruded 6005-T5 aluminum alloy tube with a .125" W. Finish: Powdercoat, color specified.

Chain: Steel 3/16" straight link chain, 800 lb. working load limit. Finish: Hot galvanized.

Belt Seat: Molded from UV stabilized black EPDM rubber encapsulating a weldment comprised of a 22 GA (.029") spring stainless steel sheet and (4) .105 thick stainless steel washers. The belt seat elliptical shape measures 7" wide x 26" long x .700" thick.

Hanger Clamp Assembly: Cast aluminum. Finish: Powdercoat color specified.

Fasteners: Primary fasteners shall be socketed and pinned tamperproof in design, stainless steel (SST) per ASTM F 879 unless otherwise indicated (see specific product installation/specifications).

111579C

Arch Belt Swings Additional 2-Place Bay, Uncoated Chain

Warranty: You have our word.

Landscape Structures Inc. warrants that all playstructures and/or equipment sold will conform in kind and in quality to the specifications manual for the products identified in the Acknowledgement of Order and will be free of defects in manufacturing and material. Seller further warrants:

100-Year Limited Warranty for all stainless steel fasteners, aluminum posts, clamps, beams and caps, against structural failure due to corrosion/natural deterioration or manufacturing defects. This warranty does not include any cosmetic issues or wear and tear from normal use.

15-Year Limited Warranty for all plastic and steel components, including TuffTimbers™, against structural failure due to corrosion/natural deterioration or manufacturing defects. TenderTuffR-coating against structural failure due to natural deterioration or manufacturing defects. (Except Wiggle Ladders, Chain Ladders and Swing Chain). TuffTurfR against material or manufacturing defects when properly installed. CorocordR cable on Spacenet climbers against breakage.

10-Year Limited Warranty for all CoolToppersR structural steel frames and Mobius climbers against structural failure due to natural deterioration or manufacturing defects.

5-Year Limited Warranty for Corocord cables on Spacenet climbers and CoolToppersR fabric against natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications found in the technical information. The Natural Elements™ climbers exterior GFRC material, against structural failure due to natural deterioration or manufacturing defects.

3-Year Limited Warranty for all other parts, ie: CableCore™ products, Swing seats and hangers, Mobius climber handholds, Wiggle Ladders, Chain Ladders and Swing Chain, Track Ride trolleys and bumpers, all rocking equipment including Sway Fun™, PVC belting material, HealthBeat hydraulic cylinders, Seesaws, Wiggle Ring Bridge, etc. against failure due to corrosion/natural deterioration or manufacturing defects.

This warranty does not include any cosmetic issues or wear and tear from normal use.

The warranty stated above is valid only if the structures and/or equipment are erected in conformance with Landscape Structures' installation instructions and maintained according to the maintenance procedures furnished by Landscape Structures Inc. For a full text of the warranty, contact your local sales representative.