



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
1

ADDRESS CORRESPONDENCE TO ATTENTION OF
TARA LYLE 304-558-2544

VENDOR

RFQ COPY
 TYPE NAME/ADDRESS HERE

SHIP TO

DIVISION OF JUVENILE SERVICES
 VARIOUS LOCALES AS INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: 12/21/2010 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
0001	1	LS		984-36-01-003		
UNIFORM: INQUIRIES: WRITTEN QUESTIONS SHALL BE ACCEPTED UNTIL THE CLOSE OF BUSINESS ON 12/07/2010. QUESTIONS MAY BE SENT VIA USPS, FAX, COURIER OR E-MAIL. IN ORDER TO ASSURE NO VENDOR RECEIVES AN UNFAIR ADVANTAGE, NO SUBSTANTIVE QUESTIONS WILL BE ANSWERED ORALLY. IF POSSIBLE, E-MAIL QUESTIONS ARE PREFERRED. ADDRESS INQUIRIES TO: TARA LYLE DEPARTMENT OF ADMINISTRATION 2019 WASHINGTON STREET, EAST CHARLESTON, WV 25305 FAX: 304-558-4115 E-MAIL: TARA.L.LYLE@WV.GOV EXHIBIT 3 LIFE OF CONTRACT: THIS CONTRACT BECOMES EFFECTIVE ON AWARD AND EXTENDS FOR A PERIOD OF ONE (1) YEAR OR UNTIL SUCH "REASONABLE TIME" THEREAFTER AS IS NECESSARY TO OBTAIN A NEW CONTRACT OR RENEW THE						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

GENERAL TERMS & CONDITIONS
REQUEST FOR QUOTATION (RFQ) AND REQUEST FOR PROPOSAL (RFP)

1. Awards will be made in the best interest of the State of West Virginia.
 2. The State may accept or reject in part, or in whole, any bid.
 3. Prior to any award, the apparent successful vendor must be properly registered with the Purchasing Division and have paid the required \$125 fee.
 4. All services performed or goods delivered under State Purchase Order/Contracts are to be continued for the term of the Purchase Order/Contracts, contingent upon funds being appropriated by the Legislature or otherwise being made available. In the event funds are not appropriated or otherwise available for these services or goods this Purchase Order/Contract becomes void and of no effect after June 30.
 5. Payment may only be made after the delivery and acceptance of goods or services.
 6. Interest may be paid for late payment in accordance with the *West Virginia Code*.
 7. Vendor preference will be granted upon written request in accordance with the *West Virginia Code*.
 8. The State of West Virginia is exempt from federal and state taxes and will not pay or reimburse such taxes.
 9. The Director of Purchasing may cancel any Purchase Order/Contract upon 30 days written notice to the seller.
 10. The laws of the State of West Virginia and the *Legislative Rules* of the Purchasing Division shall govern the purchasing process.
 11. Any reference to automatic renewal is hereby deleted. The Contract may be renewed only upon mutual written agreement of the parties.
 12. **BANKRUPTCY:** In the event the vendor/contractor files for bankruptcy protection, the State may deem this contract null and void, and terminate such contract without further order.
 13. **HIPAA BUSINESS ASSOCIATE ADDENDUM:** The West Virginia State Government HIPAA Business Associate Addendum (BAA), approved by the Attorney General, is available online at www.state.wv.us/admin/purchase/vrc/hipaa.htm and is hereby made part of the agreement. Provided that the Agency meets the definition of a Cover Entity (45 CFR §160.103) and will be disclosing Protected Health Information (45 CFR §160.103) to the vendor.
 14. **CONFIDENTIALITY:** The vendor agrees that he or she will not disclose to anyone, directly or indirectly, any such personally identifiable information or other confidential information gained from the agency, unless the individual who is the subject of the information consents to the disclosure in writing or the disclosure is made pursuant to the agency's policies, procedures, and rules. Vendor further agrees to comply with the Confidentiality Policies and Information Security Accountability Requirements, set forth in <http://www.state.wv.us/admin/purchase/privacy/noticeConfidentiality.pdf>.
 15. **LICENSING:** Vendors must be licensed and in good standing in accordance with any and all state and local laws and requirements by any state or local agency of West Virginia, including, but not limited to, the West Virginia Secretary of State's Office, the West Virginia Tax Department, and the West Virginia Insurance Commission. The vendor must provide all necessary releases to obtain information to enable the director or spending unit to verify that the vendor is licensed and in good standing with the above entities.
 16. **ANTITRUST:** In submitting a bid to any agency for the State of West Virginia, the bidder offers and agrees that if the bid is accepted the bidder will convey, sell, assign or transfer to the State of West Virginia all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of West Virginia for price fixing and/or unreasonable restraints of trade relating to the particular commodities or services purchased or acquired by the State of West Virginia. Such assignment shall be made and become effective at the time the purchasing agency tenders the initial payment to the bidder.
- I certify that this bid is made without prior understanding, agreement, or connection with any corporation, firm, limited liability company, partnership, or person or entity submitting a bid for the same material, supplies, equipment or services and is in all respects fair and without collusion or Fraud. I further certify that I am authorized to sign the certification on behalf of the bidder or this bid.

INSTRUCTIONS TO BIDDERS

1. Use the quotation forms provided by the Purchasing Division. Complete all sections of the quotation form.
2. Items offered must be in compliance with the specifications. Any deviation from the specifications must be clearly indicated by the bidder. Alternates offered by the bidder as **EQUAL** to the specifications must be clearly defined. A bidder offering an alternate should attach complete specifications and literature to the bid. The Purchasing Division may waive minor deviations to specifications.
3. Unit prices shall prevail in case of discrepancy. All quotations are considered F.O.B. destination unless alternate shipping terms are clearly identified in the quotation.
4. All quotations must be delivered by the bidder to the office listed below prior to the date and time of the bid opening. Failure of the bidder to deliver the quotations on time will result in bid disqualifications: Department of Administration, Purchasing Division, 2019 Washington Street East, P.O. Box 50130, Charleston, WV 25305-0130
5. Communication during the solicitation, bid, evaluation or award periods, except through the Purchasing Division, is strictly prohibited (W.Va. C.S.R. §148-1-6.6).



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
2

ADDRESS CORRESPONDENCE TO ATTENTION OF
TARA LYLE
304-558-2544

RFQ COPY
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DIVISION OF JUVENILE SERVICES
 VARIOUS LOCALES AS
 INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: **12/21/2010** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>ORIGINAL CONTRACT. THE "REASONABLE TIME" PERIOD SHALL NOT EXCEED TWELVE (12) MONTHS. DURING THIS "REASONABLE TIME" THE VENDOR MAY TERMINATE THIS CONTRACT FOR ANY REASON UPON GIVING THE DIRECTOR OF PURCHASING 30 DAYS WRITTEN NOTICE.</p> <p>UNLESS SPECIFIC PROVISIONS ARE STIPULATED ELSEWHERE IN THIS CONTRACT DOCUMENT, THE TERMS, CONDITIONS AND PRICING SET HEREIN ARE FIRM FOR THE LIFE OF THE CONTRACT.</p> <p>RENEWAL: THIS CONTRACT MAY BE RENEWED UPON THE MUTUAL WRITTEN CONSENT OF THE SPENDING UNIT AND VENDOR, SUBMITTED TO THE DIRECTOR OF PURCHASING THIRTY (30) DAYS PRIOR TO THE EXPIRATION DATE. SUCH RENEWAL SHALL BE IN ACCORDANCE WITH THE TERMS AND CONDITIONS OF THE ORIGINAL CONTRACT AND SHALL BE LIMITED TO TWO (2) ONE (1) YEAR PERIODS.</p> <p>CANCELLATION: THE DIRECTOR OF PURCHASING RESERVES THE RIGHT TO CANCEL THIS CONTRACT IMMEDIATELY UPON WRITTEN NOTICE TO THE VENDOR IF THE COMMODITIES AND/OR SERVICES SUPPLIED ARE OF AN INFERIOR QUALITY OR DO NOT CONFORM TO THE SPECIFICATIONS OF THE BID AND CONTRACT HEREIN.</p> <p>OPEN MARKET CLAUSE: THE DIRECTOR OF PURCHASING MAY AUTHORIZE A SPENDING UNIT TO PURCHASE ON THE OPEN MARKET, WITHOUT THE FILING OF A REQUISITION OR COST ESTIMATE, ITEMS SPECIFIED ON THIS CONTRACT FOR IMMEDIATE DELIVERY IN EMERGENCIES DUE TO UNFORESEEN CAUSES (INCLUDING BUT NOT LIMITED TO DELAYS IN TRANSPORTATION OR AN UNANTICIPATED INCREASE IN THE VOLUME OF WORK.)</p> <p>QUANTITIES: QUANTITIES LISTED IN THE REQUISITION ARE APPROXIMATIONS ONLY, BASED ON ESTIMATES SUPPLIED BY</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
-----------	-----------	------

TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE
-------	------	-----------------------------------

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
3

ADDRESS CORRESPONDENCE TO ATTENTION OF
TARA LYLE
304-558-2544

RFQ COPY
 TYPE NAME/ADDRESS HERE

RFQ COPY

SHIP TO

DIVISION OF JUVENILE SERVICES
 VARIOUS LOCALES AS INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	FOB	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: 12/21/2010 BID OPENING TIME 01:30PM

LINE	QUANTITY	UOP	CAT NO	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>THE STATE SPENDING UNIT. IT IS UNDERSTOOD AND AGREED THAT THE CONTRACT SHALL COVER THE QUANTITIES ACTUALLY ORDERED FOR DELIVERY DURING THE TERM OF THE CONTRACT, WHETHER MORE OR LESS THAN THE QUANTITIES SHOWN.</p> <p>ORDERING PROCEDURE: SPENDING UNIT(S) SHALL ISSUE A WRITTEN STATE CONTRACT ORDER (FORM NUMBER WV-39) TO THE VENDOR FOR COMMODITIES COVERED BY THIS CONTRACT. THE ORIGINAL COPY OF THE WV-39 SHALL BE MAILED TO THE VENDOR AS AUTHORIZATION FOR SHIPMENT, A SECOND COPY MAILED TO THE PURCHASING DIVISION, AND A THIRD COPY RETAINED BY THE SPENDING UNIT.</p> <p>BANKRUPTCY: IN THE EVENT THE VENDOR/CONTRACTOR FILES FOR BANKRUPTCY PROTECTION, THE STATE MAY DEEM THE CONTRACT NULL AND VOID, AND TERMINATE SUCH CONTRACT WITHOUT FURTHER ORDER.</p> <p>THE TERMS AND CONDITIONS CONTAINED IN THIS CONTRACT SHALL SUPERSEDE ANY AND ALL SUBSEQUENT TERMS AND CONDITIONS WHICH MAY APPEAR ON ANY ATTACHED PRINTED DOCUMENTS SUCH AS PRICE LISTS, ORDER FORMS, SALES AGREEMENTS OR MAINTENANCE AGREEMENTS, INCLUDING ANY ELECTRONIC MEDIUM SUCH AS CD-ROM.</p> <p>REV. 05/26/2009</p> <p>THE MODEL/BRAND/SPECIFICATIONS NAMED HEREIN ESTABLISH THE ACCEPTABLE LEVEL OF QUALITY ONLY AND ARE NOT INTENDED TO REFLECT A PREFERENCE OR FAVOR ANY PARTICULAR BRAND OR VENDOR. VENDORS WHO ARE BIDDING ALTERNATES SHOULD SO STATE AND INCLUDE PERTINENT LITERATURE AND SPECIFICATIONS. FAILURE TO PROVIDE INFORMATION FOR ANY ALTERNATES MAY BE GROUNDS FOR REJECTION OF THE BID. THE STATE RESERVES THE RIGHT TO WAIVE MINOR IRREGULARITIES IN BIDS OR SPECIFICATION</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
4

ADDRESS CORRESPONDENCE TO ATTENTION OF:
TARA LYLE
304-558-2544

RFQ COPY
TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DIVISION OF JUVENILE SERVICES
VARIOUS LOCALES AS INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: **12/21/2010** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
<p>IN ACCORDANCE WITH SECTION 148-1-4(F) OF THE WEST VIRGINIA LEGISLATIVE RULES AND REGULATIONS.</p> <p>PURCHASING CARD ACCEPTANCE: THE STATE OF WEST VIRGINIA CURRENTLY UTILIZES A VISA PURCHASING CARD PROGRAM WHICH IS ISSUED THROUGH A BANK. THE SUCCESSFUL VENDOR MUST ACCEPT THE STATE OF WEST VIRGINIA VISA PURCHASING CARD FOR PAYMENT OF ALL ORDERS PLACED BY ANY STATE AGENCY AS A CONDITION OF AWARD.</p> <p>EXHIBIT 4</p> <p>LOCAL GOVERNMENT BODIES: UNLESS THE VENDOR INDICATES IN THE BID HIS REFUSAL TO EXTEND THE PRICES, TERMS, AND CONDITIONS OF THE BID TO COUNTY, SCHOOL, MUNICIPAL AND OTHER LOCAL GOVERNMENT BODIES, THE BID SHALL EXTEND TO POLITICAL SUBDIVISIONS OF THE STATE OF WEST VIRGINIA. IF THE VENDOR DOES NOT WISH TO EXTEND THE PRICES, TERMS, AND CONDITIONS OF THE BID TO ALL POLITICAL SUBDIVISIONS OF THE STATE, THE VENDOR MUST CLEARLY INDICATE SUCH REFUSAL IN HIS BID. SUCH REFUSAL SHALL NOT PREJUDICE THE AWARD OF THIS CONTRACT IN ANY MANNER.</p> <p>REV. 3/88</p> <p style="text-align: center;">NOTICE</p> <p>A SIGNED BID MUST BE SUBMITTED TO:</p> <p style="text-align: center;">DEPARTMENT OF ADMINISTRATION PURCHASING DIVISION BUILDING 15 2019 WASHINGTON STREET, EAST</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
5

ADDRESS CORRESPONDENCE TO ATTENTION OF:
TARA LYLE 304-558-2544

RFQ COPY
 TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DIVISION OF JUVENILE SERVICES
 VARIOUS LOCALES AS
 INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: **12/21/2010** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
				CHARLESTON, WV 25305-0130		
<p>THE BID SHOULD CONTAIN THIS INFORMATION ON THE FACE OF THE ENVELOPE OR THE BID MAY NOT BE CONSIDERED:</p> <p>SEALED BID</p> <p>BUYER:-----TL/FILE 32-----</p> <p>RFQ. NO.:-----DJS010297-----</p> <p>BID OPENING DATE:-----12/21/2010-----</p> <p>BID OPENING TIME:-----1:30 PM-----</p> <p>PLEASE PROVIDE A FAX NUMBER IN CASE IT IS NECESSARY TO CONTACT YOU REGARDING YOUR BID:</p> <p>-----</p> <p>CONTACT PERSON (PLEASE PRINT CLEARLY):</p> <p>-----</p>						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE	TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'



State of West Virginia
 Department of Administration
 Purchasing Division
 2019 Washington Street East
 Post Office Box 50130
 Charleston, WV 25305-0130

Request for Quotation

RFQ NUMBER
DJS010297

PAGE
6

ADDRESS CORRESPONDENCE TO ATTENTION OF
TARA LYLE
304-558-2544

RFQ COPY
TYPE NAME/ADDRESS HERE

VENDOR

SHIP TO

DIVISION OF JUVENILE SERVICES
VARIOUS LOCALES AS INDICATED BY ORDER

DATE PRINTED	TERMS OF SALE	SHIP VIA	F.O.B.	FREIGHT TERMS
11/18/2010				

BID OPENING DATE: **12/21/2010** BID OPENING TIME **01:30PM**

LINE	QUANTITY	UOP	CAT. NO.	ITEM NUMBER	UNIT PRICE	AMOUNT
***** THIS IS THE END OF RFQ DJS010297 ***** TOTAL: _____						

SEE REVERSE SIDE FOR TERMS AND CONDITIONS

SIGNATURE		TELEPHONE	DATE
TITLE	FEIN	ADDRESS CHANGES TO BE NOTED ABOVE	

WHEN RESPONDING TO RFQ, INSERT NAME AND ADDRESS IN SPACE ABOVE LABELED 'VENDOR'

**WV Division of Juvenile Services in conjunction with the
WV Division of Corrections and WV Regional Jail Authority
Uniform Specification DJS010297
Specification to be as stated or equal**

Service Specifications

- Successful vendor must be able to provide all items listed on bid sheet.
- Vendors will provide samples upon request and samples will be sent to the WV Purchasing Division. Samples are to be received within ten (10) business days of request.
- The successful vendor must be willing to take the state purchasing card for payment or payments processed through the auditor's office. **Prompt Pay Discounts** for payments made on the purchasing card within 10 days of receipt of goods are encouraged and will play a part in the overall award decision.
- The successful bidder will have a **full time Regional Account Representative** servicing the state of West Virginia and to manage this contract. The representative will visit with applicable State of WV personnel on a quarterly basis at a minimum and more often as needed.
- The successful bidder will maintain a minimum of **six weeks of inventory** on hand at all times based on historical usage.
- The successful bidder will maintain **service levels of 98% or better** on time delivery. Delivery requirements are 14 business days or less for standard items/sizes from date of order.
- **Warranty** – All products and product embellishments must be new and meet the specifications for which they are intended. Products will be warranted free from defects in materials and workmanship for a period of one year. Proper care and laundering are required by State of WV personnel in order to maintain the warranty terms.

- **Returns:** Non embellished goods in original packaging materials may be returned for a period of up to one year. There will not be a restocking fee for these returns.
- Successful bidder will have a dedicated account management team that will be responsible for administering the terms and conditions of this program. The team must be available Mon-Fri between the hours of 8:00 AM and 5:00 PM EST.
- The successful bidder must be able to produce **an electronic catalog upon request** containing the state of WV approved items including features and photos of each.

Uniform Specifications

1. TROUSERS (Cargo Pants)

Fabric: Style: Perfection MTX-ECO Series TM or equal to with engineered stretch twill with Perfection X-Factor Technologies or equal to, featuring SwiftGaley Indestructible 5626/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex, and UltraDye Enhancements or equal.

Color: Dark Navy utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention. All available colors but at a minimum must offer a solid Dark Navy and Dark Brown with a tan stripe down the outside leg seam.

Fiber Content: 65 % polyester 35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 7.5 oz. /square yard

Construction: 90 warp x 50 filling

Tensile Strength: 160 x 90 Lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments or equal, to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids.

UV/Sun Protection - UPF 40 + rating

Pocketing and Lining:

Fiber Content: 70% polyester 30% cotton

Weave: Plain

Weight: 3.5 oz. /square yard

Construction: 82 warp x 50 filling

Tensile Strength: 119x98 lbs.

Color: Black

Design: The trousers shall be available in a men's and women's relaxed fit uniform trouser pattern. Uniform trouser shall have a plain front with two quarter top pockets. Two, side cargo pockets. Top-stitched back pockets with triangle bar-tacks, left pocket has tab to button. Zipper fly front with French fly. One-piece ECG or equal diamond-gusset crotch. Two inch wide expandable waistband, with dropped belt loops. Straight-leg bottoms. CREASET® super silicone creases or equal.

Pockets: The front pockets are quarter top style, with a minimum 6 1/2" opening and 6" depth, measured from the bottom of the opening. The front pocket bags are double tipped and shall be stitched, turned and re-stitched. The inside front pocket facing shall be a separate piece of shelf material finishing no less than 1 1/4" wide. Each front pocket shall have a straight bar-tack at the top and a triangle bar-tack at the bottom of the opening. There is a double-compartment cargo pocket with a flap centered on the out-seam, approximately 9 1/2" below the waist seam. Each cargo pocket measures 7" wide x 7 3/4" long and has mitered corners. The front compartment has a 1-1/2" stitched box pleat. The top of the flap is stitched to the pocket and has horizontal bar-tacks in the upper corners. The flap closes with three pieces of Velcro loop: a 1"x1" piece in each lower corner and a 1"x1-1/2" strip at the point to match the Velcro hook placement on the pockets. The back compartment is accessed by a hidden 6" nylon zipper with molded plastic teeth (1-1/8" behind and below the upper edge of the flap.) Zippers open in a front-toward-back direction. Velcro must be durable and washable. The back pockets have 5-1/2" openings and are 6" deep. Top-stitched on the outside with an exposed top and bottom welt inside facing. The left pocket shall have a tab to button. The back pockets shall have triangle bar-tacks at the end of the openings.

Waistband: The trousers should be made with a 2" wide expandable waistband for exact fit with enhanced comfort and mobility. The waistband on the front panel has an extension that joins to the inside of the back waistband with heavy-duty hidden elastic. This construction enables the waistband to automatically expand and contract 2 to 4 inches. It should be stabilized with fusible non-woven interlining. The waistband shall

close with two crush proof hooks and eyes, which are reinforced with canvas stays. There shall be a bar-tack behind each eye. The stretch waistband curtain finishes 2 5/8" wide. The upper portion is made of 1 1/8" wide bias cut pocketing fabric with 1/16" topstitching and 3/4" wide stretch Ban-Rol or equal to canvas. The lower portion is 1 1/2" wide and is made of woven elastic with 3-strand Mini Snugtex or equal to, to insure shirt tail "tuck". The waistband curtain shall be set on with a rocap machine and be closed by stitching below the waistband through the outer fabric and the waistband curtain.

Belt Loops: Seven belt loops on all sizes. Each loop is to be 1" wide, of double thickness, have canvas interlining and be stitched with a 1/4" gauge twin needle. All loops (except for the center back loop) shall be stitched into the waistband curtain seam and be tacked 1/4" below the waistband. The top of the center back loop shall be tacked to the outside of the waistband, folded over the tacking, with the bottom of the loop tacked 1/4" below the waistband. They shall accommodate a 2" wide belt.

Fly: The trousers shall close with a brass memory lock zipper which has a brass bottom stop at the base of the zipper chain and a brass ratcheting cam lock slider. Both flies have fusible non-woven interlining. The right fly has a French-fly extension and is lined with pocketing fabric, which extends from the waistband to the inseam. A matching button is stitched to the left waistband curtain to fasten the French-fly. A straight bar-tack shall be stitched at the bottom of the fly from the outside of the garment, through the zipper tape, the right and left fly and the right fly lining. The right and left fly shall be joined by an additional bar-tack located below the bottom zipper stop on the inside of the trousers. The zipper and fly topstitching extend to the top of the waistband.

Inside Trim: The right fly lining extension is stitched to the front seat seam allowances and extends to the inseam.

Diamond Gusset:

All trousers must have a one-piece diamond gusseted crotch construction for enhanced comfort, mobility and wear life. All edges must be serged prior to setting the gusset. After the gusset is set, it is topstitched, 1/16" from the edges.

Creasing: The front and rear creases in the trouser legs incorporate a permanent modified silicone crease produced by the CREASET® system or equal to, that is specially formulated for fabrics with high technology treatments.

Stitching: The entire trouser is to be stitched with matching polyester core or 100% polyester spun thread. The thread shall be colorfast and match the fabric. All visible stitching must be 10-11 stitches per inch. All exposed inside seams are to be serged. The seat seam must be stitched with a tandem needle machine. There is a minimum 2 3/4" seat outlet for alterations.

LABELING: Trousers shall be labeled with the following information: manufacturer, style number, size, fiber content, and care instructions.

Sizes: The trousers shall be hemmed and be available in a regular rise length in waist sizes 28 through 60. Odd waist sizes are to be available through 37. Ladies trousers should be available in sizes 2 - 24 with regular rise length.

2. Class A Trousers

Fabric Style: Perfection MatrixSeries™ Engineered Stretch Twill with Perfection X-Factor™ Technologies, featuring SwiftGaley Indestructible 5454/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex, and UltraDye Enhancements; or equal to.

Color: Dark navy utilizing H2 UltraDye Technology for Enhanced Color Depth and Color Retention.

Fiber Content: 65% polyester / 35% combed cotton

Weave: 2 x 1 Twill with engineered Stretch, or equal to.

Weight: 7.5 oz square yard or equal to.

Construction: 90 warp x 50 filling, or equal to.

Tensile Strength: 160 x 90lbs, or equal to.

Finishes: Pre-cured, Wrinkle Resistant, & H2 Tech treatments to provide superior color retention, internal hydrophilic wickability and breathability, and external hydrophobic resistance to water based liquids.

UV / Sun Protection: UPF 40+ rating (Highest apparel rating), or equal to.

POCKETING AND LINING: Style: QST Starspun III or equal to.

Fiber Content: 70% polyester / 30% cotton.

Weave: Plain

Weight: 3.5 oz / square yard, or equal to

Construction: 82 warp x 50 filling, or equal to.

Tensile Strength: 119 x 98 lbs. or equal to.

Color: All available colors at a minimum must offer a solid Dark Navy and Dark Brown with a tan stripe down the outside leg seam.

DESIGN: Shall feature the Perfection EGC System™ Design, or equal to, for enhanced comfort and mobility. Uniform trouser with a plain front with two quarter top pockets. Topstitched back pockets with triangle bartacks, left pocket has tab to button. Zipper fly front with French fly. 1-piece diamond gusset crotch, for enhanced comfort, mobility & wear life. Two inch wide EGC Perfection Fit, or equal to, expandable waistband, with set in belt loops. Straight leg bottoms. CREASET® Super Silicone Creases, or equal to. The trousers shall be made from a men's relaxed fit uniform trouser pattern.

POCKETS: The front pockets are quarter top style, with a minim of 6 ½" opening and a 6" depth, or equal to, measured from the bottom of the opening. The front pocket bags are double tipped and shall be stitched, turned, and re-stitched. The inside front pocket facing shall be a separate piece of self material finishing no less than 1 ½" wide. The back pockets have 5 ½" openings and are 6" deep. They shall be made with a Reese PW automatic machine and topstitched on the outside with an exposed top and bottom welt inside facing. The left pocket shall have a tab to button. The front pockets shall

have straight bartacks at the ends of the openings. The back pockets shall have triangle bartacks at the ends of the openings.

WAISTBAND: The trousers are made with a 2" wide Perfection EGC System™, or equal to, expandable waistband for exact fit, with enhanced comfort and mobility. The waistband on the front panel has an extension that joins to the inside of the back waistband with heavy-duty hidden elastic. This construction enables the waistband to automatically expand & contract 2 to 4 inches, as necessary. The waistband is stabilized with fusible non-woven interlining. The waistband shall close with two crush proof hooks and eyes, which are reinforced with canvas stays. There shall be a bartack behind each eye. The Perfection Breathable EGC Stretch Waistband Curtain, or equal to, finishes 2 5/8" wide. The upper portion is made of 1 1/8" wide bias cut pocket fabric with 1/16" topstitching and 3/4" wide stretch Ban-Rol canvas. The lower portion is 1 1/12" wide and is made of woven elastic with 3-strand Mini Snugtex* or equal to insure shirt tail "tuck" the waist band curtain shall be set on with a rocap machine and be closed by stitching below the waistband through the outer fabric and the waistband curtain.

BELT LOOPS: There shall be seven (7) belt loops on sizes 38 and smaller, and eight (8) belt loops on sizes 40 and larger. All loops (except for the center back loop) shall be stitched into the waistband curtain seam and the bottom of the waistband. The top of the center back loop shall be tacked to the outside of the waistband, folded over the tacking, with the bottom of the loop tacked to the trousers. They shall all accommodate a 1 3/4" wide belt.

FLY: The trousers shall close with an YKK, or equal to, brass memory lock zipper which has been brass bottom stop at the base of the zipper chain and a brass ratcheting cam lock slider. Both flies have fusible non-woven interlining. The right fly has a French fly extension and is lined with pocketing fabric, which extends from the top of the waistband to the inseam. A matching button is stitched to the left waistband curtain to fasten the French fly. A straight bartack shall be stitched at the bottom of the fly from the outside of the garment, through the zipper tape, the right and left fly and the right fly lining. The right and left fly shall be joined by an additional bartack located below the bottom zipper stop on the inside of the trousers. The zipper and fly topstitching extend to the top of the waistband.

INSIDE TRIM: The right fly lining extension is stitched to the front seat seam allowances and extends to the inseam.

DIAMOND GUSSET: A one piece Diamond Gusseted Crotch construction for enhanced comfort, mobility and wear life. All raw edges must be serged prior to setting the gusset. After the gusset is set, it is topstitched, 1/6" from the edges. Safety stitch construction is unacceptable.

CREASING: The front and rear creases in the trouser legs incorporate a permanent modified "Super Silicone" crease produced by the CREASET® System, or equal to, that is specially formulated for fabrics with high technology treatments.

STITCHING: The entire trouser is to be stitched with matching polyester core or 100% polyester spun thread. The thread shall be colorfast and match the fabric. All visible stitching must be 10-11 stitches per inch. All exposed inside seams are to be serged. The seat seam must be stitched with a tandem needle machine. There is a minimum 2 3/4" seat outlet for alterations.

LABELING: Trousers shall be labeled with the following information: manufacturer, style number, size, fiber content, care instructions, and care instructions.

SIZES: The trousers shall be hemmed and be available in regular rise length and in waist sizes 28 through 60. Odd waist sizes are available through size 37.

3. Men's LONG SLEEVE SHIRT Class A

Fabric: Perfection MTX-ECO Series or equal to Twill with Perfection X-Factor Fabric Technologies, featuring SwiftGaley Dauntless 2567/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex and UltraDye enhancements or equal

Color: Dark Navy utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention. Should offer all available colors at a minimum must offer Dark Navy.

Fiber Content: 65 % polyester/35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 6.25 - 6.50 oz/square yard

Construction: 86 warp x 52 filling

Tensile Strength: 195 x 80 lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids (Other surface treatments are unacceptable.)

UV/Sun Protection - UPF 40 + rating

Design: Plain front, coat style with convertible collar and placket front with zipper. Long- sleeves with rounded barrel cuffs. One-piece sleeve and side gussets. Two pleated breast pockets with scalloped flaps and Velcro closures. Bar-tacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® silicone or equal military creases. Graduated tail length zipper front. Velcro is durable and washable.

Collar: The shirt has a convertible collar. The collar is to be die cut, measure 3 1/4" long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent mylar collar stays are set forward, and inside the collar with no stitches showing through either ply.

Front: The left front is to have a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 7 buttonholes. It shall be interlined with 250 denier Dacron Polyester. The top buttonhole is horizontal and 5/8" below the neck seam. The remaining buttonholes are vertical, with 2 1/2" spacing between the first and second 3

1/2" spacing between the remainder. Melamine buttons (to include a spare) are stitched to the right front. Each front is to have an approximate 3" turn back. One military crease in each front incorporates a permanent CREASET® silicone crease or equal to that continues through the pocket and pocket flap. Zipper placket front with seven buttons. Third through six buttons sewn on top of the buttonholes.

Shoulder Straps: Shoulder straps are to be die-cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2 1/8" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2 ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 3/8" stitched box pleats and mitered corners. The pockets are to be die cut and finished 5 1/2" wide and 6" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro loop fasteners on the flaps. Velcro must be washable and durable.

Pocket Flaps: To be die cut, and scalloped, finishing 5 3/4" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bar-tacked at each end. Velcro loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro hook fasteners on the pockets. Velcro must be washable and durable.

Sleeves: The sleeves have 2 wrist pleats and 4 1/2" vent openings, 1" wide top and bottom plackets, with one centered button and buttonhole. Top of vent has 1 1/2" long outline reinforcement stitch.

Cuffs: Cuffs have rounded corners and are interlined with 250 denier Dacron Polyester. Cuffs to close with 2 buttons and buttonholes, be 3" wide and have 3/16" topstitching on the edges.

Side Gussets: side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the cuff to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The three military creases in the back of the shirt

must incorporate permanent Super Silicone or equal to creases, utilizing the CREASET® system or equal to.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar and cuffs are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting and cuff closing stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" or equal to crease produced by the CREASET® system or equal to that is specially formulated for fabrics with high technology treatments, and continuing the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® or equal to permanent silicone creases.

Construction: The collar, pocket flaps, shoulder straps and cuffs and are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

LABELING: The shirt shall be labeled with the following information: style number, size, fiber content and care instructions.

Sizes Shirts are to be available in even and half-neck sizes. Sleeve lengths shall be available in 1" increments.

Division patches to be sewn on each shirt per ordering agency specifications.

4. Women's LONG SLEEVE SHIRT Class A

Fabric: Perfection MTX-ECO Series or equal to Twill with Perfection X-Factor Fabric Technologies or equal to, featuring SwiftGaley Dauntless 2567/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex and UltraDye enhancements or equal

Color: All available colors at a minimum Solid Dark Navy. Utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65 % polyester/35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 6.25 - 6.50 oz/square yard

Construction: 86 warp x 52 filling

Tensile Strength: 195 x 80 lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids (Other surface treatments are unacceptable.)

UV/Sun Protection - UPF 40 + rating

Design: Plain front, coat style with convertible collar and placket front with zipper. Long- sleeves with rounded barrel cuffs. One-piece sleeve and side gussets. Two pleated breast pockets with scalloped flaps and Velcro closures. Bar-tacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® silicone military creases. Graduated tail length zipper front. Velcro is durable and washable.

Collar: The shirt has a convertible collar. The collar is to be die cut, measure 3 " long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays are set forward, and inside the collar with no stitches showing through either ply.

Front: The right front is to have a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 6 buttonholes. It shall be interlined with 250 denier Dacron Polyester. The top buttonhole is horizontal and 5/8" below the neck seam. The remaining buttonholes are vertical, with 2 1/2" spacing between the first and second 3 1/2" spacing between the remainder. The top and bottom buttonholes on the right front are functional. Melamine buttons (to include a spare) are stitched to the left front. Each front is to have an approximate 3" turn back. The front closes with a 14" nylon coil separating zipper, which begins between the first and second buttonholes. One military crease in each front incorporates a permanent CREASET® silicone crease or equal to that continues through the pocket and pocket flap.

Shoulder Straps: Shoulder straps are to be die-cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2 " wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2 ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 3/8" stitched box pleats and mitered corners. The pockets are to be die cut and finished 5 1/2" wide and 6" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro loop fasteners on the flaps. Velcro must be washable and durable.

Pocket Flaps: To be die cut, and scalloped, finishing 5 1/2" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bar-tacked at each end. Velcro loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro hook fasteners on the pockets. Velcro must be washable and durable.

Sleeves: The sleeves have 2 wrist pleats and 4 1/2" vent openings, 1" wide top and bottom plackets, with one centered button and buttonhole. Top of vent has 1 1/2" long outline reinforcement stitch.

Cuffs: Cuffs have rounded corners and are interlined with 250 denier Dacron Polyester. Cuffs to close with 1 button and a 2 button adjustment option, be 2 1/2" wide and have 3/16" topstitching on the edges.

Side Gussets: side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the cuff to the shirt hem. The graduated gusset measures 3" at each end and widens in the armhole area. Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The yoke is lined with matching 65% polyester/35% cotton poplin. The three military creases in the back of the shirt must incorporate permanent Super Silicone or equal to creases, utilizing the CREASET® system or equal to.

Buttons: To be a 20-line melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar and cuffs are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting and cuff closing stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" or equal to crease produced by the CREASET® system or equal to that is specially formulated for fabrics with high technology treatments, and continuing the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® or equal to permanent silicone creases.

Construction: The collar, pocket flaps, shoulder straps and cuffs and are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

LABELING: The shirt shall be labeled with the following information: style number, size, fiber content and care instructions.

Sizes Shirts are to be available in alpha sizes with graduated sleeve lengths.

Division patches to be sewn on each shirt per ordering agency specifications.

5. Men's Class "A" Long Sleeve Uniform Shirt

Fabric: Style: Perfection PinnacleSeries™ Engineered Stretch Poplin with Perfection X-Factor™ Fabric Technologies or equal, featuring SwiftGaley Stretch Concept Poplin 5616/158 with UltraDye Enhancements or equal.

Color: All available colors at a minimum Solid Dark Navy. Utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65% polyester/35% cotton

Weave: Plain with Engineered Stretch

Weight: 4.25 – 4.50oz./square yard

Construction: 110 warp x 52 filling

Tensile Strength: 120 x 50 lbs.

Finishes: Nano/H2Tech Finish: Pre-cured, wrinkle resistance, superior color retention, and external hydrophobic resistance to most water and oil based liquids.

Design: Shall feature the Perfection EGC System™ Design or equal for enhanced comfort and mobility. Plain front, coat style with banded collar and placket front. Gusseted fit, designed to accommodate body armor, with enhanced comfort & mobility. Long sleeves with rounded barrel cuffs. 1-piece sleeve and EGC side gussets. Two pleated breast pockets with scalloped flaps and Velcro® or equal closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® Super Silicone or equal military creases. Matching polyester/cotton poplin neck band and yoke lining. Graduated tail lengths. Optional zipper front.

Collar and Band: The long sleeve Class "A" uniform shirt shall be designed for use with a clip on neck tie. Collar and neck band are to be die cut. Points are to be 3 1/4" in length and top stitched 3/16" from the edge. The collar is interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays inside the collar with no stitches showing through either ply. The collar stays are set forward to accommodate collar insignia. The neck band is lined with 65% polyester/35% cotton poplin, interlined with Crease N Tack™ or equal and measures 1 3/8" at center back. It fastens with one button and buttonhole.

Front: The left front has a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 6 vertical buttonholes. It is interlined with 250 denier Dacron Polyester. The top buttonhole is 2 3/4" below the neck band, with 3 1/2" spacing between the remaining buttonholes. The button stand on the right side shall finish 1" wide and be edge stitched.

There shall be six front and one collar button. A spare button is stitched on the lower end of the button stand. One military crease in each front incorporates a permanent CREASET® Super Silicone or equal crease that continues through the pocket and pocket flap.

Shoulder Straps: Shoulder straps are to be die cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2 1/8" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 1/2" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 1/2" wide and 6" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro® hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro® loop fasteners on the flaps.

Pocket Flaps: To be die cut, and scalloped, finishing 5 3/4" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro® or equal hook fasteners on the pockets.

Sleeves: The sleeves will have 2 wrist pleats and 4 1/2" vent openings, 1" wide top and bottom plackets, with one centered button and buttonhole. Top of vent has 1 1/2" long outline reinforcement stitch.

Cuffs: Cuffs have rounded corners and are interlined with 250 denier Dacron Polyester. Cuffs to close with 2 buttons and buttonholes, be 3" wide and have 3/16" topstitching on the edges.

Side Gussets: Shirt shall incorporate side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the cuff to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. The EGC Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke lined on the inside with 65% polyester/35% cotton poplin. Yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The three military creases in the back of the shirt must incorporate permanent Super Silicone creases, utilizing the CREASET® System or equal.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar and cuffs are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting and cuff closing stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" crease produced by the CREASET® System that is specially formulated for fabrics with high technology treatments and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® or equal permanent silicone creases.

Construction: The collar, pocket flaps, shoulder straps and cuffs are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Shirt Labeling: The shirt shall be labeled with the following information: Make/Model or Series, size, fiber content, care instructions, RN number and country of origin

Sizes: Men's Long Sleeve Class "A" shirts to be available in even and half-size neck sizes starting at 14.5 through 22, inclusive, with sleeve lengths available in 1" graduated increments starting at 32 through 38 inclusive, commensurate with neck size. Talls shall be available in sizes 16 through 22 inclusive.

Division patches to be sewn on each shirt per ordering agency specifications.

6. Women's Class "A" Long Sleeve Uniform Shirt

Fabric: Style: Perfection PinnacleSeries™ Engineered Stretch Poplin with Perfection X-Factor™ Fabric Technologies or equal, featuring SwiftGaley Stretch Concept Poplin 5616/158 with UltraDye Enhancements or equal.

Color: All available colors at a minimum solid Dark Navy. Utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65% polyester/35% cotton

Weave: Plain with Engineered Stretch

Weight: 4.25 – 4.50oz./square yard

Construction: 110 warp x 52 filling

Tensile Strength: 120 x 50 lbs.

Finishes: Nano/H2Tech Finish: Pre-cured, wrinkle resistance, superior color retention, and external hydrophobic resistance to most water and oil based liquids.

Design: Shall feature the Perfection EGC System™ Design or equal for enhanced comfort and mobility. Plain front, coat style with banded collar and placket front. Gusseted fit, designed to accommodate body armor, with enhanced comfort & mobility. Long sleeves with rounded barrel cuffs. 1-piece sleeve and EGC side gussets. Two pleated breast pockets with scalloped flaps and Velcro® closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® Super Silicone or equal military creases. Matching polyester/cotton poplin neck band and yoke lining. Graduated tail lengths. Optional zipper front.

Collar and Band: The long sleeve Class "A" uniform shirt shall be designed for use with a clip on neck tie. Collar and neck band are to be die cut. Points are to be 3" in length and top stitched 3/16" from the edge. The collar is interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays inside the collar with no stitches showing through either ply. The collar stays are set forward to accommodate collar insignia. The neck band is lined with 65% polyester/35% cotton poplin, interlined with Crease N Tack™ or equal and measures 1 3/8" at center back. It fastens with one button and buttonhole.

Front: The right front has a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 6 vertical buttonholes. It is interlined with 250 denier Dacron Polyester. The top buttonhole is 2 3/4" below the neck band, with 3 1/2" spacing between the remaining buttonholes. The button stand on the left side shall finish 1" wide and be edge stitched. There shall be six front and one collar button. A spare button is stitched on the lower end of the button stand. One military crease in each front incorporates a permanent CREASET® Super Silicone crease or equal that continues through the pocket and pocket flap.

Shoulder Straps: Shoulder straps are to be die cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 1/2" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 1/4" wide and 5 1/2" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro® hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro® loop fasteners on the flaps.

Pocket Flaps: To be die cut, and scalloped, finishing 5 1/2" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps

to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® or equal loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro® or equal hook fasteners on the pockets.

Sleeves: The sleeves have 2 wrist pleats and 4 1/2" vent openings, 1" wide top and bottom plackets, with one centered button and buttonhole. Top of vent has 1 1/2" long outline reinforcement stitch.

Cuffs: Cuffs have rounded corners and are interlined with 250 denier Dacron Polyester. Cuffs to close with 1 buttonhole and a 2-button adjustment option, be 2 1/2" wide and have 3/16" topstitching on the edges.

Side Gussets: Perfection EGC System™ or equal incorporates side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the cuff to the shirt hem. The graduated gusset measures 3" at each end and widens in the armhole area. The EGC Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke lined on the inside with 65% polyester/35% cotton poplin. Yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The three military creases in the back of the shirt must incorporate permanent Super Silicone creases, utilizing the CREASET® System or equal.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar and cuffs are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting and cuff closing stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" crease produced by the CREASET® System or equal that is specially formulated for fabrics with high technology treatments and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® or equal permanent silicone creases.

Construction: The collar, pocket flaps, shoulder straps and cuffs are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Shirt Labeling: The shirt shall be labeled with the following information: Make/Model or Series, size, fiber content, care instructions, RN number and country of origin

Sizes: Women's Long Sleeve Class "A" shirts to be available in bust sizes (even sizes only) starting at 28 through 54, inclusive, with graduated sleeve lengths. Talls shall be available in sizes 28 through 50 inclusive.

Division patches to be sewn on each shirt per ordering agency specifications

7. Men's SHORT SLEEVE SHIRT Class B

Fabric: Perfection MTX-ECOSeries or equal to Twill with Perfection X-Factor Fabric Technologies or equal to, featuring SwiftGaley Dauntless 2567/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex and UltraDye enhancements or equal to.

Color: All available colors at a minimum Solid Dark Navy and Tan with brown pocket flaps & epaulets. Utilizing H2 Ultra Dye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65 % polyester 35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 6.25 - 6.50 oz/square yard

Construction: 86 warp x 52 filling

Tensile Strength: 195 x 80 lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids.

UV/Sun Protection - UPF 40 + rating

DESIGN: Shall feature the Perfection EGC System™ Design or equal to, for enhanced comfort and mobility. Short sleeve shirt style with convertible collar and placket front with enhanced comfort & mobility. 1-piece sleeve and side gussets. Two pleated breast pockets with scalloped flaps and Velcro closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® or equal to, Super Silicone military creases. Graduated tail lengths and zipper front.

COLLAR: The shirt shall have a convertible collar. The collar is to be die cut, measure 3 ¼" long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays are set forward, and inside the collar with no stitches showing through either ply.

FRONT: The left front is to have a self fabric center pleat 1 ½" wide with 2 rows of stitching 1" apart and 7 buttonholes. It shall be interlined with 250 denier Dacron Polyester. The tip buttonhole is horizontal and 5/8" below the neck seam. The remaining

buttonholes are vertical, with 2 ½" spacing between the first and second and 3 ½" spacing between the remainder. Melamine buttons (to include a spare) are stitched to the right front. Each front is to have an approximate 3" turn back. One military crease in each front incorporates a permanent CREASET® crease, or equal to, that continues through the pocket and pocket flap. Zipper placket front with seven buttons. Third through six buttons sewn on top of the buttonholes.

SHOULDER STRAPS: Shoulder straps are to die cut and interlined with 250 denier Dacron Polyester, Shoulder strap is topstitched ¼" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2 1/8" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately ½" from the neck seam, with the lower edge ½" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

BADGE REINFORCEMENT: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 ½" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

POCKETS: Two patch pockets with 1 3/8" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 ½" wide and 6" long. Left pocket to have a sewn through pencil stall 1 ½" wide. Velcro® hook fasteners ¾" wide and ¾" long are stitched on the upper corners to secure the Velcro® loop fasteners on the flaps.

POCKET FLAPS: To be die cut, and scalloped, finishing 5 ¾" in width, 2 ½" in length at the center and 2 1/8" each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched ¼" from edges and have one centered uncut buttonhole with button. Flaps to be set with a ¼" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® or equal loop fasteners ¾" wide and ¾" long are stitched on the underside of the flaps to secure the Velcro® hook fasteners on the pockets.

SLEEVES: The sleeves have 1" hems. A size 16 finishes 10" long from the shoulder seam.

SIDE GUSSETS: Incorporate side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the sleeve opening to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. The gusset is set with double needle stitching for enhanced performance.

BACK: Two piece yoke shall measure approximately 3' at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The yoke is lined with matching 65% polyester/35% cotton poplin. The three military creases in the back of the shirt must incorporate permanent Super Silicone Creases, utilizing the CREASET System.

STITCHING: The entire shirt is to be stitched with 100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched ¼" from the edges. There is

a second row of topstitching ¼" from the flap setting stitches. The lower edge of the yoke is topstitched 1/16".

MILITARY CREASES: One military crease in each front must incorporate a permanent modified "Super Silicone" crease or equal to, CREASET® System, that is specially formulated for fabrics with high technology treatments, and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with permanent silicone creases.

CONSTRUCTION: The collar, pocket flaps and shoulder straps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Labeling: The shirt shall be labeled with the following information: Style number, size, fiber content, & care instructions

SIZES: Shirts are available in men's and women's alpha sizes from small thru 5X.

Division patches to be sewn on each shirt per ordering agency specifications

8. Women's SHORT SLEEVE SHIRT Class B

Fabric: Perfection MTX-ECOSeries or equal to Twill with Perfection X-Factor Fabric Technologies or equal to, featuring SwiftGaley Dauntless 2567/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex and UltraDye enhancements or equal to.

Color: All available colors at a minimum Solid Dark Navy and Tan with brown pocket flaps & epaulets. Utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65 % polyester 35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 6.25 - 6.50 oz/square yard

Construction: 86 warp x 52 filling

Tensile Strength: 195 x 80 lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids.

UV/Sun Protection - UPF 40 + rating

DESIGN: Shall feature the Perfection EGC System™ Design or equal to, for enhanced comfort and mobility. Short sleeve shirt style with convertible collar and placket front with zipper. 1-piece sleeve and side gussets. Two pleated breast pockets with scalloped

flaps and Velcro closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® or equal to, Super Silicone military creases. Graduated tail lengths and zipper front.

COLLAR: The shirt shall have a convertible collar. The collar is to be die cut, measure 3" long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays are set forward to accommodate collar insignia, and inside the collar with no stitches showing through either ply.

FRONT: The right front is to have a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 7 buttonholes. It shall be interlined with 250 denier Dacron Polyester. The top buttonhole is horizontal and 5/8" below the neck seam. The remaining buttonholes are vertical, with 2 1/2" spacing between the first and second and 3 1/2" spacing between the remainder. The top and bottom buttonholes on the right are functional. Melamine buttons (to include a spare) are stitched to the left front. Each front is to have an approximate 3" turn back. The front closes with a 14" coil separating zipper, which begins between the first and second buttons. One military crease in each front incorporates a permanent CREASET® crease, or equal to, that continues through the pocket and pocket flap.

SHOULDER STRAPS: Shoulder straps are to die cut and interlined with 250 denier Dacron Polyester, Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

BADGE REINFORCEMENT: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

POCKETS: Two patch pockets with 1 3/8" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 1/4" wide and 5 1/2" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro® hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro® loop fasteners on the flaps.

POCKET FLAPS: To be die cut, and scalloped, finishing 5 3/4" in width, 2 1/2" in length at the center and 2 1/8" each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro® hook fasteners on the pockets.

SLEEVES: The sleeves have 1" hems. A size 36 finishes 10" long from the shoulder seam.

SIDE GUSSETS: Incorporate side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the sleeve opening to the shirt

hem. The graduated gusset measures 3" at each end and widens in the armhole area. The gusset is set with double needle stitching for enhanced performance.

BACK: Two piece yoke shall measure approximately 3' at center back and 3 ¼' at the ends. 1/16' topstitch on lower edge. The yoke is lined with matching 65% polyester /35% cotton poplin. The three military creases in the back of the shirt must incorporate permanent Super Silicone creases, utilizing the Creaset System.

Buttons: To be a 20 –ligne melamine button to match the fabric color.

STITCHING: The entire shirt is to be stitched with 100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched ¼" from the edges. There is a second row of topstitching ¼" from the flap setting stitches. The lower edge of the yoke is topstitched 1/16".

MILITARY CREASES: One military crease in each front must incorporate a permanent modified "Super Silicone" crease or equal to, CREASET® System, that is specially formulated for fabrics with high technology treatments, and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with permanent silicone creases.

CONSTRUCTION: The collar, pocket flaps and shoulder straps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Labeling: The shirt shall be labeled with the following information: Style number, size, fiber content, & care instructions

SIZES: Shirts are available in alpha sizes.

Colors: Dark Navy and Tan with brown epaulets and pocket flaps.

Division patches to be sewn on each shirt per ordering agency specifications

9. Men's Class "A" Short Sleeve Uniform Shirt

Fabric: Style: Perfection PinnacleSeries™ Engineered Stretch Poplin with Perfection X-Factor™ Fabric Technologies or equal to, featuring SwiftGaley Stretch Concept Poplin 5616/158 with UltraDye Enhancements or equal to.

Color: All available colors at a minimum Dark Navy and Tan with brown pocket flaps & epaulets. Utilizing H2 Ultra Dye Technology or equal to for enhanced color depth and color retention.

Fiber Content: 65% polyester/35% cotton

Weave: Plain with Engineered Stretch

Weight: 4.25 – 4.50oz./square yard

Construction: 110 warp x 52 filling

Tensile Strength: 120 x 50 lbs.

Finishes: Nano/H2Tech Finish: Pre-cured, wrinkle resistance, superior color retention, and external hydrophobic resistance to most water and oil based liquids. (Other surface treatments are unacceptable.)

Design: Shall feature the Perfection EGC System™ Design or equal for enhanced comfort and mobility. Short sleeve shirt style with convertible collar and placket front. Gusseted fit, designed to accommodate body armor, with enhanced comfort & mobility. 1-piece sleeve and EGC side gussets. Two pleated breast pockets with scalloped flaps and Velcro® closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® Super Silicone or equal military creases. Matching polyester/cotton poplin yoke lining. Graduated tail lengths. Optional zipper front.

Collar: The Men's short sleeve Class "A" uniform shirt shall be designed to be worn primarily with an open collar. The shirt has a convertible collar. The collar is to be die cut, measure 3 1/4" long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays are set inside the collar with no stitches showing through either ply. The collar stays are set forward to accommodate collar insignia.

Front: The left front is to have a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 7 buttonholes. It shall be interlined with 250 denier Dacron Polyester. The top buttonhole is horizontal and 5/8" below the neck seam. The remaining buttonholes are vertical, with 2 1/2" spacing between the first and second and 3 1/2" spacing between the remainder. Melamine buttons (to include a spare) are stitched to the right front. Each front is to have an approximate 3" turn back. One military crease in each front incorporates a permanent CREASET® Super Silicone crease that continues through the pocket and pocket flap.

Shoulder Straps: Shoulder straps are to be die cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2 1/8" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 1/2" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 1/2" wide and 6" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro® or equal hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro® or equal loop fasteners on the flaps.

Pocket Flaps: To be die cut, and scalloped, finishing 5 3/4" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® or equal loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro® hook fasteners on the pockets.

Sleeves: The sleeves have 1" hems. The sleeves are hemmed after the side-joining operation. A size 16 will finish 10" long from the shoulder seam.

Side Gussets: Perfection EGC System™ or equal incorporates side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the sleeve opening to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. The EGC Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke lined on the inside with 65% polyester/35% cotton poplin. Yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The three military creases in the back of the shirt must incorporate permanent Super Silicone creases, utilizing the CREASET® System or equal.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" crease produced by the CREASET® System or equal that is specially formulated for fabrics with high technology treatments and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® permanent silicone creases.

Construction: The collar, pocket flaps and shoulder straps are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Shirt Labeling: The shirt shall be labeled with the following information: Make/Model or Series, size, fiber content, care instructions, RN number and country of origin

Sizes: Men's Short Sleeve Class "A" shirts to be available in even and half-size neck sizes starting at 14.5 through 22, inclusive. Talls shall be available in sizes 16 through 22 inclusive.

Division patches to be sewn on each shirt per ordering agency specifications

10. Women's Class "A" Short Sleeve Uniform Shirt

Fabric: Style: Perfection PinnacleSeries™ Engineered Stretch Poplin with Perfection X-Factor™ Fabric Technologies or equal, featuring SwiftGaley Stretch Concept Poplin 5616/158 with UltraDye Enhancements or equal to.

Color: Dark Navy utilizing UltraDye Technology for Enhanced Color Depth and Color Retention.

Fiber Content: 65% polyester/35% cotton

Weave: Plain with Engineered Stretch

Weight: 4.25 – 4.50oz./square yard

Construction: 110 warp x 52 filling

Tensile Strength: 120 x 50 lbs.

Finishes: Nano/H2Tech Finish: Pre-cured, wrinkle resistance, superior color retention, and external hydrophobic resistance to most water and oil based liquids. (Other surface treatments are unacceptable.)

Design: Shall feature the Perfection EGC System™ Design or equal for enhanced comfort and mobility. Short sleeve shirt style with convertible collar and placket front. Gusseted fit, designed to accommodate body armor, with enhanced comfort & mobility. 1-piece sleeve and EGC side gussets. Two pleated breast pockets with scalloped flaps and Velcro® closures. Bartacked hidden pencil opening. Shoulder straps. Interior badge sling. Five CREASET® Super Silicone or equal military creases. Matching polyester/cotton poplin yoke lining. Graduated tail lengths. Optional zipper front.

Collar: The Women's short sleeve Class "A" uniform shirt shall be designed to be worn primarily with an open collar. The shirt has a convertible collar. The collar is to be die cut, measure 3" long at the points and be topstitched 3/16" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent Mylar collar stays are set inside the collar with no stitches showing through either ply. The collar stays are set forward to accommodate collar insignia.

Front: The right front is to have a self fabric center pleat 1 1/2" wide with 2 rows of stitching 1" apart and 7 buttonholes. It shall be interlined with 250 denier Dacron

Polyester. The top buttonhole is horizontal and 5/8" below the neck seam. The remaining buttonholes are vertical, with 2 1/2" spacing between the first and second and 3 1/2" spacing between the remainder. Melamine buttons (to include a spare) are stitched to the left front. Each front is to have an approximate 3" turn back. One military crease in each front incorporates a permanent CREASET® Super Silicone or equal crease that continues through the pocket and pocket flap.

Shoulder Straps: Shoulder straps are to be die cut and interlined with 250 denier Dacron Polyester. Shoulder strap is topstitched 1/4" from the edge and has a buttonhole. To be sewn into sleeve head seam and measure 2" wide, tapering to 1 5/8" at the pointed end. Shoulder strap to be set approximately 1/2" from the neck seam, with the lower edge 1/2" below the shoulder joining seam. It shall be X-stitched to shoulder, 2" from sleeve seam, and shall fasten to the shoulder with a melamine button.

Badge Reinforcement: 2-ply inside sling approximately 1" wide, extending from shoulder joining seam into pocket of left front. To have two small uncut horizontal buttonholes 1 1/2" above the pocket flap, spaced 1 5/16" apart and centered on the sling.

Pockets: Two patch pockets with 1 1/2" stitched box pleats and mitered corners. The pockets are to be die cut and finish 5 1/4" wide and 5 1/2" long. Left pocket to have a sewn through pencil stall 1 1/2" wide. Velcro® hook fasteners 3/4" wide and 3/4" long are stitched on the upper corners to secure the Velcro® loop fasteners on the flaps.

Pocket Flaps: To be die cut, and scalloped, finishing 5 1/2" in width, 2 1/2" in length at the center and 2 1/8" at each side. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges and have one centered uncut buttonhole with button. Flaps to be set with a 1/4" space between pocket and flap. The left flap to have a hidden pencil opening 1 3/8" in width, bartacked at each end. Velcro® or equal loop fasteners 3/4" wide and 3/4" long are stitched on the underside of the flaps to secure the Velcro® hook fasteners on the pockets.

Sleeves: The sleeves have 1" hems. The sleeves are hemmed after the side-joining operation. A size 36 will finish 10" long from the shoulder seam.

Side Gussets: Perfection EGC System™ or equal incorporates side gussets for enhanced comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the sleeve opening to the shirt hem. The graduated gusset measures 3" at each end and widens in the armhole area. The EGC Gusset is set with double needle stitching for enhanced performance.

Back: Two piece yoke lined on the inside with 65% polyester/35% cotton poplin. Yoke shall measure approximately 3" at center back and 3 1/4" at the ends. 1/16" topstitch on lower edge. The three military creases in the back of the shirt must incorporate permanent Super Silicone creases, utilizing the CREASET® System.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall

be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar are topstitched 3/16". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps and pocket flaps are topstitched 1/4" from the edges. There is a second row of topstitching 1/4" from the flap setting and cuff closing stitches. The lower edge of the yoke is topstitched 1/16".

Military Creases: One military crease in each front must incorporate a permanent modified "Super Silicone" crease produced by the CREASET® System or equal that is specially formulated for fabrics with high technology treatments and continuing through the pocket and pocket flap. There are three military creases in the back of the shirt with CREASET® or equal permanent silicone creases.

Color: All available colors at a minimum Solid Dark Navy and Tan with brown pocket flaps & epaulets. Utilizing H2 UltraDye Technology or equal to for enhanced color depth and color retention.

Construction: The collar, pocket flaps, shoulder straps and cuffs are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

Shirt Labeling: The shirt shall be labeled with the following information: Make/Model or Series, style number, size, fiber content, care instructions, RN number and country of origin

Sizes: Women's Short Sleeve Class "A" shirts to be available in bust sizes (even sizes only) starting at starting at 28 through 54, inclusive. Talls shall be available in sizes 28 through 50 inclusive.

Division patches to be sewn on each shirt per ordering agency specifications

11. Class C LONG SLEEVE SHIRT (for K-9 Officers)

Fabric: Perfection Matrix Series or equal to Twill with Perfection X-Factor Fabric Technologies or equal to, featuring SwiftGaley Dauntless 1724/158 with H2 Tech Dual Action (Hydrophilic/Hydrophobic), Flex and UltraDye enhancements.

Color: All available colors at a minimum Solid Dark Navy and Tan with brown pocket flaps & epaulets. Utilizing H2 Ultra Dye Technology or equal to for enhanced color depth and.

Fiber Content: 65 % polyester/35% combed cotton

Weave: 2x1 Twill with engineered Stretch

Weight: 6.25 - 6.50 oz/square yard

Construction: 86 warp x 52 filling

Tensile Strength: 195 x 80 lbs.

Finishes: Pre-cured, wrinkle resistant and H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability and breath-ability, and external hydrophobic resistance to water based liquids (Other surface treatments are unacceptable.)

UV/Sun Protection - UPF 40 + rating

Design: Plain front, coat style with convertible collar and square bottom. Covered placket with zip closure. Long- sleeves with squared barrel cuffs. One-piece sleeve and side gussets. Two breast pockets with flaps and Velcro closures. Bar-tacked hidden pencil openings. Shoulder straps. Interior badge sling. Five CREASET® or equal silicone military creases. Graduated tail lengths. Stabilized wing epaulets with reinforced microphone holder in each epaulet. Velcro is durable and washable.

Collar: The shirt has a convertible collar. The collar is to be die cut, measure 3 1/4" long at the points and be topstitched 1/4" from the edge. It shall be interlined with 250 denier Dacron Polyester. Permanent mylar collar stays are set forward, and inside the collar with no stitches showing through either ply.

Front: The left front is to have a covered placket with a 14" zipper. There is a buttonhole above the zipper and a buttonhole below the zipper. Both buttonholes are inside the placket and are not visible on the outside of the shirt. Melamine buttons (to include a spare) are stitched to the right front. Each front is to have an approximate 3' turn back.

Epaulets: the epaulet is 1 3/4" wide at the neck seam and widens to 7 1/2" at the sleeve head seam.

Pockets: Two patch pockets with 1" inverted pleats and mitered corners. The pleats have horizontal bartacks at each end of the 3 1/4" openings. The pockets finish 5 1/2" wide and 6" long. Both pockets to have a sewn through pencil stall 1 1/2" wide. Velcro hook fasteners 1" wide and 1' long are stitched in the upper corners to secure the Velcro loop fasteners on the flaps. The Velcro hook fasteners are box stitched and X stitched. The pockets are set at 45 degree angles for easy access.

Pocket Flaps: The pocket flaps are rectangular, finishing 5 3/4" wide and 2 1/4" long. Flaps are interlined with 250 denier Dacron Polyester, topstitched 1/4" from edges. Flaps to be set with a 1/4" space between pocket and flap. Both flaps to have a hidden pencil opening 1 3/8" wide, bartacked at each end. Velcro loop fasteners 1" wide and 1" long are stitched on the underside of the flaps. The fasteners are box stitched and X-stitched

Sleeves: The sleeves have a pleat and 4 1/2" vent openings, with a 1/2" continuous facing secured with a bartack at the upper end

Cuffs: Cuffs have square corners and are interlined with 250 denier Dacron Polyester. Cuffs to close with 1 button hole, and 2-button adjustment option, be 2 1/2" wide and have 1/4" topstitching.

Side Gussets: The gusset is a 1-piece self fabric piece that extends from the cuff to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. Gusset is set with double needle stitching.

Back: The back is of one piece construction.

Buttons: To be a 20-ligne melamine button to match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting shall be done with an over edge and safety stitch. The gusset is set with double needle stitching. The outer edges of the collar, pocket flaps and cuffs are topstitched 1/4". The center front pleat has 2 rows of stitching 1" apart. The shoulder straps are double needle topstitched. Second row of topstitching 1/4" from the flap setting and cuff closing stitches. The bottom is finished with a 1" hem.

Construction: The collar, pocket flaps, shoulder straps and cuffs and are made by the conventional construction. Top ply, bottom ply and interlining are first stitched together, then turned right side out and finally topstitched.

LABELING: The shirt shall be labeled with the following information: style number, size, and fiber content and care instructions.

Sizes Shirts are to be available in alpha sizes. Sleeve lengths shall be available in Regular, Long & extra long.

Division patches to be sewn on each shirt per ordering agency specifications

12. POLO SHIRTS

Fabric: Style: Perfection Eclipse Series or equal to Performances Synthetic Pique from Contempra Mills or equal to.

Colors: All colors available but at a minimum must offer Dark Navy, Black, Blue, Red, Silver Tan and White

Fiber Content: 100% T359 Performance Polyester or equal.

Body Knit: Pique

Welt/Collar Knit: Rib Knit with raised parallel corded rib trim design.

Weight: 8 oz. /square yard

Finish: Permanent hydrophilic/wickable finish with Microban antimicrobial treatment for continuous odor control for the lifetime of this garment by inhibiting the growth of bacteria, mold and mildew that cause stains and odors.

Design: Design is for enhanced comfort and mobility. Short sleeve shirt style with full fashioned knit collar and 3-button placket front. One-piece design and side gussets for enhanced fit, comfort, and mobility. Banded sleeve to match collar.

Collar: The shirt shall feature a 3" full fashioned rib knit collar with parallel corded rib trim design for enhanced collar smoothness, matching sleeve. The rib-knit collar shall be dyed to match the shirt fabric. The neck seam shall be covered with matching fabric.

Front: There shall be a 1 1/4" wide placket that measures 6 1/2" long. The left placket shall be backed with matching self fabric. The right placket shall be made of a double layer of self fabric. The placket shall be box stitched at the lower end and close with 3 matching melamine buttons.

Sleeves: The sleeve setting seam is finished with double topstitching for enhanced performance. The sleeves have a 1" band finish with parallel corded rib trim design, matching collar and pocket detail. A size L finishes 9 3/4" long from the shoulder seam. The left sleeve is to have a pen pocket.

Side Gussets: Gussets are incorporated for enhanced fit, comfort and mobility. The gusset is a 1-piece self fabric piece that extends from the sleeve opening to the shirt hem. The graduated gusset measures 4" at each end and widens in the armhole area. The gusset seams are finished with double needle stitching for enhanced performance.

Back: The back of the shirt has a 3 1/2" deep circular facing.

Buttons: To be a 20-line melamine button to a match the fabric color.

Stitching: The entire shirt is to be stitched with 100% polyester core/100% polyester wrap thread. All visible stitching must be 10-12 stitches per inch. Sleeve setting and gusset setting shall be done with an over edge and safety stitch and finished with double-needle topstitching. The epaulets are topstitched 1/4" from the edges.

Embroidery: Varies by agency. Specifications for each are included

Labeling: The shirt shall be labeled with style number, size, fiber content, and care instructions.

Sizes: Unisex shirts should be available in alpha sizes from Small to 5 XL.

13. Tactical Response Combat Shirt

Fabric: The shirt's torso is constructed of highly breathable no melt no drip CORDURA® Baselayer or equal fabric, a 60/40 cotton nylon blend with advanced moisture management capabilities that also reduces the severity of burn injuries. The

fabric wicks moisture away from the skin and dries rapidly, preventing the fabric from sticking to the user's skin and greatly increasing comfort. The sleeves and upper back panels of the shirt are constructed of a lightweight, but durable and abrasion-resistant 50/50 Nylon /Cotton or 65/35 Polyester/Cotton Rip-stop fabric designed to provide extra protection for areas not protected by body armor.

Color: It is our intent to primarily purchase the color combinations of Olive Drab Body/Olive Drab Sleeves and Navy Blue Body/Navy Blue Sleeves. However, the vendor shall make all body/sleeve color combinations available under the terms of this contract and shall list all such color combinations in their bid response.

Fiber Content: torso (body) no melt no drip CORDURA® Baselayer or equal fabric, a 60/40 cotton nylon blend. Sleeves/Upper Back panels: a lightweight, but durable and abrasion-resistant 50/50 Nylon /Cotton or 65/35 Polyester/Cotton Rip-stop fabric designed to provide extra protection for areas not protected by body armor.

General Design & Description: The TRU-SPEC® or equal Combat Shirt is a stand alone shirt intended to greatly increase user comfort through the use of lightweight, moisture-wicking, and breathable fabrics. The shirt's torso is constructed of highly breathable no melt no drip CORDURA® Baselayer fabric or equal, a 60/40 cotton nylon blend with advanced moisture management capabilities that also reduces the severity of burn injuries. The fabric wicks moisture away from the skin and dries rapidly, preventing the fabric from sticking to the user's skin and greatly increasing comfort. The sleeves and upper back panels of the shirt are constructed of a lightweight, but durable and abrasion-resistant 50/50 Nylon /Cotton or 65/35 Polyester/Cotton Rip-stop fabric designed to provide extra protection for areas not protected by body armor. Each sleeve has an anti abrasion padded elbow patch. No-seam shoulders minimize rubbing or chafing against armor. Other features include zippered storage pockets on the upper arm, and a place to attach name, rank, and flag on the upper arm.

Stitching: Seam specification is 10 – 12 stitches per inch (SPI) on; lock stitch, chain stitch, safety and serge seams, Bar-tacks – 36-42 SPI. Seam allowances – Serge machine 3/16" – 1/4", Safety Stitch machine 3/8" – 1/2", all edge stitching that requires folded under fabric is 1/8" – 1/4".

Collars: The collar is a turtle neck of rib knit. The finished measurement is 1-3/4" high. The collar is set with a 4-thread serge machine with topstitch in the back of the collar.

Sleeves: The sleeves are raglan with upper zippered storage pockets and anti abrasion foam elbow pads. The cuff has a tab with hook and loop closure. The cuff will be hemmed with a 1 -1/2" clean finish single needle hem. Each cuff will have a pointed tab with finished measurements of 4-1/4" long by 1 1/2" wide. The tab will be set with a box stitch. It shall have a 1" by 1-3/4" hook attached below the point. The cuff shall have a 1" by 6-1/2" loop attached at the hem. Each sleeve has a 6" underarm gusset for increased movement and comfort.

Elbow Patch: Each sleeve will have an anti abrasion padded elbow patch. The patch shall be oval shaped, 8 1/2" by 10" with binding on the perimeter. It shall be stitched with cross and x stitching. It shall be centered 11 1/2" from the sleeve hem.

Sleeve Pockets: Both sleeves will have upper zippered storage pockets. The pocket will be belled to the rear with a welt type construction for the opening. The pockets will have vertical zipper closure with the opening 1" from the front edge of the pocket. The finished measurements of the pockets will be 8 -1/2" high by 7" wide. The left sleeve pocket will have 4" by 6" loop patch attached to the outside 1 1/2" from the top of the pocket and centered. The loop shall be stitched on all sides and have a stitch centered lengthwise. There shall be a 4 1/2" by 1" pointed tab attached even with the top of the loop patch. It shall have a 1" by 1-1/4" piece of hook attached below the point of the tab. The right sleeve pocket will have 4" by 6" loop patch attached to the outside 1 1/2" from the top of the pocket and centered. The loop shall be stitched on all sides and have a stitch centered lengthwise.

Back Panel: The back panel will measure 11-1/2" from the neck at center back and will be clean finished at the bottom with a 1/8" edge stitch.

Side / Sleeve Seams: Side seams are closed with a serge stitch. Sleeves are set with a serge stitch and 1/4" topstitched.

Hem Bottom: The hem measures 1" with a cover stitch closure.

Labeling: The garment will have heat transfer labels with the manufacturers' country of origin, size, fiber content, and care instructions.

Sizes: Shall be available in Men's Sizes (chest) Small (40) through 2XL (56), inclusive with sleeve lengths starting at 31 1/4" through 33 1/4", in one inch graduated increments commensurate with chest size.

14. Raincoat, full length, reversible

General: SPIEWAK & SONS, INC. Style S309V or equal. The raincoat shall be full-length, single layer, reversible, and waterproof. The reverse high visibility side shall meet or exceed the requirements for ANSI 107-2004, Class 3. The raincoat shall have a triple fly front with a snap closure and side access pockets. Double needle construction shall be used throughout and all seams shall be taped to prevent leakage.

Material: The shell fabric shall be single layer, 100% Nylon Oxford, with a permanent polyurethane pigment coating. The shell fabric shall have a durable water repellent finish with a minimum spray rating of 90. The reverse side pigment coating shall meet the requirements for certification to the ANSI 107-2004 and EN 471 standards. Independent third party certification must be provided upon request that the fluorescent fabric side and retro-reflective trim meet all the requirements listed in Section 6 of the ANSI 107-2004 standard.

Body Detail: The front shall have two large welt access pass through for access to equipment. There shall be a badge on the left breast of the shell surface side and on the left breast of the hi-viz side to hold a badge. There shall be a badge tab made of self

fabric with two black oxidized metal eyelets located 1 ¼" apart on the left chest of both sides of the shell fabric of the garment to attach a badge. The badge tabs shall be located 9" down from the high point of the shoulder.

There shall be a 2 1/2" wide facing on the right hand shell surface side, that shall attach with /24 metal oxidized snaps to a 3" inside fly and a 3" outside fly to insure water tight integrity. The 6 snaps on each side shall be spaced 3 ½" apart and reinforced with urethane rings for reinforcement. The coat shall measure approximately 48" long (size L) from the neckline to the bottom of the coat

There shall be a 5/8" turn up around the entire bottom sweep of the raincoat. There shall be a black collar formed by two pieces of shell material approximately 4" wide at center back with 4" collar points.

Pockets: The access side openings shall be finished with a 9 ½" by 1 ¾" two-ply welt of self-material.

Reflective Tape: There shall be 2-inch wide 3M Scotchlite or equal retro-reflective tape laminated to the hi -viz side for nighttime safety. The retro-reflective tape performance and configuration shall meet and exceed the EN-471 and ANSI 107 Class 3 minimum requirements. A letter of compliance shall be available upon request. The placement configuration shall consist of one horizontal band of reflective tape around the chest area, at the bottom sweep, and two bands on the sleeves.

Sleeves: The sleeves shall be raglan one-piece, raglan, sewn double needle and finished with an elasticized cuff. All sleeve seams shall be sealed on the fluorescent yellow side with hot air sealing tape to prevent water leakage

Hood: There shall be a 3 piece, reversible hood that snaps onto the collar. There shall be a cotton draw cord sewn into a channel at the perimeter of the hood for adjustment secured with barrel locks.

Size tag and care instructions: Each jacket shall have a sewn-in woven size label, care Instructions and ANSI pictogram showing garment is Class 3 attached to the inside wind fly.

Sizes: Available in regular and long lengths. Regular sizes: S – 6XL Long sizes: M – 6XL

Standards: This garment must meet all the requirements of the ANSI 107-2004 Class 3 requirement. To insure quality the Manufacturer must be certified to ISO 9001-2000 edition at the time of bid opening.

15. Jacket, 3 Season, Class "B" Uniform

General: Galls 3 Season or equal. 3 season jacket for variety of weather conditions with microfleece lining, zipper extending into collar for added protection, two zippered slash pockets outside and one pocket inside with Velcro closure, raglan sleeves for easy movement, knit cuffs and waistband to seal out weather, washable.

Materials: M7 Taslan - Milky Coated (shell); 210T Nylon P/D Cire 114x96/70x70 (slv-lining) Polar Fleece one side shear anti-pilling 450Gm/y Needle punch 160m/y 5" slv-quilt w/nylon. Fabric Content:

SHELL- 100% Nylon; Sleeve Lining - 100% Nylon; Body Fleece Lining - 75/25 Poly/Rayon;

INSULATION - 100% Polyester

General Construction: COLLAR: (2-pc construction) Nylon outer and fleece inner layer Nylon layer lined w/#1035 Interlining SLEEVES: Raglan sleeve construction, 2-needle top stitch, 1/4" gauge Sleeves 100% nylon lined w/Diamond shaped quilting SLEEVE LOOPS: When setting cuff to sleeve opening, place a finished loop, 1/4" wide x 1.25" long, at the left & right underarm seam points. CUFF AND SWEEP: Rib Knit Nylon cuffs and bottom sweep, (waist). Cuff finishes 2.25" long Sweep finishes 2.5" long. 7" LONG ZIPPERED POCKETS: Two zippered pockets are set on bottom of left & right front panels.

Chintz Twill navy pocket bags; Nylon pocket facing, single needle set to the bottom pocket bag finishes 1.5" wide x length of pocket opening. Edges are clean finished. LEFT INSIDE POCKET: Flap is interlined w/#1035 Pocket welt finishes 7/8" height x 5.75" length. Pocket facing finishes 1.5" height x 5.75" length Pocket bag is made from navy Chintz Twill. Velcro closing - 1" x 1" loop & hook FRONT ZIPPER CLOSURE: YKK #5 Vislon zipper is 2-needle set, 1/4" gauge, full length of jacket, including collar to bottom of waist. WIND FLAP: Set shaped wind flap on wearer's right side of zipper. All edges are clean finished. Flap is multi-stitched. LABELS: single needled set, 1" below finished neck seam, (sew all around) Style/Care/Country of Origin/ loop label is set centered under the bottom of logo label

Finishes: Water Resistant Coating

Embroidery: WVDOC Badge (Blackinton B523) to be embroidered on left chest as specified in each order in either Silver or Gold with Black Lettering.

Colors: All, at a minimum: Navy shell with Heather Gray fleece lining body and collar face, Navy knit ribbing and Navy zipper.

Sizes: Small to 5XL, inclusive

16. Jacket, lightweight packable, windbreaker

General:

5.11 Tactical packable jacket style number 48035 or equal. Compact, lightweight windbreaker that folds into own left pocket to facilitate storage and carry. Strong polyester microfiber is lightweight and water resistant. Chest and hand pockets. Nylon web microphone loops at both shoulder seams.

Material: 100% polyester microfiber

Construction Details: Edgestrip placed at collar edge, inside neckline lockerloop, roundfront zipper opening, document pocket welt join seam, external and internal (which forms the packable pocket closure), internal facing edge.

¼" 2 Needle Topstitch: placed at shoulder seams and armholes.

¼" Single Needle Topstitch: placed at mid seam, which forms a packable pocket, when jacket inverted, as well as lower hands pocket seamline.

Bartacks: placed at lower hand warmer pockets top and bottom. Top and bottom of document pocket welt front corners.

Cuffs: elastic enclosed in shell fabric

Zipper: Non YKK #5 coil, left hand insertion

Pocket Zippers: Non YKK #5 coil, left hand insertion

Velcro: 2 sets of hook & loop, placed at document pocket welt to form the packable pocket opening edge when garment folded into self.

Colors: All, at a minimum Navy Blue

Silk Screening: jackets to be silk screened

Sizes: XSmall to 4X, inclusive

17. Jacket, Class "A", waist length with removable quilted windproof liner

General: 5.11 Tactical "Precinct Jacket" or equal. Waterproof, breathable nylon shell uniform jacket styled appropriately for wear with Class "A" uniform. Shell has 2 front hand pockets with Velcro flap closures, lower back pocket, zipper sleeve pocket, and Backup Belt System pockets at front chest. Bi-swing shoulder for increased range of motion. Double-welt center front with internal storm flap for added protection against wind and rain. Functioning epaulets. Washable.

Material: Outer Shell: 100% Nylon Oxford, 2WDx60D, 82x52, 192g with 3000mm waterproof PU Coating + Water Repellent finish.

Lining: 100% 210 Nylon Taffeta, 100% Polyester Needle Punched Fiber Insulation, 15 gms

Construction Details: Traditionally styled Precinct Jacket with double lower front reversed pleated hand warmer pockets which open at top and sides, lined with 100% polyester tricot. Badge tab sewn on left chest at front, upper vertical chest pockets with double Velcro closures, includes soft Backup Belt System 100% polyester loop Velcro

material, Full center storm flap to ensure water/weather repellency. Fully taped seam, sealed construction for added protection. ½ elasticized back waist using 2" elastic, sides have duty belt access zippers with double sides (12") inset into lower side seam with snap closures for security. ½ elasticized cuff using 2" elastic, with cuff tabs and Velcro adjustment. Bi-swing back runs from top shoulder seam to bottom of armhole on back panel and is 1.75" wide. Lower sleeve pocket uses 6" zippered and covered welt opening. Left inner zippered security pocket. **Inner Quilted Liner:** is fully removable to be worn with or without outer shell jacket. The inner lining jacket is quilted with 3" Diamond quilting and uses 150 GMS insulation. The Inner Liner can be worn alone and has a center front zipper closure, Liner has 2 lower hand warmer pockets lined with brushed tricot, inner security pocket, Collar and Cuffs are 2X1 rib trim.

Colors: All, at a minimum Navy Blue

Sizes: X Small to 6X, inclusive

18. JACKET: Light weight duty jacket.

Water resistant nylon shell with removable liner and hood.

Zipper closure. Two double entry front pockets with hook and loop closure and an inside pocket. Adjustable hook and loop cuffs.

Elastic back waistband with side zippers

Badge tab & epaulets.

Both shell and liner must be machine washable and dryable.

Outer buttons to be silver but must be available in gold for Lt. and above.

Color: Dark Navy

Sizes: Small through 7X

19. JACKET : 4- in -1 Patrol Jacket

FABRIC TYPE: Shell: 100% Nylon Oxford, 190 gms/m² with 3000 PU coating, Inner Jacket: 210 taffeta lining which has Dupont Active Layer Laminate or equal seam taped, and Blood Borne Pathogen Resistant. Pocketing: 100% Nylon BBS, Brushed tricot had warmer pocket lining.

Fleece Jacket: 100% Polyester 350 g/m², wind resistant fleece, 2 sided brushed, 2 sided anti-pilling property

Shoulder yokes: 130 g/m², 100% Full Dull Nylon Taslan or equal, 210 T with 100% Nylon

Lining, 2 X 1 rib neck trim, 91% Polyester/9% OP and 100% Nylon BBS pocketing.

DESIGN, FEATURES & : Shell: Traditionally styled Patrol Jacket with double lower front reversed pleated hand warmer pockets which open at top and sides, lined with 100% Polyester Tricot or equal.

Badge tab sewn on left chest at front, Upper Vertical chest Pockets with double Velcro closures include soft BBS 100% Polyester loop Velcro material lining. Double front storm flaps insure water repellency. Fully taped seam sealed construction for added protection. 1/2 Elasticized back waist using 2" elastic, sides have duty belt access zippers with double sides (12") inset into lower side seam with snap closure tabs for security. 1/2 elasticized cuff using 2" elastic with 5.11 logo cuff tabs and Velcro adjustment. The bi-swing back runs from top shoulder seam to bottom of armhole on

back panel and is 1.75" wide. Lower sleeve pocket uses 6" zippered and covered welt opening. Left inner zippered security pocket. Hood has Velcro closure at front and center back adjustment, hood securely snaps to jacket with 4 snaps. Inner Fleece Jacket: Is fully removable to be worn with or separately from outer shell jacket. 9" front yoke

depth on shoulder front overlays and back yoke overlay is 10" in depth. Top of the sleeves have Nylon overlays from armhole seam to top of elbow, a 6" wide elbow overlay is 5.5" wide at top elbow and 15" long to cuff elastic. The inner fleece jacket uses a 3 point snap and loop attachment system to secure the inner jacket to outer shell. 8" side seam zippers open for Duty Belt access and snap closure with 2 adjustment snaps at hem. Jacket has 2 lower hand warmer pockets lined with brushed tricot, 1 zippered inner security pocket, inner upper body lining of BBS material, and inner right chest hat and glove pocket. Collar is 2 X1 Rib trim. Jacket includes ANSI/ISEA traffic vest.

Color: All available colors at a minimum Dark Brown

20. Commando Sweater Acrylic/Wool Sweater

Ribbed military style. V-Neck with 1"x1" cuff and waist.

70% Acrylic/30% wool.

Color matched fabric shoulder and elbow patches.

Badge tab and shoulder epaulets. Must have 2 piece epaulets, with single needle edge stitch 1/16" margin and set on top of the shoulder patch.

Badge Tab: Two needle set woven patch to wearer's left chest 1 3/8" below finished shoulder patch.

Badge tab shall be set parallel with v-neck center seam. Shall have 2 round grommets centered and 1 3/8" apart (measured center to center) on the patch. 1st grommet is centered 1 3/16" from the finished top edge of the badge tab.

Finished dimension 3"w x4" L

Turn back cuffs.

Must be machine washable and dryable.

Color: Dark Navy and Dark Brown

Sizes: To be alpha sizes including sizes Small through 5 XL.

Division patches to be sewn on each shirt per ordering agency specifications

21. Campaign Hat, Triple Brim

General: Campaign (Trooper) Style with triple thick brim to guard against brim warping, with padded sweatband, ribbon hat band, and storage container. In addition, each hat ordered shall ship with the following accessories: rain cover, leather swivel chin strap (order will specify black or brown, campaign cords (order will specify silver or gold).

Material: Straw Version: #1 Quality Hemp Braid Tight Weave, 5 to 5.5 mm in width.
Felt Version:

Crown: 5 ½" high. Montana Peak, traditional four dent style.

Brim: 3" wide, flat, triple thick (2 layers of straw with fiber board insert)

Hat Band: 7/8" wide with bow on Left Side.

Brim Eyelets: 5/8" oval, centered on each side.

Vent Eyelets: centered on all 4 sides, approx. 2 ¼" above brim, with front vent suitable to attach Blackington Model B-511 hat badge using post/screw attachment.

Sweatband: foam cushion, padded sweatband for comfort and perspiration wicking.

Material: Campaign hat will be available in straw and felt configurations.

Labeling: will list country of origin and size.

Shapes/Sizes: sizes from 6 ½ to 7 7/8 available in a variety of head shapes, including regular, long oval, extra long oval and wide oval to provide a professional appearance and fit to a variety of head sizes/shapes.

Colors: All, specifically including Black, Navy and Brown at a minimum.

22. Winter Cold Weather Taslan Fur Trooper Cap Fur Lined Trooper Hat

General: W. Alboum Hat Co., Inc. or equal.

Material: Taslan top with double thick super dynel fur. Extra thick quilted lining. Four snap chin strap. Pellon interlining between the fur and taslan for additional warmth on the ears and neck areas.

Front Peak & Ear Flaps: To have not less than 4" Inches of fur in height and not less than 8 ½" Inches in width. Ear laps to be not less than 4" Inches of fur in height and neck fur to be not less than 2 ½" Inches in height.

Colors: All, black and navy blue at a minimum.

Sizes: Small, Medium, Large, X-Large, and XX-Large.

23. STRAW UNIFORM HAT AKA SHERIFF STYLE STRAW HAT

Quality: #1 Quality Hemp Braid, Tight Weave. 5-5 ½ MM

Color: All available.

Crown: Single Dent down the Center

Brim: 3" Wide Slightly Curled All Around. Three Separate Brims Joined for Extra Strength and Shape Retention. Brims are Sewn Together Heavily Stiffened & Shower Proofed. Made of 5 – 5 ½ MM Bedford Hemp Braid.

Stiffening: Crown Double Dipped. Brim Triple Dipped with #21 Sizing by Kempen Paint Company.

Crown Eyelets: None.

Brim Eyelets: 3/8" Oval, One on Each Side, to Accommodate the Chin Strap, Eyelets Centered on Each Side.

Badge Eyelets: One in Front of Brim 2 1/8" Above Brim Centered.

Sweat Band: Self-forming Foam Sweat with Oil Silk Liner.

Hat Band: 12 Ligne Yarn Dyed Grossgrain, 1 1/8" with Bow on Left.

Packing: Hats are to be Packed One to a Box. Size Marked on the Outside of Each Box.

Shipping: The Hats are to be packed in Shipping Containers of Sufficient Strength to Withstand Transportation by Common Carrier and to Assure Safe Arrival at the Delivery Point.

23. Baseball Caps


Caps shell fabric to matched uniforms. All caps will have the division patches as specified by ordering agency embroidered upon the front. Five panel low-profile, adjustable cap.

Color: All but at a minimum dark navy & dark brown, matching uniform fabric.

Finish: Pre-cured, Wrinkle Resistant & H2 Tech treatments to provide superior color retention, internal hydrophilic wick-ability & breath-ability, and external hydrophobic resistance to water based liquids.

Unisex caps feature adjustable back closure.

25. Flag

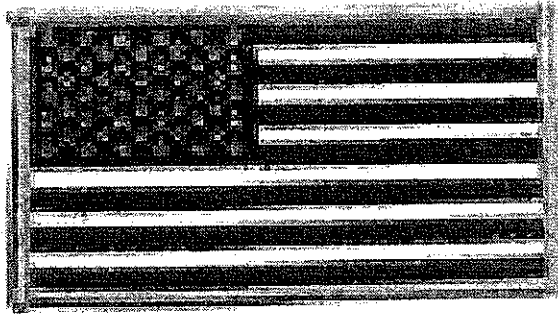

American Flag to be the same size and design presently worn by the Division. *Sample attached. To be sewn on shirts and jackets as specified by ordering agency. Size: 3 1/2" W X 2 3/8" H

26. Division Patches

Division patches to be the same size and design as presently worn by the each respective division. To be sewn on shirts and jackets as specified by ordering entities. **Color:** Dark Navy with gold trim and gold letters and Tan w/Gold Trim and Brown Lettering State Seal in Black lettering.

WV Regional Jail Shoulder Patch

General: Full Color uniform shoulder patch to be sewn on both shoulders of "Class A" Uniform shirts and jackets and other items as specified on order from the West Virginia Regional Jail Authority

Size: 3.75 W X 4.75 H

Description: Galls ES1800863 or equal with Tan background- P535K, Border Color Gold #41 and the following thread colors embroidered in the body of the patch:

Blue #P802, Yellow #74, Kelly Green # 46, Red #32, Med-Gray #218, Black #16, Brown #P735. Patch has shield edges with sides coming down to a point at the bottom of the patch with a gold border against a tan background as per sample.




Division of Juvenile Services Shoulder Patch

General: Full color uniform shoulder patch

Size: approx. 4" H X 3 ½" W

Description: Galls or Equal, Navy Blue background E-929 Border Color Gold #546 and the following thread colors embroidered in the body of the patch: Gold #546, White #800, Green # 232, Brown # 736, Light Blue #364, Navy blue #335 and Red #701

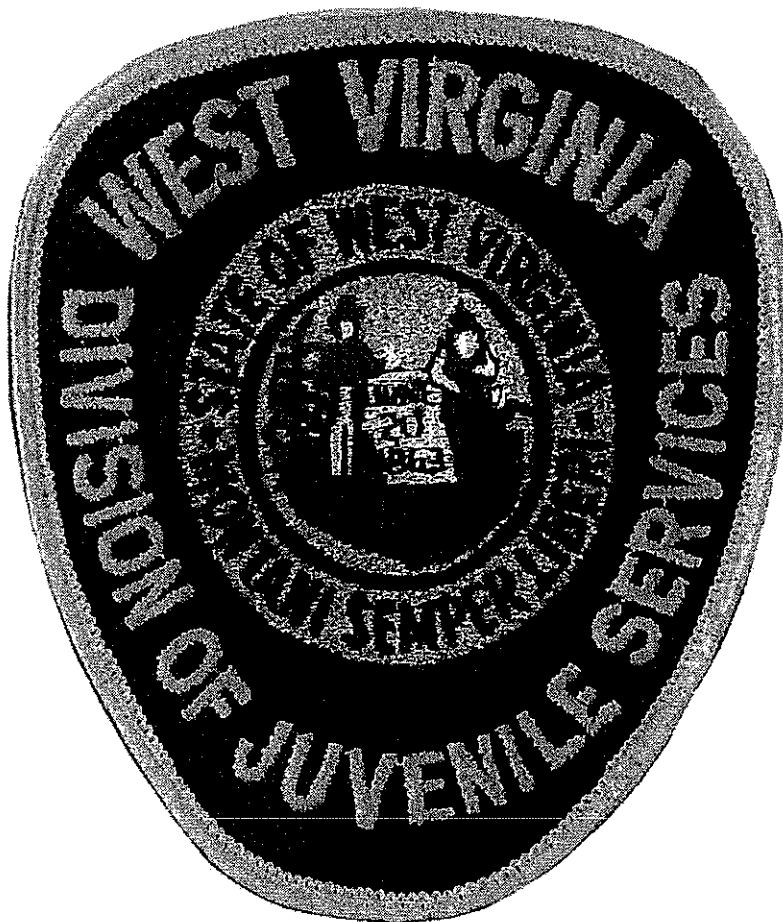

Division of Corrections Shoulder Patch

General: Full color uniform shoulder patch to sewn on both shoulders of Class "A" uniform shirts and jackets and other items as specified on order from Division of Corrections

Size: 3 3/8 inches wide and 4 inches high

Description: Galls G10255A or equal with Navy Blue background E-929, Border Color Gold #546 and the following thread colors embroidered in the body of the patch: Gold #546, White #800, Green # 232, Brown # 736, Light Blue #364, Navy blue #335 and Red #701. Patch has rounded top edges with sides coming down to a point at the bottom of the patch with a gold border against a navy blue background as per provided sample.



27. Blackinton Badge Model #B519 or equal (GLD, RHD)

1 3/4 "H X 1" W

Regional Jail above the State Seal and Authority below the State Seal

28. Blackinton Badge Model #B38 or equal (GLD, RHD)

2 9/16" H x 1 9/16" W

Regional Jail above the State Seal and Authority below the State Seal

29. Shirt/Jacket Badge**Blackinton Style B-523 with a safety catch attachment for Uniformed Correctional Officers. NOTE: to be purchased and priced as a set, two per set.****General:** Division of Corrections shirt/breast badge for Correctional Officers for uniform wear, with safety catch attachment typically attached via badge tab slots on shirts, jackets, raincoats and sweaters. See attached illustration of badge.**Colors/Finishes: Silver (Rhodium Plate):** Platinum metal group, precious metal that is applied by the electroplating process over a bright nickel base. Rhodium can be distinguished by its brilliant white finish and is tarnish resistant. It will not discolor or peel from the surface of the badge.**Gold Plate:** Deposit of 22K+ fine gold electroplate on base material for a rich, bright appearance.**Attachment:** safety catch**Lettering:** Black, enamel, block style**For Corrections:**

Lines & Seal:

- Line 2:** BLANK
- Line 3:** Div. of Corrections
- Line 4:** State of West Virginia, full color enamel seal
- Line 5:** order will specify one of the following: Officer, Corporal, Sergeant, Lieutenant, Captain or Major
- Line 6:** 3 digit numbers to run consecutively as required

Blackinton Style B-523 or equal to (for DJS Same badge different set up)

Full color WV Seal with rhodium finish. Fifth line will be 3 digit badge number to run consecutively as required. Two badges with the same number per set. Up to 6 digit rank abbreviation on the banner.

For Juvenile Services:

Term Juvenile Services above the state seal and Correctional Officer below the state seal.

Color:

Gold

Silver

30. Blackinton Style B-511 or equal with screw back attachment for attaching hat badge to a Campaign style uniform hat. NOTE: to be purchased and priced individually

General: Division of Corrections hat badge for Correctional Officers for uniform wear, with the Class "A" Uniform Campaign Style Hat. Hat badge attaches to front of hat by placing post trough front crown vent hole and securing with the screw back. See attached illustration of badge.

Colors/Finishes: Silver (Rhodium Plate): Platinum metal group, precious metal that is applied by the electroplating process over a bright nickel base. Rhodium can be distinguished by its brilliant white finish and is tarnish resistant. It will not discolor or peel from the surface of the badge.

Gold Plate: Deposit of 22K+ fine gold electroplate on base material for a rich, bright appearance.

Attachment: screw back

Lettering: Black, enamel, block style

Lines & Seal:	Line 2:	BLANK
	Line 3:	Correctional
	Line 4:	State of West Virginia, full color enamel seal
	Line 5:	Officer
	Line 6:	3 digit numbers to run consecutively as required

31. Blackinton Style B-523 or equal with wallet clip attachment for sworn, non-uniformed personnel. Intended for case/wallet carry. NOTE: to be purchased and priced individually.

General: Division of Corrections badge for case/wallet carry by authorized, sworn, non-uniformed personnel. Wallet clip badges are also flat in design for a slimmer fit in badge cases/wallets.

Colors/Finishes: Rho-Glo®: Base material which has a solid silver color throughout and requires no surface plating. Highly polished to a brilliant luster. A clear coating is then applied to enhance its durability.

Hi-Glo®: Base material which has a solid **gold** color throughout and requires no surface plating. Highly polished to a brilliant luster. A clear coating is then applied to enhance its durability.

Attachment: wallet clip

Lettering: Black, enamel, block style

Lines & Seal:

- Line 2:** BLANK
- Line 3:** Div. of Corrections
- Line 4:** State of West Virginia, full color enamel seal
- Line 5:** title or rank will be specified upon order
- Line 6:** 1 to 3 digit number to run consecutively as required

32. Division of Corrections Badge Left Chest Embroidery

General: Embroidered version of Blackinton B523 or equal badge used by WV Division of Corrections for placement on polo shirts, 3 season jackets and other items of apparel in compliance with agency policy.


Stitches & Size: Total # of stitches is 21,520 and size is 2.64 W x 3.46 H

Color: Silver with Black Lettering or Gold with Black Lettering as specified at time of order.

GOLD: Gall's LBC6948A or equal: contains following thread colors LBC6948A
Gold 1771, Black 1800, Sky Blue 1828, Hunter Green 1902, Gold 1771, Red 1747,
Royal 1676, Brown 1659, White 1801, Gold 1771.

Silver: Gall's LBC6948B or equal: contains following thread colors Silver 1886,
Black 1800, Sky Blue 1828, Hunter Green 1902, Gold 1771, Red 1747, Royal 1676,
Brown 1659, White 1801

See Below

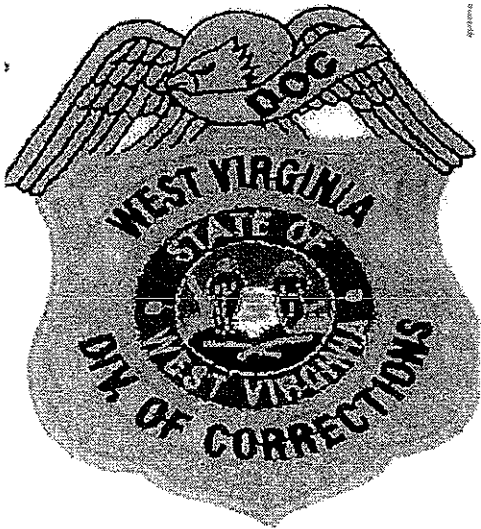

33. Regional Jail Authority Left chest Embroidery

To be sewn on RJA polo shirts and other items of apparel in compliance with agency policy


Stitches & Size Total # of stitches is 18,300 and size is Approx. 2.03" W X 3.35 "H

Color: Silver with Black Lettering or Gold with Black lettering as specified at time of order

GOLD: Gall's LBC3124 or equal: contains the following thread colors LBC2124 Gold 1771, Black 1800, Sky Blue 1828, Hunter Green 1902, Gold 1771, Red 1747, Royal 1676, Brown 1659, White 1801, Gold 1771.

Silver: Gall's LBC3125 or equal: contains following thread colors Silver 1886, Black 1800, Sky Blue 1828, Hunter Green 1902, Gold 1771, Red 1747, Royal 1676, Brown 1659, White 1801

See Below

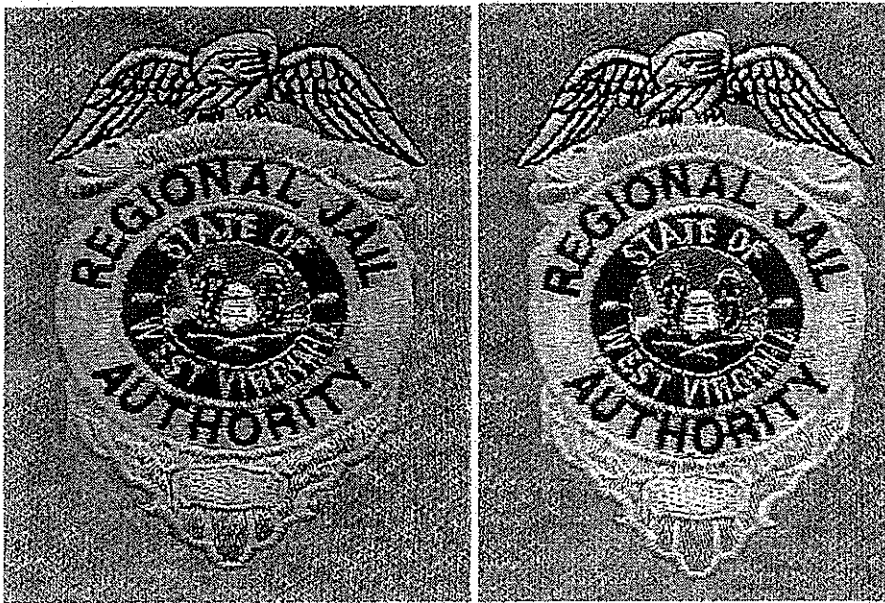

34. WV Juvenile Services Left Chest Embroidery

To be sewn on DJS polo shirts and other items of apparel in compliance with agency policy

Galls LBC5558 or equal: contains the following tread colors Gold # 1771

Size 3.97" W X 2.98" H



35. Glove, Neoprene with Kevlar

General: Gall's GL387 or equal, Neoprene® to protect from the elements, Kevlar® lining to help protect against cuts. Textured synthetic leather patches on palms and fingertips to increase grip, washable and breathable synthetic outer shell, and adjustable wrist closure.

Color: Black

Sizes: Small to 2XL, inclusive

36. Nylon Glove Case

Dyna Med or equal double glove pouch with 900 denier polyester construction. Shall have hook and loop closure. Fit belts up to 2" wide. Holds two pair gloves.

Color: Black

37. Polyester Clip-On Tie with Buttonholes

Samuel Broome Style 60001 or equal to

Fabric

100% polyester - tropical weave

Construction

Four-in-hand tie - french end construction

Pre-tied on bendover clip with black clasp

Width at widest point is 3.5"

Sizes to be regular, long and extra long.

Finished length from top of knot to tip of the tie to be approximately 22" on extra long.

Each tie shall have a label sewn into the back of big end of tie to accomodate small end

Three buttonholes to be placed in tail to match buttons on shirt

Colors

All available at a minimum dark brown and navy

38. 2" Tie Bar

Blackinton or equal

One raised color seal (West Virginia) and Division of Juvenile Services engraved to the left or right of the seal.

Color: Gold; Silver

39. Division of Corrections Tie Clasp

General: Blackinton Model #A4002B or equal. Correction Officer on panel above seal with Blue Enameled background behind letters, ½" West Virginia State Seal, for Correctional Officers to wear with the tie when wearing long sleeve, Class "A" uniform, sworn, non-uniformed personnel. Wallet clip badges are also flat in design for a slimmer fit in badge cases/wallets.

Colors/Finishes: Silver for Correctional Officer through Sergeant; Gold for Lieutenant through Major.

Attachment: tie tack

Lettering: Correction Officer on panel above seal with Blue Enameled background behind letters



State of West Virginia

40. State Seal Name Plate

Name plates are 5/8" H, come with the state seal of West Virginia. One or two-lines of type, in polished or brushed finish. Shall have clutch back, 2 prongs with clamps, or optional magnetic back.

41. Leather Belt

GARRISON BELT should be 1 3/4" W 8-9 oz top grain cowhide. Belt finish should be constructed for abrasion resistance to resist peeling and cracking.

Belt should have five sizing holes.

Belt has two snaps to hold buckle in place.

A 1/2" wide belt keeper is installed between the two snap fasteners.

Belt should have hand rubbed and dyed edges.

Size will be printed on the underside of the belt.

Brass buckle.

All belt edges should be stitched black Dacron polyester thread on a lock stitch type machine.

Color: Black

42. Web Belt with Duraflex® Buckle or equal

Product Description: TDU Belt 1.75 "with Duraflex® Buckle or equal

Fabric Type: Heavy Duty nylon web belt and crack and break resistant Duraflex® or equal

Design: High strength 1.75"wide nylon. Heavy duty nylon box stitching ensures that the buckle will never come off of the belt. One-piece buckle resists scratching, will not corrode and is airport security friendly will not set off metal detectors. No maintenance required, can be cleaned with soap and water. 1.75" Nylon web belt is permanently attached to Duraflex or equal impact resistant 5.11 branded plastic buckle. Belt has double sealed angled 5.11 Tactical signature cut for ease of donning and resistance to fraying.

Stitching & Finishing: Heavy duty box stitch with quadruple X stitching reinforcements. Open end of belt is double sealed to resist fraying.

Sizes: 28"-54"

Colors: All available but must have black

43. Metal Insignias

Clutch back metal rank insignia suitable for use on collar or shoulder of uniform shirt.
Insignia to be priced as sets.

Insignias to include:

Gold: Lt. and Capt.


Silver: Sgt. and Cpl.

INSIGNIA Pin Specifications


Gold First Sgt Chevrons, Smith Warren Model #E526 or equal
Measures 1.52"H x 0.85"W with clutch back attachment.



Small Lieut Bars (GLD, SIL), Blackinton Model #J61 or equal
Measures 3/4"H x 1/4"W with clutch back attachment.



Capt Bars (GLD, SIL), Blackinton Model #J63 or equal
Measures 3/4"H x 3/4"W with clutch back attachment.



Sgt. Chevrons (GLD, SIL), Blackinton Model#J59 or equal
Measures 3/4"H x 3/4"W with clutch back attachment.



Corp Chevrons (GLD, SIL), Blackinton Model #J57 or equal




J 57
SMOOTH

Private Chevrons (GLD, SIL), Blackinton Model: #56 or equal



J 56
SMOOTH

44. Chevron /Stripes

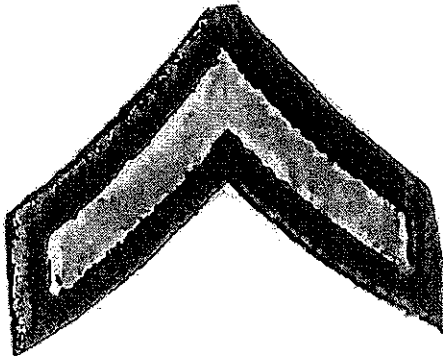


COII Stripes (1 large) 2 1/2" H X 2 7/8" W Galls-EGO246 or Equal

Gold on Navy



Cpl. Stripes / COIII (2 large) 3 1/4" H X 3" W Galls-EGO244 or Equal

Gold on Navy

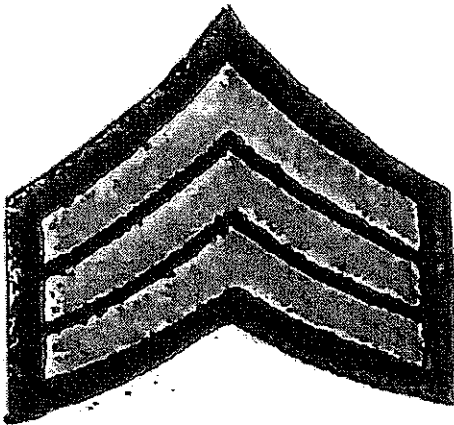


Sgt. Stripes / CO4 (3 large) 3 5/8" H X 3" W Galls-EGO245 or Equal

Gold on Navy

To be sewn on shirts, sweaters, polos and jackets when specified

45. Longevity Hash Marks

General: length of service patches to be affixed on the left sleeve on Class "A" long sleeve uniform shirts and Class "A" jacket as specified at time of order, or as a separate item. Each hash mark = 2 years service and each star = 10 year service with hash marks available in combinations starting at 2 years of service (one hashmark) and progressing in 2 year increments up to at least 30 years service (3 stars). Sew on See below

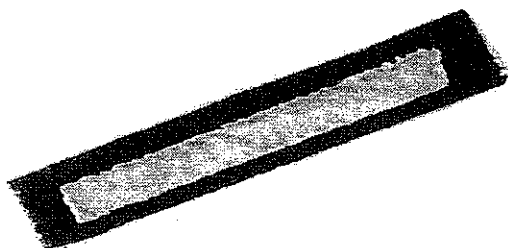


Colors are to be Gold on Navy

46. Sew on Chevrons

Rank Insignia


To be sewn on the collar of polo shirts as per Division specifications

Size: 1" X 1"



COII

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, Chevron #18 E Grey




Corporal

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, Chevron #18 E Grey




Sergeant

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, Chevron #18 E Grey




Lieutenant

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, Lt. Bar # 5363 Gold




Captain

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, Captains bar # 5363 Gold



Major

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, interior Oak leaf #5363 Gold



Colonel

Galls or Equal Fabric Color #102 Navy, Stitch border color # 25 Navy, interior Eagle #5363 Marigold

FACILITIES OPERATED BY THE
WV DIVISION OF JUVENILE SERVICES
Officers wearing Standard Officer Uniforms

Facility	Address	Phone #	Uniformed Officers
WV Industrial Home for Youth	7 Industrial Boulevard Industrial, WV 26375	Phone (304) 782-2371 Fax (304) 627-2150	148
Rubenstein Center	141 Forestry Camp Road Davis WV 26260	Phone (304) 259-5241 Fax (304) 259-4851	47
Donald R Kuhn Detention Center	One Lory Place Julian WV 25529	Phone (304) 369-2976 Fax (304) 369-2991	57
Lorrie Yeager Jr. Juvenile Center	907 Mission Drive Parkersburg WV 26101	Phone (304) 420-4860 Fax (304) 420-4861	30
Sam Perdue Juvenile Center	843 Shelter Road Princeton WV 24740	Phone (304) 425-9721 Fax (304) 487-5543	30
Tiger Morton Juvenile Center	60 Manfred Holland Way Dunbar WV 25064	Phone (304) 766-2616 Fax (304) 766-2687	31
J. M. "Chick" Buckbee Juvenile Center	One Jerry Lane Augusta WV 26704	Phone (304) 496-1341 Fax (304) 496-1475	30
Jones Building Specialized Treatment Unit	7 Industrial Boulevard Industrial, WV 26375	<u>Opening Fall of 2010</u>	40
		TOTAL	413

Officers wearing Staff Secure Uniforms

Facility	Address	Phone #	Uniformed Officers
Vicki V Douglas Juvenile Center	900 Emmett Rousch Drive Martinsburg WV 25401	Phone (304) 267-0164 Fax (304) 267-0168	30
Gene Spadaro Juvenile Center	106 Martin Drive Mt Hope WV 25880	Phone (304) 877-6890 Fax (304) 877-6929	28
Robert L Shell Juvenile Center	2 O'Hanlon Place Barboursville WV 25504	Phone (304) 733-0871 Fax (304) 733-6827	30
Youth Reporting Centers	Various Locations across the State	Various	13
		TOTAL	101

FACILITIES OPERATED BY THE
WV REGIONAL JAIL AUTHORITY

Facility	Address	Phone #	Uniformed Officers
Eastern Regional Jail	94 Grapevine Road Martinsburg, WV 25401	Phone (304) 267-0045	81
Central Regional Jail	300 Days Drive Flatwoods, WV 26601	Phone (304) 765-7904	68
North Central Regional Jail	#1 Lois Lane Greenwood, WV 26415	Phone (304) 873-1384	107
Northern Regional Jail	RD 2, Box 1 Moundsville, WV 26041	Phone (304) 843-4067	59
Potomac Highlands Regional Jail	13 Dolan Drive Augusta, WV 26704	Phone (304) 496-7854	68
South Central Regional Jail	1001 Centre Way Charleston, WV 25309	Phone (304) 558-1336	83
Southern Regional Jail	1200 Airport Road Beaver, WV 25813	Phone(304) 256-6726	84
Southwestern Regional Jail	#13 Gaston Caperton Drive Earl Ray Tomblin Industrial Park Holden, WV 25625	Phone(304) 239-3032	85
Tygart Valley Regional Jail	400 Abbey Road Belington, WV 26250	Phone (304) 637-0382	83
Western Regional Jail	One O'Hanlon Place Barboursville, WV 25504	Phone (304) 733-6821	103
		TOTAL	821

FACILITIES OPERATED BY
THE WV DIVISION OF CORRECTIONS

Facility	Address	Phone #	Uniformed Officers
Anthony Correctional Center	Box N-1, HC 70 White Sulphur Springs, WV 24986	Phone: (304) 536-3911 Fax: (304) 536-3916	54
Beckley Correctional Center	111 S. Eisenhower Drive Beckley, WV 25801	Phone: (304) 256-6780 Fax: (304) 256-6782	23
Charleston Work Release Center	607 Brooks Street Charleston WV 25301- 1319	Phone: (304) 558-2763 Fax: (304) 558-1537	11
Denmar Correctional Center	HC 64, Box125 Hillsboro, WV 24946	Phone: (304) 653-4201 Fax: (304) 653-4855	50
Huntington Work/Study Release Center	1236 Fifth Avenue Huntington, West Virginia 25701	Phone: (304) 529-6885 Fax: (304) 529-0205	11
Huttonsville Correctional Center	P.O. Box 1 Huttonsville, WV 26273	Phone: (304) 335-2291 Fax: (304) 335-4256	250
Lakin Correctional Center	11264 Ohio River Road West Columbia, WV 25287	Phone: (304) 674-2440 Fax: (304) 674-6199	104
Martinsburg Correctional Center	38 Grapevine Road Martinsburg, West Virginia 25401	Phone: (304) 267-0156 Fax: (304) 267-0196	47
Mount Olive Correctional Complex	1 Mountainside Way Mt. Olive, West Virginia 25185	Phone: (304) 442-7213 Fax: (304) 442-7225	241
Northern Correctional Facility	RD 2, Box 1 Moundsville, WV 26041	Phone: (304) 843-4067 Fax: (304) 843-4073	79
Ohio County Correctional Complex	1501 Eoff Street Wheeling WV 26003	Phone: (304) 238-1007 Fax: (304) 238-1009	20
Pruntytown Correctional Center	Rt 4 Box 49A, Grafton, WV	Phone: (304) 265-6111 Fax: (304) 265-6120	86
Saint Marys Correctional Center	2880 N. Pleasants Highway St. Marys, WV 26170	Phone: (304) 684-5500 Fax: (304) 684-5506	157
		TOTAL	1,133

STANDARD UNIFORM ISSUE BY DIVISION

UNIFORM PIECES	DIVISION OF CORRECTIONS	REGIONAL JAIL AUTHORITY	JUVENILE SERVICES (STANDARD)	JUVENILE SERVICES (STAFF SECURE)
Class A Shirt (LS)	1		1	
Class A Shirt (SS)	1	5	3	
Polo Shirts	3			4
Commando Sweater		1	1	
Class A Pant	1	5	1	
Cargo Pant	3		3	4
Tie	1		1	
Jacket (Various Styles)	1	1	1	
Hat (Various Styles)	1	1	1	
Tie Tack	1		1	
Belt	1	1	1	
Gloves	1		1	

UNIFORMS BID FORM

DJS010297

Item	Description	AGENCY	QTY **	Unit Cost	*Extended Cost
1	Trousers Cargo (Sizes 28-42)	All Agencies	300	\$	\$
1.1	Trousers Cargo (Sizes 44-50)	All Agencies	350	\$	\$
1.2	TrousersCargo (Sizes 52-54)	All Agencies	150	\$	\$
1.3	TrousersCargo (Sizes 56-60)	All Agencies	150	\$	\$
1.4	TrousersCargo (Sizes 62+)	All Agencies	50	\$	\$
1.5	TrousersCargo Ladies (Sizes 2-24)	All Agencies	110	\$	\$
2	Trousers Class A (Sizes 28-42)	All Agencies	336	\$	\$
2.1	Trousers Class A (Sizes 44-50)	All Agencies	392	\$	\$
2.2	Trousers Class A (Sizes 52-54)	All Agencies	168	\$	\$
2.3	Trousers Class A (Sizes 56-60)	All Agencies	168	\$	\$
2.4	Trousers Class A (Sizes 62+)	All Agencies	56	\$	\$
2.5	Trousers Class A Ladies (Sizes 2-26)	All Agencies	124	\$	\$
3	Men's Class A Long Sleeve Shirt (6.25 to 6.5 oz.) Sizes SM-2XL	DJS Only	90	\$	\$
3.1	Men's Class A Long Sleeve Shirt (6.25 to 6.5 oz.) Sizes 3XL-4XL	DJS Only	40	\$	\$
3.2	Men's Class A Long Sleeve Shirt (6.25 to 6.5 oz.) Sizes 5XL-6XL	DJS Only	21	\$	\$
4	Women's Class A Long Sleeve Shirt (6.25 to 6.5 oz.) Sizes SM-2XL	DJS Only	5	\$	\$
4.1	Women's Class A Long Sleeve Shirt (6.25 to 6.5 oz.) Sizes 3XL	DJS Only	15	\$	\$
5	Men's Class A Long Sleeve Shirt (4.2 to 4.5 oz.) Sizes SM-2XL	DJS / DOC	90	\$	\$
5.1	Men's Class A Long Sleeve Shirt (4.2 to 4.5 oz.) Sizes 3XL-4XL	DJS / DOC	40	\$	\$
5.2	Men's Class A Long Sleeve Shirt (4.2 to 4.5 oz.) Sizes 5XL-6XL	DJS / DOC	21	\$	\$
6	Women's Class A Long Sleeve Shirt (4.2 to 4.5 oz.) Bust Sizes 24-58	DJS / DOC	20	\$	\$
7	Men's Class B Short Sleeve Shirt (6.25 to 6.5 oz.) Sizes SM-2XL	DJS / RJA	96	\$	\$
7.1	Men's Class B Short Sleeve Shirt (6.25 to 6.5 oz.) Sizes 3XL-4XL	DJS / RJA	448	\$	\$
7.2	Men's Class B Short Sleeve Shirt (6.25 to 6.5 oz.) Sizes 5XL	DJS / RJA	96	\$	\$
8	Women's Class B Short Sleeve Shirt (6.25 to 6.5 oz.) SM-5XL	DJS / RJA	75	\$	\$
9	Men's Class A Short Sleeve Shirt (4.25 to 4.5 oz.) neck sizes 14.5-22	DJS / DOC	640	\$	\$
10	Women's Class A Short Sleeve Shirt (4.25 to 4.5 oz.) Bust Size 28-54	DJS / DOC	75	\$	\$
11	Men's Class C L/S Shirt (K-9) 6.25-6.50 oz. Sizes SM-2XL	DJS Only	10	\$	\$
11.1	Men's Class C L/S Shirt (K-9) 6.25-6.50 oz. Sizes 3XL-4XL	DJS Only	25	\$	\$
11.2	Men's Class C L/S Shirt (K-9) 6.25-6.50oz. Sizes 5XL	DJS Only	5	\$	\$
12	Polo Shirts Sizes SM-2XL	All Agencies	585	\$	\$
12.1	Polo Shirts Sizes 3XL-4XL	All Agencies	210	\$	\$
12.2	Polo Shirts Sizes 5XL	All Agencies	42	\$	\$
13	Tactical Response Combo Shirt Sizes SM-2XL	DOC / RJA	50	\$	\$
13.1	Tactical Response Combo Shirt Sizes 3XL-5XL	DOC / RJA	20	\$	\$

UNIFORMS BID FORM

DJS010297

Item	Description	AGENCY	QTY **	Unit Cost	*Extended Cost
14	Raincoat Regular Sizes SM-6XL	DOC / RJA	50	\$	\$
14.1	Raincoat Long Sizes M-6XL	DOC / RJA	20	\$	\$
15	Jacket 3-Season Class B Sizes SM-2XL	DOC Only	50	\$	\$
15.1	Jacket 3-Season Class B Sizes 3XL-5XL	DOC Only	20	\$	\$
16	Jacket lightweight packable, windbreaker Sizes XSM-2XL	DOC / RJA	50	\$	\$
16.1	Jacket lightweight packable, windbreaker Sizes 3XL-4XL	DOC / RJA	20	\$	\$
17	Jacket Class A, Waist length Sizes XSM-2XL	DOC Only	175	\$	\$
17.1	Jacket Class A, Waist length Sizes 3XL-6XL	DOC Only	75	\$	\$
18	Jacket lightweight duty jacket Sizes SM-2XL	DJS Only	70	\$	\$
18.1	Jacket lightweight duty jacket Sizes 3XL-7XL	DJS Only	21	\$	\$
19	Jacket, 4-in-one Patrol Jacket Sizes SM-2XL	RJA Only	100	\$	\$
19.1	Jacket, 4-in-one Patrol Jacket Sizes 3XL-4XL	RJA Only	71	\$	\$
19.2	Jacket, 4-in-one Patrol Jacket Sizes 5XL	RJA Only	10	\$	\$
20	Commando Sweater Sizes SM-XL	All Agencies	120	\$	\$
20.1	Commando Sweater Sizes 2XL-3XL	All Agencies	120	\$	\$
20.2	Commando Sweater Sizes 4XL-5XL	All Agencies	32	\$	\$
21	Campaign Hat Triple Brim	DOC / RJA	250	\$	\$
22	Taslan Fur Trooper Hat	DOC / RJA	91	\$	\$
23	Sheriff Style Straw Hat	RJA Only	90	\$	\$
24	Baseball Caps	All Agencies	91	\$	\$
25	Flag	DJS / DOC	3309	\$	\$
26	Division Patches (Shoulder)	All Agencies	6618	\$	\$
27	Blackington Badge Sets Style # B519 or equal	RJA Only	80	\$	\$
28	Blackington Badge Model # B38 or equal	RJA Only	80	\$	\$
29	Blackington Badge Sets Style # B523 or equal with Safety catch	DJS / DOC	80	\$	\$
30	Blackington Badge Sets Style # B511 or equal with Screw Back	DOC Only	80	\$	\$
31	Blackington Badge Sets Style # B523 or equal with Wallet Clip	DOC Only	80	\$	\$
32	Division of Corrections Badge Left Chest Embroidery	DOC Only	748	\$	\$
33	Regional Jail Authority Left Chest Embroidery	RJA Only	180	\$	\$
34	Division of Juvenile Services Left Chest Embroidery	DJS Only	89	\$	\$
35	Gloves, Neoprene with Kevlar	DOC / RJA	91	\$	\$
36	Nylon Glove case	DJS / RJA	250	\$	\$
37	Clip on Tie	All Agencies	341	\$	\$
38	2" Tie Bar	DJS Only	91	\$	\$
39	Tie Clasp	DOC Only	250	\$	\$

UNIFORMS BID FORM

DJS010297

Item	Description	AGENCY	QTY **	Unit Cost	*Extended Cost
40	State Seal Name Plate	DJS Only	91	\$	\$
41	Garrison Belt	All Agencies	342	\$	\$
42	Web Belt/Duraflex Buckle	DOC Only	180	\$	\$
43	Insignias	All Agencies	150	\$	\$
44	Stripes/chevrons	All Agencies	150	\$	\$
45	Longevity Hash Marks	All Agencies	150	\$	\$
46	Sew on chevrons	DJS / DOC	150	\$	\$

GRAND TOTAL FOR PRODUCTS

QUALIFYING FOR DISCOUNT DISCOUNT %

PROMPT PAY DISCOUNT (FOR BIDDING PURPOSES) ****

\$ ()

NET BID FOR COMPARISON PURPOSES

Bidder Name: _____

Bidder Representative Name: _____

Address: _____

Phone #: _____

E-Mail Address: _____

*Multiply your unit cost by the estimated order Quantity = Extended cost

** The Quantity listed represents an estimate of ANNUAL USEAGE and is for bid comparison only and does not guarantee any specific level of purchases. All products will be ordered on an as needed basis.

*** For Bid Comparison Purposes it will be assumed that 30% of the purchases will meet the criteria (paid within 10 days of receipt) to qualify for the prompt pay discount.

RFQ No. DJSO10297

STATE OF WEST VIRGINIA
Purchasing Division

PURCHASING AFFIDAVIT

West Virginia Code §5A-3-10a states: No contract or renewal of any contract may be awarded by the state or any of its political subdivisions to any vendor or prospective vendor when the vendor or prospective vendor or a related party to the vendor or prospective vendor is a debtor and the debt owed is an amount greater than one thousand dollars in the aggregate.

DEFINITIONS:

"Debt" means any assessment, premium, penalty, fine, tax or other amount of money owed to the state or any of its political subdivisions because of a judgment, fine, permit violation, license assessment, defaulted workers' compensation premium, penalty or other assessment presently delinquent or due and required to be paid to the state or any of its political subdivisions, including any interest or additional penalties accrued thereon.

"Debtor" means any individual, corporation, partnership, association, limited liability company or any other form or business association owing a debt to the state or any of its political subdivisions. "Political subdivision" means any county commission; municipality; county board of education; any instrumentality established by a county or municipality; any separate corporation or instrumentality established by one or more counties or municipalities, as permitted by law; or any public body charged by law with the performance of a government function or whose jurisdiction is coextensive with one or more counties or municipalities. "Related party" means a party, whether an individual, corporation, partnership, association, limited liability company or any other form or business association or other entity whatsoever, related to any vendor by blood, marriage, ownership or contract through which the party has a relationship of ownership or other interest with the vendor so that the party will actually or by effect receive or control a portion of the benefit, profit or other consideration from performance of a vendor contract with the party receiving an amount that meets or exceed five percent of the total contract amount.

EXCEPTION: The prohibition of this section does not apply where a vendor has contested any tax administered pursuant to chapter eleven of this code, workers' compensation premium, permit fee or environmental fee or assessment and the matter has not become final or where the vendor has entered into a payment plan or agreement and the vendor is not in default of any of the provisions of such plan or agreement.

Under penalty of law for false swearing (*West Virginia Code §61-5-3*), it is hereby certified that the vendor affirms and acknowledges the information in this affidavit and is in compliance with the requirements as stated.

WITNESS THE FOLLOWING SIGNATURE

Vendor's Name: _____

Authorized Signature: _____ Date: _____

State of _____

County of _____, to-wit:

Taken, subscribed, and sworn to before me this ____ day of _____, 20__.

My Commission expires _____, 20__.

AFFIX SEAL HERE

NOTARY PUBLIC _____

State of West Virginia VENDOR PREFERENCE CERTIFICATE

Certification and application* is hereby made for Preference in accordance with *West Virginia Code*, §5A-3-37. (Does not apply to construction contracts). *West Virginia Code*, §5A-3-37, provides an opportunity for qualifying vendors to request (at the time of bid) preference for their residency status. Such preference is an evaluation method only and will be applied only to the cost bid in accordance with the *West Virginia Code*. This certificate for application is to be used to request such preference. The Purchasing Division will make the determination of the Resident Vendor Preference, if applicable.

1. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is an individual resident vendor and has resided continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or,**
 Bidder is a partnership, association or corporation resident vendor and has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or** 80% of the ownership interest of Bidder is held by another individual, partnership, association or corporation resident vendor who has maintained its headquarters or principal place of business continuously in West Virginia for four (4) years immediately preceding the date of this certification; **or,**
 Bidder is a nonresident vendor which has an affiliate or subsidiary which employs a minimum of one hundred state residents and which has maintained its headquarters or principal place of business within West Virginia continuously for the four (4) years immediately preceding the date of this certification; **or,**
2. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is a resident vendor who certifies that, during the life of the contract, on average at least 75% of the employees working on the project being bid are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or,**
3. **Application is made for 2.5% resident vendor preference for the reason checked:**
 Bidder is a nonresident vendor employing a minimum of one hundred state residents or is a nonresident vendor with an affiliate or subsidiary which maintains its headquarters or principal place of business within West Virginia employing a minimum of one hundred state residents who certifies that, during the life of the contract, on average at least 75% of the employees or Bidder's affiliate's or subsidiary's employees are residents of West Virginia who have resided in the state continuously for the two years immediately preceding submission of this bid; **or,**
4. **Application is made for 5% resident vendor preference for the reason checked:**
 Bidder meets either the requirement of both subdivisions (1) and (2) or subdivision (1) and (3) as stated above; **or,**
5. **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**
 Bidder is an individual resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard and has resided in West Virginia continuously for the four years immediately preceding the date on which the bid is submitted; **or,**
6. **Application is made for 3.5% resident vendor preference who is a veteran for the reason checked:**
 Bidder is a resident vendor who is a veteran of the United States armed forces, the reserves or the National Guard, if, for purposes of producing or distributing the commodities or completing the project which is the subject of the vendor's bid and continuously over the entire term of the project, on average at least seventy-five percent of the vendor's employees are residents of West Virginia who have resided in the state continuously for the two immediately preceding years.

Bidder understands if the Secretary of Revenue determines that a Bidder receiving preference has failed to continue to meet the requirements for such preference, the Secretary may order the Director of Purchasing to: (a) reject the bid; or (b) assess a penalty against such Bidder in an amount not to exceed 5% of the bid amount and that such penalty will be paid to the contracting agency or deducted from any unpaid balance on the contract or purchase order.

By submission of this certificate, Bidder agrees to disclose any reasonably requested information to the Purchasing Division and authorizes the Department of Revenue to disclose to the Director of Purchasing appropriate information verifying that Bidder has paid the required business taxes, provided that such information does not contain the amounts of taxes paid nor any other information deemed by the Tax Commissioner to be confidential.

Under penalty of law for false swearing (West Virginia Code, §61-5-3), Bidder hereby certifies that this certificate is true and accurate in all respects; and that if a contract is issued to Bidder and if anything contained within this certificate changes during the term of the contract, Bidder will notify the Purchasing Division in writing immediately.

Bidder: _____ Signed: _____

Date: _____ Title: _____

**Check any combination of preference consideration(s) indicated above, which you are entitled to receive.*